

INTERNATIONAL STANDARD

ISO 3785

Second edition
2006-02-01

Metallic materials — Designation of test specimen axes in relation to product texture

*Matériaux métalliques — Désignation des axes des éprouvettes en
relation avec la texture du produit*

STANDARDSISO.COM : Click to view the full PDF of ISO 3785:2006



Reference number
ISO 3785:2006(E)

© ISO 2006

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3785:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Designation system	1
3 Designation of unnotched specimens	1
4 Designation of notched (or precracked) specimens	3
5 Application of designation system in material specification	3
Annex A (informative) Influence of mechanical working on material structure and properties	7

STANDARDSISO.COM : Click to view the full PDF of ISO 3785:2006

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3785 was prepared by Technical Committee ISO/TC 164, *Mechanical testing of metals*, Subcommittee SC 4, *Toughness testing — Fracture (F), Pendulum (P), Tear (T)*.

This second edition cancels and replaces the first edition (ISO 3785:1976), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 3785:2006

Introduction

The measured mechanical properties of a metallic product, especially those characterizing ductility and toughness, such as elongation, reduction of area, fracture toughness and impact resistance, are dependent on the test specimen location within the product and orientation with respect to the product's principal directions of metal working, grain flow or otherwise-produced texture. This International Standard specifies a method for designating specimen orientation in relation to product texture.

STANDARDSISO.COM : Click to view the full PDF of ISO 3785:2006

Metallic materials — Designation of test specimen axes in relation to product texture

1 Scope

This International Standard specifies a method for designating test specimen axes in relation to product texture by means of an X-Y-Z orthogonal coordinate system.

The system applies equally to unnotched and notched (or precracked) test specimens.

The method is intended only for metallic materials with uniform texture that can be unambiguously determined.

Test specimen orientation is decided before specimen machining, identified in accordance with the designation system specified in this International Standard, and recorded.

2 Designation system

2.1 General

The method for relating specimen axes to the characteristic directions of the product makes use of an X-Y-Z orthogonal coordinate system for wrought metals.

- the letter X always denotes the direction of principal deformation (maximum grain flow in the product);
- the letter Y denotes the direction of least deformation;
- the letter Z denotes the direction normal to the X-Y plane.

2.2 Exception — not aligned

When the specimen direction does not coincide with the product's characteristic grain-flow directions, two letters are used as described for unnotched specimens in 3.2.2 and 3.2.4, and for notched specimens in 4.3.

2.3 Exception — no grain flow

When there is no grain-flow direction as in a casting, specimen location and orientation shall be defined on a part drawing and the test result shall carry no orientation designation.

3 Designation of unnotched specimens

3.1 General

The designations of unnotched specimens variously aligned with respect to the product's characteristic grain-flow directions are depicted in Figure 1. Only specimens fully aligned with, or lying midway between, the product's characteristic grain-flow directions are shown.

3.2 Sheet, plate, bar (flat rolled products)

3.2.1 Aligned, grain flow different in all three orthogonal directions

For products of non-circular cross-section and grain flow differing in the three orthogonal directions, specimens aligned with the product's characteristic grain-flow directions are designated as X-, Y- or Z-direction specimens as depicted in Figure 1 a).

3.2.2 Not aligned, grain flow different in all three orthogonal directions

For products of non-circular cross-section and grain flow differing in the three orthogonal directions, specimens lying midway between the product's characteristic grain-flow directions are designated as XY-, XZ- or YZ-direction specimens as depicted in Figure 1 f). When the specimen lies neither in alignment with the product's characteristic grain-flow directions nor midway between them, but rather at some other angle to them, then that angle shall be stated between the two designation letters, the first letter denoting the direction toward which the specimen axis is inclined, and the second letter the direction from which the specimen axis is inclined. This designation scheme is restricted to direction vectors that lie within any of the three planes described by the orthogonal X, Y and Z directions. When the direction vector lies outside those planes, specimen location and orientation shall be defined on a drawing of the product or part and the test result shall carry no orientation designation.

3.2.3 Aligned, equal cross-sectional grain flow

For products of non-circular cross-section with equal Y- and Z-direction grain flow, specimens oriented normal to the X-direction (principal direction of) grain flow may be designated as either Y- or Z-direction specimens, as depicted in Figure 1 a).

3.2.4 Not aligned, equal cross-sectional grain flow

For products of non-circular cross-section with equal Y- and Z-direction grain flow, specimens lying midway between the product's characteristic grain-flow directions are designated as XY-, XZ-, or YZ-direction specimens, as depicted in Figure 1 f). When the specimen lies neither in alignment with the product's characteristic grain-flow directions nor midway between them, but rather at some other angle to them, then that angle shall be stated between the two letters, the first letter denoting the direction toward which the specimen axis is inclined, and the second letter the direction from which the specimen axis is inclined. This designation scheme is restricted to direction vectors that lie within any of the three planes described by the orthogonal X, Y and Z directions. When the direction vector lies outside those planes, specimen location and orientation shall be defined on a drawing of the product or part and the test result shall carry no orientation designation.

3.3 Cylinders and thick-walled tubes

Specimen depictions in Figures 1 b) and 1 c) pertain to solid cylinders; those in Figure 1 d) apply to hollow cylinders (thick-walled tubes).

3.4 Thin-walled tubes, helical grain flow

Specimen depictions in Figure 1 e) pertain to products with helical grain flow, typically thin-walled tubing.

3.5 Castings

When there is no grain-flow direction as in a casting, specimen location and direction shall be defined on a part drawing and the test result shall carry no orientation designation.

4 Designation of notched (or precracked) specimens

4.1 General

Designating the plane and direction of crack extension for notched (or precracked) specimens, in relation to the product's characteristic grain-flow directions, is done using a hyphenated code wherein the letter(s) preceding the hyphen represent the direction normal to the crack plane and the letter(s) following the hyphen represent the anticipated direction of crack extension.

4.2 Aligned

When the specimen direction is aligned with the product's characteristic grain-flow directions, a single letter for each case is used to denote the direction perpendicular to the crack plane and the direction of intended crack extension, as depicted in Figure 2 a), 2 c) and 2 d).

4.3 Not aligned

When the specimen orientation directions lie midway between the product's characteristic grain-flow directions, two letters shall be used to denote the normal to the crack plane or the crack propagation direction, as depicted in Figure 2 b). When the specimen orientation directions lie neither in alignment with the product's characteristic grain-flow directions nor midway between them, but rather at some other angle to them, then that angle shall be stated between the two letters, the first letter denoting the direction toward which the crack plane normal or propagation direction is inclined, and the second letter the direction from which the crack plane normal or crack propagation direction is inclined. This designation scheme is restricted to direction vectors that lie within any of the three planes described by the orthogonal X, Y and Z directions. When the direction vector lies outside those planes, the specimen crack plane orientation and propagation direction shall be defined on a drawing of the product or part, and the test result shall carry no orientation designation.

4.4 No grain flow

When there is no grain-flow direction as in a casting, specimen location and crack plane orientation shall be defined on a part drawing and the test result shall carry no orientation designation.

4.5 Welds

A future International Standard, which is being developed, contains a method of test for welds, including a unique scheme for designating specimen location and orientation. When that test method is adopted as an International Standard, its specimen location and orientation scheme will be incorporated into this International Standard.

5 Application of designation system in material specification

5.1 General

The designation of specimen location and orientation with respect to the product characteristic directions is straightforward for regular structural configurations like plate and rod. It is more difficult for complex structural shapes, in which case knowledge of production and processing plays an essential role.

5.2 Non-uniform grain flow


In cases where grain flow is not uniform, specimen location and orientation shall reference component geometry and be noted on component drawings along with a description of component production and processing.

5.3 Specifications


Specimen extraction shall conform to relevant specifications.

5.4 Comparisons


When products are to be compared on the basis of mechanical properties, it is essential that specimen location and orientation with respect to the product's grain-flow directions be comparable and that the results not be generalized beyond these limits.

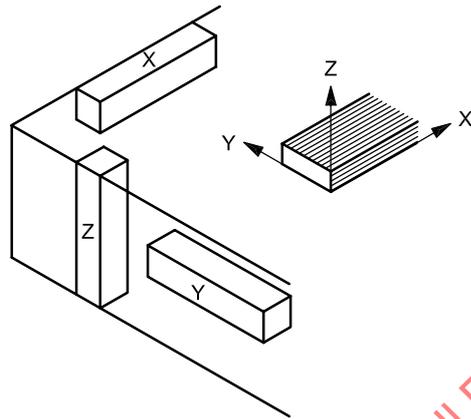

a) Sheet, plate, bar

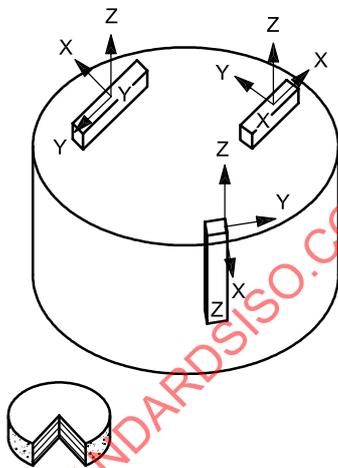


b) Cylinder — Radial grain flow, axial working direction

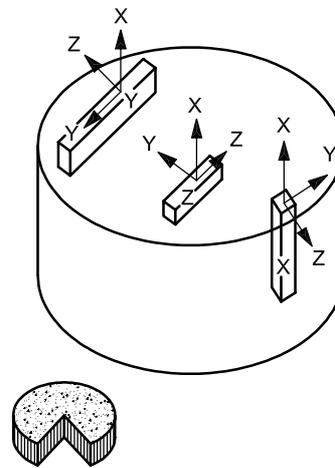


c) Cylinder — Axial grain flow, radial working direction


Figure 1 — Designation of unnotched test pieces

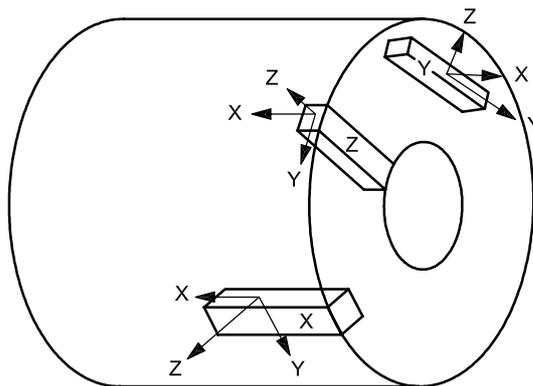

d) Tube (axial grain flow)

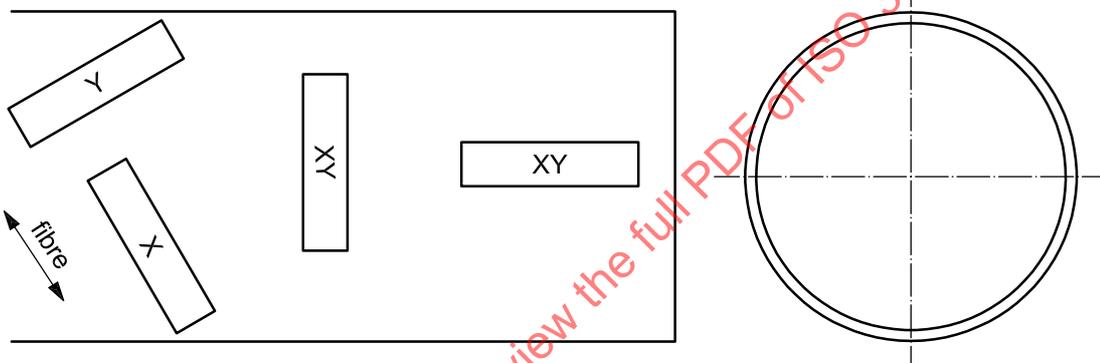

e) Thin-walled tube with helical grain flow

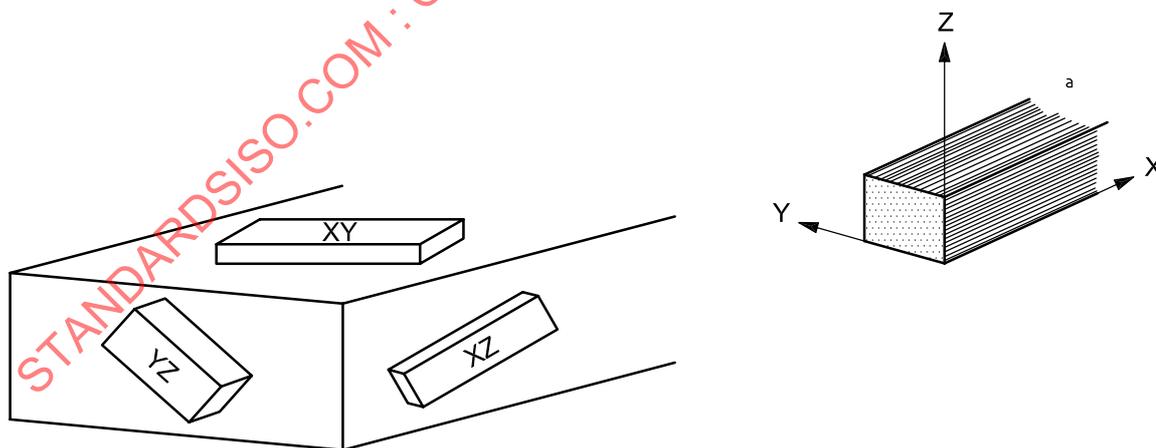

f) Not aligned — sheet, plate, bar

a Grain flow.

Figure 1 — (continued)