
**Cylinders for acetylene — Basic
requirements —**

Part 1:

Cylinders without fusible plugs

Bouteilles pour acétylène — Exigences de base —

Partie 1: Bouteilles sans bouchons fusibles



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3807-1:2000

© ISO 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 734 10 79
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative reference	1
3 Terms and definitions	1
4 Basic requirements	3
5 Type approval.....	4
6 Solvent-free acetylene cylinders.....	7
7 Acetylene cylinders used in bundles.....	7
Annex A (normative) Determination of porosity of the porous mass for type approval testing	9
Annex B (normative) Production batch test procedures for the manufacture of porous mass for acetylene cylinders.....	10
Annex C (normative) Procedure for type testing of acetylene cylinders	12
Annex D (normative) Procedure for establishing permissible acetylene/solvent concentrations.....	16
Annex E (normative) Maximum permissible settled pressure	21
Bibliography.....	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 3807 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3807-1 was prepared by Technical Committee ISO/TC 58, *Gas cylinders*.

This first edition, together with ISO 3807-2, cancels and replaces ISO 3807:1977, which has been technically revised.

ISO 3807 consists of the following parts, under the general title *Cylinders for acetylene — Basic requirements*:

- *Part 1: Cylinders without fusible plugs*
- *Part 2: Cylinders with fusible plugs*

Annexes A to E form a normative part of this part of ISO 3807.

Introduction

There are 2 types of acetylene cylinders working safely in certain parts of the world:

- acetylene cylinders designed with a test pressure of at least 60 bar gauge and without fusible plugs or any other safety devices;
- acetylene cylinders designed to a test pressure of at least 52 bar gauge, fitted with fusible plugs or other safety devices which release the gas and hence reduce the pressure if the cylinder temperature increases unintentionally.

It was decided to split International Standard ISO 3807 into 2 parts and specify the basic requirements of both systems separately; the differences are found mainly in the testing requirements.

STANDARDSISO.COM : Click to view the full PDF of ISO 3807-1:2000

Cylinders for acetylene — Basic requirements —

Part 1: Cylinders without fusible plugs

1 Scope

This part of ISO 3807 specifies the basic requirements for acetylene cylinders without fusible plugs or other safety devices with a maximum nominal water capacity of 150 l. It includes the procedures for type testing, production batch testing and the methods for determining the maximum permissible settled pressure in acetylene cylinders and the porosity of the porous mass. It also contains requirements for filling conditions of acetylene cylinders and bundles.

It does not include details of design for the cylinder shell; these are specified e.g. in ISO 4705, ISO 4706, ISO 9809-1 or ISO 9809-3.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 3807. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 3807 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 13769:—¹⁾, *Gas cylinders — Stamp marking*.

3 Terms and definitions

For the purposes of this part of ISO 3807, the following terms and definitions apply.

3.1

acetylene cylinder

pressure vessel, manufactured and suitable for transport of acetylene, containing a porous mass and solvent for acetylene (or solvent-free where applicable) with valve and other accessories fixed to the cylinder

NOTE 1 For solvent-free acetylene cylinders, see clause 6.

NOTE 2 When there is no risk of ambiguity, the word “cylinder” is used.

3.2

cylinder shell

pressure vessel, manufactured and suitable for receiving and containing a porous mass and to be fitted as an acetylene cylinder

1) To be published.

3.3

porous mass (porous substance)

single or multi-component material introduced or formed in the cylinder shell in order to fill it and that, due to its porosity, allows the absorption of the solvent/acetylene gas solution

NOTE The porous mass may be monolithic or non-monolithic:

- monolithic porous mass, consisting of a solid product typically obtained by reacting materials or by bonding materials together with a binder;
- non-monolithic porous mass, consisting typically of granular, fibrous or similar materials without addition of a binder.

3.4

solvent

liquid which is absorbed by the porous mass and is capable of dissolving and releasing the acetylene

NOTE The following abbreviations are used:

- "A" for acetone;
- "DMF" for dimethylformamide.

3.5

acetylene bundle

transportable unit consisting of two or more cylinders manifolded together within a rigid frame, equipped with all necessary equipment for filling and emptying in the assembled state

3.6

tare weight

reference mass, in kilograms, of the acetylene cylinder with the specified amount of solvent, further specified in accordance with 3.6.1, 3.6.2 or 3.6.3

NOTE For cylinders with solvent, the tare weight is expressed by indicating either one or both of the masses corresponding to TARE A and TARE S. For solvent-free acetylene cylinders, the tare weight is expressed by indicating a TARE F. For the tare weight used for cylinders in bundles, see 7.5.3.

3.6.1

TARE A

sum of empty mass of the cylinder shell, the mass of the porous substance (see 3.3), the specified mass of solvent, the valve and the mass of all other parts which are permanently attached (e.g. by clamping or nut-and-bolt fixing) to the cylinder when it is going to be filled

3.6.2

TARE S

TARE A plus the acetylene mass required to saturate the solvent at normal atmospheric pressure (1,013 bar) and at a temperature of 15 °C (saturation gas)

3.6.3

TARE F

TARE A minus the specified mass of solvent

3.7

maximum acetylene content

specified maximum mass of acetylene the cylinder is designed to contain, in kilograms "KG" [see 4.6.2 e)]

NOTE When a solvent is used, it includes the saturation gas.

3.8

total weight

total mass, in kilograms "KG" equal to TARE A (or TARE F for solvent-free cylinders) plus the maximum acetylene content [see 4.6.2 e)]

3.9**water capacity (cylinder shell volume)**

actual capacity of the cylinder shell, in litres, measured by filling the shell with water

NOTE The cylinder shell is defined as being empty of any porous mass, see 3.2.

3.10**porosity**

ratio, expressed as a percentage, of the total volume (water capacity) of the cylinder shell minus the volume of the solid material of the porous mass, to the water capacity of the cylinder shell, and determined in accordance with annex A or annex B

3.11**acetylene/solvent ratio**

ratio of the maximum acetylene content to the specified solvent content

3.12**maximum permissible settled pressure**

maximum permissible pressure, in bar gauge, at a uniform temperature of 15 °C, in a cylinder containing the maximum acetylene content and the specified solvent content

3.13**manufacturer**

company responsible for filling the cylinder shell with porous mass and which generally prepares it for the first charge of acetylene

4 Basic requirements**4.1 Cylinder shell**

4.1.1 The cylinder shell shall conform to the requirements of the relevant International Standard or the national requirements of the country(ies) of use.

4.1.2 The minimum test pressure for the cylinder shell shall be 60 bar gauge.

4.2 Porous mass

4.2.1 The porous mass in each cylinder shall be of such quality that it enables each completed cylinder to pass all the tests included in annex C.

For safety reasons, the porous mass shall be able to prevent the propagation of decomposition of the acetylene.

4.2.2 There shall be no hazardous reaction between the porous mass, the cylinder shell, the acetylene, the solvent and any parts in contact with them during preparation and use.

4.3 Solvent content

The specified mass of solvent for an acetylene cylinder shall be such that the cylinder will meet the requirements of all tests specified in annex C. Specific requirements for solvent content in acetylene cylinders and bundles are given in annex D.

4.4 Maximum acetylene charge

The total mass of acetylene in a cylinder shall not exceed the amount specified by the manufacturer. For specific requirements for individual cylinders and bundles, see annex D.

4.5 Settled pressure

When the cylinder has been charged with the specified solvent content and to the maximum acetylene content, and the pressure has reached equilibrium at a uniform temperature of 15 °C, the gauge pressure in the cylinder shall not exceed the maximum permissible settled pressure for the type of cylinder — calculated using the formula in annex E.

4.6 Cylinder identification

4.6.1 The identification of acetylene cylinders shall comply with relevant national requirements and standards for identification (e.g. stamp marking, labelling and colour-coding) in the country(ies) of use.

4.6.2 Irrespective of the requirements of 4.6.1, each acetylene cylinder shall be stamp-marked at least with the following information:

- a) the number of this part of ISO 3807, i.e. ISO 3807-1;
- b) cylinder serial number;
- c) gas identification, in the format of the chemical symbol "C₂H₂";
- d) identification of the porous mass, enabling the mass, the country and factory of origin to be clearly identified;
- e) tare weight as defined in 3.6.1 or 3.6.2. If this tare weight includes fixed parts other than the valve (normally fixed cap or valve guard), the total mass of those parts shall be indicated by a stamp marking in front of the letters "TARE" (e.g. 2.3 TARE 75.1/75.6 KG, see ISO 13769). For solvent-free acetylene cylinders, see 6 d);
- f) total weight of the acetylene cylinder as defined in 3.8;
- g) identification of the solvent including the specified mass of solvent, in kilograms (e.g. A 12.4 KG or DMF 16.0 KG). For solvent-free acetylene cylinders, see 6 d);
- h) test pressure of the cylinder shell, in bar gauge;
- i) maximum permissible settled pressure, in bar gauge, as defined in 3.12;
- j) actual water capacity of the cylinder shell, in litres "L".

5 Type approval

5.1 General requirements

Representative cylinders, selected according to 5.3 by, or on behalf of, the approving authority, shall withstand successfully the type tests as required in 5.4 prior to type approval being granted to the manufacturer of the porous mass (see 5.2).

The massing factory and the process of filling of the porous mass into the cylinder shell shall be audited by, or on behalf of, the approving organization.

5.2 Approval requirements

5.2.1 Range of a single approval

A request for approval of acetylene cylinders may cover a range of different cylinder sizes provided that:

- a) the cylinders contain the same porous mass from the same factory and the same solvent;

- b) the maximum acetylene content per litre water capacity of the cylinder shell is the same;
- c) the acetylene/solvent ratios are the same;
- d) the nominal outside diameter of the cylinder falls within the range of either:
 - 1) ≤ 270 mm or
 - 2) > 270 mm;
- e) the construction is similar (welded or seamless);
- f) the cylinder shells are made from the same material (type of steel or type of aluminium alloy, etc.).

NOTE The maximum acetylene content per litre water capacity (b) and the maximum acetylene/solvent ratio (c) may be lower than the values approved, provided they are within the safe operating area of the safe operating diagram in Figure D.1.

5.2.2 Information to be supplied

Each request for approval shall include the following information:

- a) A schedule of the different types, as defined in 5.3.2, of acetylene cylinders which form the subject of the request for approval and which includes, for each size of cylinder, the following information:
 - 1) nominal water capacity in litres;
 - 2) solvent to be used;
 - 3) specified solvent content in kilograms;
 - 4) maximum acetylene content in kilograms;
 - 5) test pressure of the cylinder shell in bar;
 - 6) the maximum settled pressure at 15 °C;
 - 7) name of manufacturer and place of production of porous mass;
 - 8) identification (trade name) of porous mass to be stamped onto the cylinder;
 - 9) rejection criteria (maximum top clearance between mass and shell).
- b) A description of the porous mass as it exists in the cylinder, which gives sufficient information concerning production process and quality control procedures (see annex B). The description shall include the following:
 - 1) maximum top clearance as manufactured, which shall be consistent with periodic inspection criteria;
 - 2) core hole size and packing material where applicable.
- c) A report on the porosity determinations carried out by, or on behalf of, the manufacturer according to the method given in annex A and a statement of the maximum and minimum limits of porosity within which the porous mass will be manufactured.

5.2.3 Declaration of the manufacturer

The request for approval shall be accompanied by a declaration from the manufacturer stating that, provided type approval is granted, the production of the porous mass will be in accordance with the information given in the request for approval in 5.2.2.

5.3 Test cylinders

5.3.1 Submission of test cylinders

The manufacturer shall submit an adequate number of cylinders representative of production of that cylinder type (e.g. with regard to top clearance, etc.), including spare cylinders, for type testing. These cylinders shall be complete with porous mass and all fittings, but without solvent and acetylene, unless otherwise specified by the approving organization.

5.3.2 Selection of test cylinders

Cylinders for tests shall be selected as follows:

- a) for cylinders with a nominal water capacity > 60 l and ≤ 150 l, test cylinders with a capacity considered to be representative of the size under consideration shall be selected;
- b) for cylinders with a nominal water capacity ≤ 60 l, tests shall be carried out on the smallest and the largest cylinders of every range proposed by the manufacturer;
- c) for cylinders with a nominal water capacity < 20 l, no tests need to be carried out on cylinders having a maximum acetylene content of not more than 90 % of the equivalent proportional content used in approved cylinders of water capacity ≥ 20 l. However, in such a case the maximum acetylene content per volume (water capacity) shall not exceed 0,180 kg/l. For cylinders having a higher acetylene content, tests shall be carried out on cylinders with a nominal water capacity representative of the size under consideration.

5.4 Type approval tests

5.4.1 Approval requirements

All tested cylinders shall successfully withstand the following type tests:

- a) the elevated temperature test in accordance with C.1;
- b) the backfire test in accordance with C.2.

In case of failure in the backfire test, it shall be repeated under certain circumstances, see C.2.2.3 e) and C.2.2.4.

5.4.2 Prototype approval tests

Cylinders shall be tested as follows:

- a) for a single cylinder size:
 - three cylinders shall be subjected to the elevated temperature test (see C.1);
 - three cylinders shall be subjected to the backfire test (see C.2);
- b) for a range of cylinder sizes as defined in 5.2.1:
 - three cylinders of the largest size shall be subjected to the elevated temperature test (see C.1);
 - three cylinders of the largest and smallest size shall be subjected to the backfire test (see C.2).

5.4.3 Extended approval tests

For cylinders containing the same porous mass and solvent for which prototype approval (see 5.4.1 and 5.4.2) has been granted, a reduced test programme may be performed:

a) For cylinders of the same size (or range of sizes) but different construction [see 5.2.1 e)] and/or made from different types of material [see 5.2.1 f)] but otherwise complying with 5.2.1:

- the elevated temperature test (C.1) need not be carried out;
- three cylinders shall be subjected to the drop treatment (C.2.1), sectioned longitudinally and inspected for damage to the porous mass (e.g. for specified top clearance and cracks or disintegration). Before longitudinal sectioning, the cylinders shall be inspected for excessive top clearance.

If these inspections after the drop treatment do not show any faults, no further tests according to C.2 are required. Otherwise a complete backfire test (C.2) on three further cylinders shall be carried out.

b) For cylinders outside the approved sizes (or range of sizes), but provided the acetylene/solvent ratio is not increased:

- the elevated temperature test (C.1) need not be carried out;
- three cylinders shall be subjected to the backfire test (see C.2).

In case of failure in the backfire test, it shall be repeated under certain circumstances, see C.2.2.3 e) and C.2.2.4.

6 Solvent-free acetylene cylinders

Acetylene cylinders intended for use as solvent-free acetylene cylinders shall:

- a) have passed the type test procedures with acetone as solvent as described in annex C;
- b) not have been previously filled with solvent;
- c) comply with 4.5 for the maximum permissible settled pressure, when inserting the specified amount of acetone as determined in 6 a) and with the constants given in Table E.1 for acetone;
- d) be stamped with TARE F as defined in 3.6.3 and the letters FS instead of the specified mass of solvent;
- e) bear the words "solvent-free" painted in a clear and visible manner.

The total weight shall be calculated from the density of acetylene at the maximum permissible settled pressure and the free volume (water capacity of the cylinder shell multiplied by the porosity) in the cylinder at 15 °C.

7 Acetylene cylinders used in bundles

7.1 General requirements

Acetylene cylinders that have been approved in accordance with the requirements of this part of ISO 3807 may be used in bundles, if authorized in the country of use, without further approval. They may be filled simultaneously provided the conditions specified in clauses 7.2 to 7.5 are fulfilled.

7.2 Filling conditions

The bundle shall only be filled without dismantling if the total residual solvent content of the cylinders has been checked (e.g. by weighing the bundle and checking the pressure). It shall lie within the permitted safe solvent operating range, S_{so} (see annex D, Figure D.1).

The maximum number of times the bundle may be filled, before it is dismantled and the cylinders individually checked and replenished with solvent, is a function of the acetylene content and solvent operating range. It shall be determined as defined in annex D. In case of a "DMF bundle" the number of fills before the bundle is dismantled shall not exceed 100.

The maximum acetylene content per cylinder shall be reduced to approximately 90 % of the amount approved for the individual cylinder.

In practice the number of times an "acetone bundle" may be filled will generally not exceed six and will depend on the operating conditions. The number of fillings may be more or less, but in all cases the permitted solvent operating range shall not be exceeded.

NOTE In the case of a "DMF bundle", the need to dismantle the bundle to replenish the solvent will usually coincide with the periodic statutory re-inspection.

7.3 Maximum acetylene content

The maximum permissible acetylene content of the bundle, G_{bund} , is a function of the selected acetylene/solvent ratio and shall be determined as defined in annex D.

7.4 Acetylene/solvent ratio

The procedure for determining the acetylene/solvent ratio is explained in annex D. It is based on the approved data for the quantities of acetylene and solvent in an individual cylinder.

NOTE The range of acetylene and solvent content may be increased if further testing (backfire, etc.) is carried out. The results from these additional tests require the consent of the relevant authority.

7.5 Construction details

7.5.1 The bundle manifold and its support structure shall be designed in accordance with a recognized code of practice.

7.5.2 All cylinders comprising the bundle shall have the same water capacity and shape and contain the same porous mass of the same designation and the same solvent.

7.5.3 Cylinders used in bundles may have an additional quantity of solvent, which will increase the tare weight. This revised tare weight shall be shown on the cylinder by the addition of a plastic or metal ring or other suitable means. This tare weight will include any changes to the individual tare weight which might have resulted from the removal or addition of the various fixed components (caps or guards, etc.).

The original stamp marking of the tare weight (as defined in 3.6) shall not be changed.

7.5.4 Each of the cylinders within the bundle shall be fitted with a valve. These valves shall be left open during storage and shipping.

Annex A (normative)

Determination of porosity of the porous mass for type approval testing

A.1 Procedure

- a) A cylinder filled only with the porous mass is fitted with a valve and weighed. It is subjected to the action of vacuum so that after standing for 12 h, with the valve closed, the pressure is less than 27 mbar absolute. It is then filled with acetone under a pressure not exceeding 18 bar gauge. When the solvent no longer penetrates, the valve is closed and the cylinder is weighed.
- b) The cylinder is again subjected to a vacuum for at least 15 min and further acetone is added. This cycle of operations is repeated until all air is expelled from the cylinder and a constant mass obtained.
- c) The cylinder is then placed in a room where the temperature is constant, the valve being left open and connected to a vessel containing acetone under a small liquid head, for at least 24 h.
- d) The valve is then closed, the acetone container disconnected and the cylinder weighed.
- e) The difference between the final mass of the cylinder and that of the cylinder before the introduction of the acetone represents the mass of acetone introduced.

A.2 Calculation

The porosity, P , of the porous mass is given as a percentage by the following formula:

$$P = \frac{m}{V \times \rho} \times 100$$

where

m is the mass of acetone in kilograms;

V is the actual water capacity, in litres, of the cylinder shell without porous mass;

ρ is the density of acetone, in kilograms per litre, at the temperature in A.1 c).

NOTE Alternative methods for determination of the porosity of the porous mass during batch testing are given in B.1 h).

Annex B (normative)

Production batch test procedures for the manufacture of porous mass for acetylene cylinders

General requirements for production batch tests are given in B.1 and additional requirements for non-monolithic masses in B.2.

B.1 General requirements

The manufacturer shall establish quality control procedures, including test frequencies, for the manufacture of the porous mass, which shall include at least:

- a) specifications for the raw material used;
- b) procedures for the goods inwards inspection of raw materials;
- c) (for monolithic masses only) procedures for testing every batch of porous mass in the condition in which it will be introduced into the cylinders;
- d) (for monolithic masses only) means for recording temperature/time curves for any heat treatment (curing, drying, etc.) performed on the batch;
- e) procedures for measuring and recording the top clearance between the porous mass and cylinder;
- f) means for checking and/or recording all necessary masses and volumes stamp-marked on the cylinders;
- g) any additional quality-relevant requirements necessary for the type of porous mass manufactured;
- h) means for determination of the porosity of the porous mass by checking it either by a test described in annex A or by one of the following two batch methods:
 - 1) by calculation:

$$P = \frac{\rho_t - \rho_a}{\rho_t} \times 100$$

where

P is the porosity of the mass in %;

ρ_t is the true density (material density) determined by taking dry mass samples from the cylinder after final preparation and measuring with a porosimeter;

ρ_a is the apparent density determined by weighing a cylinder before and after preparation, taking into account the actual water capacity;

or

- 2) for monolithic masses only where the precision of weighing shall be better than $\pm 0,1$ kg:
 - i) select a control cylinder, making certain that the cylinder is empty and dry;

- ii) weigh the empty control cylinder shell;
- iii) fill the control cylinder with water, weigh and subtract the shell mass; this yields the volume of the wet mix in the control cylinder;
- iv) empty the control cylinder of water making sure that the cylinder is dry;
- v) fill the control cylinder with wet mix, weigh and deduct the mass of the empty shell; this is the mass of the wet mix in the control cylinder;
- vi) process the control cylinder through autoclaving and drying operations together with the production cylinders;
- vii) weigh the dried control cylinder, making sure that no filler is adhering to the outside surface;
- viii) subtract the dry control cylinder mass (step vii) from the wet control cylinder mass (step v); this is the amount of water removed from the control cylinder;
- ix) divide the volume of water removed from the control cylinder (step viii) by the volume of the control cylinder (step iii); this is the porosity of the porous mass in the control cylinder.

B.2 Non-monolithic masses

The manufacturer shall establish quality control procedures, including test frequencies, for the manufacture of the porous mass, which shall include at least means for checking excessive settlement of the mass (e.g. by the drop test described in C.2.1).

STANDARDSISO.COM : Click to view the full PDF of ISO 3807-1:2000

Annex C (normative)

Procedure for type testing of acetylene cylinders

C.1 Elevated temperature test

This test shall be carried out on cylinders which have been filled with the specified mass of solvent and charged with acetylene to the maximum content as prescribed by the manufacturer, plus an overcharge of 5 % acetylene.

Each cylinder shall be placed in a heated water bath, the mean temperature of which is maintained at $65\text{ °C} \pm 2\text{ °C}$, until the pressure in the cylinder becomes constant or the pressure curve shows that hydraulic pressure has developed. If hydraulic pressure develops, it is evident that the test shall be interrupted.

If during this test the pressure curve indicates that hydraulic pressure has developed in the cylinder, or if the maximum pressure in the cylinder exceeds the cylinder test pressure, the cylinder has failed.

C.2 Backfire test

The backfire test comprises two steps, a drop treatment C.2.1 followed by the backfire procedure C.2.2.

C.2.1 Drop treatment

Each cylinder shall be filled with the mass of solvent specified by the manufacturer. It shall then be dropped ten times from a height of 0,70 m on to a concrete block covered with a protective plate in an apparatus similar to that shown in Figure C.1. It shall be confirmed that the friction between the cylinder and any guides is negligible.

The clearance between the top of the mass and the cylinder shall be measured both before and after the drop treatment and prior to the backfire procedure and included in the test report.

Each cylinder shall be fitted with a device that will prevent loss of cylinder contents during the drop treatment.

Any subsidence or other defect of the porous mass which has taken place during the drop treatment shall not be corrected before submitting the cylinders to the backfire procedure.

C.2.2 Backfire procedure

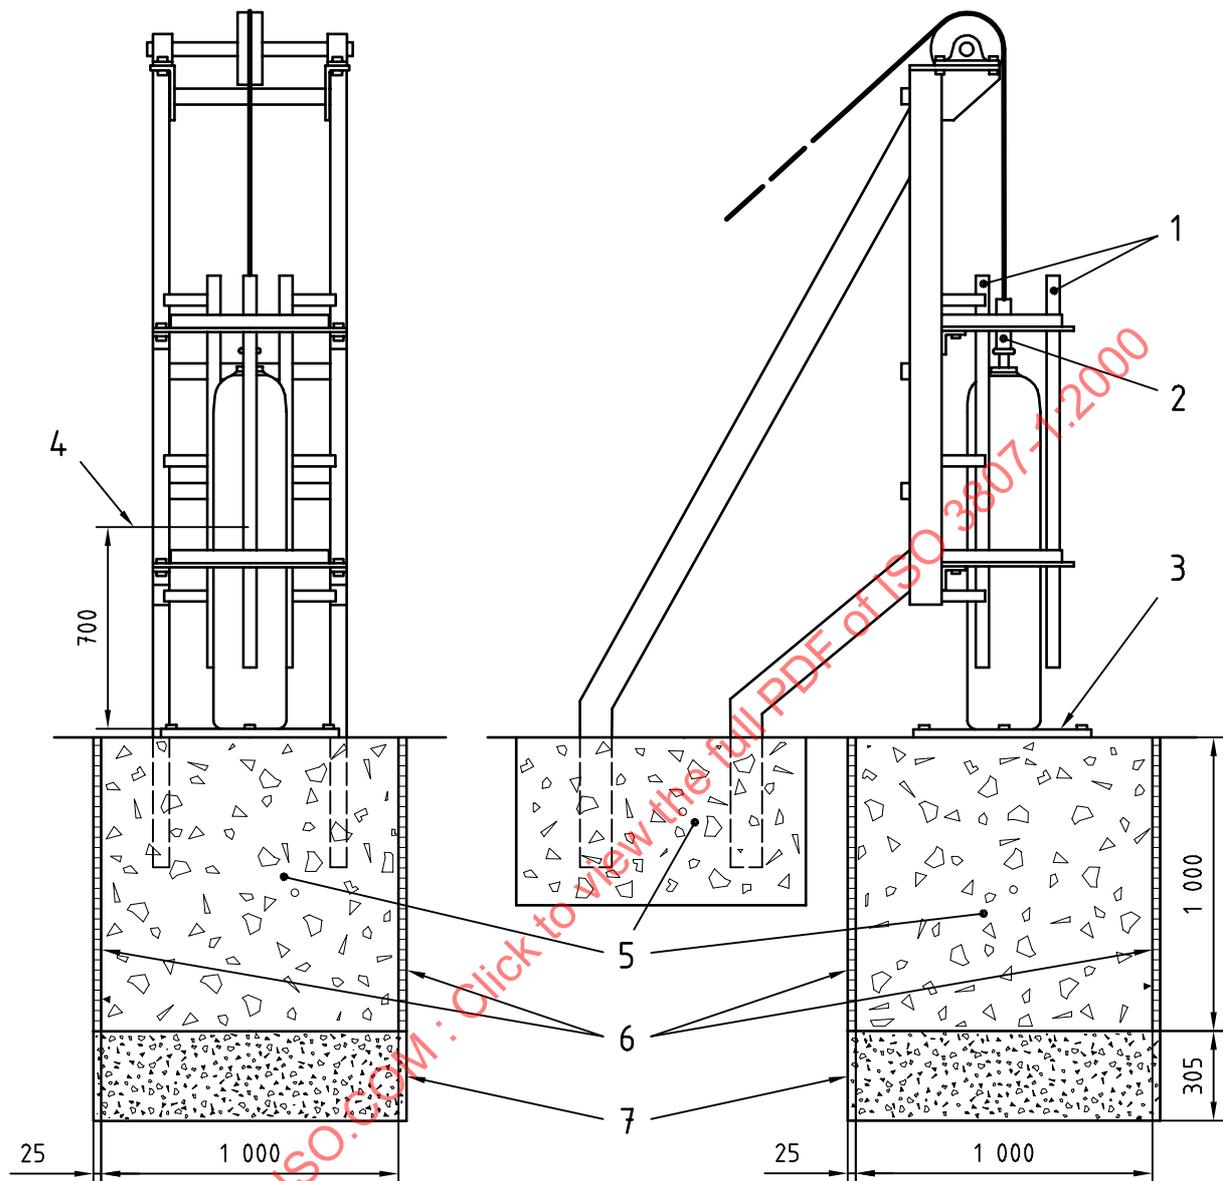
C.2.2.1 Explosion tube

For the purpose of this procedure the cylinder, after having undergone the drop treatment in C.2.1, shall be fitted with an explosion tube directly connected to the cylinder similar to that shown in Figure C.2. The capacity of the explosion tube shall be 75 ml with an internal diameter of 30 mm, terminating in a passage 4 mm in diameter and with a length of 70 mm connecting directly to the interior of the cylinder. The explosion tube shall be provided with a means of ignition, incorporating a suitable wire such as a tungsten wire 0,2 mm in diameter and 15 mm in length.

C.2.2.2 Acetylene charging

The cylinders fitted with the appropriate equipment shall be charged with acetylene to the maximum acetylene content proposed by the manufacturer plus an overcharge of 5 %, taking all necessary steps to purge the cylinder of non-soluble gases as far as is practicable.

Dimensions in millimetres

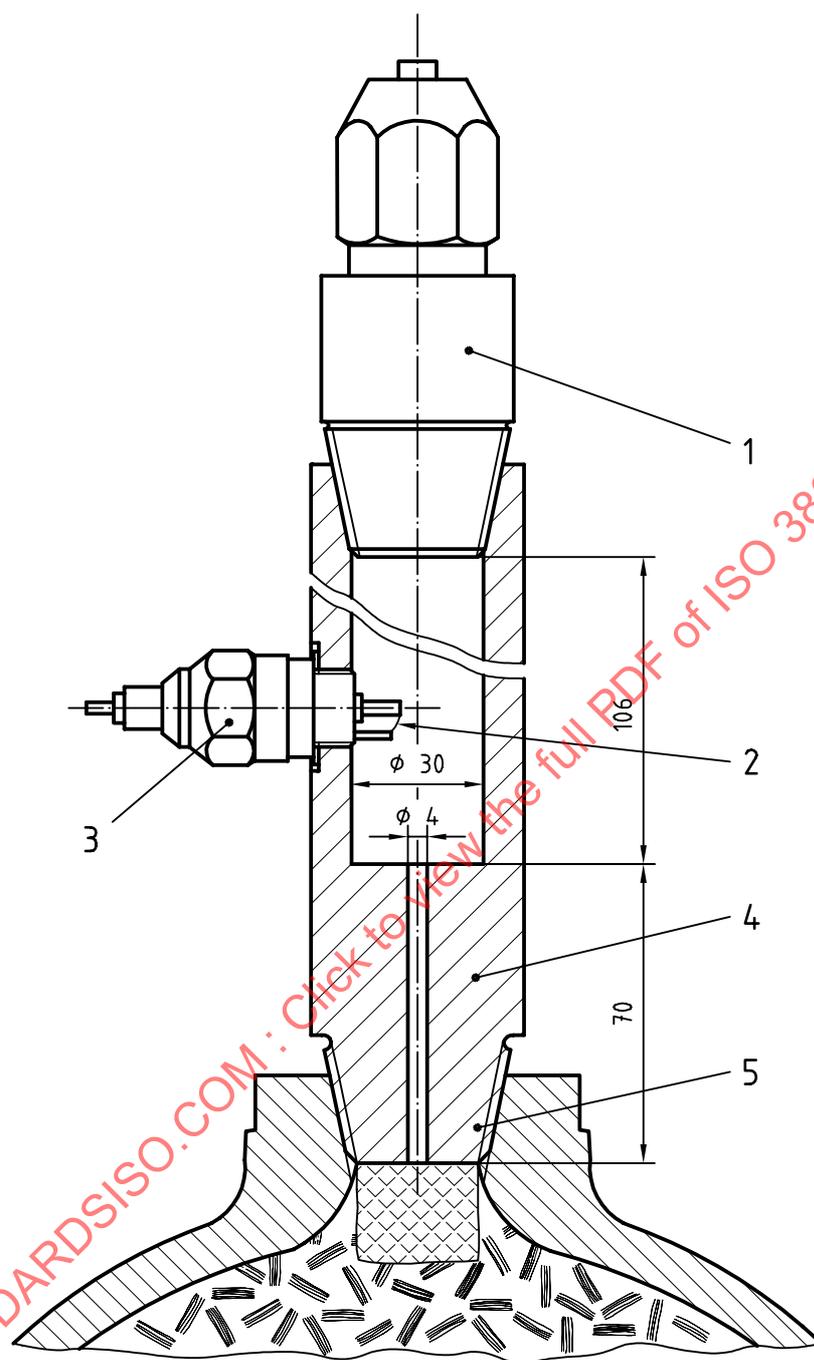
**Key**

- | | |
|---------------------------------|-----------------------------|
| 1 Guides | 5 Concrete ^b |
| 2 Quick release system | 6 Sound proofing (optional) |
| 3 Protective plate ^a | 7 Sand |
| 4 Height of travel | |

^a The protective plate shall consist of 25 mm thick sheet made from material with a Brinell hardness of approx. 48 HB (10 mm ball, 300 kg load).

^b Recommended concrete grade for the foundation is C25/30 in accordance with ISO 3893:1977. The concrete shall be cast in one piece. It is important that the surface on which the protective plate is placed be smooth and horizontal.

Figure C.1 — Typical apparatus for drop treatment



Key

- 1 Valve enabling the test cylinder to be filled with acetylene
- 2 Ignition source
- 3 Firing device
- 4 Explosion tube
- 5 Taper part to suit valve threads in the cylinder

Figure C.2 — Typical explosion tube for backfire procedure

C.2.2.3 Test sequence

After filling, each cylinder shall be subjected to the following procedure:

- a) stored horizontally for at least 3 d at a minimum temperature of 15 °C;
- b) placed vertically in a water bath, maintained at a temperature of 35 °C, for at least 3 h except for cylinders ≤ 10 l nominal water capacity in which case the heating time shall be at least 1,5 h;
- c) placed vertically in the firing test location before the pressure inside the cylinder has fallen to a value not more than 4 % below the maximum pressure attained in the cylinder during its heating, as described in b) above, then fired by igniting the firing device;
- d) there shall be an adequate means of verifying that the required energy has been provided to initiate the acetylene decomposition in the explosion tube (e.g. by inspection of the wire after firing to ensure that it has fused);
- e) if there is evidence of a fault in the test equipment or in the procedure, the test shall be repeated.

C.2.2.4 Failure criteria

The cylinder has failed the test if it bursts, if there is a significant deformation of the shell or if there is any release of gas within 24 h of the initiation of the backfire.

If the pressure after 24 h in any one of the tested cylinders is higher than 30 bar gauge related to the temperature of 15 °C, another three cylinders shall be subjected to the complete backfire test. All three cylinders shall pass the test.

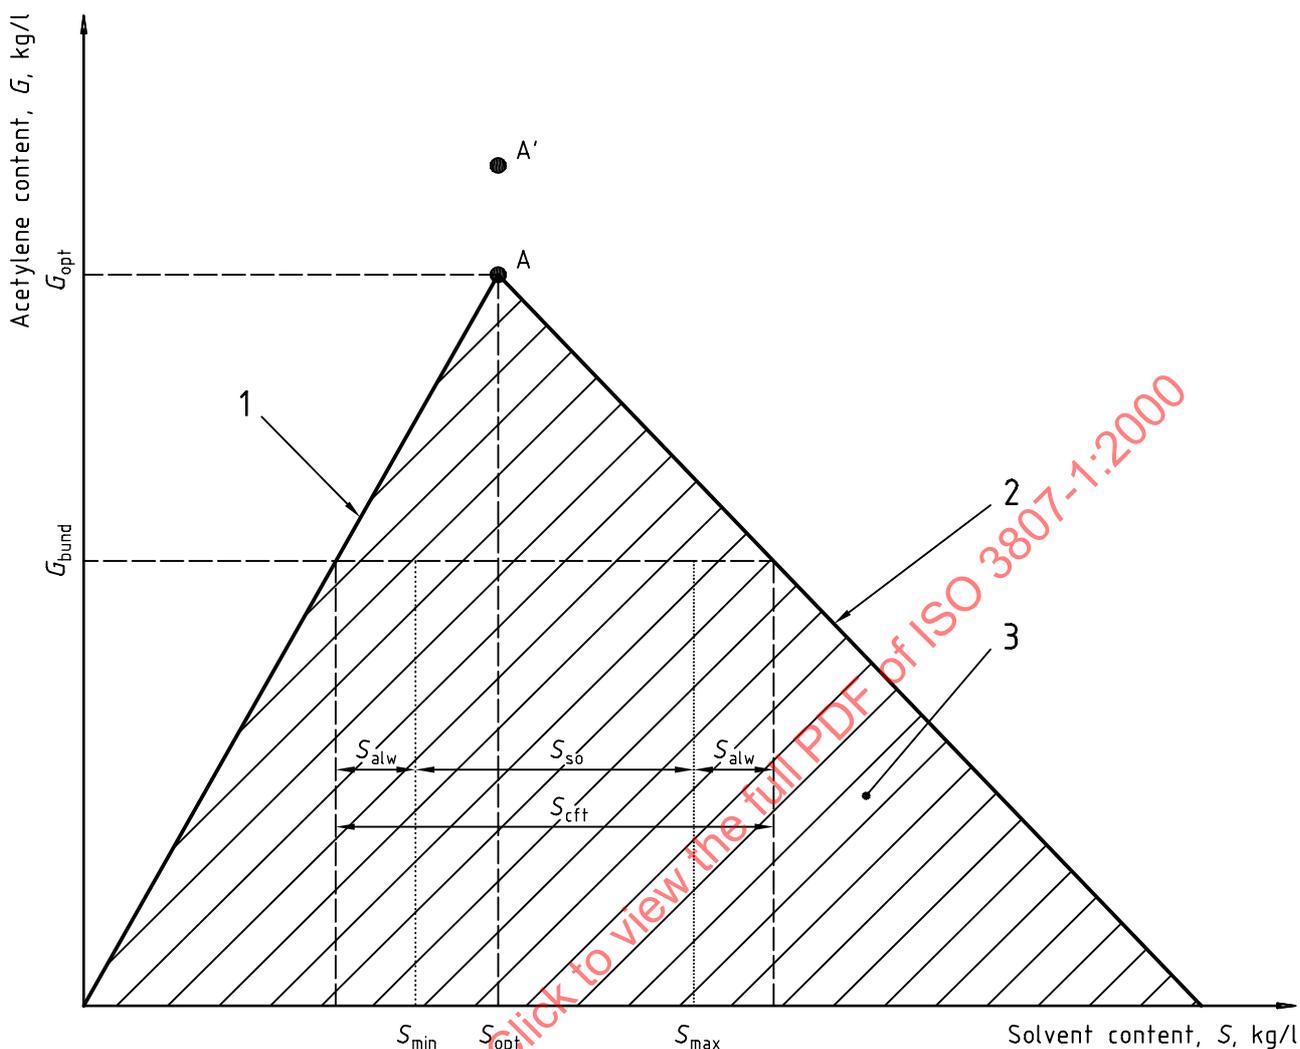
STANDARDSISO.COM : Click to view the full PDF of ISO 3807-1:2000

Annex D (normative)

Procedure for establishing permissible acetylene/solvent concentrations

D.1 Symbols

- a_4, a_5 are constants for the constant volume line (see D.2);
- G is the acetylene content per cylinder shell water capacity in kilograms per litre;
- G_{bund} is the acetylene content per acetylene bundle water capacity in kilograms per litre;
- G_{opt} is the optimum acetylene content per cylinder shell water capacity in kilograms per litre (point A in Figure D.1);
- K is the reduction coefficient for acetylene content, $K = \frac{G_{\text{opt}} - G_{\text{bund}}}{G_{\text{opt}}}$;
- m_{gas} is the mass of acetylene in kilograms;
- m_{sol} is the mass of solvent in kilograms;
- N is the number of cycles before dismantling the bundle for solvent replenishment (see D.3);
- S is the solvent mass per cylinder shell water capacity in kilograms per litre;
- S_{alw} is the solvent safety allowance per acetylene bundle water capacity in kilograms per litre (see D.3);
- S_{cft} is the solvent cylinder filling tolerance in kilograms per litre (see D.3);
- S_{loss} is the loss of solvent per cylinder shell water capacity and fill cycle in kilograms per litre (see D.3);
- S_{max} is the maximum solvent content per acetylene bundle water capacity in kilograms per litre;
- S_{min} is the minimum solvent content per acetylene bundle water capacity in kilograms per litre;
- S_{opt} is the solvent content per cylinder shell water capacity in kilograms per litre at optimum acetylene content (point A in Figure D.1);
- S_{so} is the solvent operating range in kilograms per litre;
- V is the volume of the acetylene/solvent solution in litres;
- V_A is the volume of the acetylene/solvent solution in litres at point A, see Figure D.1;
- V_{wc} is the water capacity of the cylinder shell in litres.

**Key**

- 1 Backfire line — Line 1
- 2 Constant volume line — Line 2
- 3 Safe operating area (hatched)

Figure D.1 — Typical safe operating diagram for individual cylinders or bundles

D.2 The safe operating diagram

The safe operating diagram defines the maximum and minimum permissible quantities of solvent for a given quantity of acetylene. A typical diagram is shown in Figure D.1 and it is prepared from experimental data. The diagram shows the acetylene and solvent quantities divided by the cylinder shell water capacity, thus making it independent of the actual cylinder size.

Line 1 represents the backfire line. This line is assumed to be straight and to start at the origin (no acetylene and no solvent) and runs to point A, which has been established by backfire tests according to annex C and is approved by the relevant authority.

NOTE The actual test cylinders contained 5 % more acetylene — point A' in Figure D.1.

Line 2, the constant volume line, represents points for which the volume of the acetylene/solvent solution is constant at any acetylene/solvent ratio, at a specified temperature. The line is drawn through point A, which has been established by elevated temperature tests as described above for Line 1. It represents a permissible volume of solution in the cylinder.

The volume, V , of an acetylene/solvent solution in the range of interest may be represented by a linear expression,

$$V = a_4 \times m_{\text{gas}} + a_5 \times m_{\text{sol}} \tag{D.1}$$

where a_4 and a_5 are constants, which have been determined experimentally (results vary between laboratories). The values given in Table D.1 shall be used for the diagram in Figure D.1.

Table D.1 — Volume formula constants

Constant	Solvent	
	Acetone l/kg	DMF ^a l/kg
a_4	1,91	1,75
a_5	1,25	1,05
a_4/a_5	1,53	1,67
^a Dimethylformamide.		

There is no common consensus about the values for the constants in Table D.1 and they shall not be used uncritically for any other purpose. They are considered to give a conservative value for the quotient a_4/a_5 .

The equation for Line 2 is derived as follows:

Let the volume of the acetylene/solvent solution at point A be V_A and divide formula D.1 by the cylinder shell water capacity, V_{wc} . Insert expressions for the specific quantities of acetylene and solvent (mass per cylinder shell water capacity).

$$\frac{V_A}{V_{\text{wc}}} = a_4 \times G + a_5 \times S \tag{D.2}$$

in which

$$G = \frac{m_{\text{gas}}}{V_{\text{wc}}}; S = \frac{m_{\text{sol}}}{V_{\text{wc}}} \tag{D.3}$$

Solving for G yields,

$$G = -\frac{a_5}{a_4} S + \frac{V_A}{a_4 \times V_{\text{wc}}} \tag{D.4}$$

where the last term contains constants only. As can be seen from the equation, the slope of Line 2 is $-(a_5/a_4)$.

It follows that although point A is the optimum operating point, any complementary ratio which lies beneath Line 1 and Line 2 is safe and may be used. It is this principle which permits any cylinder to be safely filled with less than the rated amount of solvent provided that the acetylene charge is correspondingly less.