

INTERNATIONAL STANDARD

**ISO
3842**

Fourth edition
2006-12-15

Road vehicles — Fifth wheels — Interchangeability

Véhicules routiers — Sellette d'attelage — Interchangeabilité

STANDARDSISO.COM : Click to view the full PDF of ISO 3842:2006



Reference number
ISO 3842:2006(E)

© ISO 2006

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3842:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3842 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 15, *Interchangeability of components of commercial vehicles and buses*.

This fourth edition cancels and replaces the third edition (ISO 3842:2001), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 3842:2006

Road vehicles — Fifth wheels — Interchangeability

1 Scope

This International Standard lays down the dimensional characteristics necessary for mounting and interchangeability of the fifth wheel mounted on a mounting plate (standard fifth wheel, Clause 4) or directly on the frame (direct-mounted fifth wheel, Clause 5) of towing vehicles for semi-trailers. It applies to the fifth wheels intended to hitch on semi-trailers equipped with a:

- 50 coupling pin as defined in ISO 337;
- 90 coupling pin as defined in ISO 4086.

Dimensions not specified are left to the discretion of the component manufacturer.

Test conditions and strength requirements to be met by 50 and 90 fifth wheel coupling are specified in ISO 8717.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 337, *Road vehicles — 50 semi-trailer fifth wheel coupling pin — Basic and mounting/interchangeability dimensions*

ISO 1726, *Road vehicles — Mechanical coupling between tractors and semi-trailers — Interchangeability*

ISO 4086, *Road vehicles — 90 semi-trailer fifth wheel kingpin — Interchangeability*

ISO 8717, *Commercial road vehicles — Fifth wheel couplings — Strength tests*

3 Designation

Fifth wheels meeting the requirements of this International Standard shall be identified by the following details in the order specified:

- 1) reference to this International Standard;
- 2) code FW 50 for 50 mm fifth wheels and FW 90 for 90 mm fifth wheels according to Clause 4;
- 3) or code DFW 50 for 50 mm direct-mounted fifth wheels according to Clause 5;
- 4) number of class of fifth wheel height H according to Tables 1 or 3;
- 5) class of transversal width (A or B) according to Table 2 for direct-mounted fifth wheels according to Clause 5.


EXAMPLES

- 50 mm fifth wheel coupling having a height within the range of class 1: Fifth wheel ISO 3842 FW 50-1;
- 90 mm fifth wheel coupling having a height within the range of class 4: Fifth wheel ISO 3842 FW 90-4;
- 50 mm direct-mounted fifth wheel coupling having a width of Class A and a height within the range of class 1: Direct-mounted fifth wheel ISO 3842 DFW 50-1-A.

4 Standard fifth wheels

4.1 Fixing holes

The position of the fixing holes on the mounting plate shall be as shown in Figure 1. The position of the fixing holes on the fifth wheel coupling shall be as shown in Figure 2.

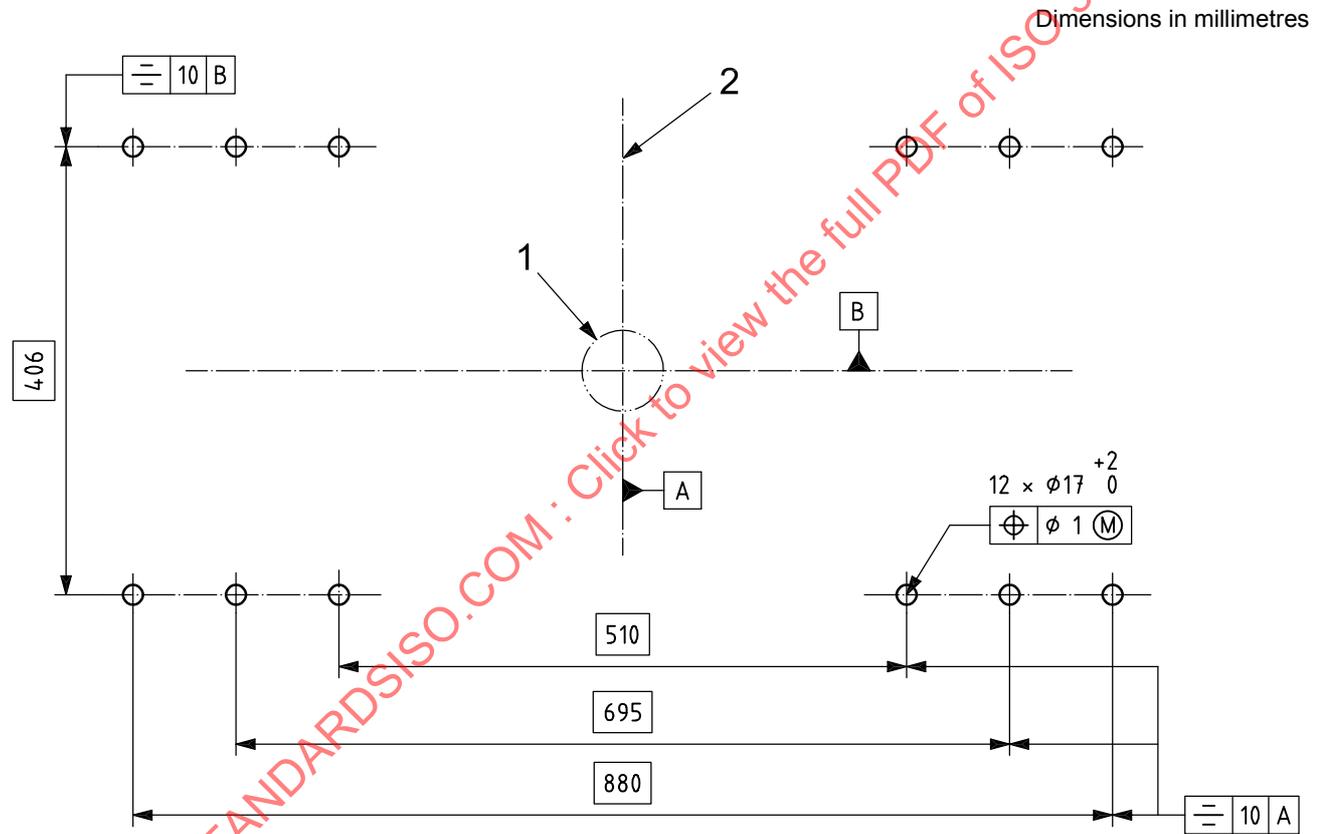

Key

- 1 coupling pin 1 (in accordance with ISO 337 or ISO 4086)
- 2 longitudinal axis of towing vehicle

Figure 1 — Dimensions and location of fixing holes on the mounting plate

Dimensions in millimetres

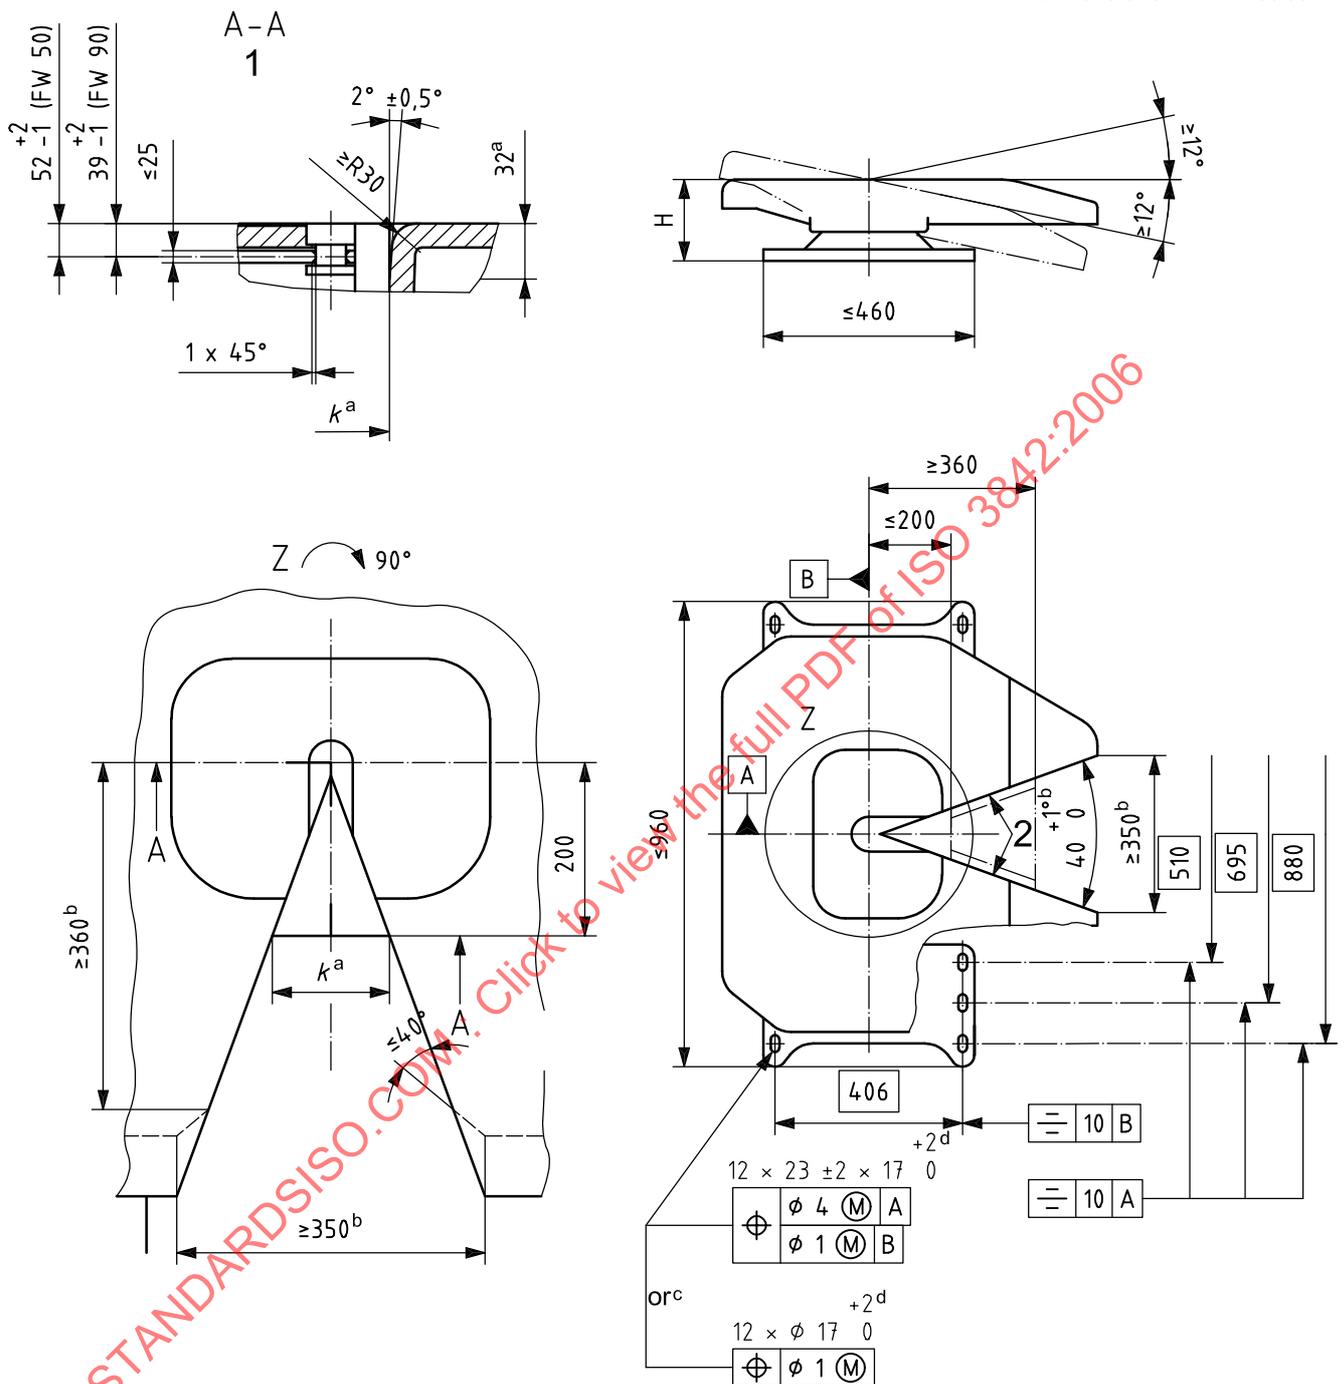


Figure 2 — Dimensions of fifth wheels

4.2 Mounting

Mounting of 50 mm fifth wheels (FW 50) is adequate with minimum 8 bolts, size M16, minimum property class 8.8, placed symmetrically with respect to the longitudinal and transverse axes of the fifth wheel. 90 mm fifth wheels (FW 90) shall be bolted with 12 bolts, size M16, minimum property class 8.8.

4.3 Inclination angles

Longitudinal inclination of the fifth wheel not installed on the vehicle (but bolts or nuts at mounting brackets considered) shall be $\pm 12^\circ$ minimum as shown in Figure 2.

A lateral angle of maximum $\pm 3^\circ$ is permissible (see ISO 1726) for fifth wheels complying with this International Standard.

4.4 Height

The height *H* of the fifth wheel coupling shall be within one of the classes specified in Table 1.

Table 1 — Classes of standard fifth wheel height

Dimensions in millimetres

FW	class 1	class 2	class 3	class 4	class 5	class 6
<i>H</i>	150	170	185	205	225	250
± 5						

4.5 Dimensions of standard fifth wheels


Standard fifth wheels shall have dimensions as shown in Figure 2.

4.6 Minimum force introduction area

A minimum force introduction area at the top of the fifth wheel plate is defined as shown in Figure 3 in order to show the area in which the trailer plate forces shall be introduced (grease grooves on the surface of the fifth wheel top plate are allowed in this area).

Within this outer diameter (*D* = 870 mm), no holes or sharp edges are allowed on the trailer plate.

The trailer plate shall be designed with adequate longitudinal and lateral reinforcement in the areas defined in Figure 3 in order to ensure optimal force introduction appropriate to the design of the fifth wheel.

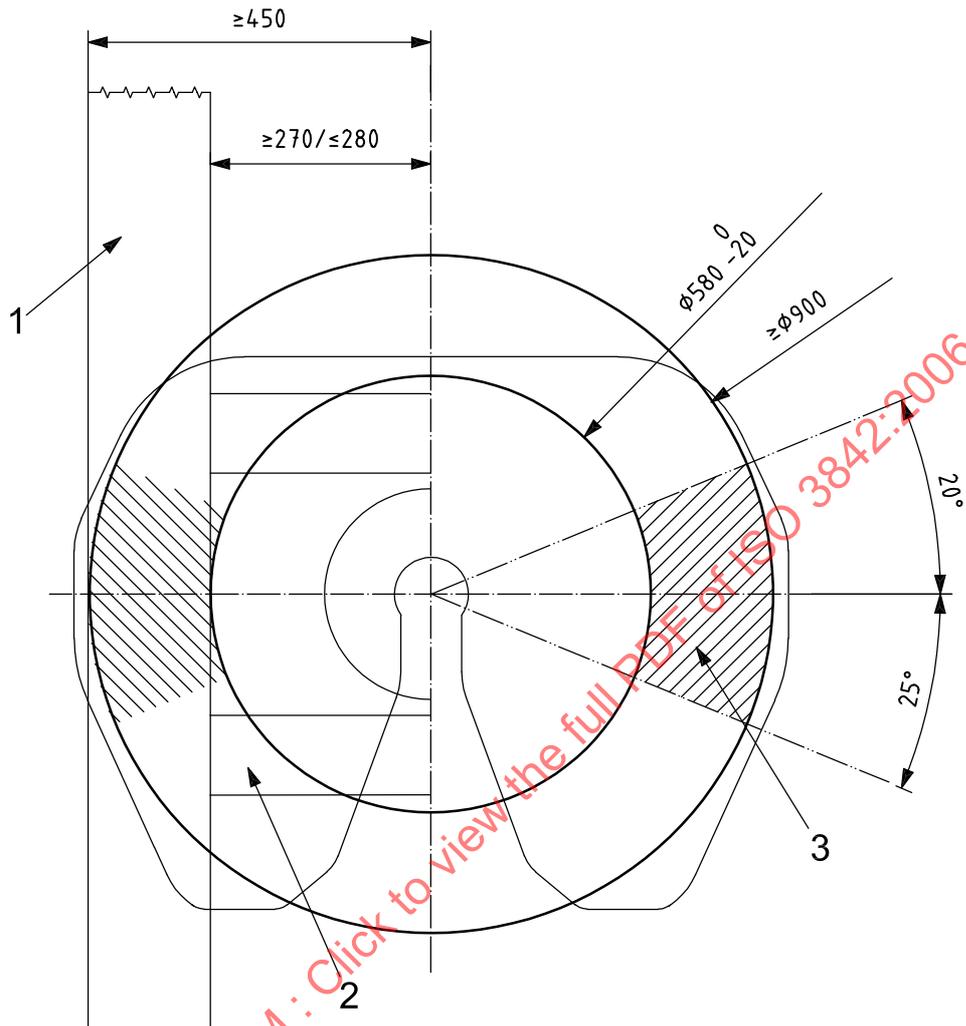**Key**

- 1 longitudinal support of the trailer chassis
- 2 cross bar of the trailer chassis
- 3 area of force introduction

Figure 3 — Minimum force introduction area

5 Direct-mounted fifth wheels

5.1 Fixing holes

The position of the fixing holes on the subframe and on the fifth wheel coupling shall be as shown in the respective view in Figure 4.

The transversal width of the fixing holes on the subframe and on the fifth wheel coupling shall be within one of the classes specified in Table 2.