

INTERNATIONAL STANDARD 3922

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Continuous mechanical handling equipment — Rotary vane feeder — Dimensional specifications

Engins de manutention continue — Écluses rotatives — Spécifications dimensionnelles

Second edition — 1978-12-15

Withdrawn

UDC 621.867.2

Ref. No. ISO 3922-1978 (E)

Descriptors : materials handling equipment, continuous handling, pneumatic conveyors, dimensions.

Price based on 1 page

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3922 was developed by Technical Committee ISO/TC 101, *Continuous mechanical handling equipment*.

This second edition was submitted directly to the ISO Council, in accordance with clause 6.13.1 of the Directives for the technical work of ISO. It cancels and replaces the first edition (i.e. ISO 3922-1977), which had been approved by the member bodies of the following countries :

Australia	Germany, F.R.	Turkey
Austria	India	United Kingdom
Belgium	Korea, Rep. of	U.S.S.R.
Bulgaria	Mexico	Yugoslavia
Czechoslovakia	Romania	
France	Spain	

No member body had expressed disapproval of the document.

Continuous mechanical handling equipment – Rotary vane feeder – Dimensional specifications

1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the dimensional characteristics of rotary vane feeders.

2 REFERENCES

ISO/R 773, *Rectangular or square parallel keys and their corresponding keyways (Dimensions in millimetres).*

ISO/R 775, *Cylindrical and 1/10 conical shaft ends.*

ISO 2148, *Continuous handling equipment – Nomenclature.*

3 DIMENSIONS

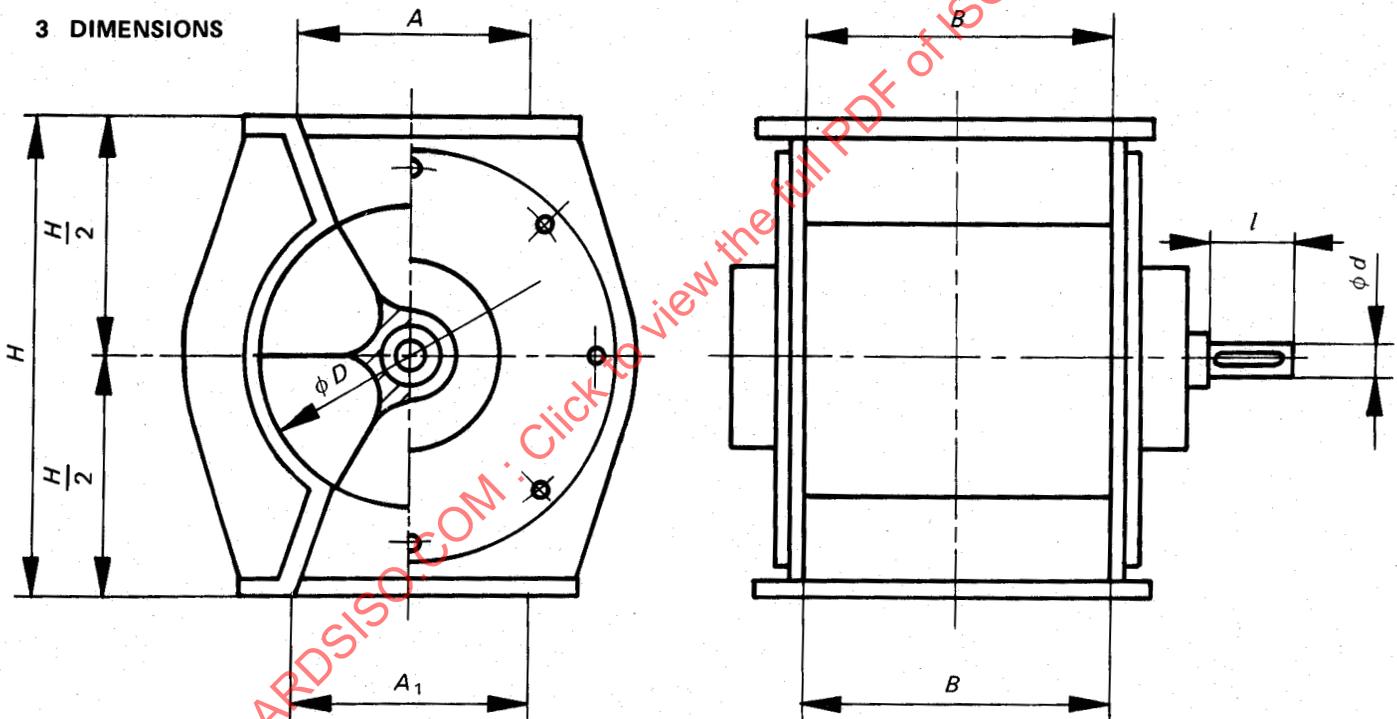


TABLE 1
Dimensions in millimetres

D^*	160	200	250	315	400	500	630	800	1 000
A	125	160	200	250	315	400	500	630	800
A_1	125	160	200	250	315	400	500	630	800
	160	200	250	315	400	500	630	800	1 000
B	125	160	200	250	315	400	500	630	800
	160	200	250	315	400	500	630	800	1 000
	200	250	315	400	500	630	800	1 000	1 250
H	250	315	400	500	630	800	1 000	1 250	1 600
d^{**}	25	32	32	40	45	50	60	80	100
l^{**}	60	80	80	110	110	110	140	170	210

* Diameter D may have values different from those given in table 1.

** Shaft ends in accordance with ISO/R 775.

Keys and keyways in accordance with ISO/R 773.

Inlets and discharges shall be in accordance with table 2 :

TABLE 2

Shape		Inlet	Discharge
Round	ϕ	A	A_1
Square	sides	A	A_1
Rectangular	sides	$A \times B$	$A_1 \times B$