
**Countersinks, 90°, with parallel
shanks and solid pilots**

Outils à chanfreiner à 90°, à queue cylindrique et pilote fixe

STANDARDSISO.COM : Click to view the full PDF of ISO 4205:2016



STANDARDSISO.COM : Click to view the full PDF of ISO 4205:2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Dimensions	1
Annex A (informative) Relationship between designations in this International Standard and ISO 13399 (all parts)	2
Bibliography	3

STANDARDSISO.COM : Click to view the full PDF of ISO 4205:2016

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 2, *Holding tools, adaptive items and interfaces*.

This third edition cancels and replaces the second edition (ISO 4205:1991), of which it constitutes a minor revision, notably with the addition of [Annex A](#), which gives the relationship between the designations of this International Standard and the ISO 13399 series.

Countersinks, 90°, with parallel shanks and solid pilots


1 Scope

This International Standard specifies the dimensions, in millimetres, and the tolerances of 90° countersinks with parallel shanks and solid pilots for general use.

2 Dimensions

The dimensions and tolerances are shown in [Figure 1](#) and given in [Table 1](#).

NOTE [Figure 1](#) illustrating this International Standard is diagrammatic only. It is not intended to show details of design.

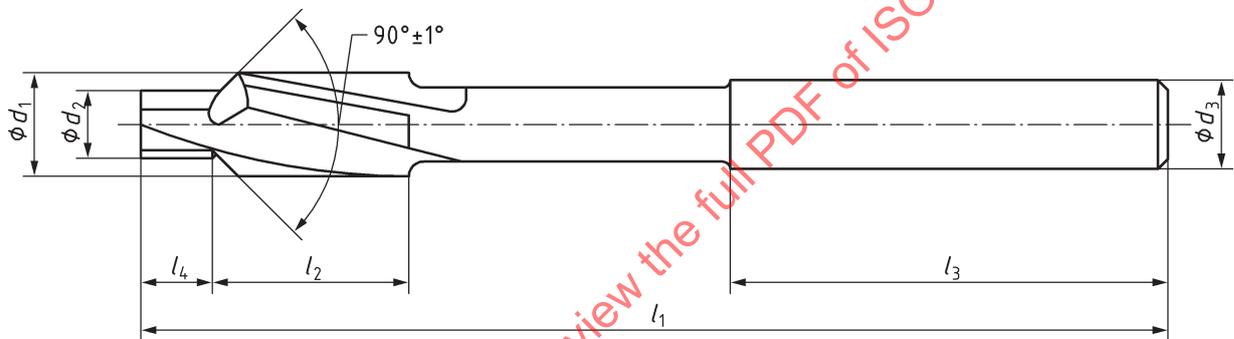

NOTE This figure shows a countersink with cutting diameter d_1 greater than 5 mm.

Figure 1

Table 1

Cutting diameter d_1 z9 ^a	Pilot diameter d_2 e8 ^a	Shank diameter d_3 h9 ^a	l_1	l_2	l_3	l_4
$2 \leq d_1 \leq 3,15$	Diameter to be specified to suit pilot hole diameter, when ordering (minimum possible diameter is $d_2 = 1/3 d_1$)	d_1	45	7	—	$\approx d_2$
$3,15 < d_1 \leq 5$			56	10		
$5 \leq d_1 \leq 8$			71	14	31,5	
$8 < d_1 \leq 10$			80	18	35,5	
$10 < d_1 \leq 12,5$			10	100	22	
$12,5 < d_1 \leq 20$		12,5	100	22	40	

^a See ISO 286-2.

Annex A (informative)

Relationship between designations in this International Standard and ISO 13399 (all parts)

For relationship between designations in this International Standard and preferred symbols according to ISO 13399 (all parts), see [Table A.1](#).

**Table A.1 — Relationship between designations in this International Standard
and ISO 13399 (all parts)**

Symbol in ISO 4205	Reference in ISO 4205	Property name in ISO 13399 (all parts)	Symbol in ISO 13399 (all parts)	Reference in ISO 13399 (all parts)
d_1	Figure 1 Table 1	cutting diameter	DC	71D084653E57F
d_2	Figure 1 Table 1	guide pilot diameter	GPD	71ED6A7A6E6A2
d_3	Figure 1 Table 1	connection diameter machine side	DCONMS	71EBDBF5060E6
l_1	Figure 1 Table 1	overall length	OAL	71D078EB7C086
l_3	Figure 1 Table 1	shank length	LS	71CF298870946
l_4	Figure 1 Table 1	guide pilot length	GPL	72724DE9E999D
90°	Figure 1	point angle	SIG	71DCCC4FEF366
$d_3 h9$	Table 1	tolerance class connection diameter machine side	TCDCONMS	72719B2BD8041