
**Cycles — Safety requirements for
bicycles —**

Part 2:

**Requirements for city and trekking,
young adult, mountain and racing
bicycles**

Cycles — Exigences de sécurité pour les bicyclettes —

*Partie 2: Exigences pour bicyclettes de ville et tout chemin (trekking),
jeunes adultes, tout-terrain et de course*

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-2:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 4210-2:2023



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
Introduction.....	vii
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 Requirements.....	2
4.1 Toxicity.....	2
4.2 Sharp edges.....	2
4.3 Security and strength of safety-related fasteners.....	2
4.3.1 Security of screws.....	2
4.3.2 Minimum failure torque.....	2
4.3.3 Folding bicycle mechanism.....	2
4.4 Crack detection methods.....	3
4.5 Exposed protrusions.....	3
4.6 Brakes.....	3
4.6.1 Braking systems.....	3
4.6.2 Hand-operated brakes.....	3
4.6.3 Attachment of brake assembly and cable requirements.....	4
4.6.4 Brake-block and brake-pad assemblies — Security test.....	5
4.6.5 Brake adjustment.....	5
4.6.6 Hand-operated braking-system — Strength test.....	5
4.6.7 Back-pedal braking system — Strength test.....	5
4.6.8 Braking performance.....	5
4.6.9 Brakes — Heat-resistance test.....	8
4.7 Steering.....	8
4.7.1 Handlebar — Dimensions.....	8
4.7.2 Handlebar grips and plugs.....	9
4.7.3 Handlebar stem — Insertion-depth mark or positive stop.....	9
4.7.4 Handlebar stem to fork steerer — Clamping requirements.....	10
4.7.5 Steering stability.....	10
4.7.6 Steering assembly — Static strength and security tests.....	11
4.7.7 Handlebar and stem assembly — Fatigue test.....	12
4.8 Frames.....	12
4.8.1 Suspension-frames — Special requirements.....	12
4.8.2 Frame — Impact test (falling mass).....	13
4.8.3 Frame and front fork assembly — Impact test (falling frame).....	13
4.8.4 Frame — Fatigue test with pedalling forces.....	13
4.8.5 Frame — Fatigue test with horizontal forces.....	13
4.8.6 Frame — Fatigue test with a vertical force.....	13
4.8.7 Rear brake mount tests.....	14
4.9 Front fork.....	14
4.9.1 General.....	14
4.9.2 Means of location of the axle and wheel retention.....	14
4.9.3 Tyre clearance test — Suspension fork.....	14
4.9.4 Front fork — Tensile test.....	14
4.9.5 Front fork — Static bending test.....	14
4.9.6 Front fork — Rearward impact test.....	14
4.9.7 Front fork — Bending fatigue test plus rearward impact test.....	15
4.9.8 Forks intended for use with hub- or disc-brakes.....	15
4.9.9 Steerer tube — fatigue test.....	15
4.10 Wheels and tyre assembly.....	16
4.10.1 Wheels and tyre assembly — Rotational accuracy — Concentricity tolerance and lateral tolerance.....	16

4.10.2	Wheel and tyre assembly — Clearance	16
4.10.3	Wheel and tyre assembly — Static strength test	16
4.10.4	Wheels — Wheel retention	16
4.10.5	Wheels — Quick-release devices — Operating features	17
4.10.6	Wheel and tyre assembly — Greenhouse effect test for composite wheels	17
4.10.7	Wheel and tyre assembly — Heat resistance tests for composite rims used in conjunction with rim brake	18
4.10.8	Wheel and tyre assembly — Overpressure test	18
4.10.9	Wheel and tyre assembly — Information for users	19
4.11	Front mudguard	19
4.12	Pedals and pedal/crank drive system	19
4.12.1	Pedal tread	19
4.12.2	Pedal clearance	20
4.12.3	Pedal — Static strength test	21
4.12.4	Pedal — Impact test	21
4.12.5	Pedal — Dynamic durability test	21
4.12.6	Drive system — Static strength test	21
4.12.7	Crank assembly — Fatigue test	22
4.13	Drive-chain and drive belt	22
4.13.1	Drive-chain	22
4.13.2	Drive belt	22
4.14	Chain-wheel and belt-drive protective device	22
4.14.1	Requirements	22
4.14.2	Chain-wheel disc and drive pulley disc diameter	23
4.14.3	Chain and drive belt protective device	24
4.14.4	Combined front gear-change guide	25
4.15	Saddles and seat-posts	25
4.15.1	Limiting dimensions	25
4.15.2	Seat-post — Insertion-depth mark or positive stop	25
4.15.3	Saddle/seat-post — Security test	26
4.15.4	Saddle and saddle rail — Static strength test	26
4.15.5	Saddle and seat-post assembly — Fatigue test	26
4.15.6	Seat-post — Fatigue test	26
4.16	Spoke protector	27
4.17	Luggage carriers	27
4.18	Road test of a fully assembled bicycle	27
4.19	Lighting systems and reflectors	27
4.19.1	General	27
4.19.2	Wiring harness	27
4.19.3	Lighting systems	28
4.19.4	Reflectors	28
4.20	Warning device	28
5	Manufacturer's instructions	28
6	Marking	30
6.1	Requirement	30
6.2	Durability test	31
Annex A (informative) Steering geometry		32
Bibliography		33

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 149, *Cycles*, Subcommittee SC 1, *Cycles and major sub-assemblies*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 333, *Cycles*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This third edition cancels and replaces the second edition (ISO 4210-2:2015), which has been technically revised.

The main changes as follows:

- improvement of [4.3.2](#) Minimum failure torque;
- change in minimum braking performance value in [Table 2](#) of [4.6.8.1.3](#);
- improvement of [4.6.9](#);
- improvement of [4.7.2](#);
- addition of a requirement for angle-adjustable handlebar stem in [4.7.6.3](#);
- addition of [4.8.7](#);
- addition of [4.9.8.3](#);
- addition of [4.9.9](#);
- re-arrangement of requirements for “Wheel and tyre assembly”, “Rims, tyres, and tubes”;
- improvement of [4.10.2](#);
- change in test force of [4.10.4.3](#);
- addition of [4.10.7](#);

ISO 4210-2:2023(E)

- improvement of [4.11](#);
- change in option c) of [4.14](#);
- addition of [4.15.4.2](#);
- improvement of [4.15.6](#);
- addition of icons in [Clause 6](#).

A list of all parts in the ISO 4210 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-2:2023

Introduction

This document has been developed in response to demand throughout the world, and the aim has been to ensure that bicycles manufactured in conformity with this document will be as safe as is practically possible. The tests have been designed to ensure the strength and durability of individual parts as well as of the bicycle as a whole, demanding high quality throughout and consideration of safety aspects from the design stage onwards.

The scope has been limited to safety considerations and has specifically avoided standardization of components.

For the purpose of improving the safety of luggage carriers, revision work of ISO 11243, referenced in [4.17](#), is in progress. In case this revision work involves requirements for the entire bicycle, this document will incorporate those requirements in the next revision.

If the bicycle should be used on public roads, national regulations apply.

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-2:2023

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4210-2:2023

Cycles — Safety requirements for bicycles —

Part 2:

Requirements for city and trekking, young adult, mountain and racing bicycles

1 Scope

This document specifies safety and performance requirements for the design, assembly, and testing of bicycles and sub-assemblies, and lays down guidelines for manufacturer's instructions on the use and care of such bicycles.

This document applies to young adult bicycles with maximum saddle height of 635 mm or more and less than 750 mm, city and trekking bicycles, mountain bicycles, and racing bicycles that have a maximum saddle height of 635 mm or more including folding bicycles.

This document does not apply to specialized types of bicycle, such as delivery bicycles, recumbent bicycles, tandems, BMX bicycles, and bicycles designed and equipped for use in severe applications such as sanctioned competition events, stunting, or aerobic manoeuvres.

NOTE For bicycles with a maximum saddle height of 435 mm or less, see national regulations for ride-on toys, and with a maximum saddle height of more than 435 mm and less than 635 mm, see ISO 8098^[8].

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4210-1, *Cycles — Safety requirements for bicycles — Part 1: Vocabulary*

ISO 4210-3:2023, *Cycles — Safety requirements for bicycles — Part 3: Common test methods*

ISO 4210-4:2023, *Cycles — Safety requirements for bicycles — Part 4: Braking test methods*

ISO 4210-5:2023, *Cycles — Safety requirements for bicycles — Part 5: Steering test methods*

ISO 4210-6:2023, *Cycles — Safety requirements for bicycles — Part 6: Frame and fork test methods*

ISO 4210-7:2023, *Cycles — Safety requirements for bicycles — Part 7: Wheels and rims test methods*

ISO 4210-8:2023, *Cycles — Safety requirements for bicycles — Part 8: Pedal and drive system test methods*

ISO 4210-9:2023, *Cycles — Safety requirements for bicycles — Part 9: Saddles and seat-post test methods*

ISO 6742-1, *Cycles — Lighting and retro-reflective devices — Part 1: Lighting and light signalling devices*

ISO 6742-2, *Cycles — Lighting and retro-reflective devices — Part 2: Retro-reflective devices*

ISO 6742-3, *Cycles — Lighting and retro-reflective devices — Part 3: Installation and use of lighting and retro-reflective devices*

ISO 9633, *Cycle chains — Characteristics and test methods*

ISO 11243, *Cycles — Luggage carriers for bicycles — Requirements and test methods*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4210-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Requirements

4.1 Toxicity

Any items which come into intimate contact with the rider (i.e. causing any hazard due to sucking or licking) shall conform with any national regulations specific to children's products.

4.2 Sharp edges

Exposed edges that could come into contact with the rider's hands, legs, etc., during normal riding or normal handling and normal maintenance shall not be sharp, e.g. deburred, broken, rolled, or processed with comparable techniques.

NOTE See ISO 13715^[9].

4.3 Security and strength of safety-related fasteners

4.3.1 Security of screws

Any screws used in the assembly of suspension systems, brackets attached to electric generators, brake mechanisms and mudguards to the frame or fork shall be provided with suitable locking devices, e.g. lock-washers, lock-nuts, thread locking compound, or stiff nuts. Fasteners used to assemble hub and disc brakes shall have heat-resistant locking devices.

NOTE For example, mechanical and physical properties of bolts are specified in ISO 898-1^[1].

4.3.2 Minimum failure torque

The minimum failure torque of bolted joints for the fastening of handle bars, handlebar stems, bar ends, saddle and seat-posts shall be at least 20 % greater than the manufacturer's maximum recommended tightening torque.

4.3.3 Folding bicycle mechanism

If folding bicycle mechanism is provided, it shall be designed so that the bicycle can be locked for use in a simple, stable, safe way, and when folded, no damage shall occur to any cables. No locking mechanism shall contact the wheels or tyres during riding, and it shall be impossible to unintentionally loosen or unlock the folding mechanisms during riding.

4.4 Crack detection methods

Standardized methods should be used to emphasize the presence of cracks where visible cracks are specified as criteria of failure in tests specified in this document.

NOTE For example, suitable dye-penetrant methods are specified in ISO 3452-1^[2], ISO 3452-2^[3], ISO 3452-3^[4], and ISO 3452-4^[5]. In addition, white paint or surface treatment can be used to aid in detection for composite materials.

4.5 Exposed protrusions

This requirement is intended to address the hazards associated with the users of bicycles falling on projections or rigid components (e.g. handlebars, levers) on a bicycle, possibly causing internal injury or skin puncture.

Tubes and rigid components in the form of projections which constitute a puncture hazard to the user should be protected. The size and shape of the end protection has not been stipulated, but an adequate shape shall be given to avoid puncturing of the body. Screw threads which constitute a puncture hazard shall be limited to a protrusion length of one major diameter of the screw beyond the internally threaded mating part.

NOTE Handlebar ends are covered in [4.7.2](#).

4.6 Brakes

4.6.1 Braking systems

A bicycle shall be equipped with at least two independently actuated braking systems. At least one shall operate on the front wheel and one on the rear wheel. The braking systems shall operate without binding and shall be capable of meeting the braking performance requirements of [4.6.8](#).

Brake blocks containing asbestos shall not be permitted.

4.6.2 Hand-operated brakes

4.6.2.1 Brake lever position

The brake levers for front and rear brakes shall be positioned according to the legislation or custom and practice of the country in which the bicycle is to be sold, and the bicycle manufacturer shall state in the manufacturer's instructions which levers operate the front and rear brakes [see also [Clause 5](#), item b)].

4.6.2.2 Brake lever grip dimensions

a) The brake lever similar to type A or type B.

The dimension, d , measured at the non-activated position of the brake lever between the outer surfaces of the brake lever in the region intended for contact with the rider's fingers and the handlebar or any other covering present shall cover a distance of not less than 40 mm as shown in [Figure 1](#) a) and [Figure 1](#) b) and conform to the following:

- on bicycles on which the minimum intended height of the saddle is 635 mm or more, d shall not exceed 90 mm;
- on bicycles on which the minimum intended height of the saddle is less than 635 mm, d shall not exceed 75 mm.


Conformity shall be established by the method detailed in ISO 4210-4:2023, 4.1.1. The range of adjustment on the brake lever should permit these dimensions to be obtained.

NOTE See [Clause 5](#), item c) in relation to the minimum intended height of the saddle.

b) The brake lever similar to type C.

It shall be possible to fit the dimension gauge shown in ISO 4210-4:2023, Figure 3 over the brake lever (or a secondary brake lever) and the handlebar grip or any other covering in at least one position between points *B* and *C* indicated in Figure 1 c), without causing any movement of the brake lever towards the handlebar. The dimension *d* shall not exceed 100 mm.

Conformance shall be established by the method detailed in ISO 4210-4:2023, 4.1.2. The range of adjustment on the brake lever should permit these dimensions to be obtained.

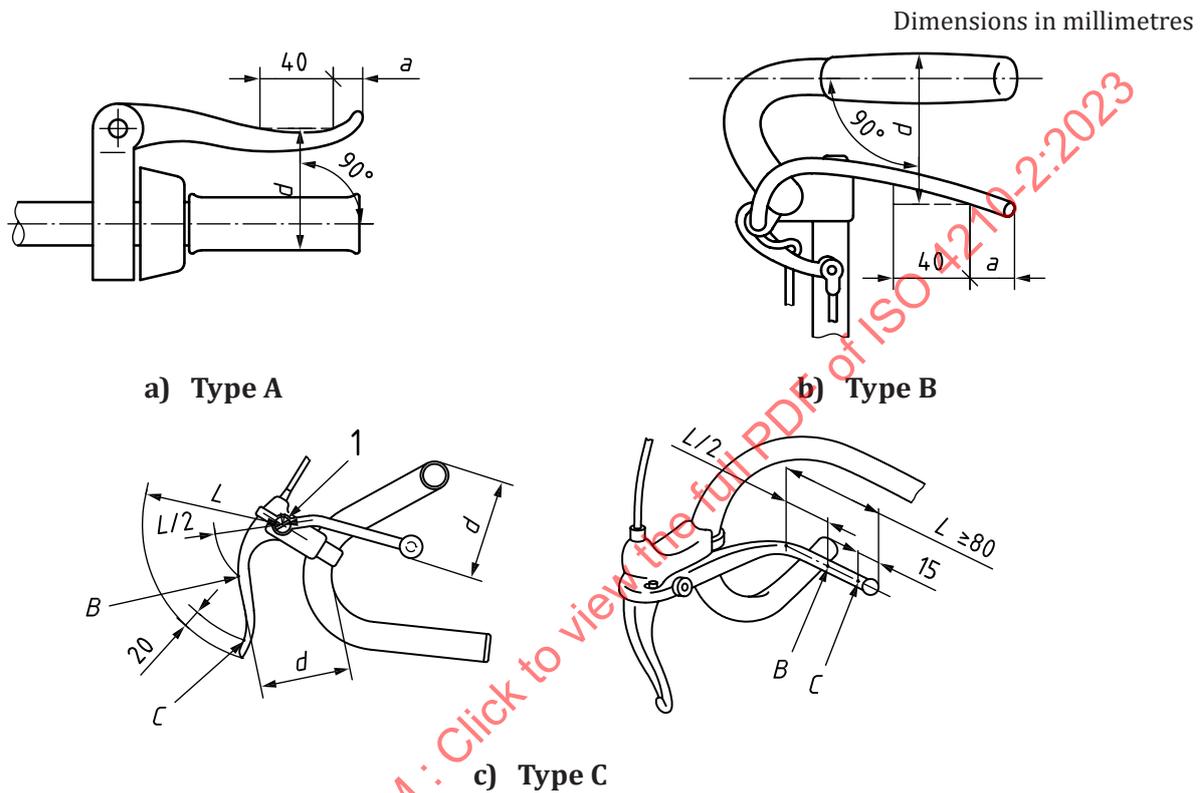

Key

- 1 pivot
- a* distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever
- B* point of $L/2$
- C* point of 20 mm (in case of an extension brake lever, 15 mm) from the end of the lever
- d* brake lever grip dimension — non activated
- L* distance between the centre of the lever pivot and the lever tip end

Figure 1 — Brake lever grip dimensions

4.6.3 Attachment of brake assembly and cable requirements

Cable pinch bolts shall not sever any of the cable strands when assembled to the manufacturer's instructions. In the event of a cable failing, no part of the brake mechanism shall inadvertently inhibit the rotation of the wheel.

The cable end shall either be protected with a cap that shall withstand a removal force of not less than 20 N or be otherwise treated to prevent unravelling.

NOTE See 4.3 in relation to fasteners.

4.6.4 Brake-block and brake-pad assemblies — Security test

The friction material shall be securely attached to the holder, backing plate, or shoe and there shall be no failure of the braking system or any component thereof, and the brake shall meet the performance requirements of [4.6.8](#) when tested by the method specified in ISO 4210-4:2023, 4.3.

4.6.5 Brake adjustment

Each brake shall be equipped with an adjustment mechanism, either manual or automatic.

Each brake shall be capable of adjustment with or without the use of a tool to an efficient operating position until the friction material has worn to the point of requiring replacement as recommended in the manufacturer's instructions. Also, when correctly adjusted, the friction material shall not contact anything other than the intended braking surface.

The brake blocks of a bicycle with rod brakes shall not come into contact with the rim of the wheels when the steering angle of the handlebars is set at 60°, nor shall the rods bend, or be twisted after the handlebars are reset to the central position.

4.6.6 Hand-operated braking-system — Strength test

When tested by the method described in ISO 4210-4:2023, 4.4, there shall be no failure of the braking system or of any component thereof.

4.6.7 Back-pedal braking system — Strength test

4.6.7.1 General

If the back-pedal braking system is fitted, the brake shall be actuated by the operator's foot applying force to the pedal in a direction opposite to that of the drive force. The brake mechanism shall function regardless of any drive gear positions or adjustments. The differential between the drive and brake positions of the crank shall not exceed 60°.

The measurement shall be taken with the crank held against each position with a pedal force of at least 250 N. The force shall be maintained for 1 min in each position.

4.6.7.2 Requirement

When tested in accordance with ISO 4210-4:2023, 4.5, there shall be no failure of the brake system or any component thereof.

4.6.8 Braking performance

4.6.8.1 General

4.6.8.1.1 Test method options

Two test methods are specified to determine braking performance and experience has shown that either method is suitable and either can be used. One test method is the track test in which braking distance is measured directly with the progressive characteristics of the brakes being self-evident. The alternative test method is a machine/rig base test in which braking force is measured and, from which, braking performance values are calculated. The progressive characteristics of the brake are determined by linearity measurements. A final, simple track test checks for smooth, safe, stopping characteristics.

Whichever method is used, there shall be conformity with [4.6.8.1.2](#) or [4.6.8.1.3](#).

NOTE1 See ISO 4210-4:2023, 4.6.5.7 item i), test method — simple track test.

NOTE2 For the purposes of improving repeatability and reproducibility and considering the applicability to all types of bicycle and the size and influence of the operator, the machine test method reflects today's state of the art.

4.6.8.1.2 Track test

When tested in accordance with ISO 4210-4:2023, 4.6.3, the bicycle shall fulfil the requirements shown in [Table 1](#).

Table 1 — Brake test velocities and braking distances

Bicycle type	Condition	Velocity km/h	Brake in use	Maximum corrected braking distance m
City and trekking bicycles	Dry	25	Both	7
			Rear only	15
	Wet	16	Both	5
			Rear only	10
Young adult bicycles	Dry	25	Both	7
			Rear only	15
	Wet	16	Both	5
			Rear only	10
Mountain bicycles	Dry	25	Both	6
			Rear only	10
	Wet	16	Both	5
			Rear only	10
Racing bicycles	Dry	25	Both	6
			Rear only	12
	Wet	16	Both	5
			Rear only	10

4.6.8.1.3 Machine test

When tested in accordance with ISO 4210-4:2023, 4.6.5, the bicycle shall fulfil the requirements shown in [Table 2](#).

Table 2 — Calculated braking performance values

Bicycle type	Condition	Brake in use	Minimum braking perfor- mance value, B_p N
City and trekking bicycles	Dry	Front only	300
		Rear only	200
	Wet	Front only	150
		Rear only	120

Table 2 (continued)

Bicycle type	Condition	Brake in use	Minimum braking performance value, B_p N
Young adult bicycles	Dry	Front only	180
		Rear only	120
	Wet	Front only	90
		Rear only	80
Mountain bicycles	Dry	Front only	350
		Rear only	260
	Wet	Front only	180
		Rear only	120
Racing bicycles	Dry	Front only	350
		Rear only	220
	Wet	Front only	160
		Rear only	120

4.6.8.2 Smooth, safe-stop characteristics

The bicycle shall show smooth, safe-stop characteristics with regard to the intended use of the bicycle and the ability of the expected user of the bicycle.

- a) For the track test, smooth, safe-stop characteristics are defined as stopping within the required distances without occurrence of any of the following:
- 1) excessive juddering;
 - 2) front wheel locking;
 - 3) bicycle overturning (rear wheel lifting uncontrollably);
 - 4) rider's loss of control;
 - 5) excessive side-skid causing the rider to put his foot to the ground to retain control.

With certain types of braking system, it might not be possible to avoid entirely some skidding of the rear wheel and tyre assembly during braking; this is considered acceptable provided that item 4) or item 5) above do not occur as a result.

Back pedal brakes shall additionally conform with the linearity test of ISO 4210-4:2023, 4.6.4.

- b) For the machine test, smooth, safe-stop characteristics are defined by conformity with the linearity requirements specified in ISO 4210-4:2023, 4.6.5.3 and the simple track test described in ISO 4210-4:2023, 4.6.5.7 item i).

4.6.8.3 Ratio between wet and dry braking performance

For city and trekking, young adult, and mountain bicycles, in order to ensure safety for both wet and dry braking, the ratio of braking performance wet/dry shall be greater than 4:10.

The methods for calculating this ratio are given in ISO 4210-4:2023, 4.6.3.11 item c) for the track test and in ISO 4210-4:2023, 4.6.5.7 item h) for the machine test.

4.6.9 Brakes — Heat-resistance test

4.6.9.1 General

This test applies to all disc and hub brakes, and it also applies to rim brakes where the rim brake sidewalls are known to be manufactured from or include composite materials.

Each brake on the bicycle shall be tested individually, but where the front and rear brakes are identical, only one brake needs to be tested. If rims are identical (spoke count, material, design), only one wheel and tyre assembly needs to be tested.

Prior to this test, [4.6.5](#) shall be conducted to record the braking performance at the highest operating force for both dry and wet condition.

4.6.9.2 Requirement

Throughout the test described in ISO 4210-4:2023, 4.7.1, the brake lever shall not touch the handlebar grip, the operating force shall not exceed 180 N.

When tested by the method described in [4.7.2](#), the brakes shall achieve at least 60 % of the braking performance both dry and wet condition which was recorded at the highest operating force used during the performance tests ISO 4210-4:2023, 4.6.5.7 d) items 1) and 2).

4.7 Steering

4.7.1 Handlebar — Dimensions

The handlebar shall have an overall width between 350 mm and 1 000 mm unless national regulations dictate otherwise. Adjust the handlebar height to its highest normal riding position and the saddle to its lowest normal riding position as specified by the manufacturer [see [Clause 5](#), item c)]. Measure the vertical distance from the centre and top of the handlebar grips to a point where the saddle surface is intersected by the seat post axis (see [Figure 2](#)). This dimension shall not exceed 400 mm.

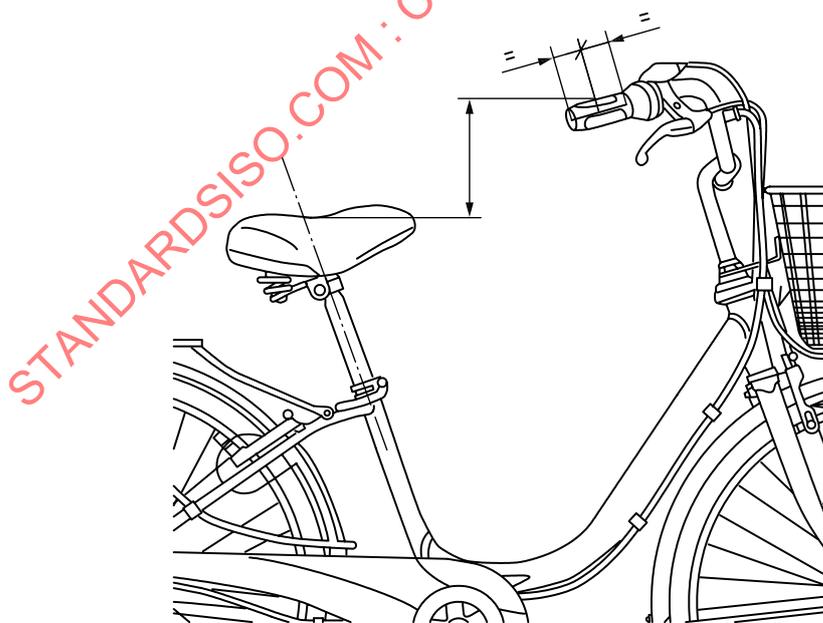


Figure 2 — Vertical distance between the handlebar grips and the seat surface

4.7.2 Handlebar grips and plugs

4.7.2.1 General

The ends of the handlebar shall be covered according to a) or b) or c);

- a) For handlebars with end axes which are oriented within 60° of parallel to the axis of the front wheel axle, end plugs in conformity with [4.7.2.2](#) and [4.7.2.3](#) shall be fitted. Handgrips in conformity with [4.7.2.2](#) may additionally be fitted.
- b) For drop handlebars, any open handlebar end shall be fitted with a suitable end plug (for example, of the type used to secure handlebar wrapping tape). Conformity with [4.7.2.2](#) or [4.7.2.3](#) is not required for these end plugs.
- c) For handlebars other than a) or b), either handgrips which cover the handlebar end, or end plugs, shall be fitted. If end plugs are installed, hand grips may additionally be fitted (handgrips which do not cover the handlebar ends are permitted). All handgrips and end plugs fitted shall be in conformity with [4.7.2.2](#).

4.7.2.2 Loosening of grips and plugs


When tested by the method described in ISO 4210-5:2023, 4.1.1 and 4.1.2, the handgrips shall withstand the specified removal forces.

When tested by the method described in ISO 4210-5:2023, 4.1.1, the plugs shall withstand the specified removal forces. Plugs installed within handgrips which cover the handlebar end are excluded from this requirement.

4.7.2.3 Design of end plugs

Unless the handlebar has permanently closed ends (for example metal end plates, welded or otherwise permanently attached), each handlebar end shall be fitted with a handlebar end plug.

The outside diameter of the handlebar end plug shall match the outside diameter of the handlebar end. If made from plastic, the handlebar end plug shall have minimum 3 mm thickness for its end as shown in [Figure 3](#), and have a minimum durometer of 65 Shore A. Alternatively, the handlebar end plug can be made from a durable material such as metal.

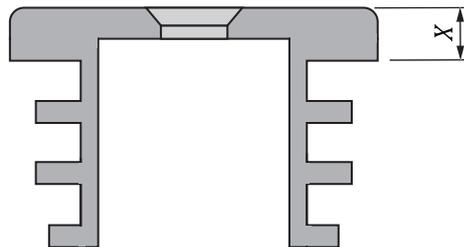

Key

X minimum 3 mm

Figure 3 — handlebar end plug

4.7.3 Handlebar stem — Insertion-depth mark or positive stop

The handlebar stem shall be provided with one of the two following alternative means of ensuring a safe insertion depth into the fork steerer.

- a) It shall contain a permanent, transverse mark, of length not less than the external diameter of the stem that clearly indicates the minimum insertion depth of the handlebar stem into the fork steerer.

The insertion mark shall be located at a position not less than 2,5 times the external diameter of the handlebar stem from the bottom of the stem, and there shall be at least one stem diameter's length of contiguous, circumferential stem material below the mark.


- b) It shall incorporate a permanent stop to prevent it from being drawn out of the fork steerer such as to leave the insertion less than the amount specified in item a).

4.7.4 Handlebar stem to fork steerer — Clamping requirements

The distance, *g*, (see [Figure 4](#)) between the top of the handlebar stem and the top of the fork steerer to which the handlebar stem is clamped shall not be greater than 5 mm.

The upper part of the fork steerer to which the handlebar stem is clamped shall not be threaded.

The dimension, *g*, shall also ensure that the proper adjustment of the steering system can be achieved.

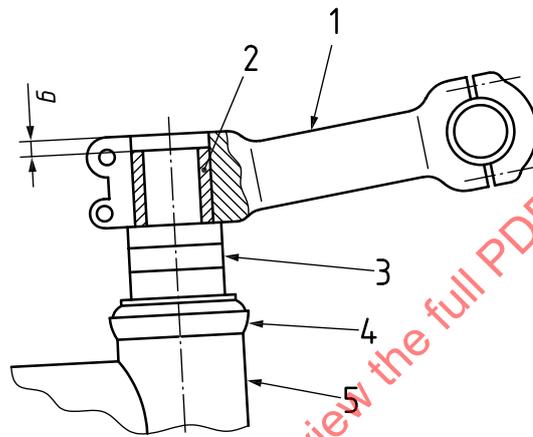

Key

- 1 handlebar stem
- 2 extended fork steerer
- 3 spacer rings
- 4 head set
- 5 head tube
- g* distance between the upper clamping part of the handlebar stem and the upper part of the fork steerer

Figure 4 — Clamping between the handlebar stem and fork steerer

4.7.5 Steering stability

The steering shall be free to turn through at least an angle of θ_1 either side of the straight-ahead position and shall exhibit no tight spots, stiffness, or slackness in the bearings when correctly adjusted. The values are given in [Table 3](#).

A minimum of 25 % of the total mass of the bicycle and rider shall act on the front wheel and tyre assembly when the rider is holding the handlebar grips and sitting on the saddle, with the saddle and rider in their most rearward positions.

NOTE Recommendations for steering geometry are given in [Annex A](#).

Table 3 — Values of steering angle

Angles in degrees

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Steering angle θ_1	60	60	30	30

4.7.6 Steering assembly — Static strength and security tests

4.7.6.1 Handlebar stem — Lateral bending test

4.7.6.1.1 General

This test is intended for stem manufacturers who do not produce handlebars.

4.7.6.1.2 Requirement

When tested by the method described in ISO 4210-5:2023, 4.2, there shall be no cracking or fracture of the stem and the permanent deformation measured at the point of application of the test force and in the direction of the test force shall not exceed 10 mm.

Handlebar stems can influence test failures of handlebars but handlebars do not usually influence test failures of stems. For these reasons, a handlebar is always to be tested mounted on a stem but stems can be tested with a solid bar in place of a handlebar.

4.7.6.2 Handlebar and stem assembly — Lateral bending test

4.7.6.2.1 General

This test is for manufacturers who produce handlebars and stems or for cycle manufacturers.

4.7.6.2.2 Requirement

When tested by the method described in ISO 4210-5:2023, 4.3, there shall be no cracking or fracture of the handlebar, stem, or clamp-bolt and the permanent deformation measured at the point of application of the test force shall not exceed 15 mm.

4.7.6.3 Handlebar-stem — Forward bending test

4.7.6.3.1 General

Conduct the test in two stages on the same assembly as follows. For angle-adjustable handlebar stems, the test shall be carried out with adjustable part of the handlebar stem set in unfavourable position within the range permitted by the manufacturer.

4.7.6.3.2 Requirement for stage 1

When tested by the method described in ISO 4210-5:2023, 4.4.1, there shall be no visible cracks or fractures and the permanent deformation measured at the point of application of the test force and in the direction of the test force shall not exceed 10 mm.

4.7.6.3.3 Requirement for stage 2

When tested by the method described in ISO 4210-5:2023, 4.4.2, there shall be no visible cracks or fractures.

4.7.6.4 Handlebar to handlebar stem — Torsional security test

When tested by the method described in ISO 4210-5:2023, 4.5, there shall be no movement of the handlebar relative to the handlebar stem. This requirement is for city and trekking bicycles, young adult bicycles and mountain bicycles. This requirement is not applicable for bicycles fitted with drop handlebars.

4.7.6.5 Handlebar stem to fork steerer — Torsional security test

When tested by the method described in ISO 4210-5:2023, 4.6, there shall be no movement of the handlebar stem relative to the fork steerer.

4.7.6.6 Bar end to handlebar — Torsional security test

When tested by the method described in ISO 4210-5:2023, 4.7, there shall be no movement of the bar end in relation to the handlebar.

4.7.6.7 Aerodynamic extensions to handlebar — Torsional security test

When a handlebar is suitable for use with aerodynamic extensions, the extension/handlebar/handlebar stem assembly shall withstand the following security test.

When tested by the method described in ISO 4210-5:2023, 4.8, there shall be no movement of the extension in relation to the handlebar and of the handlebar in relation to the handlebar stem.

4.7.7 Handlebar and stem assembly — Fatigue test

4.7.7.1 General

Handlebar stems can influence test failures of handlebars and, for this reason, a handlebar shall always be tested mounted on a stem, but it is permitted to test a stem with a solid bar in place of the handlebar and bar ends with dimensions corresponding to handlebars/bar ends suitable for that stem.

When the fatigue test is for the stem only, the manufacturer of the stem shall specify the types and sizes of handlebar for which the stem is intended and the test shall be based on the most severe combination.

Conduct the test in two stages on the same assembly.

4.7.7.2 Requirement for stage 1 and stage 2

When tested by the method described in ISO 4210-5:2023, 4.9.1 or 4.9.2, there shall be no visible cracks or fractures in any part of the handlebar and stem assembly or any bolt failure.

For composite handlebars or stems, the running displacements (peak-to-peak value) at the points where the test forces are applied shall not increase by more than 20 % of the initial values.

4.8 Frames

4.8.1 Suspension-frames — Special requirements

The design shall be such that if the spring or damper fails, the tyre shall not contact any part of the frame or the assembly carrying the rear wheel shall become detached from the rest of the frame.

NOTE See ISO 4210-6:2023, Annex C.

4.8.2 Frame — Impact test (falling mass)

When tested by the method described in ISO 4210-6:2023, 4.1, there shall be no visible cracks or fractures of the frame.

The permanent deformation measured between the axis of the wheel axles (the wheelbase, see ISO 4210-6:2023, 4.1 and Figure 1) shall not exceed the following values:

- a) 30 mm where a fork is fitted;
- b) where a dummy fork is fitted in place of a fork, the values are given in [Table 4](#).

NOTE See ISO 4210-6:2023, Annex A.

Table 4 — Values of permanent deformation (falling mass)

Dimensions in millimetres

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Permanent deformation	10	10	10	15

4.8.3 Frame and front fork assembly — Impact test (falling frame)

When tested by the method described in ISO 4210-6:2023, 4.2, there shall be no visible cracks or fractures in the assembly, and after the second impact, there shall be no separation of any parts of any suspension system. The permanent deformation measured between the axis of the wheel axles shall not exceed the values specified in [Table 5](#).

Table 5 — Values of permanent deformation (falling frame)

Dimensions in millimetres

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Permanent deformation	60	60	60	15

4.8.4 Frame — Fatigue test with pedalling forces

When tested by the method described in ISO 4210-6:2023, 4.3, there shall be no visible cracks or fractures in any part of the frame and there shall be no separation of any parts of the suspension system.

For composite frames, the running displacements (peak-to-peak values) at the points where the test forces are applied shall not increase by more than 20 % of the initial values (see ISO 4210-3:2023, 4.6).

4.8.5 Frame — Fatigue test with horizontal forces

When tested by the method described in ISO 4210-6:2023, 4.4, there shall be no visible cracks or fractures in the frame and there shall be no separation of any parts of any suspension system.

For composite frames, the running displacement (peak-to-peak value) at the point where the test forces are applied shall not increase by more than 20 % of the initial values (see ISO 4210-3:2023, 4.6).

4.8.6 Frame — Fatigue test with a vertical force

When tested by the method described in ISO 4210-6:2023, 4.5, there shall be no visible cracks or fractures in the frame and the seat tube clamp and there shall be no separation of any parts of the suspension system.

For composite frames, the running displacement (peak-to-peak value) at the point where the test forces are applied shall not increase by more than 20 % of the initial value (see ISO 4210-3:2023, 4.6).

4.8.7 Rear brake mount tests

When tested by the method described in ISO 4210-6:2023, 4.6, there shall be no fracture or visible cracks in any part of the frame and, in the case of suspension frame, there shall be no separation of any parts.

4.9 Front fork

4.9.1 General

[4.9.2](#), [4.9.5](#), [4.9.6](#) and [4.9.7](#) apply to all types of fork.

In the strength tests in [4.9.4.1](#), [4.9.5](#), [4.9.6](#), [4.9.7](#), and [4.9.8](#), a suspension fork shall be tested in its free, uncompressed length condition.

4.9.2 Means of location of the axle and wheel retention

The slots or other means of location for the wheel axle within the front fork shall be such that when the axle or cones are firmly abutting the top face of the slots, the front wheel remains central within the fork.

The front fork and wheel shall also fulfil the requirements of [4.10.4](#) and [4.10.5](#).

4.9.3 Tyre clearance test — Suspension fork

When tested by the method described in ISO 4210-6:2023, 5.1, the tyre shall not contact the crown of the fork, nor shall the components separate.

4.9.4 Front fork — Tensile test

4.9.4.1 Suspension fork

When tested by the method described in ISO 4210-6:2023, 5.2.1, there shall be no detachment or loosening of any parts of the assembly.

4.9.4.2 Rigid non-welded fork

When tested by the method described in ISO 4210-6:2023, 5.2.2, there shall be no detachment or loosening of any parts of the assembly.

4.9.5 Front fork — Static bending test

When tested by the method described in ISO 4210-6:2023, 5.3, there shall be no fractures or visible cracks in any part of the fork, and the permanent deformation, measured as the displacement of the axis of the wheel axle, or simulated axle in relation to the axis of the fork steerer, shall not exceed 10 mm.

4.9.6 Front fork — Rearward impact test

4.9.6.1 Forks made entirely of metal

When tested by the method described in ISO 4210-6:2023, 5.4.1, if there are any fractures or visible cracks in any part of the fork, and the permanent deformation, measured as the displacement of the axis of the wheel axle or simulated axle in relation to the axis of the fork steerer, exceeds 45 mm, the fork shall be considered to have failed.

If the fork meets the first test criteria, then, it shall be subjected to a second test as described in ISO 4210-6:2023, 5.4.2, after which it shall exhibit no fractures. If the fork meets the first and second test criteria, then, it shall be subjected to a third test as described in ISO 4210-6:2023, 5.4.3, irrespective of the amount of permanent deformation, there shall be no relative movement between the steerer and the crown.

4.9.6.2 Forks which have composite parts

When tested by the method described in ISO 4210-6:2023, 5.4.1, there shall be no fractures in any part of a fork, and the permanent deformation, measured as the displacement of the axis of the wheel axle or simulated axle in relation to the axis of the fork steerer, shall not exceed 45 mm. If the fork meets the first test criteria, then it shall be subjected to a second test as described in ISO 4210-6:2023, 5.4.3. In the case of torque on fork, irrespective of the amount of permanent deformation, there shall be no relative movement between the steerer and the crown.

4.9.7 Front fork — Bending fatigue test plus rearward impact test

When tested by the method described in ISO 4210-6:2023, 5.5, there shall be no fractures in any part of the fork, and the permanent deformation, measured as the displacement of the axis of the wheel axle or simulated axle in relation to the axis of the fork steerer, shall not exceed 45 mm.

For composite forks, the running displacement (peak-to-peak value) at the points where the test forces are applied shall not increase by more than 20 % for rigid forks or more than 40 % for suspension forks from the initial values (see ISO 4210-3:2023, 4.6).

4.9.8 Forks intended for use with hub- or disc-brakes

4.9.8.1 Static brake-torque test

When tested by the method described in ISO 4210-6:2023, 5.6.2, there shall be no fractures or visible cracks in any part of the fork.

4.9.8.2 Fork for hub-brake — Brake mount fatigue test

When tested by the method described in ISO 4210-6:2023, 5.6.3, there shall be no fractures or visible cracks in any part of the fork and, in the case of suspension forks, there shall be no separation of any parts.

4.9.8.3 Fork made of composite materials designed for disc-brakes — Brake mount fatigue test

When tested by the method described in ISO 4210-6:2023, 5.6.4, there shall be no fracture or visible cracks in any part of the fork and, in the case of suspension forks, there shall be no separation of any parts.

4.9.9 Steerer tube — fatigue test

This test shall apply only to rigid forks intended for use with drop handlebars.

When tested by the method described in ISO 4210-6:2023, 5.7, there shall be no fractures or visible cracks in any part of the fork. This shall be confirmed by removing the steering assembly and inspecting the fork steerer. The running displacements (peak-to-peak value) at the points where the test forces are applied shall not increase by more than 20 % of the initial values for a composite fork.

4.10 Wheels and tyre assembly

4.10.1 Wheels and tyre assembly — Rotational accuracy — Concentricity tolerance and lateral tolerance

When measured by the method described in ISO 4210-7:2023, 4.1, the run-out shall not exceed the values which are given in [Table 6](#).

Table 6 — Wheel and tyre assembly — Concentricity and lateral tolerances

Dimensions in millimetres

Bicycle type		City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Concentricity and lateral tolerance	Intended for rim-brakes	1	1	1	0,7
	Not intended for rim-brakes	2	2	2	

4.10.2 Wheel and tyre assembly — Clearance

Alignment of the wheel and tyre assembly in a bicycle shall allow not less than the clearance values given in [Table 7](#) between the tyre and the frame or fork, or a front mudguard and its attachment bolts. This does not apply to the clearance between the tyre and a frame lock placed on the rear wheel.

The fully assembled wheel shall be fitted with the appropriate size tyre and inflated to the lower value of maximum inflation pressure recommended on the rim or on the tyre. This shall be checked before the test. Where a bicycle has a frame or a fork with a suspension system, the values in [Table 7](#) apply to the suspension system in its uncompressed state. Clearance requirements for the frame or fork under a load are specified in ISO 4210-6:2023, Annex C and 4.9.3.

Table 7 — Wheel and tyre assembly — Clearance

Dimensions in millimetres

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Clearance	6	6	6	4

4.10.3 Wheel and tyre assembly — Static strength test

When tested by the method described in ISO 4210-7:2023, 4.2, there shall be no failure of any of the components of the wheel, and the permanent deformation, measured at the point of application of the force on the rim, shall not exceed the values which are given in [Table 8](#).

Table 8 — Values of permanent deformation

Dimensions in millimetres

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Permanent deformation	1,5	1,5	1,0	1,0

4.10.4 Wheels — Wheel retention

4.10.4.1 General

Wheel retention safety is related to the combination of wheel, retention device, and drop-out design.

Wheels shall be secured to the bicycle frame and fork such that when adjusted to the manufacturer's instructions they conform with [4.10.4.2](#), [4.10.4.3](#), and [4.10.5](#).

Wheel nuts shall have a minimum removal torque of 70 % of the manufacturer's recommended tightening torque.

Where quick-release axle devices are used they shall conform with [4.10.5](#).

4.10.4.2 Wheel retention — Retention devices secured

When tested by the method described in ISO 4210-7:2023, 4.3, there shall be no relative motion between the axle and the front fork/frame.

4.10.4.3 Front wheel retention — Retention devices unsecured

A bicycle shall be equipped with secondary retention system that retains the front wheel in the drop-outs when the primary retention system is in the open (unlocked) position.

Where threaded axles and nuts are fitted, and the nuts are unscrewed by at least 360° from the finger tight condition and the brake system is disconnected or released, the wheel shall not detach from the front fork when a force of 110 N is applied radially outwards, in line with the drop-out slots, and maintained for 1 min.

Where quick-release is fitted, and the quick-release lever is fully open and the brake system is disconnected or released, the wheel shall not detach from the front fork when a force of 110 N is applied to the wheel radially outwards, in line with the drop-out slots, and maintained for 1 min.

4.10.5 Wheels — Quick-release devices — Operating features

Any quick-release device shall have the following operating features:

- a) it shall be adjustable to allow setting for tightness;
- b) its form and marking shall clearly indicate whether the device is in the open or locked position;
- c) if adjustable by a lever, the force required to close a properly set lever shall not exceed 200 N and, at this closing force, there shall be no permanent deformation of the quick-release device;
- d) the releasing force of the clamping device when closed shall not be less than 50 N;
- e) if operated by a lever, the quick-release device shall withstand without fracture or permanent deformation a closing force of not less than 250 N applied with the adjustment set to prevent closure at this force;
- f) the wheel retention with the quick-release device in the clamped position shall be in accordance with [4.10.4.2](#);
- g) the front wheel retention with the quick-release device in the open position shall be in accordance with [4.10.4.3](#).

If applied to a lever, the forces specified in items c), d), and e) shall be applied 5 mm from the tip end of the lever.

4.10.6 Wheel and tyre assembly — Greenhouse effect test for composite wheels

4.10.6.1 General

This requirement is to ensure wheels made from composite materials that are subjected to high temperature conditions (e.g. car storage in direct sunlight) do not suffer concealed damage that could subsequently affect the safety performance of the wheel during normal use.

4.10.6.2 Requirement

When a fully assembled wheel made of composite material, fitted with the appropriate size tyre and inflated according to the lower value between maximum inflation pressure recommended on the rim or the tyre, is tested by the method described in ISO 4210-7:2023, 4.4, there shall be

- no failure of any of the components of the wheel,
- no tyre separation from the rim during the test,
- no increase in rim width greater than 5 % of the initial maximal width value,
- conformity of lateral and concentricity tolerance according to [4.10.1](#),
- conformity of tyre and rim compatibility according to [4.10.8](#), and
- conformity of static strength according to [4.10.3](#).

4.10.7 Wheel and tyre assembly — Heat resistance tests for composite rims used in conjunction with rim brake

4.10.7.1 General

These tests apply to rims where the rim brake sidewalls are known to be manufactured from or include composite materials.

4.10.7.2 Requirements

4.10.7.2.1 Heat resistance test

A new wheel with new brake pads (recommended by the wheel/rim manufacturer) and a new tyre (tubular tyre, tyre with inner tube or tubeless tyre) shall be subjected to two consecutive tests: ISO 4210-7:2023, 4.5 and ISO 4210-7:2023, 4.6.

After having been subjected to the first test described in ISO 4210-7:2023, 4.5 the rim with the inflated tyre mounted on shall have no visible cracking, fracture or permanent deformation (rim width shall not increase greater than 5 % of the initial maximal width value with ISO 4210-7:2023, 4.4 width measurement method).

4.10.7.2.2 Wheel — Impact test

These requirements apply to front and rear wheels, which are known to have composite rim material and are used in conjunction with rim brakes. This impact test shall be conducted on rims that have previously been tested by a braking test as described in ISO 4210-7:2023, 4.5.

After testing by the method described ISO 4210-7:2023, 4.6, there shall be no visible cracks or fracture of the rim and the rotational accuracy shall be checked. Rotational accuracy is tested by the method described in ISO 4210-7:2023, 4.1. The lateral and radial run out shall not exceed 1,0 mm.

4.10.8 Wheel and tyre assembly — Overpressure test

Non-pneumatic tyres are excluded from the requirement of [4.10.8](#).

When tested by the method described in ISO 4210-7:2023, 4.7, the tyre shall remain intact on the rim. The tyre shall not derail from the wheel or have permanent damage that prevents normal operation when re-inflated to normal operating pressure.

NOTE ISO 5775-1^[6] provides dimensions for tyres and ISO 5775-2^[7] provides dimensions for rims. In the absence of suitable information from the above-mentioned International Standards, other publications can be used. See Reference [\[10\]](#) and Reference [\[11\]](#).

4.10.9 Wheel and tyre assembly — Information for users

4.10.9.1 General

Non-pneumatic tyres are excluded from the requirements of [4.10.9.2.1](#) and [4.10.9.2.2](#).

NOTE For wheel and tyre assembly fatigue test for city and trekking bicycles, see ISO 4210-7:2023, Annex A.

4.10.9.2 Requirements

4.10.9.2.1 Tyre inflation pressure

The maximum inflation pressure recommended by the manufacturer shall be permanently marked on the side wall of the tyre so as to be readily visible when the latter is assembled on the wheel. If the rim manufacturer recommends a maximum tyre inflation pressure, it shall be clearly and permanently marked on the rim and also specified in the manufacturer's instructions. It is recommended that the minimum inflation pressure specified by the tyre manufacturer also be permanently marked on the side wall of the tyre.

4.10.9.2.2 Tubular tyres and rims

Tubular tyres shall be compatible with the rim design. Instructions for the correct gluing technique shall be given in the bicycle or the wheel assembly instructions of the manufacturer's instructions [see [Clause 5](#), item v)].

4.10.9.2.3 Rim-wear

In the case where the rim forms part of a braking system and there is a danger of failure due to wear, the manufacturer shall make the rider aware of this danger by durable and legible marking on the rim, in an area not obscured by the tyre [see [Clause 5](#), item u) and [6.2](#)]. A symbol referring to the instruction manual is an acceptable marking for rims for wear.

Where the rim is made of composite materials, the manufacturer shall include in the manufacturer's instructions warnings of the danger of rim failure caused by wear of the braking surfaces.

4.11 Front mudguard

If a front mudguard is fitted, perform tests as described in ISO 4210-3:2023, 4.2.1 (for mudguards with stays) or ISO 4210-3:2023, 4.2.2 (for mudguards without stays).

The tests shall be conducted in combination with the wheel and tyre as specified by the manufacturer.

If any part of the mudguard assembly breaks (loose) or deforms during the test, check the assembly according ISO 4210-2:2023, 4.5 for dangerous protrusions which could cause injuries.

Damage due to the tests shall not result in obstruction of the steering or blocking of the wheel and tyre assembly. In case of contact between stationary and rotating parts the blocking of the wheel and tyre assembly shall be verified by means of the test method describe in ISO 4210-3:2023, 4.2.3.

4.12 Pedals and pedal/crank drive system

4.12.1 Pedal tread

4.12.1.1 Tread surface

The tread surface of a pedal shall be secured against movement within the pedal assembly.

4.12.1.2 Toe clips

Pedals intended to be used without toe clips, or for optional use with toe clips, shall have

- a) tread surfaces on the top and bottom surfaces of the pedal, or
- b) a definite preferred position that automatically presents the tread surface to the rider's foot.

4.12.1.3 Pedals designed to be used only with toe clips or foot-retention devices

Pedals designed to be used only with toe clips or foot-retention devices shall have toe clips or foot-retention devices securely attached and need not conform with the requirements of 4.12.1.2, items a) and b).

4.12.2 Pedal clearance

4.12.2.1 Ground clearance

With the bicycle unladen, the pedal at its lowest point and the tread surface of the pedal parallel to the ground and uppermost where it has only one tread surface, the bicycle shall be capable of being leaned over at an angle of θ_2 from the vertical before any part of the pedal touches the ground. The values are given in Table 9.

When a bicycle is equipped with a suspension system, this measurement shall be taken with the suspension adjusted to the softest condition and with the bicycle depressed into a position such as would be caused by a rider weighing 80 kg (in case of young adult bicycles, apply 40 kg).

Table 9 — Values of ground clearance

Angles in degrees

Bicycle type	City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Lean angle θ_2	25	23	25	23

4.12.2.2 Toe clearance

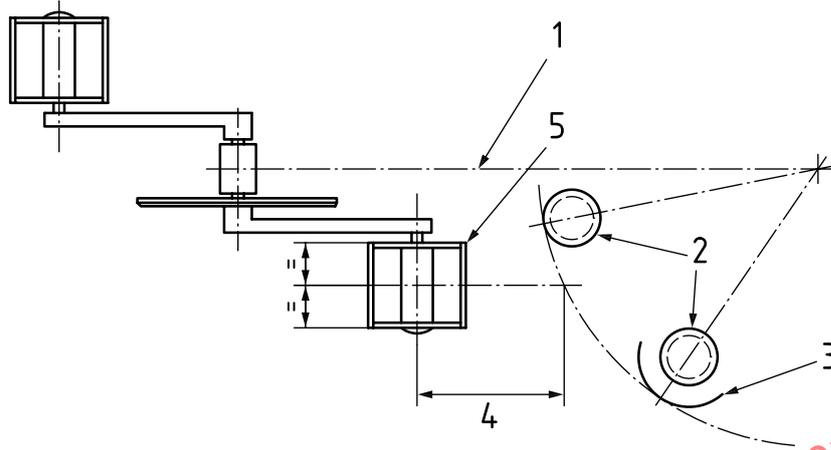
Bicycles shall have at least C clearance between the pedal and front tyre or mudguard (when turned to any position). The clearance shall be measured forward and parallel to the longitudinal axis of the bicycle from the centre of either pedal axle to the arc swept by the tyre or mudguard, whichever results in the least clearance (see Figure 5). The values are given in Table 10.

Table 10 — Values of toe clearance

Dimensions in millimetres

Bicycle type		City and trekking bicycle	Young adult bicycle	Mountain bicycle	Racing bicycle
Toe clearance, C	without foot retention	100	89	100	100
	with foot retention	89	89	89	89

NOTE Foot retention system, e.g. clipless pedal or toe-clip.

**Key**

- 1 longitudinal axis
- 2 front tyre
- 3 mudguard
- 4 clearance, C
- 5 pedal

Figure 5 — Toe clearance — Pedal to front tyre or mudguard

4.12.3 Pedal — Static strength test

When tested by the method described in ISO 4210-8:2023, 4.1, there shall be no fractures, visible cracks, or distortion of the pedal or spindle that could affect the operation of the pedal and pedal spindle.

4.12.4 Pedal — Impact test

When tested by the method described in ISO 4210-8:2023, 4.2, there shall be no fractures of any part of the pedal body, the pedal spindle, or any separation of the bearing system. Cleats are excluded from this requirement.

NOTE 1 The pedal reflector is not considered part of the pedal body.

NOTE 2 The binding system is considered part of the pedal body.

4.12.5 Pedal — Dynamic durability test

When tested by the method described in ISO 4210-8:2023, 4.3, there shall be no fractures or visible cracking of any part of the pedal, the pedal spindle, or any separation of the bearing system.

NOTE 1 The pedal reflector is not considered part of the pedal body.

NOTE 2 Noise or higher resistance or similar deterioration of the bearing system are not considered to be safety related hazards.

4.12.6 Drive system — Static strength test

a) Drive system with chain

When tested by the method described in ISO 4210-8:2023, 4.4.1, there shall be no fracture of any component of the drive system and drive capability shall not be lost.

b) Drive system with belt

ISO 4210-2:2023(E)

When tested by the method described in ISO 4210-8:2023, 4.4.2, there shall be no fracture of any component of the drive system and the belt shall not slip/skip, fracture, or cause any loss in drive capability.

Smooth sliding between pulleys and belt is allowed at a rate not exceeding 1°/s at the drive axis.

4.12.7 Crank assembly — Fatigue test

4.12.7.1 Requirement

When tested by the method described in ISO 4210-8:2023, 4.6.2, there shall be no fractures of or visible cracks on any crank assembly component, or loosening or detachment of the chain wheel from the crank.

In addition to above, for composite cranks, the running displacements (peak-to-peak values) of either crank at the point where the test forces are applied shall not increase by more than 20 % of the initial value (see ISO 4210-3:2023, 4.6).

4.12.7.2 Special requirements for mountain bicycles

For mountain bicycles, two types of fatigue test are specified, one with the cranks positioned at 45° to the horizontal to simulate the forces due to pedalling, and the second test with the cranks positioned at 30° to the horizontal, which has been found to simulate the forces due to the rider standing on the pedals during the descent of hills. The two tests shall be conducted on separate assemblies.

When tested by the method described in ISO 4210-8:2023, 4.6.3, there shall be no fractures or visible cracks in any crank assembly component, or loosening or detachment of the chain wheel from the crank.

In addition to above, for composite cranks, the running displacements (peak-to-peak values) of either crank at the point where the test forces are applied shall not increase by more than 20 % of the initial value (see ISO 4210-3:2023, 4.6).

4.13 Drive-chain and drive belt

4.13.1 Drive-chain

Where a chain-drive is used as a means of transmitting the motive force, the chain shall operate over the front and rear sprockets without binding.

The chain shall conform to the tensile strength and push-out force requirements of ISO 9633.

4.13.2 Drive belt

Where a belt-drive is used as a means of transmitting the motive force, the drive belt shall operate over the front and rear pulleys without binding. When tested by the methods described in ISO 4210-8:2023, 4.5, there shall be no evidence of cracking, fracture, or delamination of the belt drive.

4.14 Chain-wheel and belt-drive protective device

4.14.1 Requirements

City and trekking and young adult bicycles shall be equipped with one of the following:


- a) a chain wheel disc or drive pulley disc which conforms to [4.14.2](#), or
- b) a chain and drive belt protective device which conforms to [4.14.3](#), or
- c) a combined front gear-change guide which conforms to [4.14.4](#).

Mountain and racing bicycles may be equipped with any of the above-mentioned.

4.14.2 Chain-wheel disc and drive pulley disc diameter

A chain-wheel disc shall exceed the diameter of the outer chain wheel, when measured across the tips of the teeth, by not less than 10 mm (see [Figure 6](#)).

A drive pulley disc shall exceed the diameter of the front pulley, when measured across the tips of the teeth, by not less than 10 mm (see [Figure 7](#)). Where the design is such that the crank and chain wheel or the crank and front pulley are too close together to accommodate a full disc, a partial disc can be fitted which closely abuts the crank.

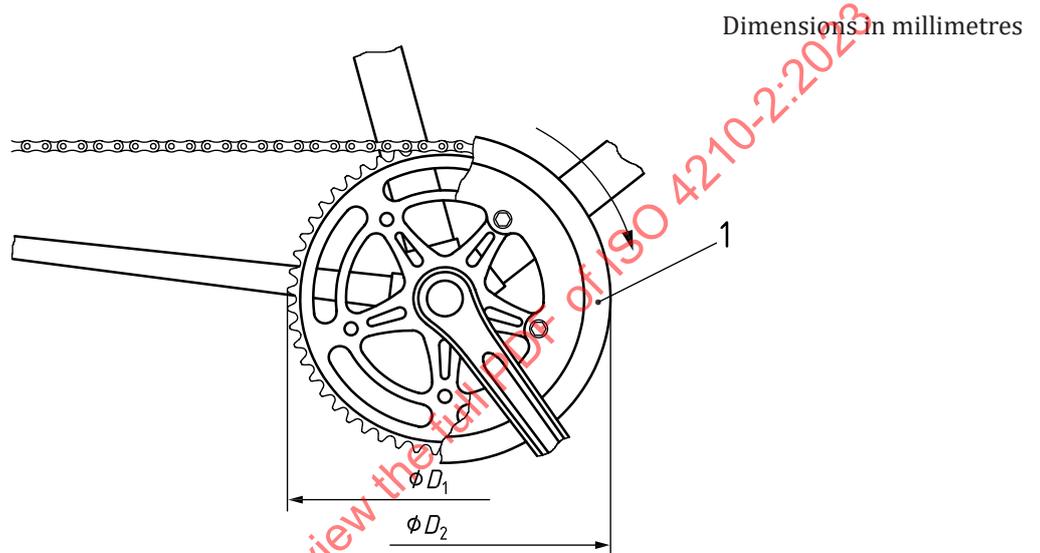


Key

- 1 chain-wheel disc ($D_2 \geq D_1 + 10$)

Figure 6 — Chain-wheel disc

Dimensions in millimetres

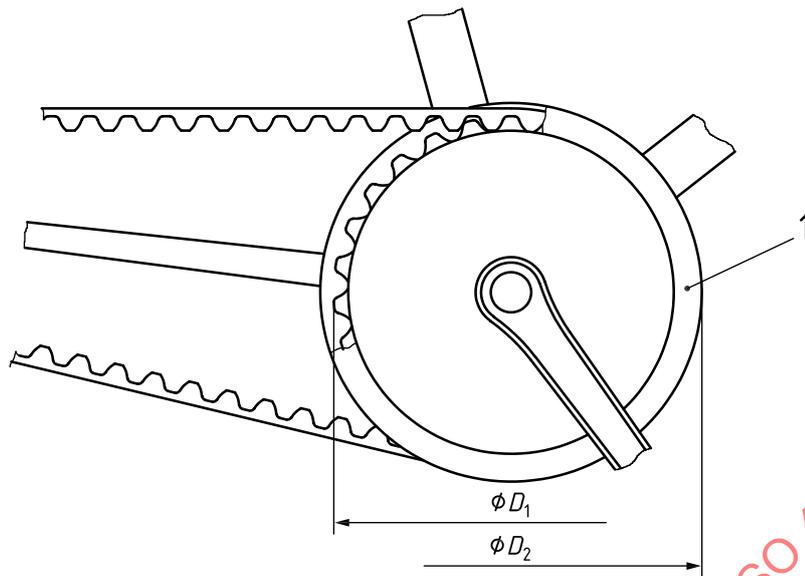

Key

- 1 drive pulley disc ($D_2 \geq D_1 + 10$)


Figure 7 — Drive pulley disc

4.14.3 Chain and drive belt protective device

A chain protective device shall, as a minimum, shield the side plates and top surface of the chain and the chain wheel for a distance of at least 25 mm rearwards along the chain from the point where the chain wheel teeth first pass between the side plates of the chain, and forwards round the outer chain wheel to a horizontal line passing through the bottom-bracket axle centre [see Figure 8 a)]. If fitted with a combined front gear-change guide (e.g. front derailleur) which conforms to 4.14.4, the chain protective device does not need shield the top surface of the combined front gear-change guide.

A drive belt protective device shall, as a minimum, shield the side and top surface of the drive belt and the front pulley for a distance of at least 25 mm rearwards along the drive belt from the point where the tip circle of the pulley [Figure 8 b), circle B] is intersected by the tip line of the belt [Figure 8 b), line C], and forwards round the front pulley to a horizontal line passing through the bottom-bracket axle centre [see Figure 8 b)].

Dimensions in millimetres

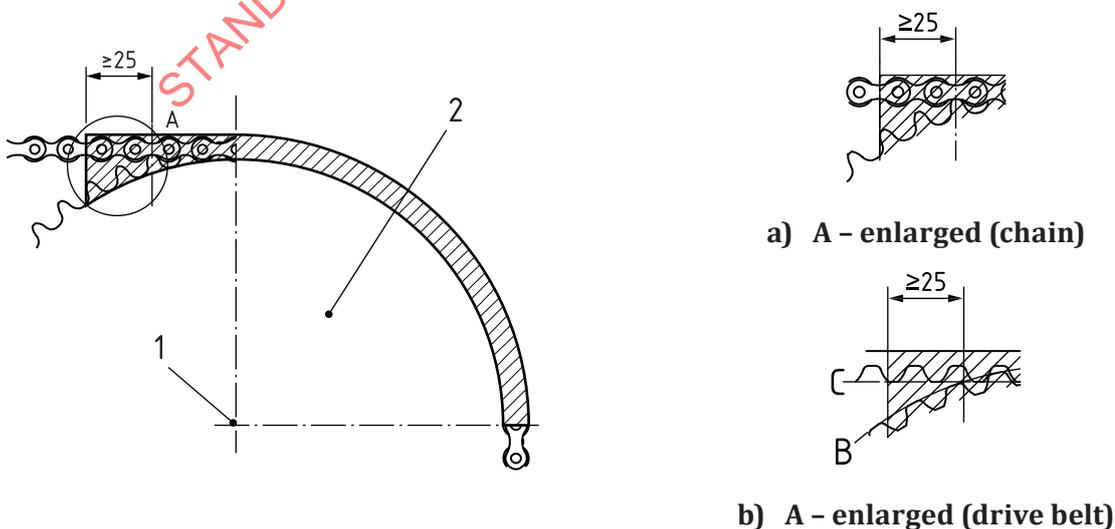


Key

- 1 bottom-bracket axle centre
- 2 chain wheel or front pulley
- B tip circle of the pulley
- C tip line of the belt

Figure 8 — Chain and drive belt protective device requirements (minimum)**4.14.4 Combined front gear-change guide**

When the chain is located in the outer gear position, some portion of the combined front gear change guide shall be above the chain in the region 25 mm from the point A where the chain wheel first passes between the side plates of the chain, parallel to the chain side plates in the direction towards the rear wheel of the bicycle (see [Figure 9](#)).

In addition, some portion of the combined front gear change guide shall be present below the chain in the region beyond 25 mm from the point A, where the chain wheel first passes between the side plates of the chain, parallel to the chain side plates in the direction towards the rear wheel of the bicycle (see [Figure 9](#)).

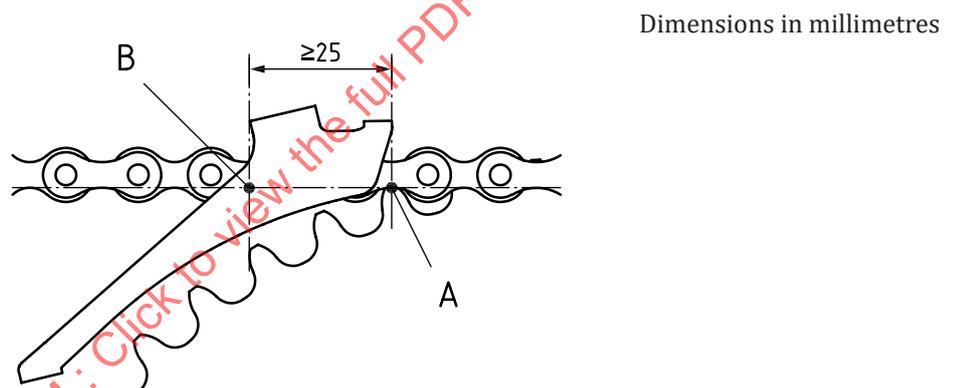**Key**

- A point where the chain wheel first passes between the side plates of the chain
- B 25 mm rearwards from the point where the chain wheel first passes between the side plates of the chain

Figure 9 — Chain and chain-wheel junction**4.15 Saddles and seat-posts****4.15.1 Limiting dimensions**

No part of the saddle, saddle supports, or accessories to the saddle shall be more than 125 mm above the top saddle surface at the point where the saddle surface is intersected by the seat-post axis.

4.15.2 Seat-post — Insertion-depth mark or positive stop

The seat-post shall be provided with one of the two following alternative means of ensuring a safe insertion depth into the frame.

- a) It shall contain a permanent, transverse mark of length not less than the external diameter or the major dimension of the cross section of the seat-post that clearly indicates the minimum insertion depth of the seat-post into the frame. For a circular cross section, the mark shall be located not less than two diameters of the seat-post from the bottom of the seat-post (i.e. where the diameter is the