

First edition
2014-07-01

Corrected version
2014-11-01

**Cycles — Safety requirements for
bicycles —**

**Part 4:
Braking test methods**

Cycles — Exigences de sécurité des bicyclettes —

Partie 4: Méthodes d'essai de freinage

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014



Reference number
ISO 4210-4:2014(E)

© ISO 2014

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Test methods.....	1
4.1 Brake lever grip dimensions.....	1
4.2 Brake levers — Position of applied force.....	5
4.3 Brake-block and brake-pad assemblies — Security test.....	7
4.4 Hand-operated braking-system — Strength test.....	7
4.5 Back-pedal braking system — Strength test.....	7
4.6 Braking performance.....	8
4.7 Brakes — Heat-resistance test.....	25
Annex A (informative) Explanation of the method of least squares for obtaining the line of best fit and ± 20 % limit lines for braking performance linearity.....	26
Bibliography.....	29

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 149, *Cycles*, Subcommittee SC 1, *Cycles and major sub-assemblies*.

This first edition of ISO 4210-4, together with ISO 4210-1, ISO 4210-2, ISO 4210-3, ISO 4210-5, ISO 4210-6, ISO 4210-7, ISO 4210-8, and ISO 4210-9, cancels and replaces ISO 4210:1996, which has been technically revised.

ISO 4210 consists of the following parts, under the general title *Cycles — Safety requirements for bicycles*:

- *Part 1: Terms and definitions*
- *Part 2: Requirements for city and trekking, young adult, mountain and racing bicycles*
- *Part 3: Common test methods*
- *Part 4: Braking test methods*
- *Part 5: Steering test methods*
- *Part 6: Frame and fork test methods*
- *Part 7: Wheels and rims test methods*
- *Part 8: Pedals and drive system test methods*
- *Part 9: Saddles and seat-post test methods*

This corrected version of ISO 4210-4:2014 incorporates a date's change in 4.6.1, 4.6.3.6, 4.6.3.9, 4.6.3.10, 4.6.3.11 and 4.6.5.7 e) and two technical corrections in [Annex A](#).

Introduction

This International Standard has been developed in response to the demand throughout the world. The aim is to ensure that bicycles manufactured in compliance with this International Standard will be as safe as is practically possible. The tests are designed to ensure the strength and durability of individual parts as well as of the bicycle as a whole, demanding high quality throughout and consideration of safety aspects from the design stage onwards.

The scope is limited to safety considerations, and has specifically avoided standardization of components.

If the bicycle is to be used on public roads, national regulations apply.

For the purpose of improvement of repeatability and reproducibility, and considering the applicability to all types of bicycle and the size and influence of the operator, the machine test method reflects today's state of the art and is preferred to the track test method.

Unless there is evidence of improvement of the test track method in the future, make this method informative for the next revision. Users of this International Standard are invited to provide their feedback to the ISO/TC 149/SC 1.

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

Cycles — Safety requirements for bicycles —

Part 4: Braking test methods

1 Scope

This part of ISO 4210 specifies the braking test methods for ISO 4210-2.

2 Normative references

The following referenced documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4210-1, *Cycles — Safety requirements for bicycles — Part 1: Terms and definitions*

ISO 4210-2:2014, *Cycles — Safety requirements for bicycles — Part 2: Requirements for city & trekking, young adult, mountain and racing bicycles*

3 Terms and definitions


For the purposes of this document, the terms and definitions given in ISO 4210-1 apply.

4 Test methods

4.1 Brake lever grip dimensions

4.1.1 Test method for the brake lever similar to type A or type B

Fit the gauge illustrated in [Figure 1](#) over the handlebar grip or the handlebar (when the manufacturer does not fit a grip) and the brake lever as shown in [Figure 2](#) so that face A is in contact with the handlebar or grip and the side of the brake lever. Ensure that face B spans an area of that part of the brake lever which is intended for contact with the rider's fingers without the gauge causing any movement of the brake lever towards the handlebar or grip. Measure the distance, a , the distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever. The measurement should be conducted only on a fully assembled bicycle.

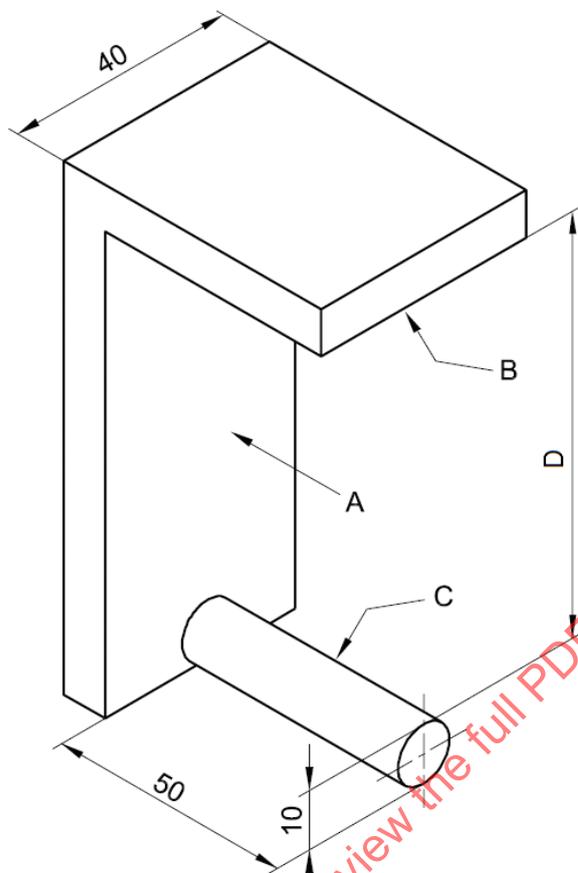


Key


- A face A
- B face B
- C rod
- D 75 mm or 90 mm

Figure 1 — Brake lever grip dimension gauge for type A and type B

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

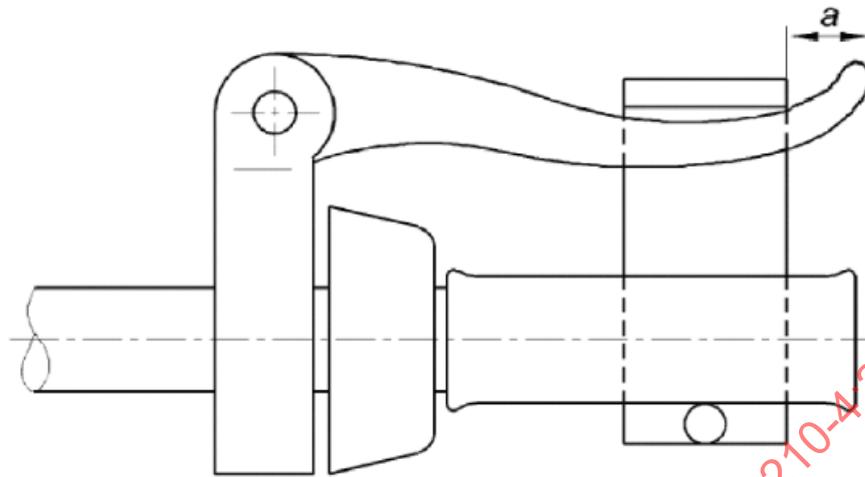

a) Type A

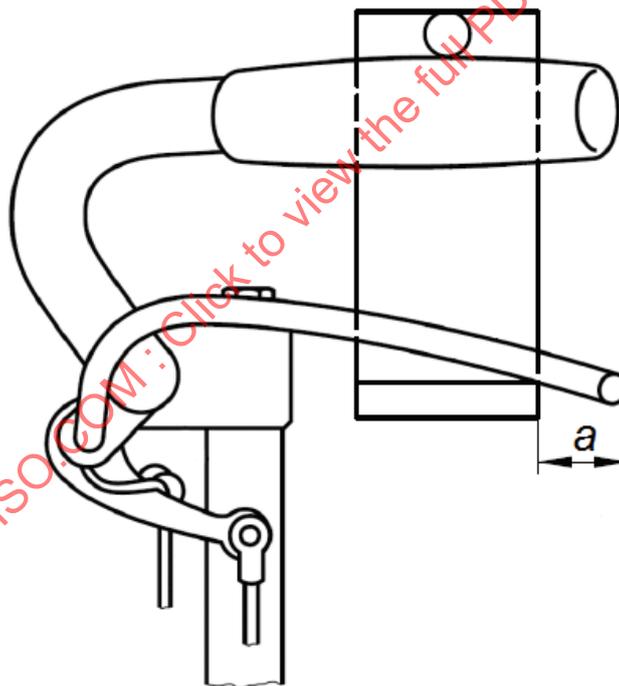


b) Type B

NOTE Minimum grip length is shown.

Figure 2 — Method of fitting the gauge to the brake lever and handlebar

4.1.2 Test method for the brake lever similar to type C

Fit the gauge illustrated in [Figure 3](#) over the handlebar and brake lever as shown in [Figure 4](#) so that face A is in contact with the handlebar or handlebar grip and the brake lever. Put the face of cylinder B in contact with the part of the grip intended for contact with the rider's hand and check if the requirements are met.

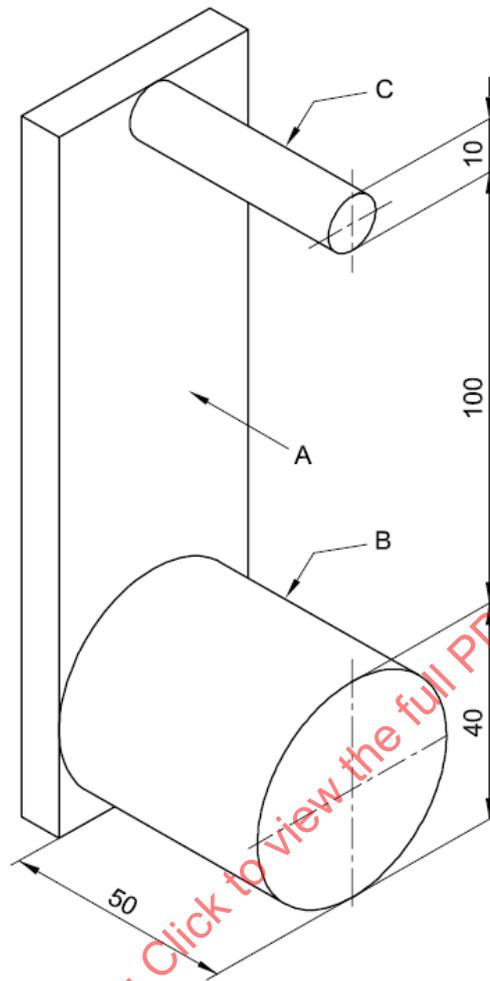

Key

- A face A
- B face of cylinder
- C rod

Figure 3 — Brake lever grip-dimension gauge for type C

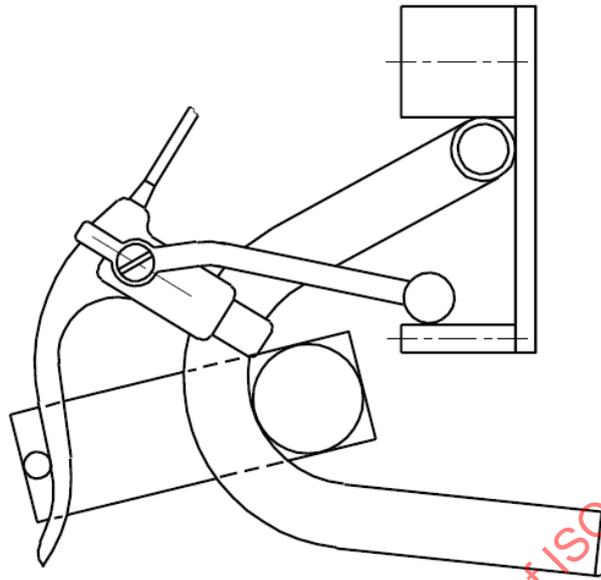


Figure 4 — Method of fitting the gauge to the brake lever and handlebar for type C


4.2 Brake levers — Position of applied force

4.2.1 Type A and B brake levers

For the purposes of braking tests in this part of ISO 4210, for brake levers similar to type A or type B, the test force shall be applied at a distance b , which is equal to either dimension a [see ISO 4210-2:2014, Figure 2 a) and b)] as determined in 4.1.1 or 25 mm from the free end of the brake lever, whichever is the greater [see Figure 5 a) and Figure 5 b)].

4.2.2 Type C brake levers

For the purposes of braking tests in this part of ISO 4210, for brake levers similar to type C, the test force shall be applied at a distance of 25 mm from the free end of the brake lever [see Figure 5 c)].

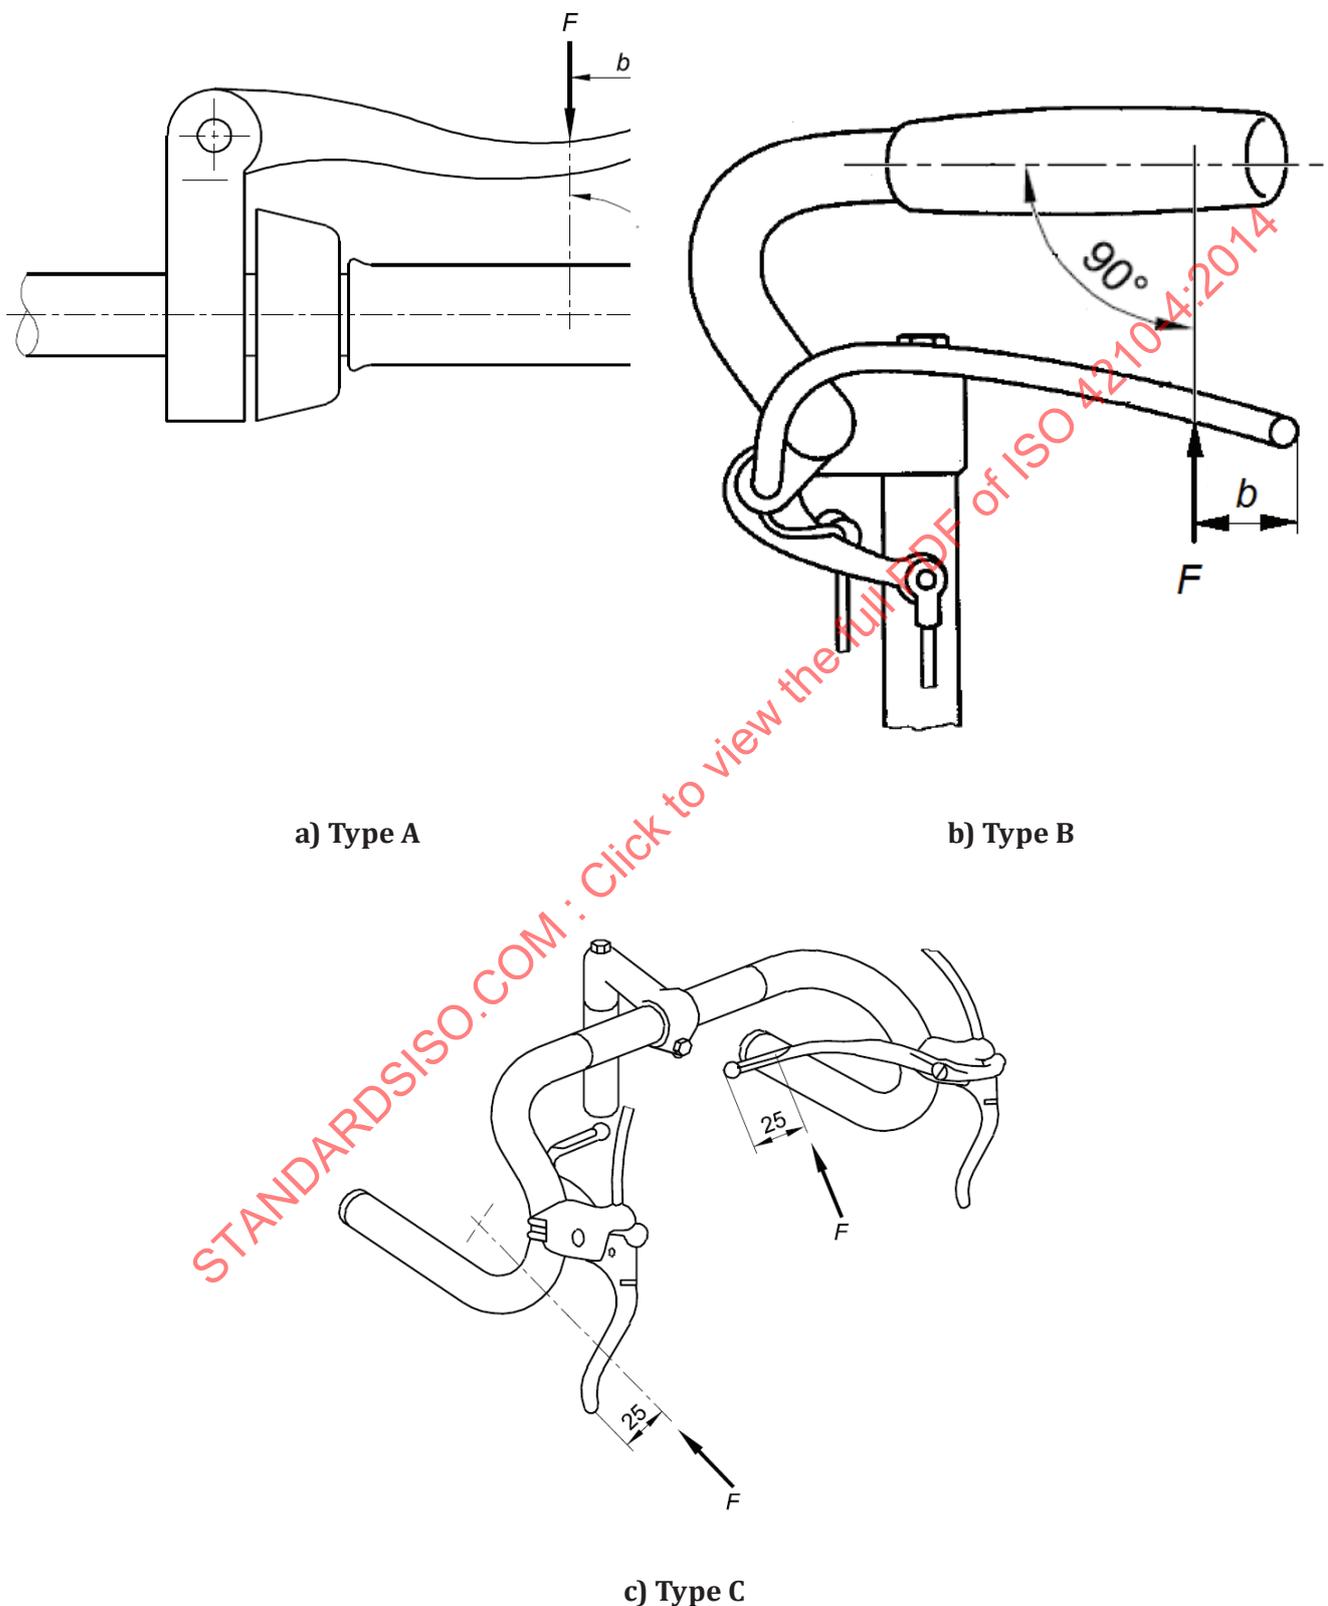

Key

- F applied force
 b ≥ 25 mm

Figure 5 — Position of applied force on the brake lever**4.3 Brake-block and brake-pad assemblies — Security test**

Conduct the test on a fully assembled bicycle with the brakes adjusted to a correct position with a rider or equivalent mass on the saddle. The combined mass of the bicycle and rider (or equivalent mass) shall be 100 kg.

Actuate each brake lever with a force of 180 N applied at the point specified in [Figure 5](#) or a force sufficient to bring the brake lever into contact with the handlebar grip, whichever is lesser. Maintain this force while subjecting the bicycle to five forward and five rearward movements, each of which is not less than 75 mm distance.

Then conduct the test described in [4.4](#) or [4.5](#) as appropriate, depending on the style of brake, and then the test described in [4.6](#).

4.4 Hand-operated braking-system — Strength test


Conduct the test on a fully assembled bicycle. After it has been ensured that the braking system is adjusted according to the recommendations in the manufacturer's instructions, apply a force to the brake lever at the point specified in [Figure 5](#). This force shall be 450 N, or such lesser force as is required to bring

- a) a brake lever into contact with the handlebar grip or the handlebar where the manufacturer does not fit a grip,
- b) a brake extension lever level with the surface of the handlebar or in contact with the handlebar, and
- c) a secondary brake lever to the end of its travel.

Repeat the test 10 times on each brake lever, secondary brake lever, or extension lever.

4.5 Back-pedal braking system — Strength test

Conduct the test on a fully assembled bicycle. After it has been ensured that the braking system is correctly adjusted, and with the pedal cranks in a horizontal position, as shown in [Figure 6](#), apply a vertically downward force to the centre of the left-hand pedal spindle. Increase the force progressively to 1 500 N and maintain fully for 1 min.

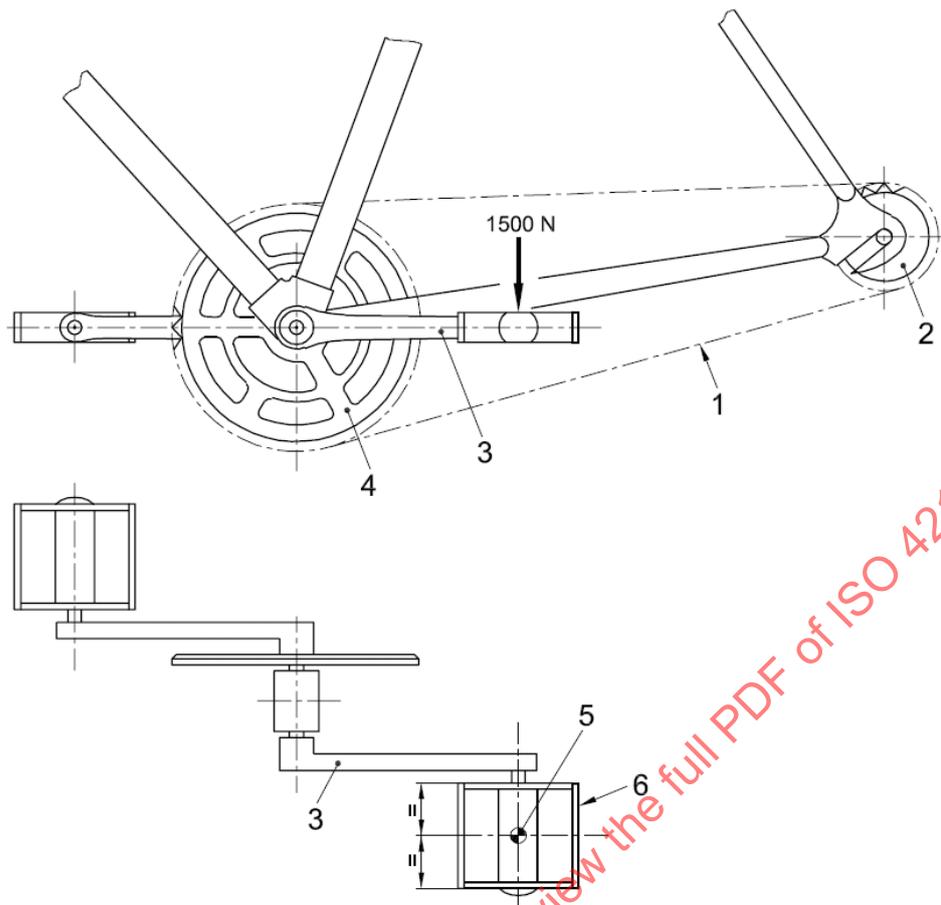

Key

- 1 chain
- 2 hub sprocket
- 3 non-drive side crank
- 4 cycle chain wheel and pedal crank
- 5 point of force application
- 6 pedal

Figure 6 — Back-pedal brake test

4.6 Braking performance

4.6.1 Test bicycle

Conduct the braking performance test on a fully assembled bicycle after the brakes have been subjected to the strength test detailed in ISO 4210-2:2014, 4.6.6, and 4.6.7. Before testing the bicycle by either method, inflate the tyres and adjust the brakes according to the manufacturer's instructions. In the case of rim-brakes, adjust it to the maximum clearance specified by the manufacturer.

4.6.2 Secondary brake levers

Where a bicycle is fitted with secondary brake levers attached to brake levers, bar-ends, or aerodynamic extensions, separate tests shall be conducted for the operation of the secondary brake levers in addition to tests with the normal levers.

4.6.3 Track test method

4.6.3.1 Test track

- a) Use an indoor test track if possible. If an outdoor test track is used, pay special attention to ambient conditions throughout the test.
- b) The gradient of the track shall not exceed 0,5 %. If the gradient is less than 0,2 % carry out all runs in the same direction. If the gradient lies between 0,2 % and 0,5 %, carry out alternate runs in opposite directions.
- c) The surface shall be hard, of concrete or fine asphalt, and free from loose dirt or gravel. The minimum coefficient of friction between the dry surface and the bicycle tyre shall be 0,75.
- d) The track shall be essentially dry at the commencement of tests. When testing to the requirements of [4.6.3.6](#), the track shall remain dry throughout the tests.
- e) The wind speed on the track shall not exceed 3 m/s during the tests.

4.6.3.2 Instrumentation

The test bicycle or the test track shall be instrumented to include the following:

- a) a calibrated speedometer or tachometer (accurate to within ± 5 %) to indicate to the rider the approximate speed at the commencement of braking;
 - b) a velocity-recording device (accurate to within ± 2 %) to record the velocity at the commencement of braking;
 - c) a distance recording system (accurate to within ± 1 %) to record the braking distance;
 - d) a water spray system, to provide wetting of the braking surface, consisting of a water reservoir connected by tubing to a pair of nozzles at the front wheel and a pair of nozzles at the rear wheel. A quick-acting on/off valve shall be included for control by the rider. Each nozzle shall provide a flow of water at ambient temperature of not less than 4 ml/s. Details of the positions and directions of nozzles for rim brakes, hub brakes, band brakes, disc brakes, and back-pedal brake are given in [Figures 7 to 13](#);
- NOTE [Figures 7 and 8](#) for rim brakes show side-pull callipers but the same arrangements apply to centre-pull callipers and cantilever brakes.
- e) a brake-actuation indicating system to record independently when each lever or pedal is actuated.

4.6.3.3 Mass of bicycle, rider, and instrumentation

The combined mass of the bicycle, the rider, and the instrumentation shall be 100 kg.

When wet condition braking tests are performed, the combined mass can decrease throughout the test due to water consumption, but it shall not be less than 99 kg at the end of the valid test runs.

Where a manufacturer specifies that their bicycle can carry a mass such that the sum of that mass plus the mass of the bicycle is in excess of 100 kg (60 kg for young adults) to some value M , apply M as total weight.

Any extra weight shall be positioned above the rear wheel and in front of the rear axle.

4.6.3.4 Force applied to the brake levers

- a) Magnitude and position of force on brake levers

Apply a handgrip force not exceeding 180 N at the point as specified in [Figure 5](#). Check before and after each series of test runs to verify the lever force.

b) Optional brake-force application device

It is permissible to use a test mechanism to operate the brake lever, and when such a device is used, it shall meet the requirements of [4.6.3.4](#) item a) and shall additionally control the rate of application of the brake lever force such that 63 % of the intended lever force is applied in not less than 0,2 s.

4.6.3.5 Running — in the braking surfaces

A running-in process shall be conducted on every brake before performance testing is carried out.

Apply the brakes for not less than 3 s to maintain steady deceleration while the bicycle is being ridden at a speed of approximately 16 km/h. Repeat this operation 10 times.

4.6.3.6 Test method — Test runs under dry conditions

Pedal the test bicycle until the specified test velocity is attained (see ISO 4210-2:2014, Table 2). Then stop pedalling and apply the brakes. The bicycle shall be brought to a smooth, safe stop [see ISO 4210-2:2014, 4.6.8.2 item a)].


4.6.3.7 Test method — Test runs under wet conditions

The method shall be as given in [4.6.3.6](#), with the addition that wetting of the brake system(s) shall commence not less than 25 m prior to the commencement of braking and shall continue until the bicycle comes to rest. Excessive amounts of water can be swept from the test track surface between runs.

4.6.3.8 Number of valid test runs

- a) If the gradient of the track is less than 0,2 %, the following runs shall be made:
- 1) five consecutive valid runs under dry conditions;
 - 2) two acclimatization runs under wet conditions (results not recorded);
 - 3) five consecutive valid runs under wet conditions.
- b) If the gradient of the track lies between 0,2 % and 0,5 %, the following runs shall be made:
- 1) six consecutive valid runs under dry conditions with alternate runs in opposite directions;
 - 2) two acclimatization runs under wet conditions (results not recorded);
 - 3) six consecutive valid runs under wet conditions with alternate runs in opposite directions.

A rest period not exceeding 3 min can be taken between successive runs.

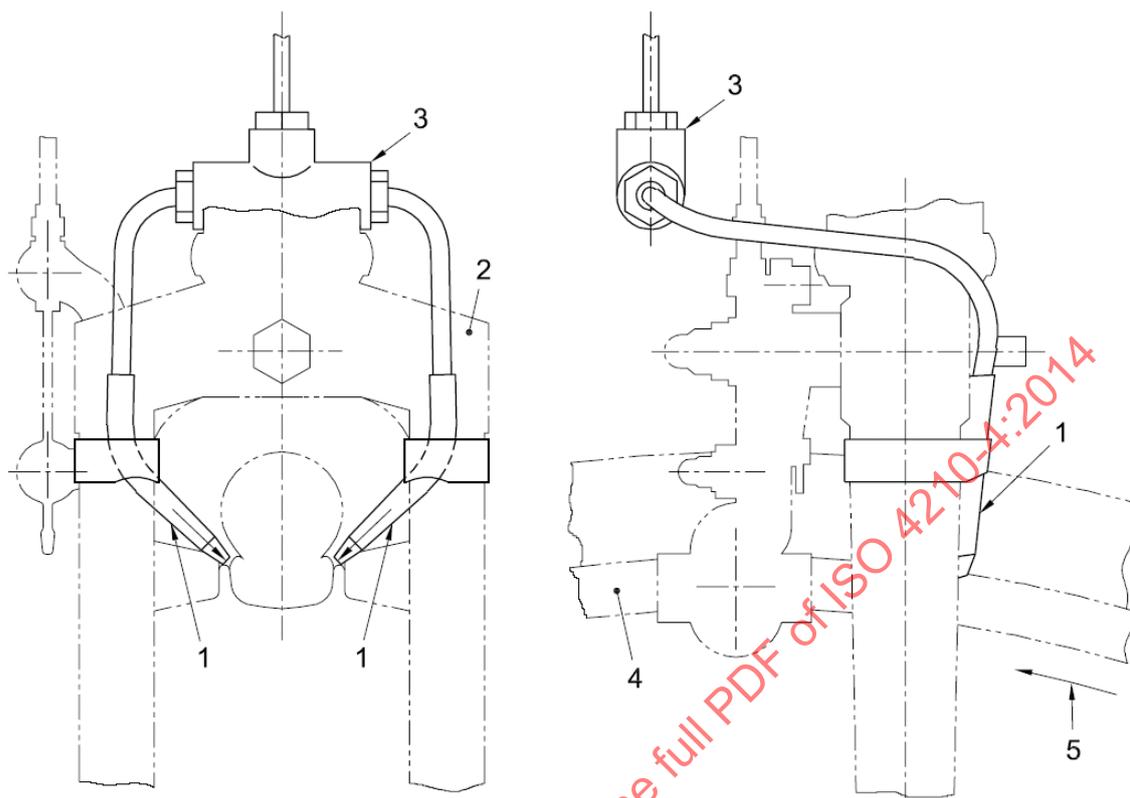


Key

- 1 water nozzles
- 2 fork crown
- 3 front tee-piece
- 4 wheel rim
- 5 direction of the wheel rotation

Figure 7 — Water nozzles for rim-brake (front)

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014


Dimensions in millimetres

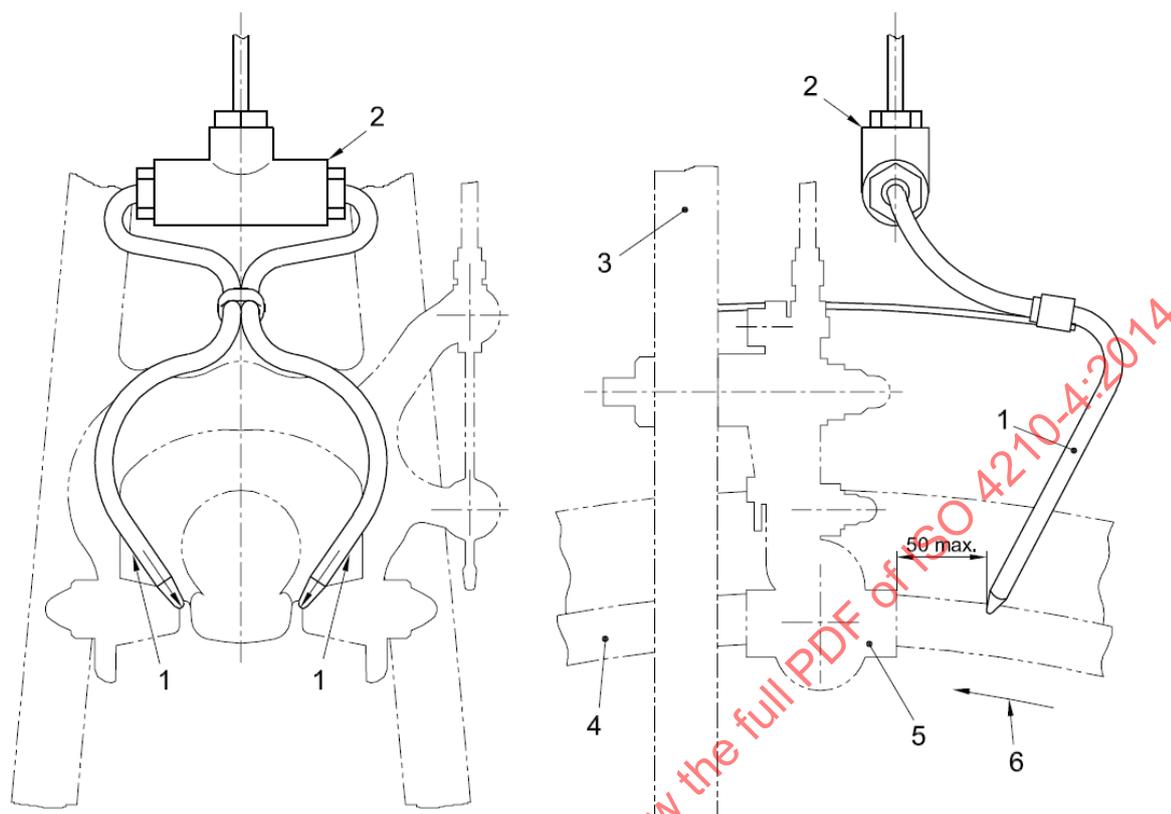

Key

- 1 water nozzles
- 2 rear tee-piece
- 3 bicycle frame
- 4 wheel rim
- 5 brake assembly
- 6 direction of the wheel rotation

Figure 8 — Water nozzles for rim-brake (rear)

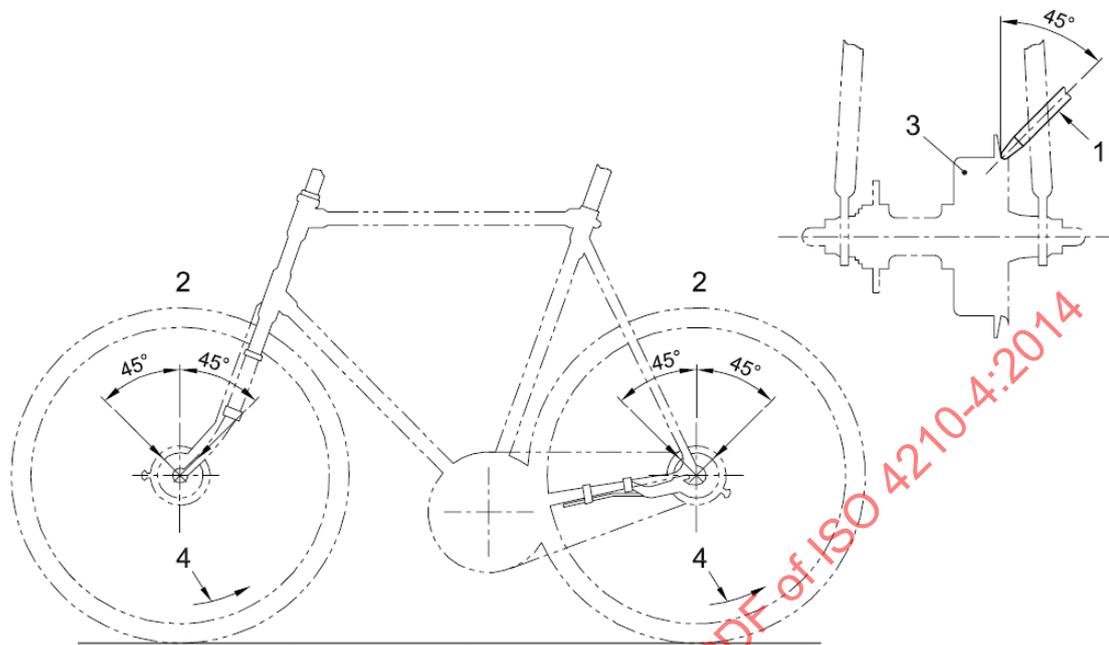


Key

- 1 water nozzle
- 2 two water nozzles
- 3 hub brake
- 4 direction of the wheel rotation

Figure 9 — Water nozzles for hub-brake


STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

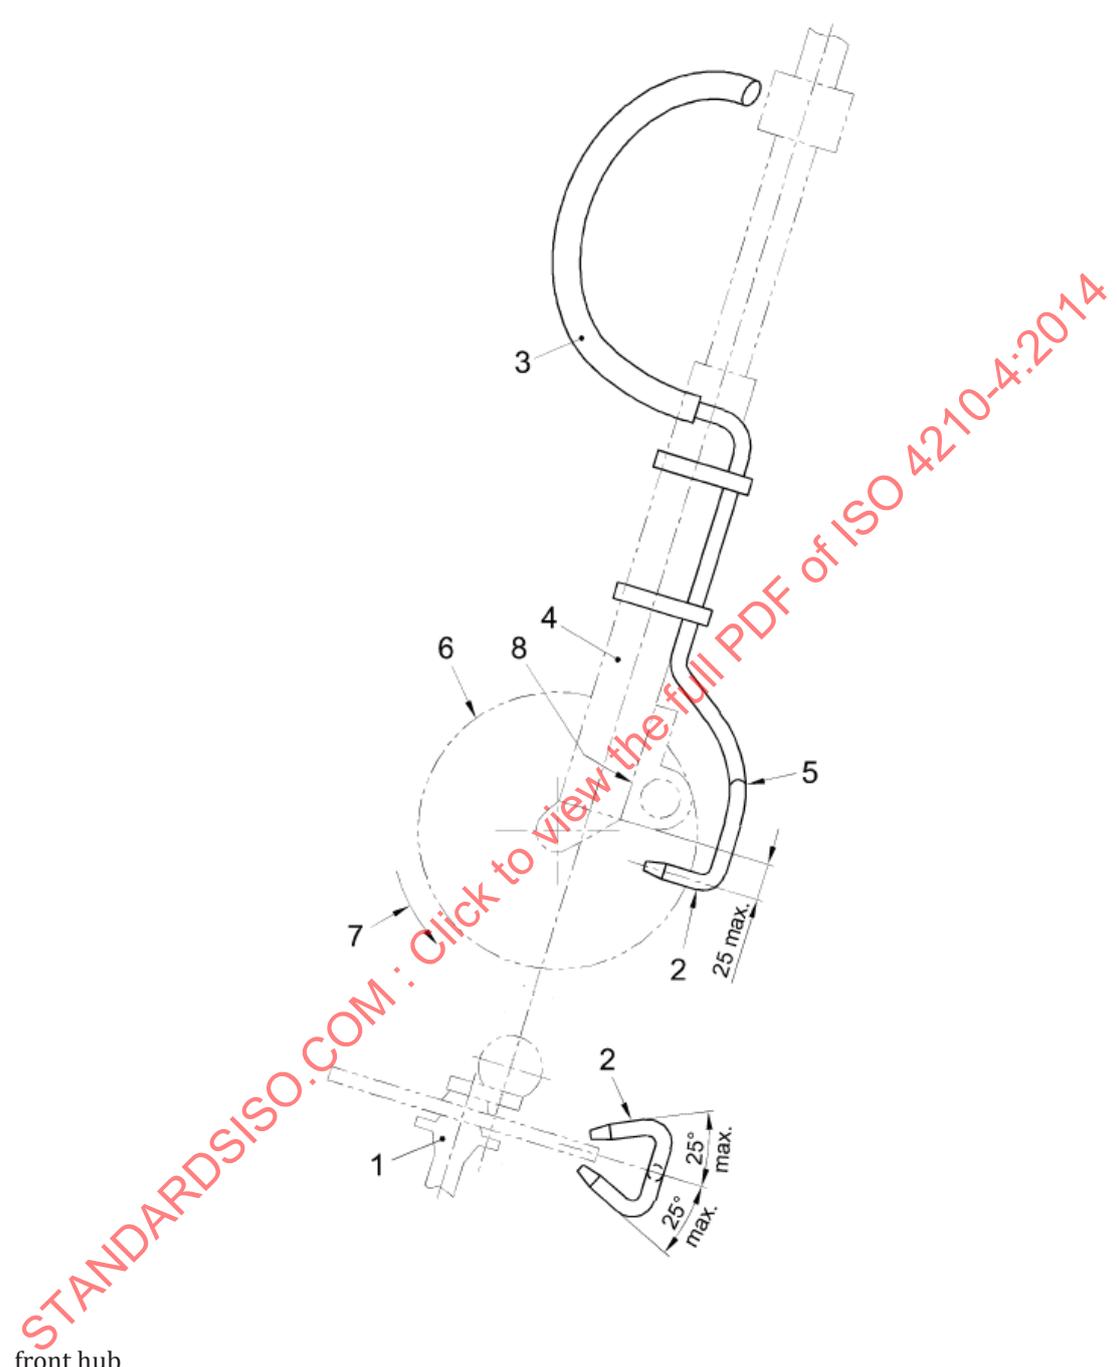

Key

- 1 front hub
- 2 water nozzles
- 3 flexible pipe
- 4 suspension-fork leg
- 5 Y-joint
- 6 brake-disc
- 7 direction of the wheel rotation
- 8 disc-brake calliper


Figure 11 — Water nozzles for disc-brake (front)

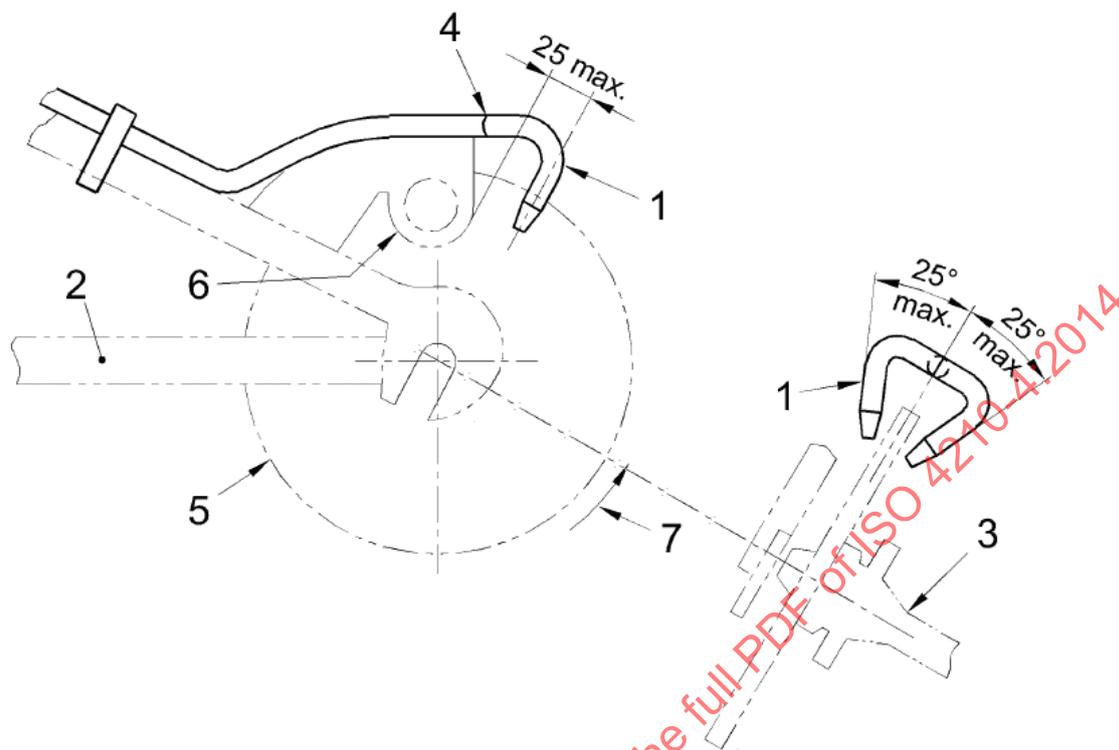

Key

- 1 water nozzles
- 2 bicycle frame
- 3 rear hub
- 4 Y-joint
- 5 brake disc
- 6 disc-brake calliper
- 7 direction of the wheel rotation

Figure 12 — Water nozzles for disc-brake (rear)

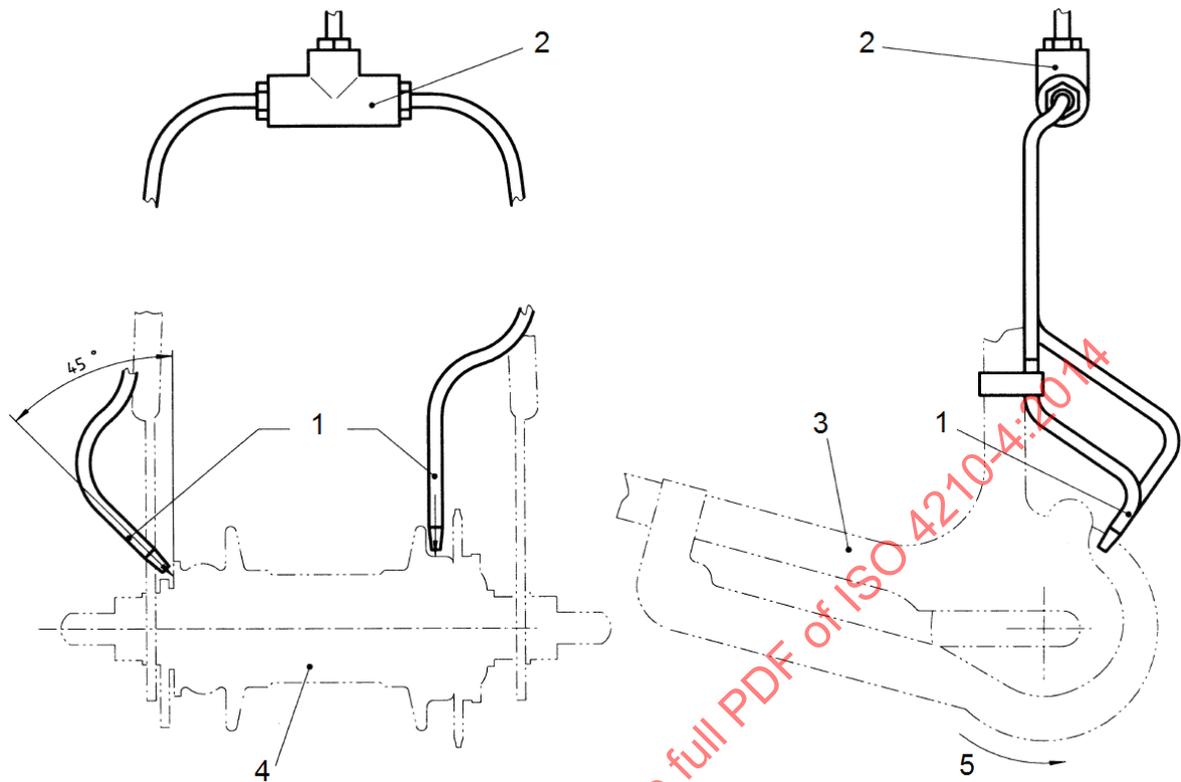**Key**

- 1 water nozzles
- 2 rear tee-piece
- 3 bicycle frame
- 4 brake hub
- 5 direction of the wheel rotation

Figure 13 — Water nozzles for back-pedal brake

4.6.3.9 Velocity/distance correction factor

A correction factor shall be applied to the measured braking distance if the velocity as checked by the timing device is not precisely as specified in ISO 4210-2:2014, 4.6.8.1.1.

The corrected braking distance shall be determined from Formula (1):

$$S_c = \left(\frac{V_s}{V_m} \right)^2 \times S_m \quad (1)$$

where

- S_c is the corrected braking distance (m);
- S_m is the measured braking distance (m);
- V_s is the specified test velocity (m/s);
- V_m is the measured test velocity (m/s).

4.6.3.10 Validity of test runs

- a) A test run shall be considered invalid if
- 1) excessive side-skid causing the rider to put his foot to the ground to retain control occurs, or
 - 2) loss of control occurs.

With certain types of braking system, it might not be possible to avoid entirely some skidding of the rear wheel during braking. This is considered acceptable provided that 1) or 2) above do not occur as a result.

- b) If the corrected braking distance exceeds the braking distance specified in ISO 4210-2:2014, Table 2, a test run shall be considered invalid if the velocity at the commencement of the test exceeds the specified test velocity by more than 1,5 km/h as specified in ISO 4210-2:2014, Table 2.
- c) If the corrected braking distance is less than the braking distance specified in ISO 4210-2:2014, Table 2, a test run shall be considered invalid if the velocity at the commencement of braking is more than 1,5 km/h below the specified test velocity.

If the corrected braking distance exceeds the braking distance specified in ISO 4210-2:2014, Table 2, the test run shall be considered valid.

4.6.3.11 Test results

- a) Braking under dry conditions

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distance (see 4.6.3.9) of the test results of either 4.6.3.8 item a) 1) or 4.6.3.8 item b) 1).

For compliance with the requirements of ISO 4210-2:2014, 4.6.8.1.1 the above average values shall not exceed the relevant braking distances specified in ISO 4210-2:2014, Table 2.

- b) Braking under wet conditions

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distances (see 4.6.3.9) of the test results of either 4.6.3.8 item a) 3) or 4.6.3.8 item b) 3).

For compliance with the requirements of ISO 4210-2:2014, 4.6.8.1.1, the above average values shall not exceed the relevant braking distances specified in ISO 4210-2:2014, Table 2.

- c) Ratio between wet and dry braking performance for city and trekking, young adult and mountain bicycles

Because the wet and dry braking distances are measured at different test velocities, a simple comparison of braking distances is not meaningful. Therefore, a comparison shall be made of equivalent, calculated values, using Formula (2):

$$\frac{16^2}{S_c^W} : \frac{25^2}{S_c^D} \quad (2)$$

where

S_c^D is the corrected braking distance in dry conditions (m);

S_c^W is the corrected braking distance in wet conditions (m).

4.6.4 Back-pedal brake linearity test

This test shall be conducted on a fully assembled bicycle. The output force for a back-pedal brake shall be measured tangentially to the circumference of the rear tyre, when the wheel is rotated in the direction

of forward movement, while a force of between 90 N and 300 N is being applied to the pedal at right angles to the crank and in the direction of braking.

The braking force reading shall be taken during a steady pull and after one revolution of the wheel. A minimum of five results, each at a different pedal force level, shall be taken. Each result shall be the average of three individual readings at the same load level.

The results shall be plotted on a graph, showing the line of best fit and the $\pm 20\%$ limit lines obtained by the method of least squares outlined in [Annex A](#).

4.6.5 Machine test method

4.6.5.1 General

The test machine enables the braking distances for both brakes or the rear brake alone to be calculated from measurements of the individual braking forces of the front and rear brakes on a drum or belt.

4.6.5.2 Symbols

F_{Op}	Operating force (i.e. force applied on brake lever or pedal)
$F_{Op\ intend}$	Intended operating force (e.g. 40 N, 60 N, 80 N etc.)
$F_{Op\ rec}$	Recorded operating force (e.g. 38 N, 61 N, 79 N etc.)
F_{Br}	Braking force
$F_{Br\ rec}$	Recorded braking force
$F_{Br\ corr}$	Corrected braking force (Corrected for difference between $F_{Op\ intend}$ and $F_{Op\ rec}$)
$F_{Br\ average}$	Arithmetic mean of the three $F_{Br\ corr}$ at one level of $F_{Op\ intend}$
$F_{Br\ max}$	Maximum $F_{Br\ average}$
F_{Br}^D	Dry braking force
F_{Br}^W	Wet braking force

4.6.5.3 Linearity

When tested by the methods described in [4.6.5.7](#) item c) 1) and 2), the braking force $F_{Br\ average}$ shall be linearly proportional (within $\pm 20\%$) to the progressively increasing intended operating forces $F_{Op\ intend}$. The requirement applies to braking forces $F_{Br\ average}$ equal to and greater than 80 N (see [Annex A](#)).


4.6.5.4 Test machine

The test machine shall incorporate a system that drives the wheel during the test by tyre contact and a means of measuring the braking force, and typical examples of two types of machine are illustrated in [Figures 14](#) and [15](#).

[Figure 14](#) shows a machine in which a roller drives the individual wheels, and [Figure 15](#) shows a machine in which a driven belt contacts both wheels. Other types of machine are permitted, provided they meet the specific requirements listed below and those specified in [4.6.5.5](#) and [4.6.5.6](#).

The specific requirements are as follows:


- the linear surface velocity of the tyre shall be 12,5 km/h and shall be controlled within $\pm 5\%$;

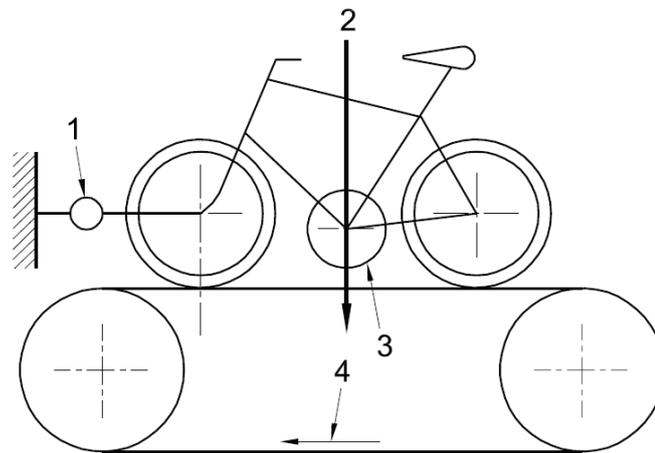**Key**

- 1 braking force transducer
- 2 applied force
- 3 additional mass
- 4 direction of belt travel

Figure 15 — Braking performance test machine — Driven belt type

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2014

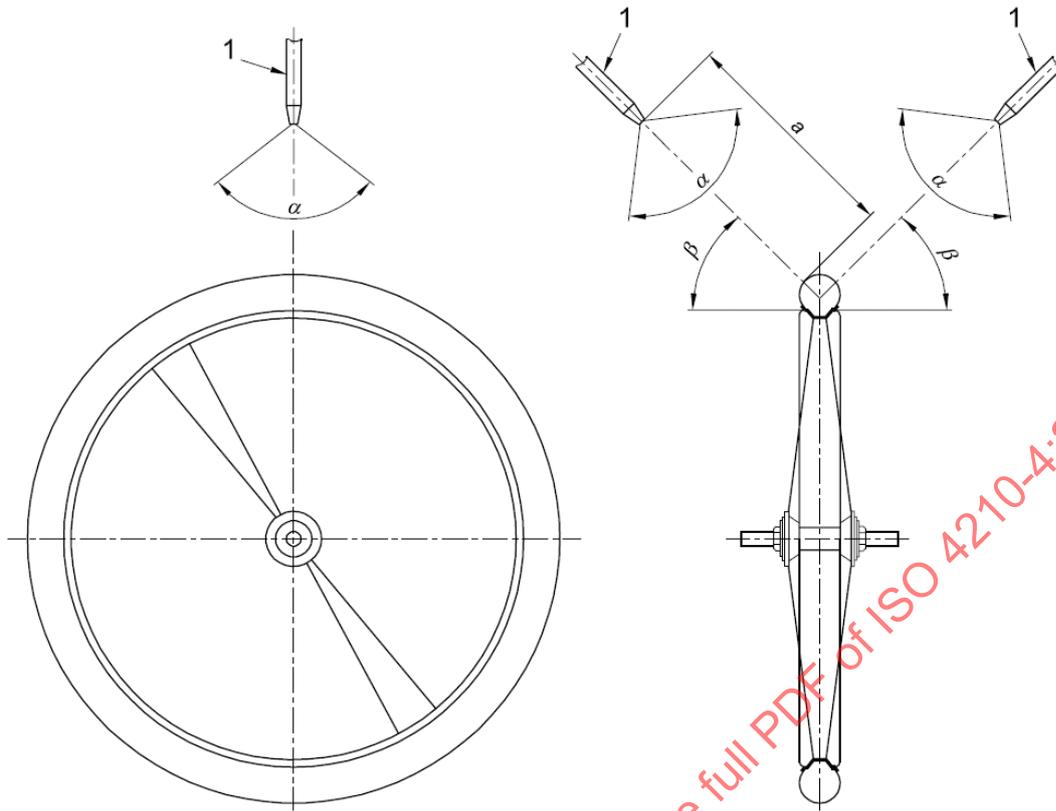

Key

- α 90° to 120°
- β 30° to 60°
- a 150 mm to 200 mm
- 1 water nozzles

NOTE Applicable to all types of brake.

Figure 16 — Water nozzle arrangement for the wet braking test

4.6.5.6 Vertical force on the tested wheel

The wheel to be tested shall be forced vertically downwards so that no skidding of the wheel occurs when tested according to 4.6.5.7 item c) 1) and 2). The necessary force can be applied anywhere on the bicycle (wheel axle, bottom bracket, seat-post, etc.) provided that it is exerted vertically downwards.

4.6.5.7 Test method

a) General

Test the front and rear wheels individually.

b) Running-in the braking surfaces

Conduct a running-in process on every brake before the performance test is performed.

In order to determine the operating force to be used during the running-in process, mount and load the bicycle on the test machine with the belt or drum running at the specified speed and apply an operating force to the brake lever or the pedal that is high enough to achieve a braking force