
**Cycles — Safety requirements for
bicycles —**

**Part 4:
Braking test methods**

Cycles — Exigences de sécurité pour les bicyclettes —

Partie 4: Méthodes d'essai de freinage

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2023



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Test methods.....	1
4.1 Brake lever grip dimensions.....	1
4.1.1 Test method for the brake lever similar to type A or type B.....	1
4.1.2 Test method for the brake lever similar to type C.....	3
4.2 Brake levers — Position of applied force.....	5
4.2.1 Type A and B brake levers.....	5
4.2.2 Type C brake levers.....	5
4.3 Brake-block and brake-pad assemblies — Security test.....	6
4.4 Hand-operated braking-system — Strength test.....	6
4.5 Back-pedal braking system — Strength test.....	7
4.6 Braking performance.....	7
4.6.1 Test bicycle.....	7
4.6.2 Secondary brake levers.....	7
4.6.3 Track test method.....	8
4.6.4 Back-pedal brake linearity test.....	17
4.6.5 Machine test method.....	17
4.7 Brakes — Heat-resistance test.....	23
4.7.1 Drag test.....	23
4.7.2 Brake performance measurement after drag test.....	24
Annex A (informative) Explanation of the method of least squares for obtaining the line of best fit and ± 20 % limit lines for braking performance linearity.....	26
Annex B (informative) Method of measuring braking distance with different lever forces.....	29
Annex C (informative) How to derive the total braking energy for brake heat resistance test.....	31

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 149, *Cycles*, Subcommittee SC 1, *Cycles and major sub-assemblies*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 333, *Cycles*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 4210-4:2014), which has been technically revised.

The main changes are as follows:

- improvement of [4.1.2](#);
- addition of test temperature requirement in [4.6.3](#) and [4.6.5](#);
- change in the method of calculating the braking distance in [4.6.3](#);
- addition of rolling resistance requirement and cooling requirement in [4.6.5.7](#);
- change in the test method to no cooling air of [4.7](#);
- addition of [Annex B](#) and [Annex C](#).

A list of all parts in the ISO 4210 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document has been developed in response to the demand throughout the world. The aim is to ensure that bicycles manufactured in conformity with this document will be as safe as is practically possible. The tests are designed to ensure the strength and durability of individual parts as well as of the bicycle as a whole, demanding high quality throughout and consideration of safety aspects from the design stage onwards.

The scope is limited to safety considerations and has specifically avoided standardization of components.

If the bicycle should be used on public roads, national regulations apply.

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2023

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4210-4:2023

Cycles — Safety requirements for bicycles —

Part 4: Braking test methods

1 Scope

This document specifies the braking test methods for ISO 4210-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4210-1, *Cycles — Safety requirements for bicycles — Part 1: Vocabulary*

ISO 4210-2:2023, *Cycles — Safety requirements for bicycles — Part 2: Requirements for city and trekking, young adult, mountain and racing bicycles*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4210-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:


- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Test methods

4.1 Brake lever grip dimensions

4.1.1 Test method for the brake lever similar to type A or type B


Fit the gauge illustrated in [Figure 1](#) over the handlebar grip or the handlebar (when the manufacturer does not fit a grip) and the brake lever as shown in [Figure 2](#) so that face A is in contact with the handlebar or grip and the side of the brake lever. Ensure that face B spans an area of that part of the brake lever which is intended for contact with the rider's fingers without the gauge causing any movement of the brake lever towards the handlebar or grip. Measure the distance, a , the distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever. The measurement should be conducted only on a fully assembled bicycle.

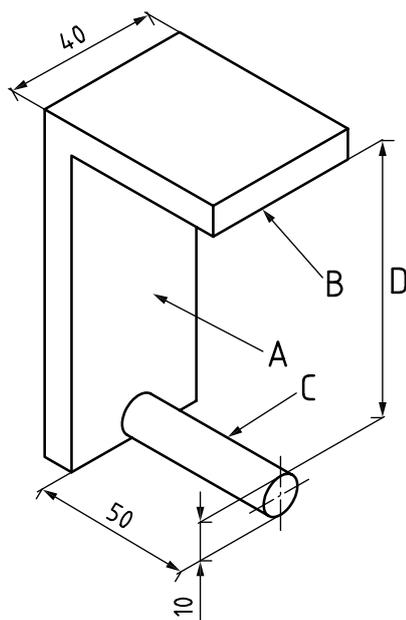


Key

- A face A
- B face B
- C rod
- D 75 mm or 90 mm

Figure 1 — Brake lever grip dimension gauge for type A and type B

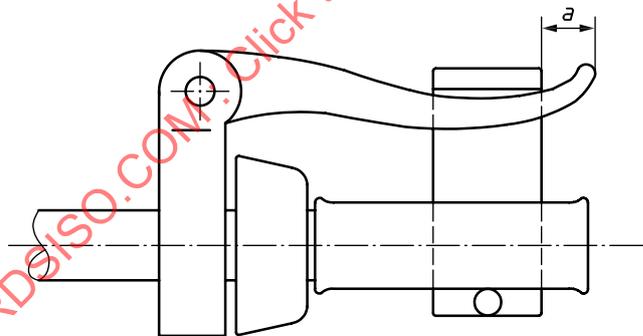

a) Type A

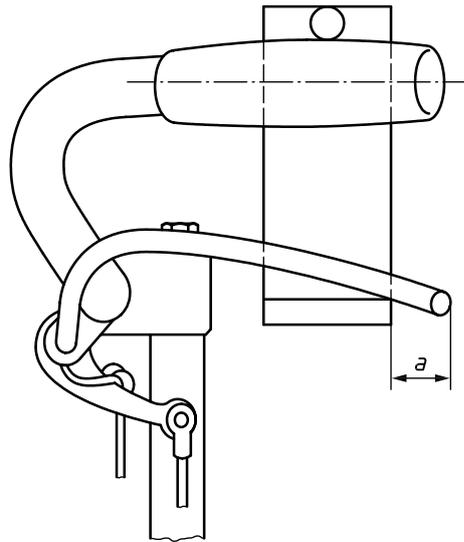

b) Type B


Key

a distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever

Figure 2 — Method of fitting the gauge to the brake lever and handlebar**4.1.2 Test method for the brake lever similar to type C**

Fit the gauge illustrated in [Figure 3](#) over the handlebar and brake lever as shown in [Figure 4](#) so that face A is in contact with the handlebar or handlebar grip and the brake lever. Put the face of cylinder B in contact with the part of the grip intended for contact with the rider's hand and check if the requirements are met. In the case of brake lever with position adjustment, check if the requirements are met in a specific range of the adjustable range.

Dimensions in millimetres

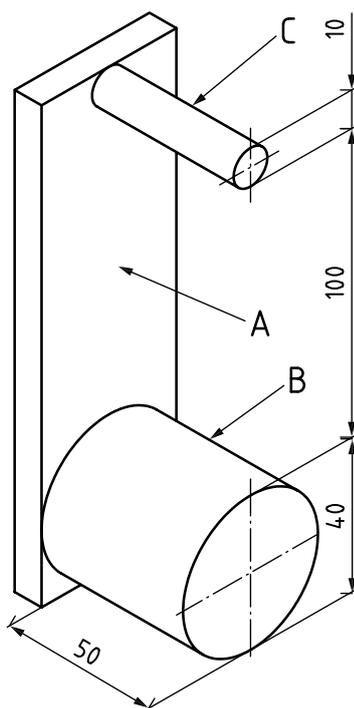

Key

- A face A
- B face of cylinder
- C rod

Figure 3 — Brake lever grip-dimension gauge for type C

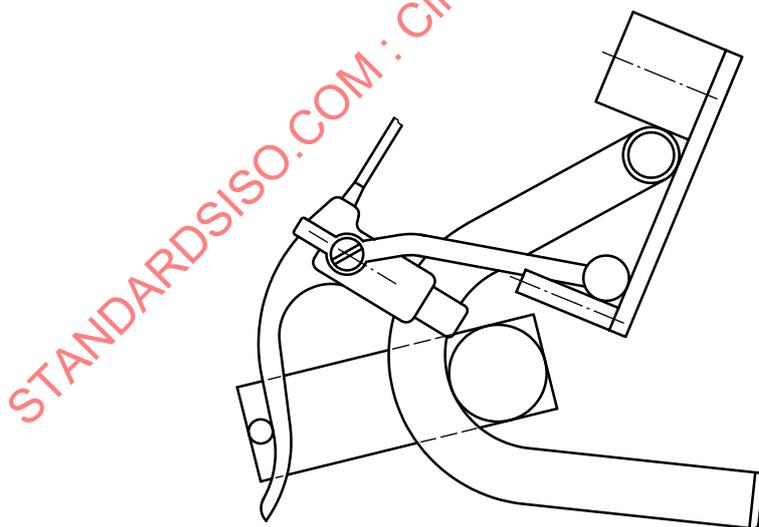


Figure 4 — Method of fitting the gauge to the brake lever and handlebar for type C


4.2 Brake levers — Position of applied force


4.2.1 Type A and B brake levers

For the purposes of braking tests in this document, for brake levers similar to type A or type B, the test force shall be applied at a distance b , which is equal to either dimension a [see ISO 4210-2:2023, Figure 1 a) and b)] as determined in 4.1.1 or 25 mm from the free end of the brake lever, whichever is the greater [see Figure 5 a) and Figure 5 b)].

4.2.2 Type C brake levers

For the purposes of braking tests in this document, for brake levers similar to type C, the test force shall be applied at a distance of 25 mm from the free end of the brake lever [see Figure 5 c)].

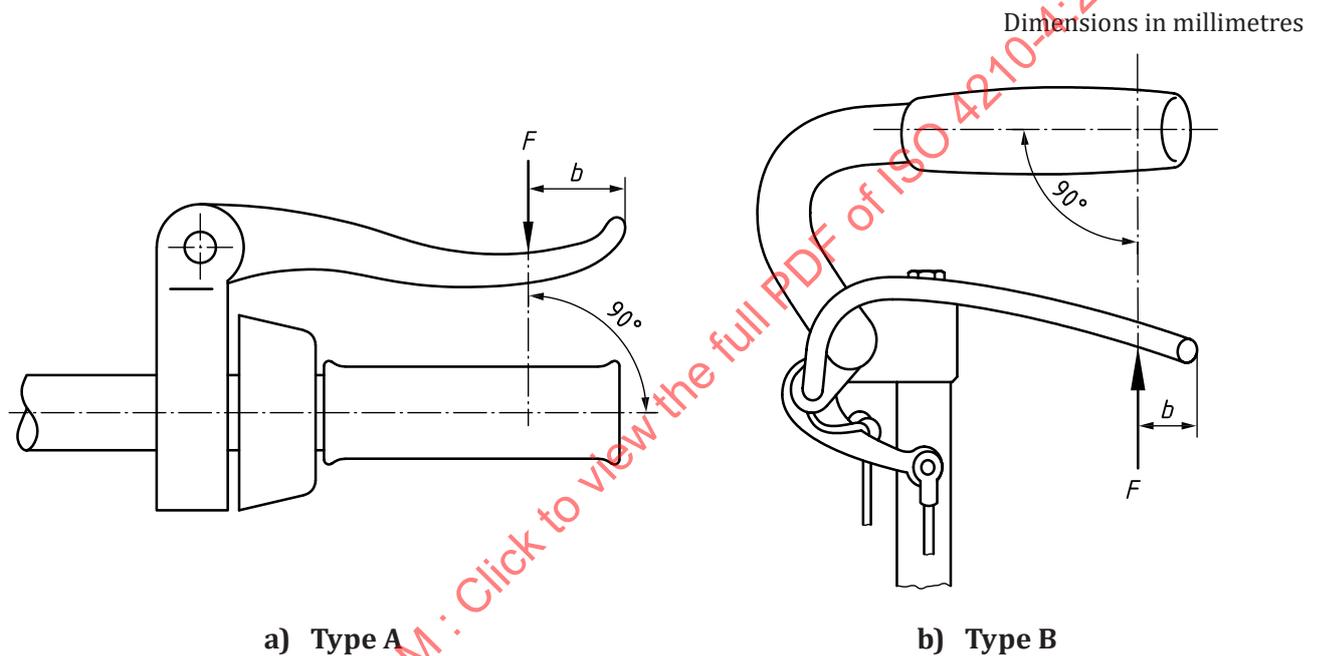

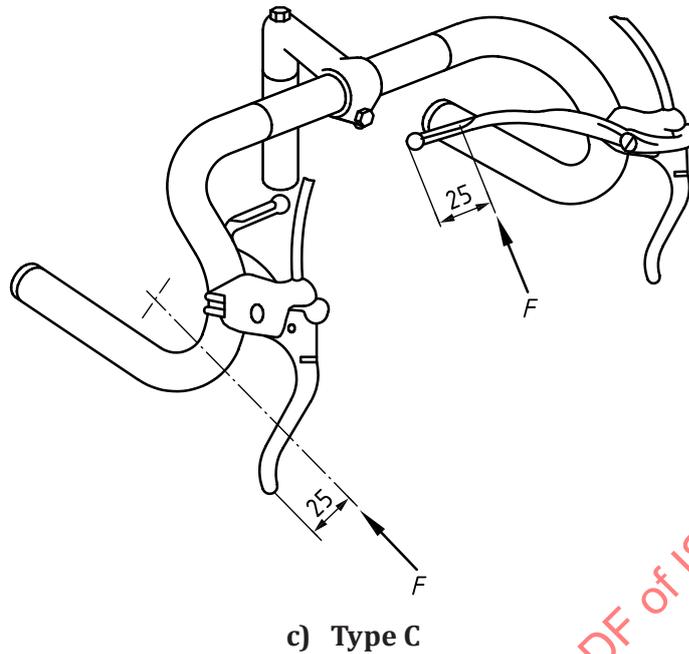

Key

- F applied force
- $b \geq 25$ mm

Figure 5 — Position of applied force on the brake lever

4.3 Brake-block and brake-pad assemblies — Security test

Conduct the test on a fully assembled bicycle with the brakes adjusted to a correct position with a rider or equivalent mass on the saddle. The combined mass of the bicycle and rider (or equivalent mass) shall be 100 kg.

Actuate each brake lever with a force of 180 N applied at the point specified in [Figure 5](#) or a force sufficient to bring the brake lever into contact with the handlebar grip, whichever is lesser. Maintain this force while subjecting the bicycle to five forward and five rearward movements, each of which is not less than 75 mm distance.

Then conduct the test described in [4.4](#) or [4.5](#) as appropriate, depending on the style of brake, and then the test described in [4.6](#).

4.4 Hand-operated braking-system — Strength test


Conduct the test on a fully assembled bicycle. After it has been ensured that the braking system is adjusted according to the recommendations in the manufacturer's instructions, apply a force to the brake lever at the point specified in [Figure 5](#). This force shall be 450 N, or such lesser force as is required to bring

- a) a brake lever into contact with the handlebar grip or the handlebar where the manufacturer does not fit a grip,
- b) a brake extension lever level with the surface of the handlebar or in contact with the handlebar, and
- c) a secondary brake lever to the end of its travel.

Repeat the test 10 times on each brake lever, secondary brake lever, or extension lever.

4.5 Back-pedal braking system — Strength test

Conduct the test on a fully assembled bicycle. After it has been ensured that the braking system is correctly adjusted, and with the pedal cranks in a horizontal position, as shown in [Figure 6](#), apply a vertically downward force to the centre of the left-hand pedal spindle. Increase the force progressively to 1 500 N and maintain fully for 1 min.

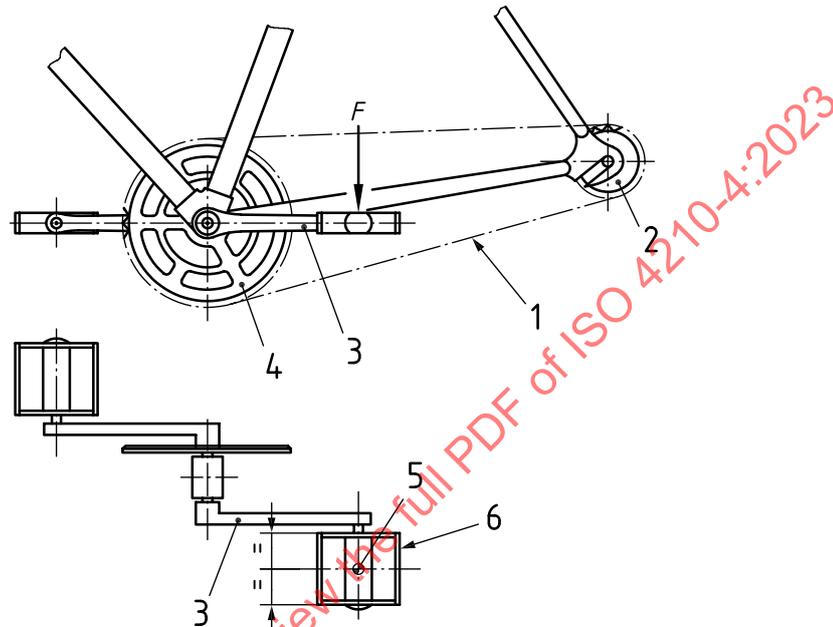

Key

- 1 chain
- 2 hub sprocket
- 3 non-drive side crank
- 4 chain wheel and pedal crank
- 5 point of force application
- 6 pedal
- F vertically downward force to the centre of the left-hand pedal spindle, 1 500 N

Figure 6 — Back-pedal brake test

4.6 Braking performance

4.6.1 Test bicycle

Conduct the braking performance test on a fully assembled bicycle after the brakes have been subjected to the strength test detailed in ISO 4210-2:2023, 4.6.6, and 4.6.7. Before testing the bicycle by either method, inflate the tyres and adjust the brakes to the nominal reach position according to the manufacturer's instructions. In the case of rim-brakes, adjust it to the maximum clearance specified by the manufacturer.

4.6.2 Secondary brake levers

Where a bicycle is fitted with secondary brake levers attached to brake levers, bar-ends, or aerodynamic extensions, separate tests shall be conducted for the operation of the secondary brake levers in addition to tests with the normal levers.

4.6.3 Track test method

4.6.3.1 Test track

- a) Use an indoor test track if possible. If an outdoor test track is used, pay special attention to ambient conditions throughout the test. The ambient temperature while performing the test shall be $20\text{ °C} \pm 10\text{ °C}$.
- b) The gradient of the track shall not exceed 0,5 %. If the gradient is less than 0,2 % carry out all runs in the same direction. If the gradient lies between 0,2 % and 0,5 %, carry out alternate runs in opposite directions.
- c) The surface shall be hard, of concrete or fine asphalt, and free from loose dirt or gravel. The minimum coefficient of friction between the dry surface and the bicycle tyre shall be 0,75.
- d) The track shall be essentially dry at the commencement of tests. When testing in accordance with the requirements of [4.6.3.6](#), the track shall remain dry throughout the tests.
- e) The wind speed on the track shall not exceed 3 m/s during the tests.

4.6.3.2 Instrumentation

The test bicycle or the test track shall be instrumented to include the following:

- a) a calibrated speedometer or tachometer (accurate to within $\pm 5\%$) to indicate to the rider the approximate speed at the commencement of braking;
- b) a velocity-recording device (accurate to within $\pm 2\%$) to record the velocity at the commencement of braking;
- c) a distance recording system (accurate to within $\pm 1\%$) to record the braking distance;

The velocity-recording device and distance recording system should have the least possible resistance to the road surface.

- d) a water spray system, to provide wetting of the braking surface, consisting of a water reservoir connected by tubing to a pair of nozzles at the front wheel and a pair of nozzles at the rear wheel. A quick-acting on/off valve shall be included for control by the rider. Each nozzle shall provide a flow of water at ambient temperature of not less than 4 ml/s. Details of the positions and directions of nozzles for rim brakes, hub brakes, band brakes, disc brakes, and back-pedal brake are given in [Figures 7 to 13](#);

NOTE [Figures 7 and 8](#) for rim brakes show side-pull callipers but the same arrangements apply to centre-pull callipers and cantilever brakes.

- e) a brake-actuation indicating system to record independently when each lever or pedal is actuated.

4.6.3.3 Mass of bicycle, rider, and instrumentation

The combined mass of the bicycle, the rider, and the instrumentation shall be 100 kg.

When wet condition braking tests are performed, the combined mass can decrease throughout the test due to water consumption, but it shall not be less than 99 kg at the end of the valid test runs.

Where a manufacturer specifies that their bicycle can carry a mass such that the sum of that mass plus the mass of the bicycle is in excess of 100 kg (60 kg for young adults) to some value M , apply M as total mass.

Any extra mass shall be positioned above the rear wheel and in front of the rear axle.

4.6.3.4 Force applied to the brake levers

a) Magnitude and position of force on brake levers

Apply a handgrip force not exceeding 180 N at the point as specified in [Figure 5](#). Check before and after each series of test runs to verify the lever force. In order to stabilize the lever operating force during braking, the lever may be fitted with an attachment which limits its range of movement. Brakes that produce high braking forces with small operating forces should have their brake characteristics checked beforehand to ensure that they can be tested safely.

NOTE When the braking distance can only be measured at lower lever operating force, see [Annex B](#) for the calculation of the braking distance at a maximum lever operating force (bottom up or 180 N).

b) Optional brake-force application device

It is permissible to use a test mechanism to operate the brake lever, and when such a device is used, it shall meet the requirements of [4.6.3.4](#) item a) and shall additionally control the rate of application of the brake lever force such that 63 % of the intended lever force is applied in not less than 0,2 s.

4.6.3.5 Running — in the braking surfaces

A running-in process shall be conducted on every brake before performance testing is carried out.

Apply the brakes for not less than 3 s to maintain steady deceleration while the bicycle is being ridden at a speed of approximately 16 km/h. Repeat this operation 10 times.

4.6.3.6 Test method — Test runs under dry conditions

Pedal the test bicycle until the specified test velocity is attained (see ISO 4210-2:2023, Table 1). Then stop pedalling and apply the brakes. The bicycle shall be brought to a smooth, safe stop [see ISO 4210-2:2023, 4.6.8.2 item a)].

4.6.3.7 Test method — Test runs under wet conditions

The method shall be as given in [4.6.3.6](#), with the addition that wetting of the brake system(s) shall commence not less than 25 m prior to the commencement of braking and shall continue until the bicycle comes to rest. Excessive amounts of water can be swept from the test track surface between runs.

4.6.3.8 Number of valid test runs


a) If the gradient of the track is less than 0,2 %, the following runs shall be made:

- 1) five consecutive valid runs under dry conditions;
- 2) two acclimatization runs under wet conditions (results not recorded);
- 3) five consecutive valid runs under wet conditions.

b) If the gradient of the track lies between 0,2 % and 0,5 %, the following runs shall be made:

- 1) six consecutive valid runs under dry conditions with alternate runs in opposite directions;
- 2) two acclimatization runs under wet conditions (results not recorded);
- 3) six consecutive valid runs under wet conditions with alternate runs in opposite directions.

A rest period not exceeding 3 min can be taken between successive runs.

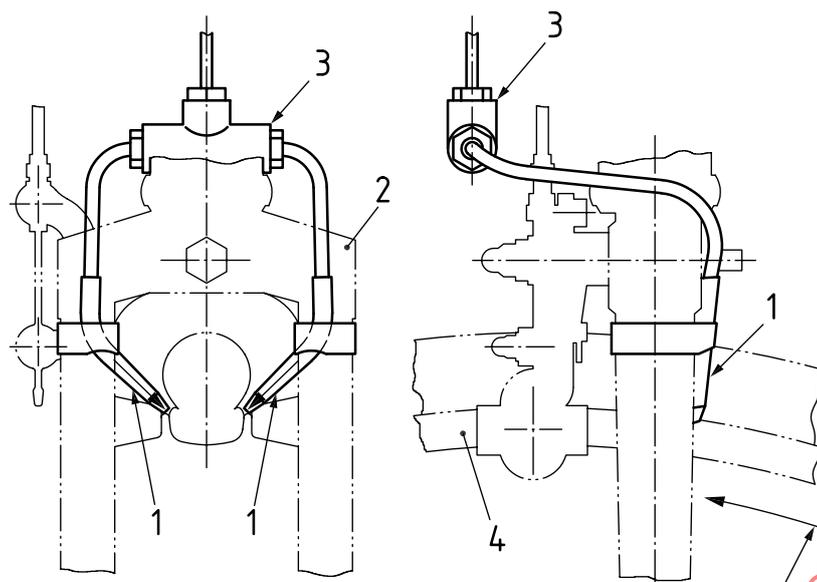


Key

- 1 water nozzles
- 2 fork crown
- 3 front tee-piece
- 4 wheel rim
- a Direction of the wheel rotation.

Figure 7 — Water nozzles for rim-brake (front)

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2023


Dimensions in millimetres

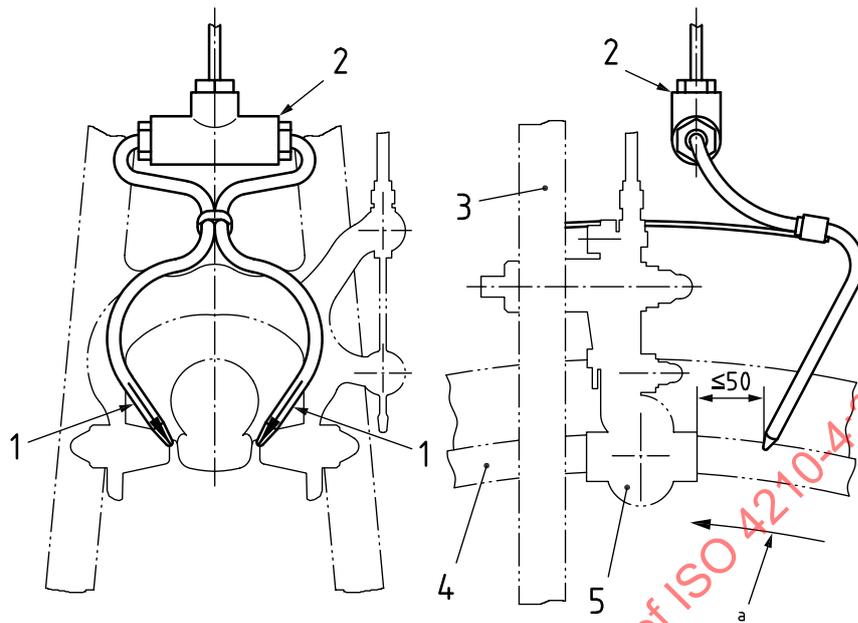

Key

- 1 water nozzles
- 2 rear tee-piece
- 3 bicycle frame
- 4 wheel rim
- 5 brake assembly
- a Direction of the wheel rotation.


Figure 8 — Water nozzles for rim-brake (rear)

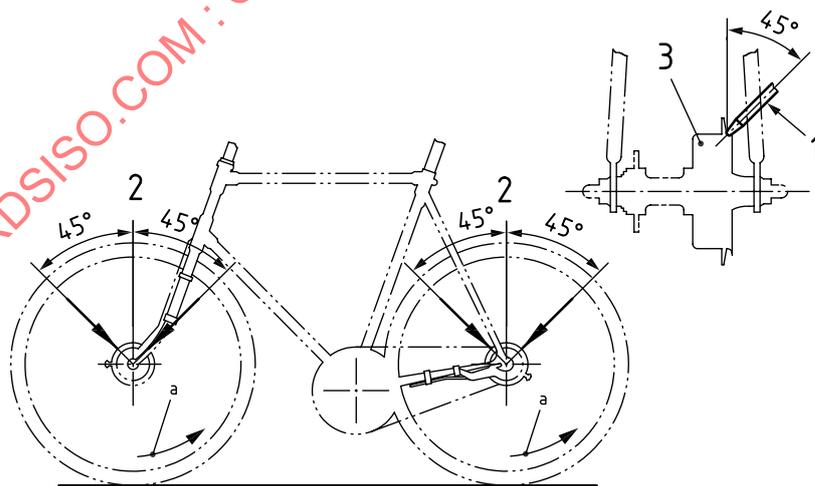

Key

- 1 water nozzle
- 2 two water nozzles
- 3 hub brake
- a Direction of the wheel rotation.

Figure 9 — Water nozzles for hub-brake

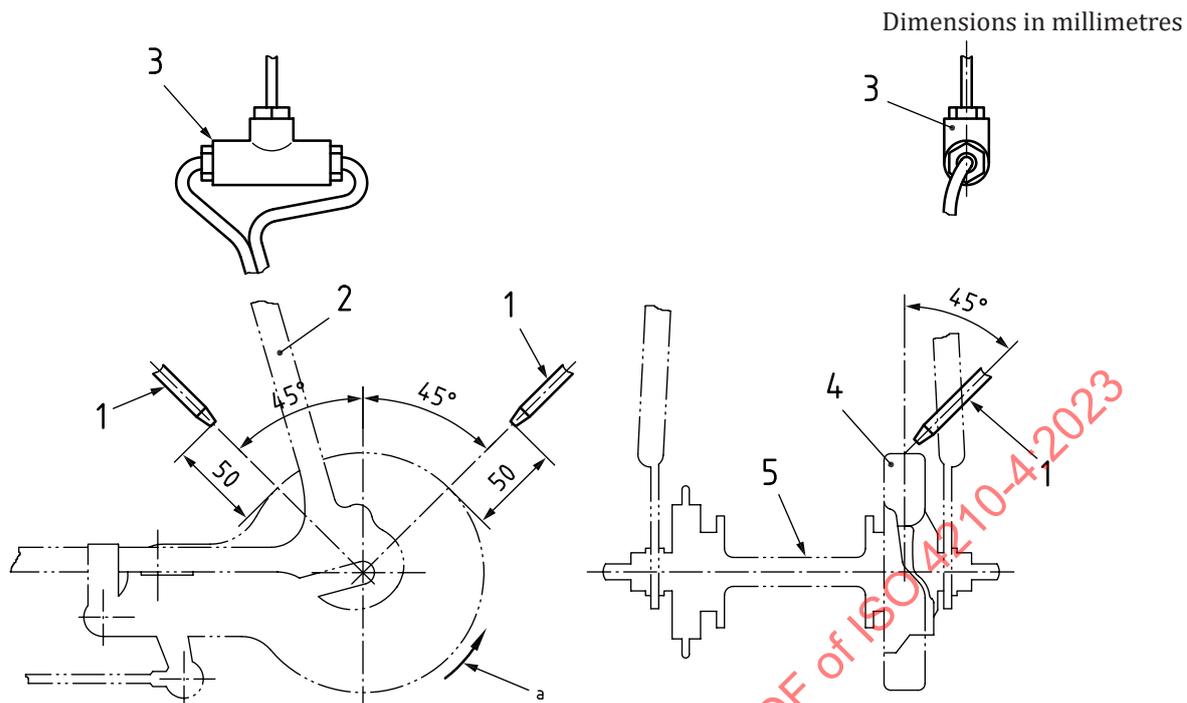


Key

- 1 water nozzle
- 2 bicycle frame
- 3 rear tee-piece
- 4 band brake
- 5 rear hub
- a Direction of the wheel rotation.

Figure 10 — Water nozzles for band-brake


Dimensions in millimetres

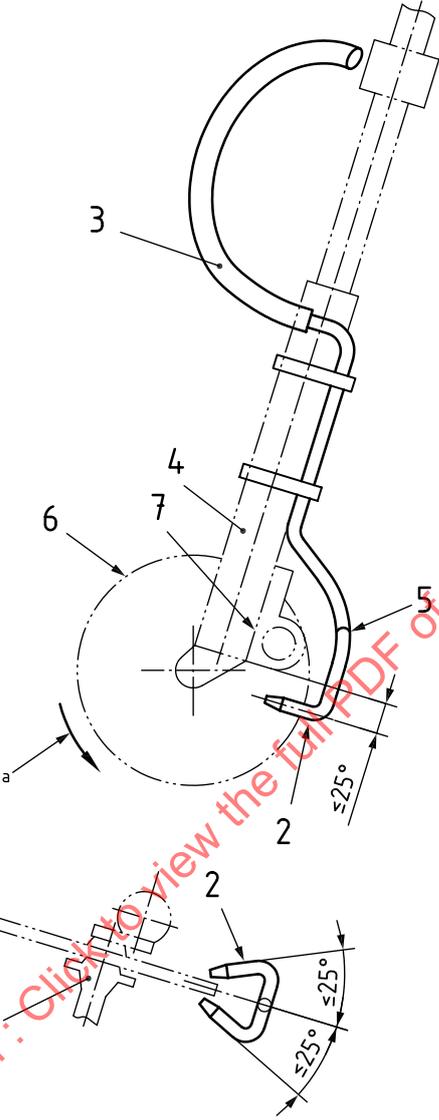

- Key**
- 1 front hub
 - 2 water nozzles
 - 3 flexible pipe
 - 4 suspension-fork leg
 - 5 Y-joint
 - 6 brake-disc
 - 7 disc-brake calliper
 - a Direction of the wheel rotation.

Figure 11 — Water nozzles for disc-brake (front)

Dimensions in millimetres

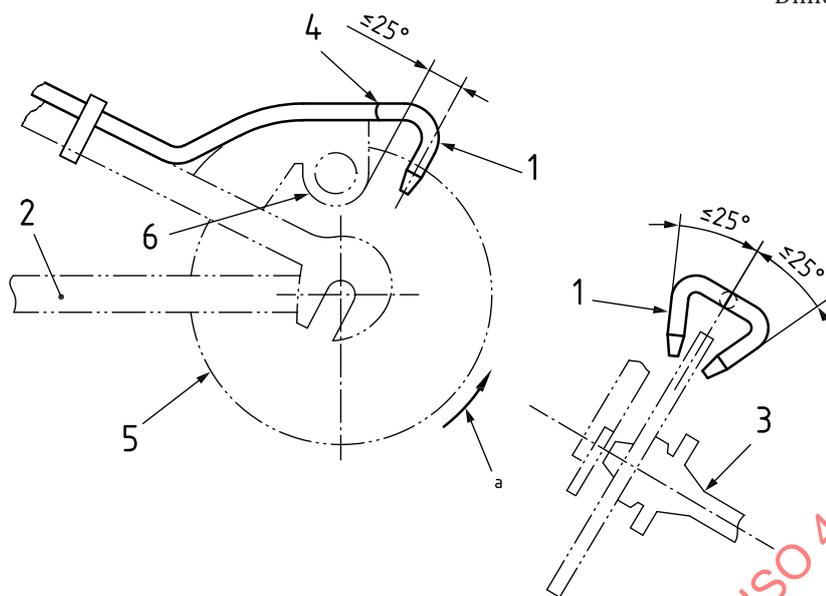


Key

- 1 water nozzles
- 2 bicycle frame
- 3 rear hub
- 4 Y-joint
- 5 brake disc
- 6 disc-brake calliper
- a Direction of the wheel rotation.

Figure 12 — Water nozzles for disc-brake (rear)

STANDARDSISO.COM : Click to view the full PDF of ISO 4210-4:2023

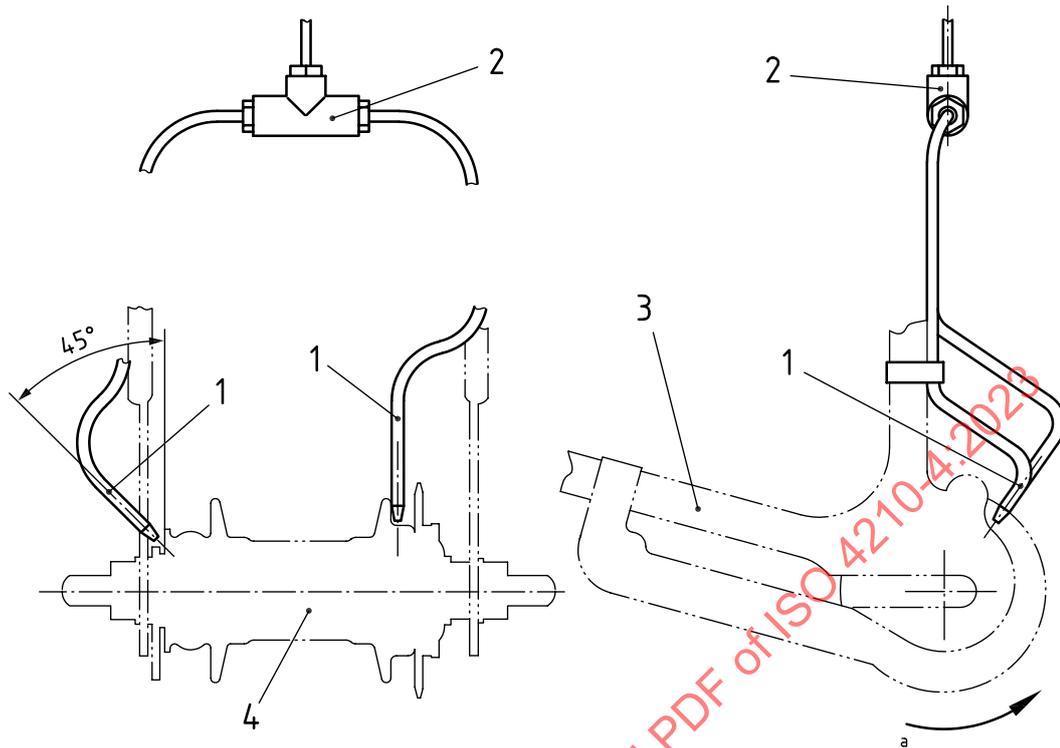**Key**

- 1 water nozzles
- 2 rear tee-piece
- 3 bicycle frame
- 4 brake hub
- a Direction of the wheel rotation.

Figure 13 — Water nozzles for back-pedal brake

4.6.3.9 Braking distance calculation

The corrected braking distance shall be determined from [Formula \(1\)](#):

$$S_c = \frac{V_s^2 \cdot (t_e - t_b)}{2 \cdot (V_b - 0,278)} \quad (1)$$

where

S_c is the corrected braking distance (m);

V_s is the specified test velocity (i.e., 6,94 m/s under dry condition, 4,44 m/s under wet condition) (m/s);

V_b is $0,8V_s$ (i.e., 5,56 m/s under dry condition, 3,56 m/s under wet condition) (m/s);

t_b is the time at $0,8 V_s$ (s);

t_e is the time at 1 km/h (s).

NOTE To eliminate the effect of variations in the testers' lever operation, the braking distance from an initial speed is calculated using data from 80 % of the initial speed to 1 km/h (= 0,278 m/s).

4.6.3.10 Validity of test runs

- a) A test run shall be considered invalid if
 - 1) excessive side-skid causing the rider to put his foot to the ground to retain control occurs, or
 - 2) loss of control occurs.

With certain types of braking system, it might not be possible to avoid entirely some skidding of the rear wheel and tyre assembly during braking. This is considered acceptable provided that 1) or 2) above do not occur as a result.

- b) If the corrected braking distance exceeds the braking distance specified in ISO 4210-2:2023, Table 1, a test run shall be considered invalid if the velocity at the commencement of the test exceeds the specified test velocity by more than 1,5 km/h as specified in ISO 4210-2:2023, Table 1.
- c) If the corrected braking distance is less than the braking distance specified in ISO 4210-2:2023, Table 1, a test run shall be considered invalid if the velocity at the commencement of braking is more than 1,5 km/h below the specified test velocity.

If the corrected braking distance exceeds the braking distance specified in ISO 4210-2:2023, Table 1, the test run shall be considered valid.

4.6.3.11 Test results

- a) Braking under dry conditions.

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distance (see 4.6.3.9) of the test results of either 4.6.3.8 item a) 1) or 4.6.3.8 item b) 1).

For conformity with the requirements of ISO 4210-2:2023, 4.6.8.1.2 the above average values shall not exceed the relevant braking distances specified in ISO 4210-2:2023, Table 1.

- b) Braking under wet conditions.

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distances (see 4.6.3.9) of the test results of either 4.6.3.8 item a) 3) or 4.6.3.8 item b) 3).

For conformity with the requirements of ISO 4210-2:2023, 4.6.8.1.2, the above average values shall not exceed the relevant braking distances specified in ISO 4210-2:2023, Table 1.

- c) Ratio between wet and dry braking performance for city and trekking, young adult and mountain bicycles.

Because the wet and dry braking distances are measured at different test velocities, a simple comparison of braking distances is not meaningful. Therefore, a comparison shall be made of equivalent, calculated values, using Formula (2):

$$\text{brake performance wet : brake performance dry} = \frac{16^2}{S_c^W} : \frac{25^2}{S_c^D} \tag{2}$$

where

S_c^D is the corrected braking distance in dry conditions (m);

S_c^W is the corrected braking distance in wet conditions (m).

4.6.4 Back-pedal brake linearity test

This test shall be conducted on a fully assembled bicycle. The output force for a back-pedal brake shall be measured tangentially to the circumference of the rear tyre, when the wheel is rotated in the direction of forward movement, while a force of between 90 N and 300 N is being applied to the pedal at right angles to the crank and in the direction of braking.

The braking force reading shall be taken during a steady pull and after one revolution of the wheel. A minimum of five results, each at a different pedal force level, shall be taken. Each result shall be the average of three individual readings at the same load level.

The results shall be plotted on a graph, showing the line of best fit and the $\pm 20\%$ limit lines obtained by the method of least squares outlined in [Annex A](#).

4.6.5 Machine test method

4.6.5.1 General

The machine test allows to verify the braking forces are sufficient to reach the braking distance requirements from measurements of the individual braking forces of the front and rear brakes on a drum or belt.

NOTE See ISO 4210-2:2023, Table 1.

The relationship between braking distance and braking force is given by the [Formula \(3\)](#):

$$F_{Br} = \frac{m_s}{2S} \cdot V^2 \quad (3)$$

where

F_{Br} is braking force (N);

m_s is the standard mass of the bicycle defined as 100 kg for adult bicycle and 60 kg for young adult bicycle (kg);

S is the required braking distance (m);

V is the initial velocity (m/s).

4.6.5.2 Symbols

F_{Op} Operating force (i.e. force applied on brake lever or pedal)

$F_{Op\text{ intend}}$ Intended operating force (e.g. 40 N, 60 N, 80 N etc.)

$F_{Op\text{ rec}}$ Recorded operating force (e.g. 38 N, 61 N, 79 N etc.)

F_{Br} Braking force

$F_{Br\text{ rec}}$ Recorded braking force

$F_{Br\text{ corr}}$ Corrected braking force (Corrected for difference between $F_{Op\text{ intend}}$ and $F_{Op\text{ rec}}$)

$F_{Br\text{ average}}$ Arithmetic mean of the three $F_{Br\text{ corr}}$ at one level of $F_{Op\text{ intend}}$

$F_{Br\text{ max}}$ Maximum $F_{Br\text{ average}}$

F_{Br}^D Dry braking force

F_{Br}^W Wet braking force

4.6.5.3 Linearity

When tested by the methods described in 4.6.5.7 item d) 1) and 2), the braking force $F_{Br\ average}$ shall be linearly proportional (within $\pm 20\%$) to the progressively increasing intended operating forces $F_{Op\ intend}$. The requirement applies to braking forces $F_{Br\ average}$ equal to and greater than 80 N or 40 N for young adult bicycle (see Annex A).

4.6.5.4 Test machine

The test machine shall incorporate a system that drives the wheel during the test by tyre contact and a means of measuring the braking force, and typical examples of two types of machine are illustrated in Figures 14 and 15.

Figure 14 shows a machine in which a roller drives the individual wheel and tyre assemblies, and Figure 15 shows a machine in which a driven belt contacts both wheel and tyre assemblies. Other types of machine are permitted, provided they meet the specific requirements listed below and those specified in 4.6.5.5 and 4.6.5.6.

The specific requirements are as follows:


- the linear surface velocity of the tyre shall be 12,5 km/h and shall be controlled within $\pm 5\%$;
- a means of laterally restraining the wheel under test shall be provided which does not influence the measurement of braking force;
- a means of laterally applying forces to the brake levers at the point specified in Figure 5 shall be provided, with the width of the contact on the lever not greater than 5 mm. In the case of back-pedal brakes, a means of applying forces to a pedal is also required.

4.6.5.5 Instrumentation

The test machine shall be instrumented to include the following:

- a device to record the surface velocity of the tyre, accurate to within $\pm 2\%$;
- a device to record the braking force (see Figures 14 and 15, for example), accurate to within $\pm 5\%$;
- a device to record the operating force applied to the hand lever or pedal, accurate to within $\pm 1\%$;
- a water spray system, to provide wetting of the brakes of the bicycle, consisting of a water reservoir connected by tubing to a pair of nozzles arranged as shown in Figures 16. Each nozzle shall provide a flow of water at ambient temperature of not less than 4 ml/s. The wheel shall be suitably enclosed to ensure that, in addition to the rim, any hub- or disc-brake is thoroughly wetted before a test begins;
- a system for loading the wheel and tyre assemblies of the bicycle against the driving mechanism (see 4.6.5.6).


Dimensions in millimetres

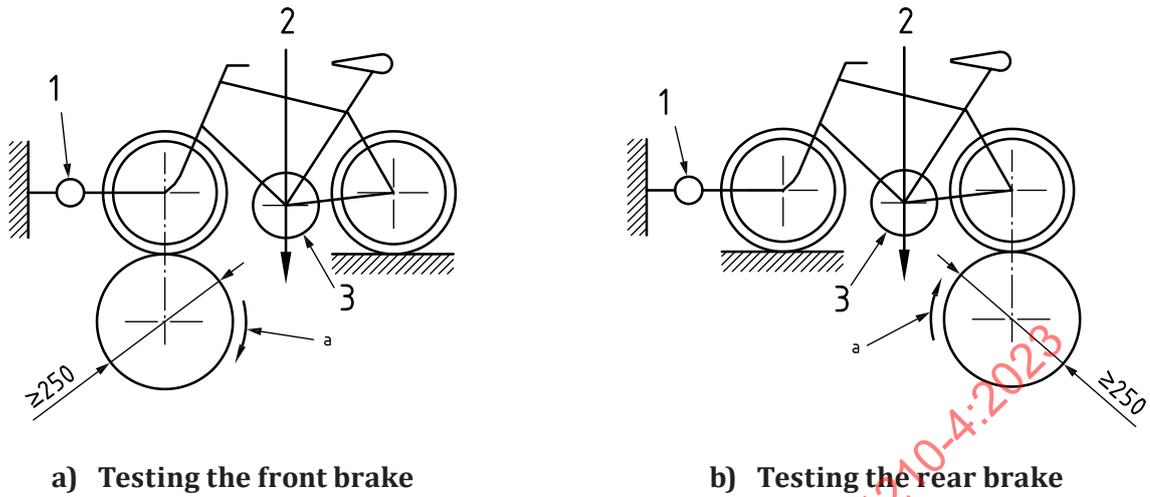

Key

- 1 braking force transducer
- 2 applied force
- 3 additional mass
- a Direction of the wheel rotation.


Figure 14 — Braking performance test machine — Single drum type

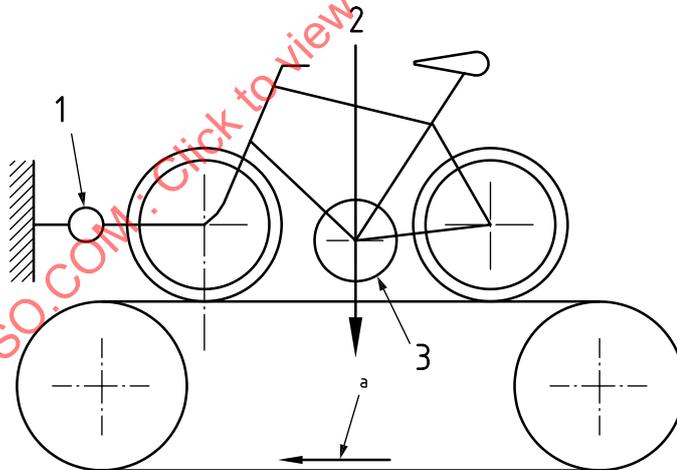

Key

- 1 braking force transducer
- 2 applied force
- 3 additional mass
- a Direction of belt travel.

Figure 15 — Braking performance test machine — Driven belt type

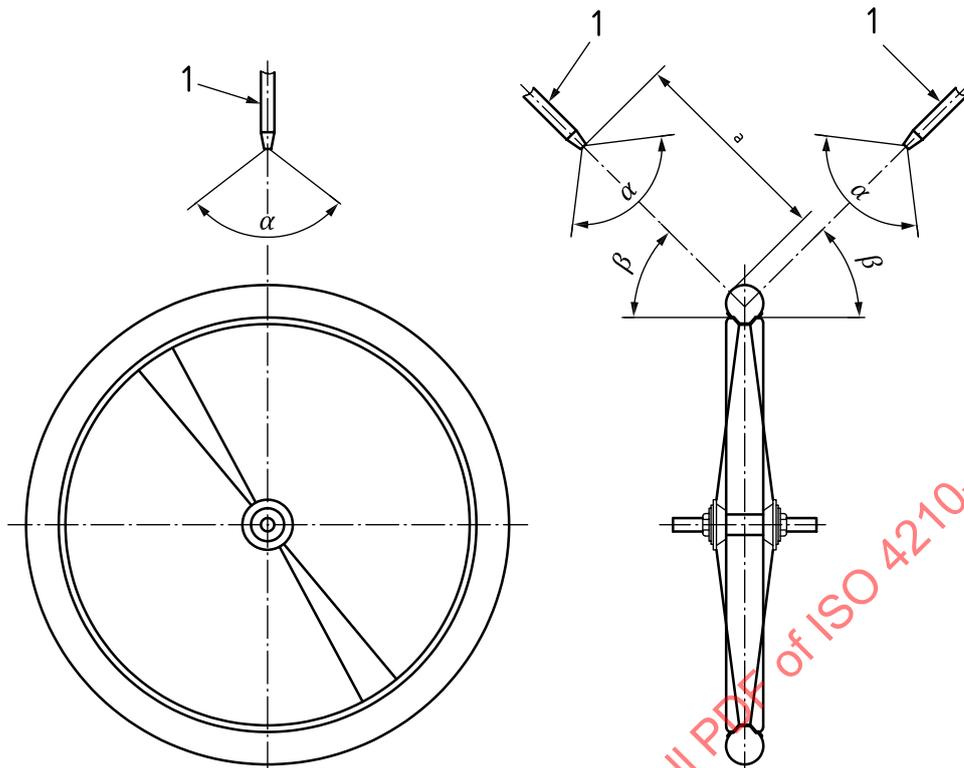

Key

- α 90° to 120°
- β 30° to 60°
- a 150 mm to 200 mm.
- 1 water nozzles

NOTE Applicable to all types of brake.

Figure 16 — Water nozzle arrangement for the wet braking test

4.6.5.6 Vertical force on the tested wheel

The wheel and tyre assembly to be tested shall be forced vertically downwards so that no skidding of the wheel and tyre assembly occurs when tested according to 4.6.5.7 item d) 1) and 2). The necessary force can be applied anywhere on the bicycle (wheel axle, bottom bracket, seat-post, etc.) provided that it is exerted vertically downwards.

4.6.5.7 Test method

a) General.

Test the front and rear wheel and tyre assemblies individually.

b) Machine drag force and bicycle rolling resistance.

In order to determine the drag force, mount and load the bicycle on the test machine with the belt or drum running at the specified speed. Verify that the braking force without operating load is lower than 20 N if not, proceed to braking force measurement device offset correction.

c) Running-in the braking surfaces.

Conduct a running-in process on every brake before the performance test is performed.

In order to determine the operating force to be used during the running-in process, mount and load the bicycle on the test machine with the belt or drum running at the specified speed and apply an operating force to the brake lever or the pedal that is high enough to achieve a braking force of $200\text{ N} \pm 20\text{ N}$ or $120\text{ N} \pm 12\text{ N}$ for young adult bicycle. Maintain this operating force for at least 2,5 s, and note the value of the applied operating force.

Repeat the procedure (applying the operating force determined in the paragraph above accurate to within $\pm 5\%$) 10 times, or with more repetitions if necessary, until the mean braking force from anyone of the three latest tests does not deviate by more than $\pm 10\%$ from the mean braking force from these same three tests.

d) The performance tests.

1) Testing under dry conditions.

The ambient temperature while performing the test shall be $20\text{ }^\circ\text{C} \pm 10\text{ }^\circ\text{C}$.

For hand-operated brakes, with a vertical force applied to the bicycle sufficient to prevent skidding of the tyre on the wheel under test, accelerate the driving mechanism to the specified velocity, then apply the operating force in a series of 20 N increments from 40 N to either 180 N (in case of young adult bicycles, apply to 120 N) or to the force necessary to achieve a braking force of at least 700 N, whichever is the lesser. However, if the wheel locks, if any possible brake-overload device is actuated, or if the hand lever comes into contact with the handlebar, do not increase the force further. For each increment of applied operating force, perform three tests. There shall be an interval between each application of the operating force which is long enough for the brake components to reach the ambient temperature level. Forced air cooling is permitted to reduce the interval time.

For back-pedal brakes, with a vertical force applied to the bicycle sufficient to prevent skidding of the tyre on the wheel under test, accelerate the driving mechanism to the specified velocity, then apply the operating force in a series of 50 N increments from 100 N to either 350 N or to the force necessary to achieve a braking force of at least 400 N, whichever is the lesser. However, if the wheel locks, if any possible brake-overload device is actuated, do not increase the force further. For each increment of applied operating force, perform three tests. There shall be an interval between each application of the operating force which is long enough for the brake components to reach the ambient temperature level. Forced air cooling is permitted to reduce the interval time.

The applied operating forces shall lie within $\pm 10\%$ of the intended operating forces, shall be applied as specified in [Figures 5](#) and [6](#) and [4.6.5.4](#) item c), shall be recorded with an accuracy of $\pm 1\%$, and shall be fully applied within 1,0 s of the commencement of braking.

For each increment of operating force, record the braking force value, $F_{\text{Br rec}}$, for a period of between 2,0 s and 2,5 s, with measurement starting 0,5 s to 1,0 s after the commencement of braking. Record $F_{\text{Br rec}}$ as the average braking force during this measurement period.

The time at which the measurement of the braking force is started shall be related to the speed at which the operating force is applied. If the operating force is fully applied in less than 0,5 s after the commencement of braking, start the measurement after 0,5 s. However, if the operating force is fully applied between 0,5 s and 1,0 s after the commencement of braking, start the measurement when the operating force is fully applied.

2) Testing under wet conditions.

The method shall be as given in [4.6.5.7](#) item d) 1) with the addition that wetting of the brake system shall commence not less than 5,0 s before the commencement of braking and shall continue until the measurement period has ended.

Water nozzles shall be arranged according to [Figure 16](#).

e) Correction of braking force.

Each recorded braking force, $F_{Br\ rec}$, shall be corrected for any difference between the recorded operating force and the intended operating force. The corrected braking force shall be calculated by multiplying the recorded braking force, $F_{Br\ rec}$, with a correction factor which is the ratio between the intended operating force, $F_{Op\ intend}$, and the recorded operating force, $F_{Op\ rec}$.

EXAMPLE Recorded braking force $F_{Br\ rec} = 225\text{ N}$

Intended operating force $F_{Op\ intend} = 180\text{ N}$

Recorded operating force $F_{Op\ rec} = 184\text{ N}$

Correction factor = $180/184$

Corrected braking force $F_{Br\ corr} = 225 \times (180/184)$

f) Test results.

Select from the record the maximum output braking force, $F_{Br\ max}$, for each combination of wheel and tyre assembly (front or rear) and each test condition (wet or dry).

The braking performance value shall be calculated using [Formula \(4\)](#):

$$B_p = F_{Br\ max} \cdot \frac{m}{m_s} \tag{4}$$

where

B_p is the braking performance value (N);

$F_{Br\ max}$ is the maximum $F_{Br\ average}$ (N);

m_s is the standard mass of the bicycle defined as 100 kg for adult bicycle and 60 kg for young adult bicycle (kg);

m is the maximum permissible total mass specified by the manufacturer in ISO 4210-2:2023, Clause 5 item h) (kg).

Where a manufacturer specifies that his bicycle can carry a mass such that the sum of that mass plus the mass of the bicycle is in excess of 100 kg (60 kg for young adults) to some value m , apply m as total mass.

g) Linearity.

Plot the calculated $F_{Br\ average}$ values (the arithmetic mean of the three corrected braking forces at each level of operating force) against the equivalent operating force values, $F_{Op\ intend}$, in order to assess the linearity against the requirement in [4.6.5.3](#). Plot the results on a graph, showing the line of best fit and the $\pm 20\%$ limit lines obtained by the method of least squares outlined in [Annex A](#).

h) Ratio between wet and dry braking for city and trekking, young adult, and mountain bicycles.

For any operating force (F_{Op}) for which the measured dry braking force ($F_{Br\ average}^D$) is greater than 200 N or 100 N for young adult bicycle, the ratio between the measured braking force in wet conditions ($F_{Br\ average}^W$) and the measured braking force in dry conditions ($F_{Br\ average}^D$) shall be greater than 40 %.

For each F_{Op} where $F_{Br\ average}^D$ is $> 200\text{ N}$, determine whether or not the requirements of have been met using [Formula \(5\)](#):

$$\text{brake performance wet : brake performance dry} = F_{Br\ average}^W : F_{Br\ average}^D \tag{5}$$

For symbols see [4.6.5.2](#).

- i) Simple track test (see ISO 4210-2:2023, 4.18).

After completion of the machine test, conduct a brief, simple track test with progressively increasing operating forces to determine whether or not the brakes bring the bicycle to a smooth, safe stop.

NOTE This test can be combined with the test on the fully assembled bicycle.

4.7 Brakes — Heat-resistance test

4.7.1 Drag test

Use a test bench as described in [4.6.5.4](#). During the test, the brakes shall not be subjected to external wind and shall not be affected by wind from the air conditioning system.

Drive the bicycle with the brakes applied at a speed of 12,5 km/h with a tolerance of $\pm 5\%$ such that a total braking energy of E Wh with a tolerance of $\pm 5\%$ as specified in [Table 1](#) is developed.

Repeat 3 test cycles of $300 \text{ s} \pm 3 \text{ s}$ of brake loading. $120 \text{ s} \pm 1 \text{ s}$ pause period shall be provided between each test cycle. If necessary, it is allowed to adjust the brake while the first pause period. For hydraulic brakes, $3 \text{ s} \pm 0,5 \text{ s}$ of brake venting with braking force F_{Br} shall be conducted within $10 \text{ s} \pm 0,5 \text{ s}$ after each cycle. The brake venting time is not included in the pause period.

Calculate the braking energy from [Formula \(6\)](#):

$$E \cdot c = F_{\text{Br}} \cdot V_{\text{Br}} \cdot T \text{ (Wh)} \quad (6)$$

where

c is m/M ;

m is permissible total mass as specified by the manufacturer (kg);

M is 100 kg;

F_{Br} is the braking force (N);


V_{Br} is the linear velocity of the periphery of the tyre (i.e. 12,5 km/h = 3,472 m/s) (m/s);

T is the duration of total test cycle (excluding interruptions) (i.e. 15 min = 0,25 h) (h).

Table 1 — Total braking energy

Bicycle type		City and trekking bicycles	Young adult bicycles	Mountain bicycles	Racing bicycles
Total braking energy, E Wh	Disc brake	22	22	30	30
	Band brake/drum brake/back pedal brake	26	26	35	35
	Roller brake	30	30	40	40
	Rim brakes (where the rim brake sidewalls are known to be manufactured from or include composite materials.)	55	55	75	75

NOTE Due to the different heat dissipation capacity in relation to the cooling air, the total brake energy requirements are different for each type of brake. In the future, if heat resistance test of brakes other than those listed above is needed, [Annex C](#) shows how to derive the total braking energy for brake heat resistance test.

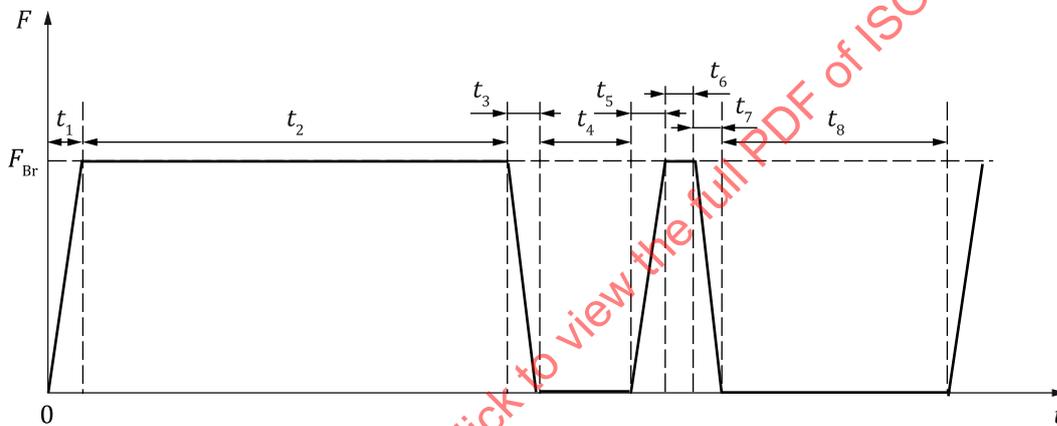

Key

- F braking force
- F_{Br} braking force during drag test calculated by [Formula \(6\)](#)
- t time
- t_1 brake load operation time $1\text{ s} \pm 0,2\text{ s}$
- t_2 braking time $300\text{ s} \pm 3\text{ s}$
- t_3 brake release operation time $1\text{ s} \pm 0,2\text{ s}$
- t_4 pause period for brake venting $10\text{ s} \pm 0,5\text{ s}$ only for hydraulic brakes
- t_5 brake load operation time for brake venting $1\text{ s} \pm 0,2\text{ s}$ only for hydraulic brakes
- t_6 braking time for brake venting $3\text{ s} \pm 0,5\text{ s}$ only for hydraulic brakes
- t_7 brake release operation time for brake venting $1\text{ s} \pm 0,2\text{ s}$ only for hydraulic brakes
- t_8 pause period $120\text{ s} \pm 1\text{ s}$

Figure 17 — One test cycle

4.7.2 Brake performance measurement after drag test

After [4.7.1](#), the brake system shall be cool to ambient temperature.

Subject the brakes to the tests described in [4.6.5.7](#) item d) 1) and 2) in order to check that the requirement in ISO 4210-2:2023, 4.6.9.2 is fulfilled. The lever operating force may start at the highest operating force used during the performance tests [4.6.5.7](#) d) items 1) and 2) carried out prior to the heat resistance test and need not necessarily start from 40 N.