

---

---

**Agricultural machinery — Safety —**

Part 11:  
**Pick-up balers**

*Matériel agricole — Sécurité —*

*Partie 11: Ramasseuses-presses*

STANDARDSISO.COM : Click to view the full PDF of ISO 4254-11:2010



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 4254-11:2010



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

**Contents**

Page

Foreword .....	iv
Introduction.....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	2
4 List of significant hazards .....	2
5 Safety requirements and/or protective measures.....	4
5.1 General .....	4
5.2 Requirements for all types of balers .....	4
5.3 Requirements for rectangular balers .....	8
5.4 Requirements for round balers.....	12
6 Verification of the safety requirements and/or protective measures .....	13
7 Information for use.....	13
7.1 Operator's manual.....	13
7.2 Marking.....	14
Bibliography.....	15

STANDARDSISO.COM : Click to view the full PDF of ISO 4254-11:2010

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4254-11 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 7, *Equipment for harvesting and conservation*.

For the purposes of global relevance, the requirements related to the guarding of moving parts for power transmission have been transferred and published as two separate Technical Specifications: ISO/TS 28923:2007 (Guard opening with tool) and ISO/TS 28924:2007, which include the requirements taken from both 4.6 and Annex C of ISO 4254-1:2008.

ISO 4254 consists of the following parts, under the general title *Agricultural machinery — Safety*:

- *Part 1: General requirements*
- *Part 5: Power-driven soil-working machines*
- *Part 6: Sprayers and liquid fertilizer distributors*
- *Part 7: Combine harvesters, forage harvesters and cotton harvesters*
- *Part 8: Solid fertilizer distributors*
- *Part 9: Seed drills*
- *Part 10: Rotary tedders and rakes*
- *Part 11: Pick-up balers*
- *Part 12: Rotary disc and drum mowers and flail mowers*
- *Part 13: Large rotary mowers<sup>1)</sup>*

Part 2, *Anhydrous ammonia applicators*, has been withdrawn; Part 3, *Tractors*, has been cancelled and is to be replaced by ISO 26322 (all parts), *Tractors for agriculture and forestry — Safety*; and Part 4, *Forestry winches*, has been cancelled and replaced by ISO 19472, *Machinery for forestry — Winches — Dimensions, performance and safety*.

---

1) Under preparation.

## Introduction

The structure of safety standards in the field of machinery is as follows:

- a) type-A standards (basic standards) giving basic concepts, principles for design, and general aspects that can be applied to machinery;
- b) type-B standards (generic safety standards) dealing with one or more safety aspects or one or more types of safeguards that can be used across a wide range of machinery:
  - type-B1 standards on particular safety aspects (e.g. safety distances, surface temperature, noise);
  - type-B2 standards on safeguards (e.g. two-hand controls, interlocking devices, pressure-sensitive devices, guards);
- c) Type-C standards (machinery safety standards) dealing with detailed safety requirements for a particular machine or group of machines.

This document is a type-C standard as stated in ISO 12100.

The machinery concerned and the extent to which hazards, hazardous situations or hazardous events are covered are indicated in the Scope of this part of ISO 4254. These hazards are specific to self-propelled and trailed pick-up balers, including the combination of pick-up balers with wrappers.

Significant hazards that are common to all the agricultural machines (self-propelled ride-on, mounted, semi-mounted and trailed) are dealt with in ISO 4254-1.

When requirements of this type-C standard are different from those which are stated in type-A or type-B standards, the requirements of this type-C standard take precedence over the requirements of the other standards for machines that have been designed and built according to the provisions of this type-C standard.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4254-11:2010

# Agricultural machinery — Safety —

## Part 11: Pick-up balers

### 1 Scope

This part of ISO 4254, intended to be used together with ISO 4254-1, specifies the safety requirements and their verification for the design and construction of self-propelled and trailed pick-up balers, including the combination of pick-up balers with wrappers, independent of the shape or size of the bales formed. It describes methods for the elimination or reduction of hazards arising from the intended use and reasonably foreseeable misuse of these machines by one person (the operator) in the course of normal operation and service. In addition, it specifies the type of information on safe working practices to be provided by the manufacturer.

When requirements of this part of ISO 4254 are different from those which are stated in ISO 4254-1, the requirements of this part of ISO 4254 take precedence over the requirements of ISO 4254-1 for machines that have been designed and built according to the requirements of this part of ISO 4254.

This part of ISO 4254, taken together with ISO 4254-1, deals with all the significant hazards (as listed in Table 1), hazardous situations and events relevant to self-propelled and trailed pick-up balers, including the combination of pick-up balers with wrappers, when they are used as intended and under the conditions of misuse that are reasonably foreseeable by the manufacturer (see Clause 4).

This part of ISO 4254 is not applicable to pedestrian-controlled round balers, environmental hazards, road safety, vibration and hazards related to moving parts for power transmission. It is not applicable to hazards related to maintenance or repairs carried out by professional service personnel.

NOTE Specific requirements related to road traffic regulations are not taken into account in this part of ISO 4254.

This part of ISO 4254 is not applicable to machines manufactured before the date of its publication.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3600:1996, *Tractors, machinery for agriculture and forestry, powered lawn and garden equipment — Operator's manuals — Content and presentation*

ISO 4254-1:2008, *Agricultural machinery — Safety — Part 1: General requirements*

ISO 11684:1995, *Tractors, machinery for agricultural and forestry, powered lawn and garden equipment — Safety signs and hazard pictorials — General principles*

ISO 12100:—, *Safety of machinery — General principles for design — Risk assessment and risk reduction<sup>2)</sup>*

---

2) To be published.

ISO 13857:2008, *Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs*

ISO 14982:1998, *Agricultural and forestry machinery — Electromagnetic compatibility — Test methods and acceptance criteria*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12100 and ISO 4254-1 apply.

### 4 List of significant hazards

Table 1 specifies the significant hazards, the significant hazardous situations and significant hazardous events that have been identified by risk assessment as being significant for this type of machine, covered by this part of ISO 4254, and which may require specific action by the designer or manufacturer to eliminate or reduce the risk.

Attention is drawn to the necessity to verify that the safety requirements specified in this part of ISO 4254 apply to each significant hazard presented by a given machine and to validate that the risk assessment is complete.

**Table 1 — List of significant hazards associated with self-propelled and trailed pick-up balers, including the combination of pick-up balers with wrappers**

No. <sup>a</sup>	Hazard	Hazardous situation and event	Clause/subclause of ISO 4254-1:2008	Clause/subclause of this part of ISO 4254
<b>A.1 Mechanical hazards</b>				
A.1.1	Crushing	Manual feeding; uncontrolled movements of the drawbar; contact with pick-up device; contact with feeding elements; contact with the flywheel or other moving parts, ejection of the bale	4.7; 4.8; 4.14.1; 4.14.3; 4.14.5; 4.14.6; 5.2; 6.4	5.1; 5.2; 5.3; 5.4; 7.1; 7.2
A.1.2	Shearing	Manual feeding; uncontrolled movements of the drawbar; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	4.7; 4.8; 4.14.1; 4.14.3; 4.14.5; 4.14.6; 5.2; 6.4	5.1; 5.2; 5.3; 5.4; 7.1; 7.2
A.1.3	Cutting or severing	Manual feeding; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	4.7	5.1; 5.2; 5.3; 5.4; 7.1; 7.2
A.1.4	Entanglement	Manual feeding; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	6.4; 4.7	5.1; 5.2; 5.3; 5.4; 7.1; 7.2
A.1.5	Drawing-in or trapping	Manual feeding; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	6.4; 4.7	5.1; 5.2; 5.3; 5.4; 7.1; 7.2
A.1.6	Impact	Manual feeding; uncontrolled movements of the drawbar; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	4.14.5; 4.14.6; 5.1.3.1	5.1; 5.2; 5.3; 5.4; 7.1; 7.2

Table 1 (continued)

No. <sup>a</sup>	Hazard	Hazardous situation and event	Clause/subclause of ISO 4254-1:2008	Clause/subclause of this part of ISO 4254
A.1.7	Stabbing or puncture	Manual feeding; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	4.7	5.1; 5.3.4; 7.1; 7.2
A.1.8	Friction or abrasion	Manual feeding; contact with pick-up device; contact with feeding elements; contact with the flywheel, knotting mechanism or other moving parts	4.4.3; 5.1.3.2; 4.9.1; 4.5.1.1.2	5.1; 5.3.1; 7.1; 7.2
A.1.9	High-pressure fluid injection	Ejection due to excessive pressure in the hoses	4.10; 6.5	7.1
A.1.10	Ejection of parts	Ejection of the bales	—	5.3.6; 5.4.2
<b>A.5 Hazards generated by materials and substances</b>				
A.5.2	Fire or explosion		4.12; 5.1.6; 5.5	7.1
<b>A.6 Hazards generated by neglecting ergonomic principles in machinery design</b>				
A.6.6	Human error, human behaviour		4.4; 8.1; 8.2	7.1; 7.2.3
A.6.7	Inadequate design, location or identification manual controls		4.4; 5.1.3; 6.1; 8.1; 8.2	5.2.4.2; 5.2.7.1; 5.3.4.6; 5.4.1.2; 6; 7.2.3.3
<b>A.7 Combination of hazards</b>				
A.7.1	Manual operation of individual assemblies;  Missing or insufficient information about manual operation of individual assemblies and, if required, use of special tools in the operator's manual		8.1.3	7.1  7.2
A.7.2	Safety signs and signals		8.2	7.2.3
A.7.3	Essential equipment and accessories for safe adjusting and/or maintaining		4.8; 4.14; 8.1.3	7.1; 7.2
<b>A.8 Unexpected start-up, unexpected overrun/overspeed</b>				
A.8.1	Failure/disorder of the control system		4.8.2; 5.1.8; 6.1.1	5.2.7.1; 5.2.7.2; 5.3.1; 5.3.3; 5.3.4.6
<b>A.11</b>	<b>Failure of power supply</b>	Starting and stopping devices	4.8.2; 5.1.8; 6.1.1	5.2.4; 5.4.1; 5.4.2
<b>A.13</b>	<b>Errors of fitting</b>		6.2; 6.3; 8.1; 8.2	7.1; 7.2

Table 1 (continued)

No. <sup>a</sup>	Hazard	Hazardous situation and event	Clause/subclause of ISO 4254-1:2008	Clause/subclause of this part of ISO 4254
A.14	Guards and barriers		4.7	7.1
	Supports		4.8	7.2
A.21	Lack of stability		6.2; 8.1.3	7.1.4
<b>A.22 Due to the power source and to the transmission of power</b>				
A.22.3	Hazards from coupling and towing		6.3; 8.1.3	—
<sup>a</sup> With reference to ISO 4254-1:2008, Table A.1.				

## 5 Safety requirements and/or protective measures

### 5.1 General

**5.1.1** Machinery shall comply with the safety requirements and/or protective measures of this clause. In addition, the machine shall be designed in accordance with the principles of ISO 12100:—, Clause 4, for hazards relevant, but not significant, which are not dealt with by this part of ISO 4254.

**5.1.2** Except where otherwise specified in this part of ISO 4254, the machine shall comply with the requirements of ISO 4254-1 and with Tables 1, 3, 4 and 6 of ISO 13857:2008 as appropriate.

**5.1.3** Machinery shall comply with ISO 14982 for evaluating the electromagnetic compatibility.

### 5.2 Requirements for all types of balers

#### 5.2.1 Drawbar

When the drawbar has separate positions, for transport and for working, it shall be provided with a mechanical or hydraulic locking device that requires an intentional action to change from transport to working position and from working to transport position (e.g. pin, latch or hydraulic cylinder). When a hydraulic device is used, the drawbar shall remain locked in position if the hydraulic circuit fails or else the requirements of 4.8.3 of ISO 4254-1:2008 shall apply.

#### 5.2.2 Pick-up device


Protection against inadvertent contact with the pick-up device shall be provided by parts of the machine, guards, barriers or a combination of these. The position of parts which may be adjustable shall always remain within the limits specified in 5.2.2.1. The projection on a horizontal plane of these protective devices shall be continuous.

NOTE Requirements for the strength of barriers and guards are given in ISO 4254-1:2008, Annex C.

**5.2.2.1** When the pick-up device is in the working position as defined in the operator's manual, these barriers shall be:

- a minimum of 230 mm in front of the most forward point of the tine path and at a height, *h*, as low as practicable between 300 mm and 1 000 mm above the ground, as defined in Figure 1;
- a minimum of 150 mm from the sides of the tine path at a maximum height above the ground of 500 mm (see Figure 1). If the tine path is totally covered by a part of the machine when viewed from the side, as defined and shown in Figure 2, this barrier is not required.

**5.2.2.2** When the pick-up device is in the working position, side guards, if fitted, shall be located in accordance with Figure 2.

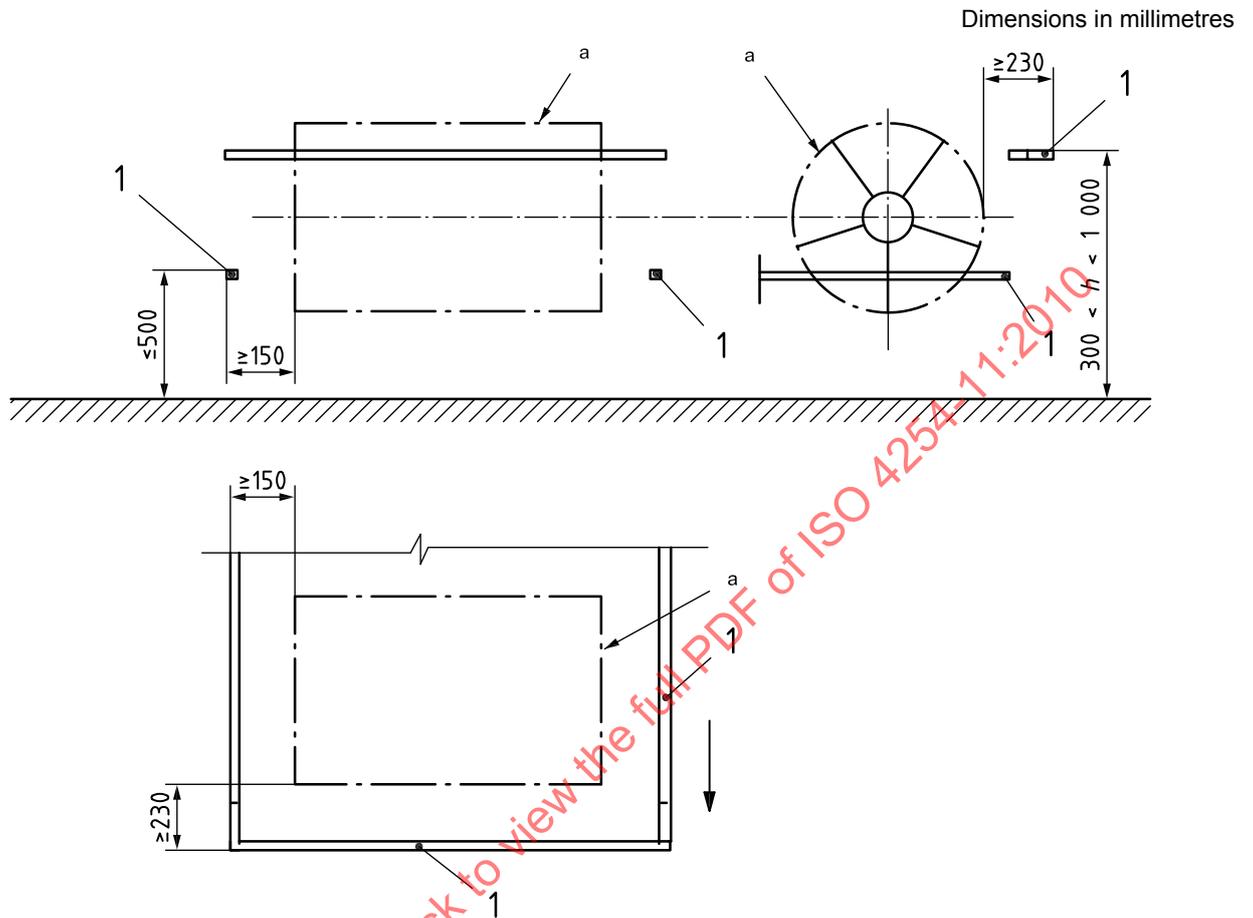


**Key**

- 1 barrier
- a Tine path.

NOTE This figure illustrates an example of protective devices complying with 5.2.2.

**Figure 1 — Guarding of the pick-up device definable by a combination of barriers**

Dimensions in millimetres

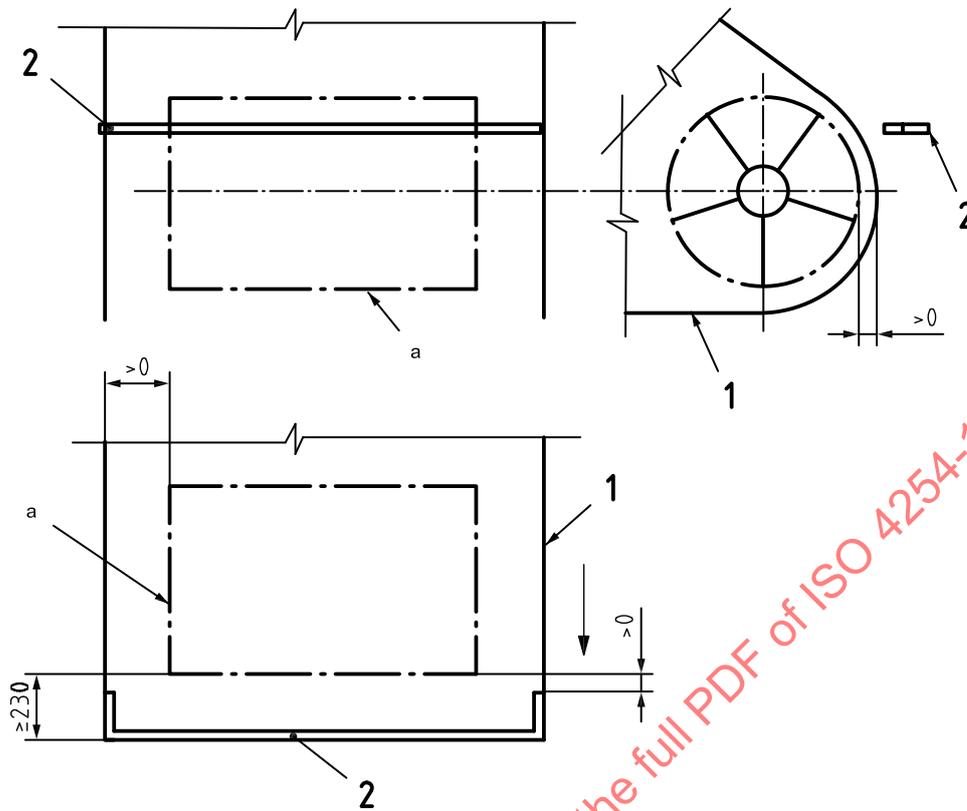

**Key**

- 1 fixed guard or part of the machine
- 2 barrier
- a Tine path.

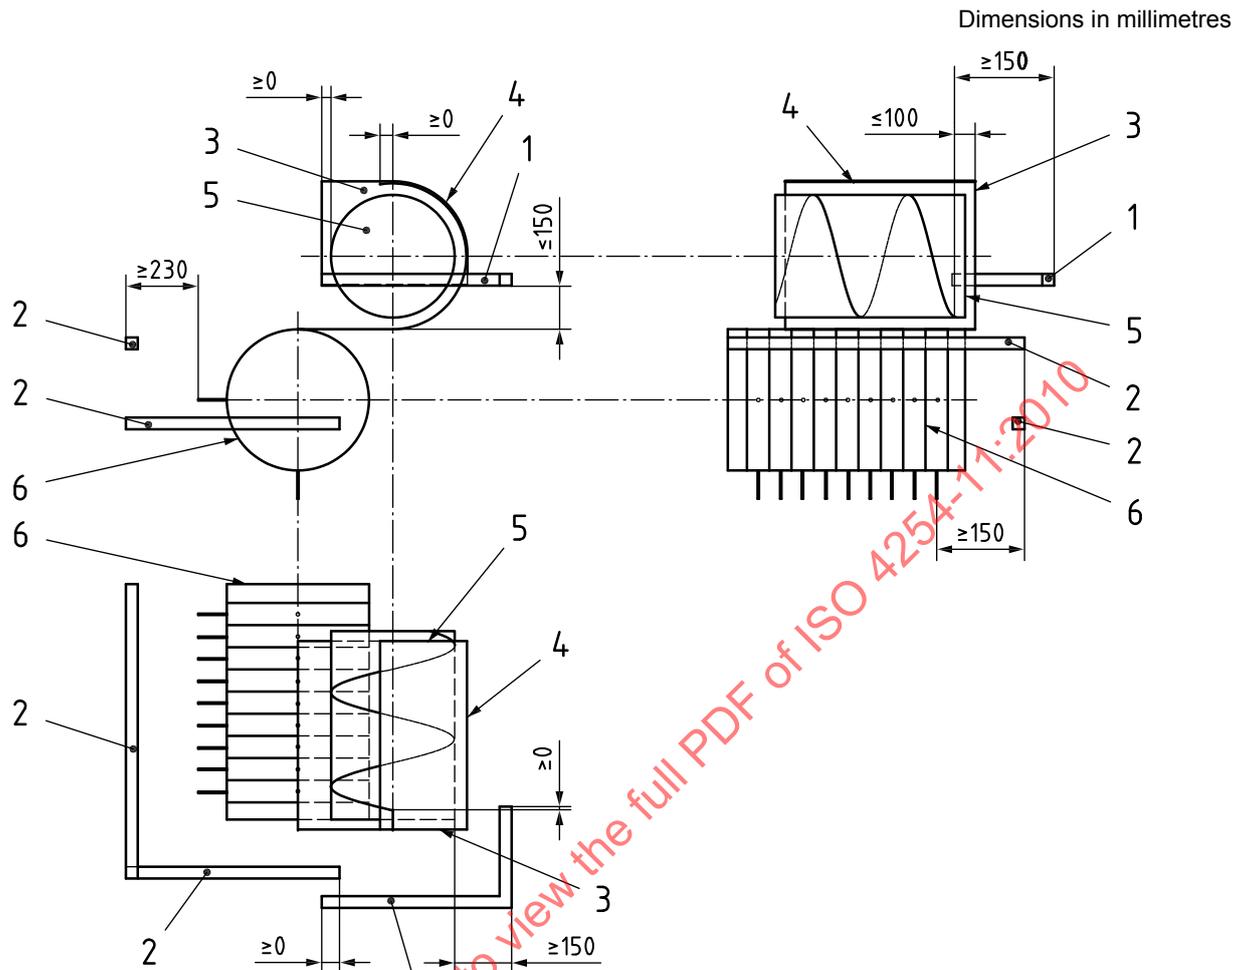
NOTE This figure illustrates an example of protective devices complying with 5.2.2.

**Figure 2 — Guarding of the pick-up device definable by a combination of barriers and fixed guards or parts of the machine**

**5.2.3 Feeding elements**

**5.2.3.1** Crushing and shearing points located at a distance of less than 550 mm from the outer limit of the machine or from the extreme edges of the feeding channel shall be guarded against inadvertent contact and shall meet the requirements as defined in ISO 13857. In case the elements to convey the crop laterally are designed as augers, the guard above the auger shall extend forward from the rear of the auger to at least the longitudinal axis of the auger as shown in Figure 3. Devices other than augers shall be guarded on top in a comparable manner to meet the requirements as specified in ISO 13857.

**5.2.3.2** A lateral fixed guard partially covering the auger and a distance barrier, in combination with barriers as defined in 5.2.2.1, are deemed to meet the requirements of 5.2.3.1 when the dimensions of Figure 3 are respected.

**Key**

- 1 barrier
- 2 barrier, as defined in 5.2.2.1
- 3 lateral rigid fixed guard
- 4 rear covering above the auger
- 5 feeding auger
- 6 pick-up

**Figure 3 — Guarding of the feeding elements**

### 5.2.4 Automatic starting systems

**5.2.4.1** Systems with moving components that are engaged by a triggering mechanism shall have a device in order to prevent an inadvertent start-up of these elements, e.g. knotter mechanism, tying mechanism or feeder system.

**5.2.4.2** The control of this device shall have a contrasting colour and the method of operation shall be explained on or in close proximity to this control, as well as in the operator's manual.

### 5.2.5 Manual feeding of twine

Specific instructions, stating the hazards related to the manual feeding of the twine on to the bale to start the twine-tying process as the bale is rotating, shall be given in the operator's manual [see 7.1.4 o)].

## 5.2.6 Changing of knives

Specific instructions on the procedures to be followed for the changing of knives (e.g. stop the machine and constrain the flywheel) shall be given in the operator's manual [see 7.1.4 p)].

## 5.2.7 Pick-up balers with wrappers

### 5.2.7.1 Requirements for balers with integrated wrapper

**5.2.7.1.1** For maintenance purposes and for clearance of failures, the wrapper shall be equipped with a device for isolating the energy supply. The activation of the isolating device shall only be possible outside the hazard zone.

**5.2.7.1.2** In addition, wrapping devices with rotating arms shall be equipped with a trip device. Contact with this trip device shall stop the movement of the rotating arm before the rotating arm comes into contact with the operator.

**5.2.7.1.3** Provisions shall be made to shut off the energy supply automatically when the normal cycle is not correctly performed. Following an automatic stop, the automatic cycle shall be deactivated and a restart shall be possible only after an intentional action by the operator from outside the danger zone.

### 5.2.7.2 Requirements for balers combined with wrappers

**5.2.7.2.1** The provisions of 5.2.7.1 apply.

**5.2.7.2.2** The operator's manual shall include information on whether the pick-up baler can be combined with wrappers [see 7.1.4 u)].

**5.2.7.2.3** If the pick-up baler is capable of being combined with a wrapper, it shall be equipped with an appropriate connecting device for the wrapper.


**5.2.7.2.4** For the control system, the provisions of 5.2.7.1 apply.

## 5.3 Requirements for rectangular balers

### 5.3.1 Flywheel

**5.3.1.1** Parts of the flywheel accessible from the ground or operator position shall be guarded according to provisions for moving transmission parts against inadvertent contact.

**5.3.1.2** If the flywheel guard is open underneath, a distance of at least 25 mm shall be provided between the flywheel and the guard; this 25 mm shall extend from the lower edge of the guard for a distance of at least 120 mm; the lower edge of the guard shall extend at least to the lower edge/contour of the flywheel and shall be located at a maximum distance of 800 mm from the ground (see Figure 4).

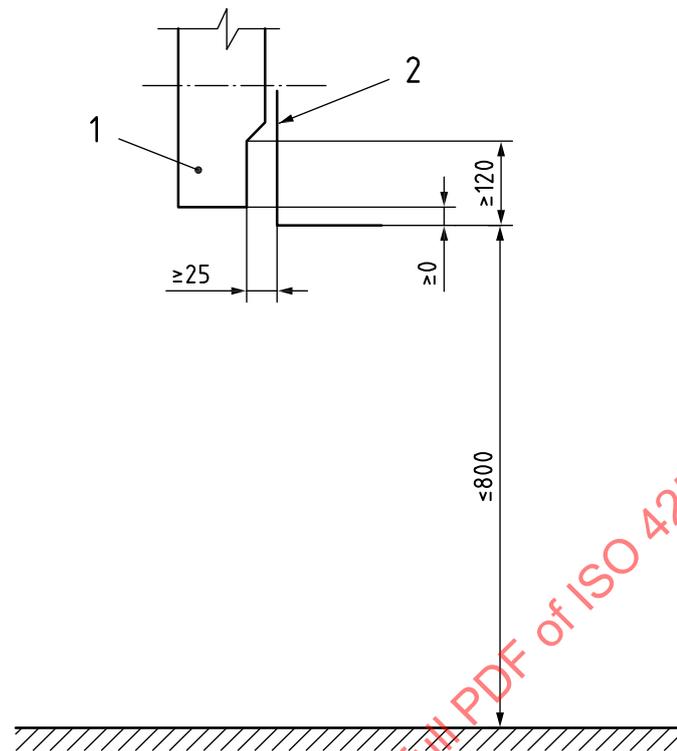**Key**

- 1 flywheel  
2 guard

**Figure 4 — Guarding of flywheel**


**5.3.1.3** For balers capable of forming bales with a cross-section of 0,25 m<sup>2</sup> or greater:

- it shall be possible to immobilize the flywheel to avoid unintentional movement after it has stopped for maintenance, service or failure of the process;
- when the flywheel is positioned in such a way that it is located above the crop flow when packing, the lower part of the flywheel can be exposed, providing the flywheel has a smooth surface and the upper part is guarded for at least 2/3 of the flywheel diameter measured vertically from the top.

**5.3.2 Driving mechanism for the plunger**

**5.3.2.1** The connecting rod and crank mechanism shall be guarded according to provisions for moving transmission parts against inadvertent contact. If the guard of the rod and crank mechanism is open underneath, the side guard shall cover the extreme path of the crank when viewed from the side. Furthermore, a distance of at least 25 mm shall be provided between the rod and the crank mechanism and the guard; this 25 mm clearance shall extend from the edge of the guard for a distance of at least 120 mm (see Figure 5).

**5.3.2.2** If fixed parts of the baler are located directly below the crank path at a distance,  $d$ , less than 300 mm from it, then the side guard shall extend below these fixed parts (see Figure 5).

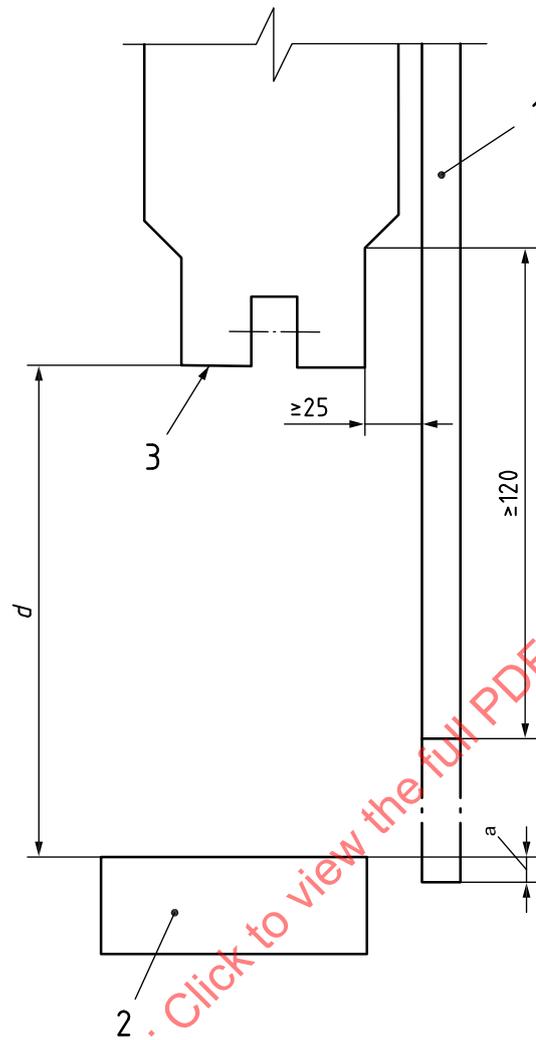

**Key**

- 1 guard
- 2 fixed part of the baler
- 3 lowest position of the crank
- a  $\geq 0$  if  $d < 300$ .

**Figure 5 — Guarding of the driving mechanism for the plunger**

**5.3.3 Transmission parts of feeding elements**

**5.3.3.1** On balers capable of forming bales with a cross-section smaller than 0,25 m<sup>2</sup>, the transmission parts of the feeding elements, located in the upper part of the machine, shall be guarded according to provisions for moving transmission parts against inadvertent contact.

**5.3.3.2** When the crushing or shearing points are located less than 850 mm from the outer limit of the machine, a guard shall be fitted in such a way that its upper edge is located at a vertical distance of at least 130 mm above the extreme path of the crank.

**5.3.3.3** Between the guard and the movable parts of the machine, there shall be a safety distance of at least 50 mm.


### 5.3.4 Knotter and tying mechanism

5.3.4.1 On the top and on the left- and right-hand sides, the knotter shall be guarded.

5.3.4.2 In the direction of travelling at the front and rear of the machine:

- when the knotter is not accessible from the ground (in accordance with Table 1 of ISO 13857:2008), no protection is required;
- when the knotter is accessible from the ground (in accordance with Table 1 of ISO 13857:2008), the front part shall be guarded in accordance with Table 4 of ISO 13857 and the rear part shall be guarded against inadvertent contact in accordance with Figure 6.

5.3.4.3 The moving parts of the tying mechanism shall be guarded according to provisions for moving transmission parts against inadvertent contact.

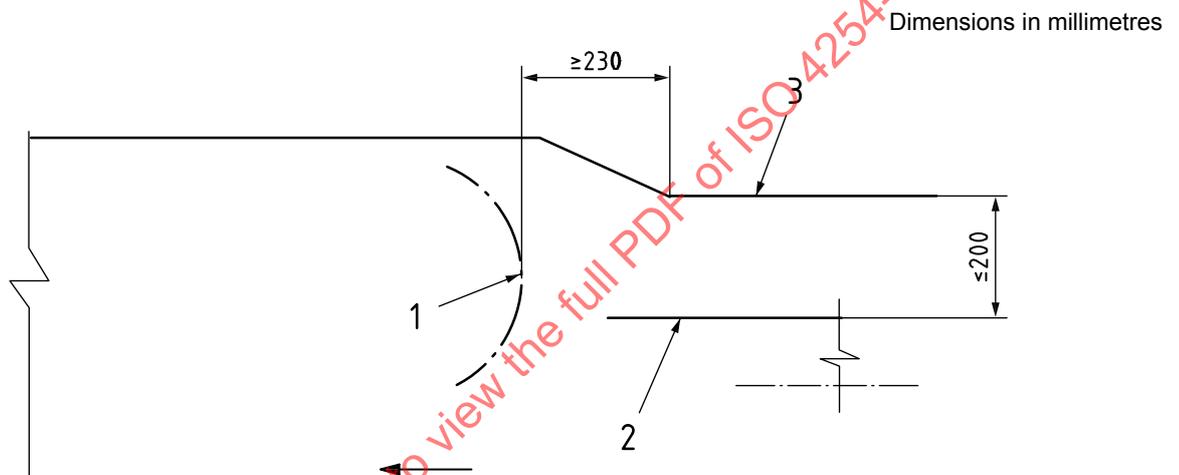

#### Key

- 1 rear outer contour of the tying mechanism
- 2 top of bale chamber
- 3 guard

**Figure 6 — Guarding of the rear part of the knotter when it is accessible from the ground**

5.3.4.4 If the distance between the wall of the channel and the end of the needle in the lower extreme position is greater than 20 mm, the end of the needle shall be guarded on both sides. The crushing and shearing points accessible on the sides in the needle movement zone shall be guarded at a minimum along the entire course of the needle movement.

5.3.4.5 If the guard is open underneath, a distance of at least 25 mm shall be provided between the guard and the moving parts of the machine. This 25 mm clearance shall extend from the edge of the guard for a distance of at least 120 mm.

5.3.4.6 When the knotting system contains a blower or blowers to keep the area free of chaff and trash, then:

- the blowers shall engage and disengage simultaneously with the tractor power take-off (PTO);
- either the blowers shall be located in a way that inadvertent contact with the wings is not possible during inspection, service and maintenance, or the blowers shall be protected by interlocking devices.