
**Essential oil of spike lavender
(*Lavandula latifolia* Medikus), Spanish
type**

Huile essentielle d'aspic (Lavandula latifolia Medikus), type Espagne

STANDARDSISO.COM : Click to view the full PDF of ISO 4719:2012



STANDARDSISO.COM : Click to view the full PDF of ISO 4719:2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4719 was prepared by Technical Committee ISO/TC 54, *Essential oils*.

This third edition cancels and replaces the second edition (ISO 4719:1999), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 4719:2012

STANDARDSISO.COM : Click to view the full PDF of ISO 4719:2012

Essential oil of spike lavender (*Lavandula latifolia* Medikus), Spanish type

1 Scope

This International Standard specifies certain characteristics of essential oil of spike lavender (*Lavandula latifolia* Medikus), Spanish type, in order to facilitate assessment of its quality.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TR 210, *Essential oils — General rules for packaging, conditioning and storage*

ISO/TR 211, *Essential oils — General rules for labelling and marking of containers*

ISO 212, *Essential oils — Sampling*

ISO 279, *Essential oils — Determination of relative density at 20 °C — Reference method*

ISO 280, *Essential oils — Determination of refractive index*

ISO 592, *Essential oils — Determination of optical rotation*

ISO 875, *Essential oils — Evaluation of miscibility in ethanol*

ISO 1242, *Essential oils — Determination of acid value*

ISO 11024 (all parts), *Essential oils — General guidance on chromatographic profiles*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

essential oil of spike lavender

essential oil obtained by steam distillation of the flowering tops of *Lavandula latifolia* Medikus, of the Lamiaceae family, growing mainly in Spain

Note 1 to entry: For information on the CAS number, see ISO/TR 21092.[2]

4 Requirements

4.1 Appearance

Clear mobile liquid.

4.2 Colour

Light yellow to orange yellow.

4.3 Odour

Characteristic, earthy, more or less camphoraceous.

4.4 Relative density at 20 °C, d_{20}^{20}

Minimum: 0,894

Maximum: 0,907

4.5 Refractive index at 20 °C

Minimum: 1,461

Maximum: 1,468

4.6 Optical rotation at 20 °C

Between -7° and $+2^{\circ}$

4.7 Miscibility in ethanol 70 % volume fraction at 20 °C

It shall not be necessary to use more than 3 volumes of ethanol 70 % volume fraction to obtain a clear solution with 1 volume of essential oil.

NOTE Sometimes opalescence is observed on dilution.

4.8 Acid value

Maximum: 2,0

4.9 Chromatographic profile

Carry out the analysis of the essential oil by gas chromatography. Identify in the chromatogram obtained the representative and characteristic components shown in Table 1. The proportions of these components, indicated by the integrator, shall be as shown in Table 1. This constitutes the chromatographic profile of the essential oil.

Table 1 — Chromatographic profile

Component	Minimum	Maximum
	%	%
Limonene	0,5	3,0
1,8-Cineole	16,0	39,0
Camphor	8,0	16,0
Linalool	34,0	50,0
Linalyl acetate	n.d. ^a	1,6
α -Terpineol	0,2	2,0
<i>trans</i> - α -Bisabolene	0,4	2,5
NOTE The chromatographic profile is normative, contrary to typical chromatograms given for information in Annex A .		
^a Not detectable.		

4.10 Flashpoint

Information on the flashpoint is given in [Annex B](#).

5 Sampling

Sampling shall be performed in accordance with ISO 212.

Minimum volume of test sample: 25 ml.

NOTE This volume allows each of the tests specified in this International Standard to be carried out at least once.

6 Test methods

Relative density at 20 °C, d_{20}^{20}

Determine the relative density in accordance with ISO 279.

6.1 Refractive index at 20 °C

Determine the refractive index in accordance with ISO 280.

6.2 Optical rotation at 20 °C

Determine the optical rotation in accordance with ISO 592.

6.3 Miscibility in ethanol 70 % volume fraction at 20 °C

Determine the miscibility in accordance with ISO 875.

6.4 Acid value

Determine the acid value in accordance with ISO 1242.

6.5 Chromatographic profile

Determine the chromatographic profile in accordance with ISO 11024.

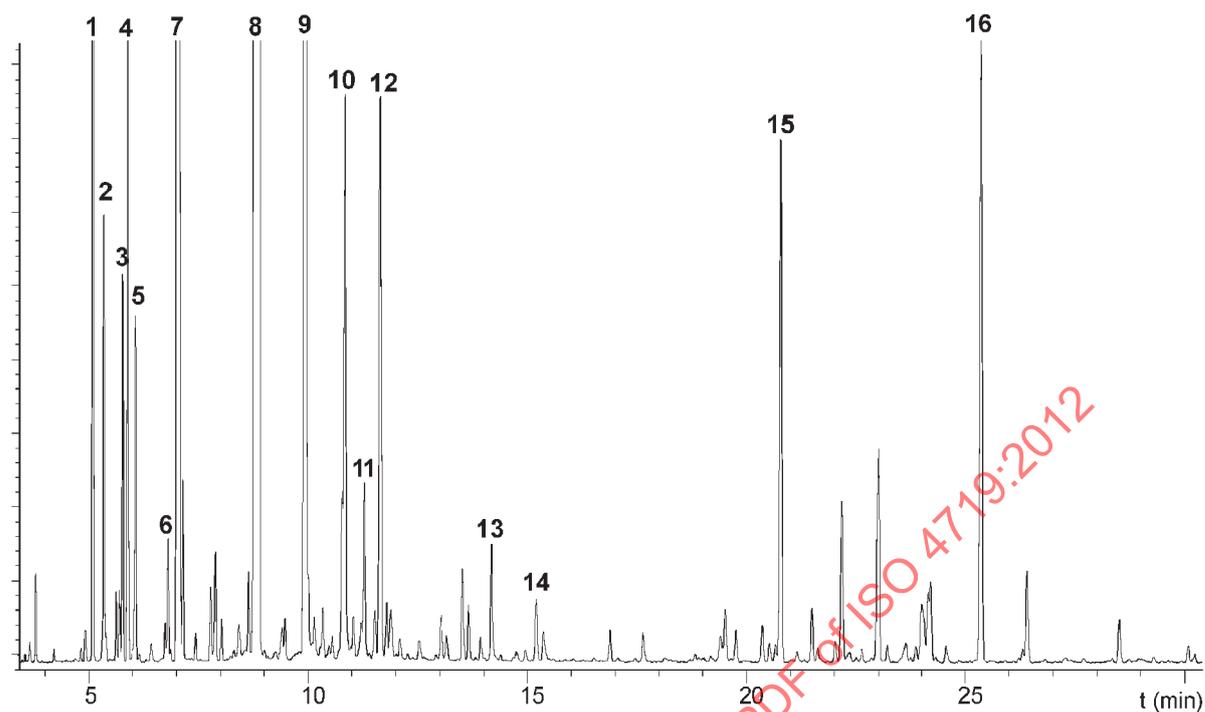
7 Packaging, labelling, marking and storage

These items shall be in accordance with ISO/TR 210 and ISO/TR 211.

Annex A
(informative)

**Typical chromatograms of the analysis by gas chromatography
of the essential oil of spike lavender (*Lavandula latifolia*
Medikus), Spanish type**

STANDARDSISO.COM : Click to view the full PDF of ISO 4719:2012

**Key****Peak identification**

- | | |
|----|-------------------------------------|
| 1 | α -Pinene |
| 2 | Camphene |
| 3 | Sabinene |
| 4 | β -Pinene |
| 5 | Myrcene |
| 6 | p-Cymene |
| 7 | Limonene + 1,8-cineole |
| 8 | Linalool |
| 9 | Camphor |
| 10 | Borneol |
| 11 | Terpinen-4-ol |
| 12 | α -Terpineol |
| 13 | Linalyl acetate |
| 14 | Bornyl acetate |
| 15 | β -Caryophyllene |
| 16 | <i>trans</i> - α -Bisabolene |

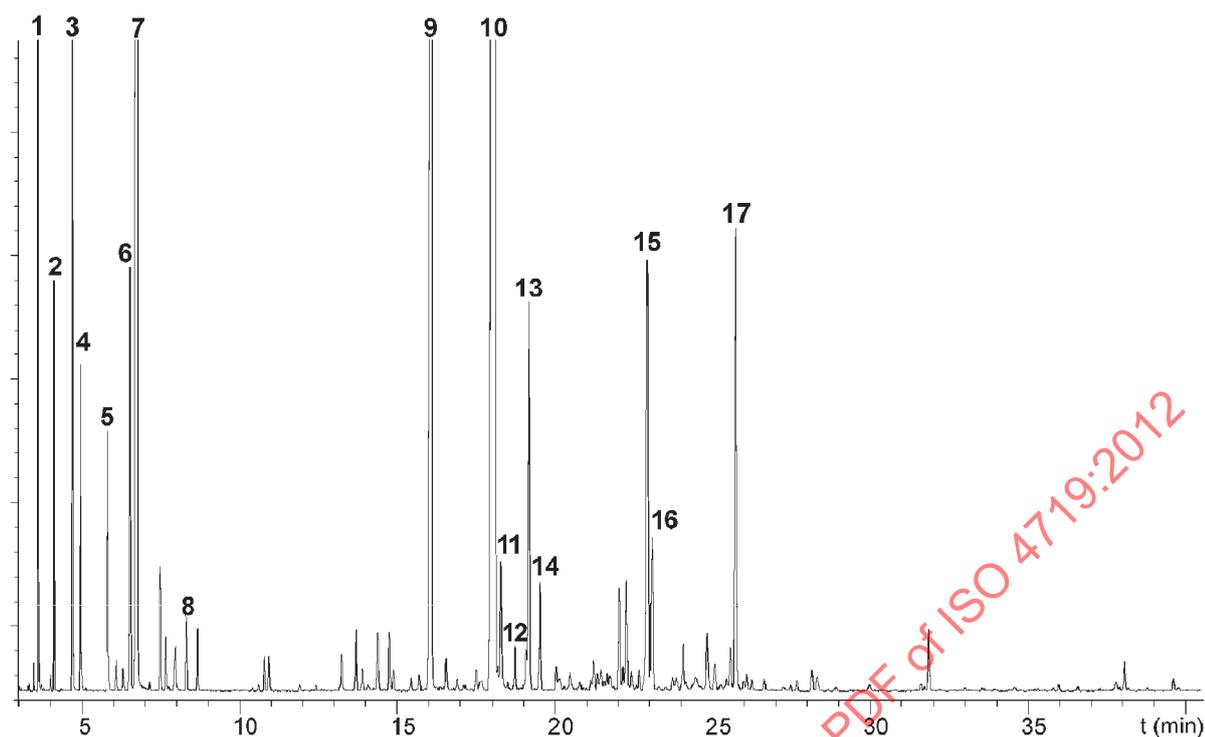
Operating conditions

- | |
|---|
| Column: capillary, fused silica; length 30 m; internal diameter 0,25 mm |
| Stationary phase: poly(methyl siloxane)[HP-1 ^a] |
| Film thickness: 0,25 μ m |
| Oven temperature: programmed temperature from 75 $^{\circ}$ C to 210 $^{\circ}$ C at a rate of 3 $^{\circ}$ C/min |
| Injector temperature: 250 $^{\circ}$ C |
| Detector temperature: 250 $^{\circ}$ C |
| Detector: flame ionization type |
| Carrier gas: helium |
| Volume injected: 0,1 μ l |
| Carrier gas flow rate: 1 ml/min |
| Split ratio: 1/250 |

t time

^aHP-1 is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.

Figure A.1 — Typical chromatogram taken on an apolar column

**Key****Peak identification**

- 1 α -Pinene
- 2 Camphene
- 3 β -Pinene
- 4 Sabinene
- 5 Myrcene
- 6 Limonene
- 7 1,8-Cineole
- 8 *p*-Cymene
- 9 Camphor
- 10 Linalool
- 11 Linalyl acetate
- 12 Bornyl acetate
- 13 β -Caryophyllene
- 14 Terpinen-4-ol
- 15 α -Terpineol
- 16 Borneol
- 17 *trans*- α -Bisabolene

Operating conditions

- Column: capillary, fused silica; length 30 m; internal diameter 0,25 mm
- Stationary phase: poly(ethylene glycol) [Innowax 20 M^a]
- Film thickness: 0,15 μ m
- Oven temperature: programmed temperature from 50 °C to 210 °C at a rate of 3 °C/min, then from 210 °C to 250 °C at a rate of 40 °C/min, then isothermal at 250 °C for 5 min
- Injector temperature: 250 °C
- Detector temperature: 250 °C
- Detector: flame ionization type
- Carrier gas: helium
- Volume injected: 0,1 μ l
- Carrier gas flow rate: 1 ml/min
- Split ratio: 1/250

t time

^aInnowax 20 M is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.

Figure A.2 — Typical chromatogram taken on a polar column

Annex B (informative)

Flashpoint

B.1 General information

For safety reasons, transport companies, insurance companies, and people in charge of safety services require information on the flashpoints of essential oils, which in most cases are flammable products.

A comparative study on the relevant methods of analysis (see ISO/TR 11018^[1]) concluded that it was difficult to recommend a single apparatus for standardization purposes, given that:

there is a wide variation in the chemical composition of essential oils;

the volume of the sample needed in certain requirements would be too costly for high-priced essential oils;

as there are several different types of equipment which can be used for the determination, users cannot be expected to use one specified type only.

Consequently, it was decided to give a mean value for the flashpoint annexed to each International Standard, for information, in order to meet the requirements of the interested parties.

The equipment with which this value was obtained has to be specified.

For further information see ISO/TR 11018.^[1]

B.2 Flashpoint of the essential oil of spike lavender

The mean value is +60 °C.

NOTE Obtained with Setflash¹⁾ equipment.

1) Equipment available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.