

---

# INTERNATIONAL STANDARD



# 4872

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Acoustics — Measurement of airborne noise emitted by construction equipment intended for outdoor use — Method for determining compliance with noise limits

*Acoustique — Mesurage du bruit aérien émis par les machines et équipements de construction destinés à être utilisés à l'air libre — Méthode de vérification de la conformité en ce qui concerne les limites de bruit*

First edition — 1978-06-15

STANDARDSISO.COM : Click to view the full PDF of ISO 4872:1978

---

UDC 534.6 : 69.057

Ref. No. ISO 4872-1978 (E)

**Descriptors:** acoustics, acoustic tests, acoustic measurement, engine noise, airborne sound, site equipment, sound power, sound pressure, enclosures.

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 4872 was developed by Technical Committee ISO/TC 43, *Acoustics*, and was circulated to the member bodies in July 1976.

It has been approved by the member bodies of the following countries:

Austria	Hungary	Norway
Belgium	India	Poland
Brazil	Ireland	Spain
Bulgaria	Israel	Sweden
Canada	Italy	Turkey
Denmark	Japan	U.S.A.
Finland	Korea, Rep. of	U.S.S.R.
France	Mexico	
Germany	New Zealand	

The member bodies of the following countries expressed disapproval of the document on technical grounds:

Czechoslovakia  
Switzerland  
United Kingdom

# Acoustics — Measurement of airborne noise emitted by construction equipment intended for outdoor use — Method for determining compliance with noise limits

## 0 INTRODUCTION

This International Standard describes a method for measuring the noise emitted by construction equipment and machines intended for outdoor use. The method allows the determination of the acoustical characteristics of a sound source in terms of its A-weighted sound power level. The values obtained by this method are the fundamental quantities for characterizing the sound output. The results may be used for comparison with noise limits. In this case, the A-weighted sound power levels determined according to this International Standard are to be considered as guaranteed values which include all sources of measurement uncertainty.

The A-weighted sound power level of a device or machine is calculated from the measured values of the A-weighted sound pressure level at several microphone positions located on a hypothetical measurement surface which envelops the source. One of two alternative measurement surfaces may be selected:

- a hemispherical surface, or
- a rectangular parallelepipedal surface.

The method requires that the background noise be significantly lower than the noise produced by the source. Annex A gives procedures for qualifying the acoustic environment for the purpose of measurements made according to the requirements of this International Standard and for determining the magnitude of the environmental correction (if any).

Only the acoustical requirements for measurements in a free field over a reflecting plane are defined in this International Standard. The operating and mounting conditions of the device or machine are described in general terms. For specific types of machine, for example concrete

mixers, compressors, earth-moving machinery, etc., reference should be made to special test codes which give detailed information on operating and mounting conditions and the array of microphone positions to be selected from those given in this International Standard.

## 1 SCOPE AND FIELD OF APPLICATION

### 1.1 General

This International Standard describes a method for measuring the weighted sound pressure levels at prescribed microphone positions in the proximity of a device or machine for outdoor use, in order to determine compliance with noise limits. The A-weighted sound power level of the source is calculated from the measured values.

### NOTES

- 1 When nine or more microphone positions are prescribed in the proximity of the source (as in clause 7), the A-weighted sound power levels determined in accordance with this International Standard tend to result in standard deviations less than approximately 2,0 dB, provided that the spectrum does not contain pronounced discrete frequencies; if it does, the magnitude of the uncertainties will be larger and no general rules for the magnitude of the uncertainties can be given. These standard deviations reflect the cumulative effects of all causes of measurement uncertainty, excluding variations in the sound power level from machine to machine or from test to test, which may be caused, for example, by changes in the mounting or operating conditions of the source.
- 2 For measurements made using a hemispherical measurement surface, the directivity index of the source may be calculated according to the description of annex B.
- 3 Measurement of A-weighted sound pressure levels at the operator's position(s) is not described in this International Standard.
- 4 The results of noise measurements made according to this International Standard are obtained under prescribed conditions and will not necessarily correspond to the noise experienced from the equipment when it is in operation on a construction site.

## 1.2 Field of application

### 1.2.1 Types of noise

This International Standard applies to sources which radiate broad-band noise, narrow-band noise, discrete tones and combinations thereof. Procedures given in this International Standard are primarily applicable to sources that radiate steady noise. These procedures may also be applied to sources that radiate non-steady noise, quasi-steady noise and impulsive noise, provided that certain precautions are taken (see 7.8).

### 1.2.2 Size of source

In principle, the method given in this International Standard does not restrict the size of the machine to be measured; for very large machines the procedure may, however, lead to microphone positions which are impracticable to use.

NOTE — In such cases the noise source may often be defined as being part of the complete machine. In some cases of excessively large plant, for example conveyer systems extending to hundreds of metres in length, it will be possible to identify separate pieces of noisy machinery which are part of the whole and to which the procedure of this International Standard may be applied individually.

## 2 REFERENCES

ISO/R 1996, *Acoustics — Assessment of noise with respect to community response*.

ISO 2204, *Acoustics — Guide to the measurement of airborne acoustical noise and evaluation of its effects on man*.

ISO 3741, *Acoustics — Determination of sound power levels of noise sources — Precision methods for broad-band sources in reverberation rooms*.

IEC Publication 179, *Precision sound level meters*.

IEC Publication 179A, (First supplement to IEC Publication 179), *Additional characteristic for the measurement of impulsive noise*.

## 3 DEFINITIONS

For the purposes of this International Standard, the following definitions apply :

**3.1 sound pressure level,  $L_p$**  : Twenty times the logarithm to the base 10 of the ratio of the sound pressure to the reference sound pressure, expressed in decibels. For the purposes of this International Standard, the A-weighting network shall always be used, yielding the A-weighted sound pressure level,  $L_{pA}$ . The reference sound pressure is 20  $\mu$ Pa.

**3.2 surface sound pressure level,  $\overline{L_{pA}}$**  : The mean sound pressure level A-weighted over the measurement surface as required in clause 8.

**3.3 sound power level,  $L_W$**  : Ten times the logarithm to the base 10 of the ratio of a given sound power to the reference sound power, expressed in decibels. For the purposes of this International Standard, A-weighting shall always be used, yielding the A-weighted sound power level,  $L_{WA}$ . The reference sound power is 1 pW (=  $10^{-12}$  W).

**3.4 measurement surface** : A hypothetical surface of area  $S$  which envelops the source and on which the microphone positions are located.

**3.5 background noise** : At the microphone positions on the measurement surface, the A-weighted sound pressure levels of the noise which is not generated by the source under test.

## 4 ACOUSTIC ENVIRONMENT

### 4.1 Criterion for adequacy of the test environment

Ideally, the test environment should be free from reflecting objects other than a reflecting plane so that the source radiates into a free field over a reflecting plane. Annex A describes a procedure for determining the magnitude of the environmental correction (if any) to account for departures of the test environment from the ideal condition.

### 4.2 Criterion for background noise

At the microphone positions, the A-weighted sound pressure level due to the background noise shall be at least 6 dB, and preferably more than 10 dB, below the A-weighted sound pressure level with the source operating.

### 4.3 Wind

The wind speed at the test site shall be less than 8 m/s. For wind speeds in excess of 1 m/s, a microphone windscreen shall be used and appropriate compensation for the effects of its use shall be allowed for in the calibration.

## 5 INSTRUMENTATION

### 5.1 General

The instrumentation shall be designed to permit the determination of the value of the A-weighted sound pressure level averaged over time on an energy basis. Tolerances of the several sections of the measuring chain shall not exceed the tolerances given in the relevant clauses of IEC Publications 179 and 179A.

### NOTES

1 An example of an appropriate instrument for these measurements is a sound level meter that meets the requirements of IEC Publication 179 with a "slow" meter characteristic. For establishing the presence of impulsive noise, the "impulse" meter characteristic according to IEC Publication 179A shall be used in addition.

2 Another example of an appropriate instrumentation system is an integrator which effects an analogue or digital integration of the squared signal over a given time-interval.

## 5.2 Microphone and associated cable

To minimize the influence of the observer on the measurements, a cable should preferably be used between the microphone and the sound level meter. The observer shall not stand between the microphone and the source whose sound power level is being determined. The microphone shall comply with the specifications given in IEC Publication 179.

## 5.3 Frequency response of the instrumentation system

The frequency response of the instrumentation system for the angle of incidence specified by the manufacturer shall be within the tolerances given in IEC Publication 179.

## 5.4 Calibration

At least before and after each series of measurements, an acoustical calibrator with an accuracy of  $\pm 0,5$  dB shall be applied to the microphone for calibration of the entire measuring cable, if used, at one or more frequencies. One calibration frequency should be in the range 250 to 1 000 Hz. The calibrator shall be checked annually to verify that its output has not changed.

# 6 INSTALLATION AND OPERATION OF SOURCE

## 6.1 General

In many cases, the sound radiated by a source depends upon its support and/or mounting conditions as well as the manner in which it is operated. This clause gives general recommendations concerning the installation and operation of sources. More detailed information concerning the installation and operation of specific kinds of machinery is given in special test codes which shall be referred to when carrying out detailed tests on a specific machine.

## 6.2 Auxiliary equipment

The description of the sound source under test (see 9.1) shall define precisely the items of equipment that are to be considered as integral parts of the sound source and the items of equipment that are to be considered auxiliary to the sound source.

If possible, all auxiliary equipment necessary for the operation of the device under test that is not a part of the source shall be located so as not to influence the results of the test; all such auxiliary equipment should be located outside of, or acoustically isolated from, the test environment. Sound sources which operate with interchangeable devices (for example pneumatic tools) shall be operated with at least one principal device with which the sound source is designed to operate and possibly with the device which yields the maximum noise.

## 6.3 Operation of source during tests

During the acoustical measurements, the source shall be operated in a specified manner typical of normal use.

Before the measurements are made, the device or machine under test shall be permitted to reach a stable operating condition. Reference shall be made to the test code appropriate for the device or machine for detailed instructions concerning the operation of the source during the test.

Each test shall preferably include an evaluation of the sound source under no load (idling) at the rated engine speed and one or more tests carried out under load. When operating under load, either real or simulated working conditions may be prescribed.

If no special test code exists, one or more of the following operational conditions should be used :

- a) device under specified operating conditions;
- b) device under full load [if different from a)];
- c) device under no load (idling);
- d) device under operating condition corresponding to maximum sound generation.

In defining operating conditions for a machine under test, it is particularly important to consider noise generated not only by the machine itself but also by the tools, work materials or work surfaces in close contact with the machine or excited by the operation of the machine. For example, the noise emitted by a circular saw operating in free air is quite different from that emitted by the saw when cutting through a piece of plywood. For machines that operate in this manner it is necessary that the special test code for these machines describe in detail the test conditions including the tools, work materials and work surfaces that radiate sound energy when the machine itself is in operation.

# 7 MEASUREMENT OF A-WEIGHTED SOUND PRESSURE LEVELS

## 7.1 Reference parallelepiped and measurement surface

To facilitate the location of the microphone positions, the smallest possible imaginary rectangular parallelepiped (length  $l_1$ , width  $l_2$ , height  $l_3$ ) just enclosing the source and terminating on the reflecting plane is used for reference purposes. When defining the reference parallelepiped, small elements protruding from the source which are unlikely to be major radiators of sound energy may be disregarded.

The microphone positions lie on the measurement surface, a hypothetical surface of area  $S$  which envelops the source as well as the reference parallelepiped and terminates on the reflecting plane. One of two alternative measurement surfaces may be used :

- a hemispherical surface, or
- a rectangular parallelepipedal surface whose sides are parallel to those of the reference parallelepiped (in this case, the measurement distance  $d$  is the shortest distance between the measurement surface and the reference parallelepiped).

The construction of the reference parallelepiped, the size and shape of the measurement surface as well as the measurement distance or the radius of the hemisphere shall be described as defined in the special test code for the kind of machine under investigation. For measurements on a series of similar sources (for example concrete mixers, compressors, etc.), the use of a measurement surface of the same shape is recommended.

## 7.2 Microphone positions on the hemispherical measurement surface

### 7.2.1 General

The microphone positions lie on the hypothetical hemispherical surface of area  $S = 2\pi r^2$  enveloping the source and terminating on the reflecting plane. The centre of the hemisphere is the projection of the geometric centre of the reference parallelepiped on the reflecting plane. The radius of the hemisphere ( $r$ ) is at least twice the largest dimension of the reference parallelepiped ( $l_1$ ,  $l_2$  or  $l_3$ ). The radius of the hemisphere shall be rounded off to the nearest higher integer value, preferably in the series 4–6–8–10 m ... The same value for the radius of the hemisphere shall be used for measurements on all machines of the same family unless otherwise directed by the test code. For large machines, the reference surface may be defined to enclose only the principal source or sources of noise, thus reducing the radius of the hemispherical measurement surface. In this case, preliminary measurements on at least one machine of a given type should be carried out (in addition to those measurements required by 7.3.2) to demonstrate that the calculated value of the sound power level is the same as that determined using a larger hemispherical measurement surface.

Two possibilities for the distribution of microphone positions on the hemispherical measurement surface are given as alternatives in 7.2.2 and 7.2.3.

It must be clearly stated in the test report which of the alternatives, A or B, for the distribution of microphone positions on the hemisphere has been chosen.

NOTE — For sources which radiate sound having a broad-band spectrum, the two distributions of microphone positions are likely to yield the same result within the given accuracy.

### 7.2.2 Alternative A

The locations of 10 microphone positions distributed on the surface of a hemisphere of radius  $r$  are shown in figure 1 and tabulated in table 1.

#### NOTES

1 The overhead position (microphone position No. 10 in figure 1) may be deleted for safety reasons or if it can be shown by preliminary investigation that the exclusion of the overhead position does not significantly influence the calculated sound power level of the source.

2 For non-directional machines and for machines having unusual configurations, any of the microphone positions in the array described in figure 1 may be deleted following the instructions of the special test code for the machine under investigation.

### 7.2.3 Alternative B

The location of 12 microphone positions distributed on the surface of a hemisphere of radius  $r$  are shown in figure 2 and tabulated in table 2.

NOTE — For non-directional machines and for machines having unusual configurations, any of the microphone positions in the array described in figure 2 may be deleted following the instructions of the special test code for the machine under investigation.

## 7.3 Microphone positions on the parallelepipedal measurement surface

The microphone positions lie on the measurement surface, a hypothetical surface of area  $S$  enveloping the source, whose sides are parallel to the sides of the reference rectangular parallelepiped and situated at a distance  $d$  (measuring distance) from the parallelepiped. The measuring distance,  $d$ , is preferably selected from the series 1, 2, 4 m. The key measurement positions are shown in figure 3. For larger machines, the nine key measurement positions shall be supplemented by additional measurement positions as shown in figure 3. Additional measurement positions are necessary whenever the distance between two adjacent measurement positions is greater than twice the measuring distance,  $d$  (see also note 3). The height,  $h$ , of the four lower key microphone positions and the height of the upper five positions are given by the following expression:

$$h = 0,5c = 0,5(l_3 + d)$$

#### NOTES

1 The overhead position may be deleted for safety reasons or if it can be shown by a preliminary investigation that the exclusion of the overhead position does not significantly influence the calculated sound power level of the source.

2 For non-directional machines and for machines having unusual configurations, any of the microphone positions in the array described in figure 3 may be deleted following the instructions of the special test code for the machine under investigation.

3 Measurements at additional microphone positions are not necessary if the difference, in decibels, between the highest and lowest sound pressure levels measured at the positions defined in figure 3 is numerically less than the number of measurement positions.

## 7.4 Choice of measurement surface

While the hemispherical measurement surface is an appropriate choice for many construction machines, it may not always be appropriate for very large machines, for test sites in which the background noise is relatively high and when an extended reflecting plane is not available. Under these circumstances, it may be appropriate to choose a parallelepipedal measurement surface.

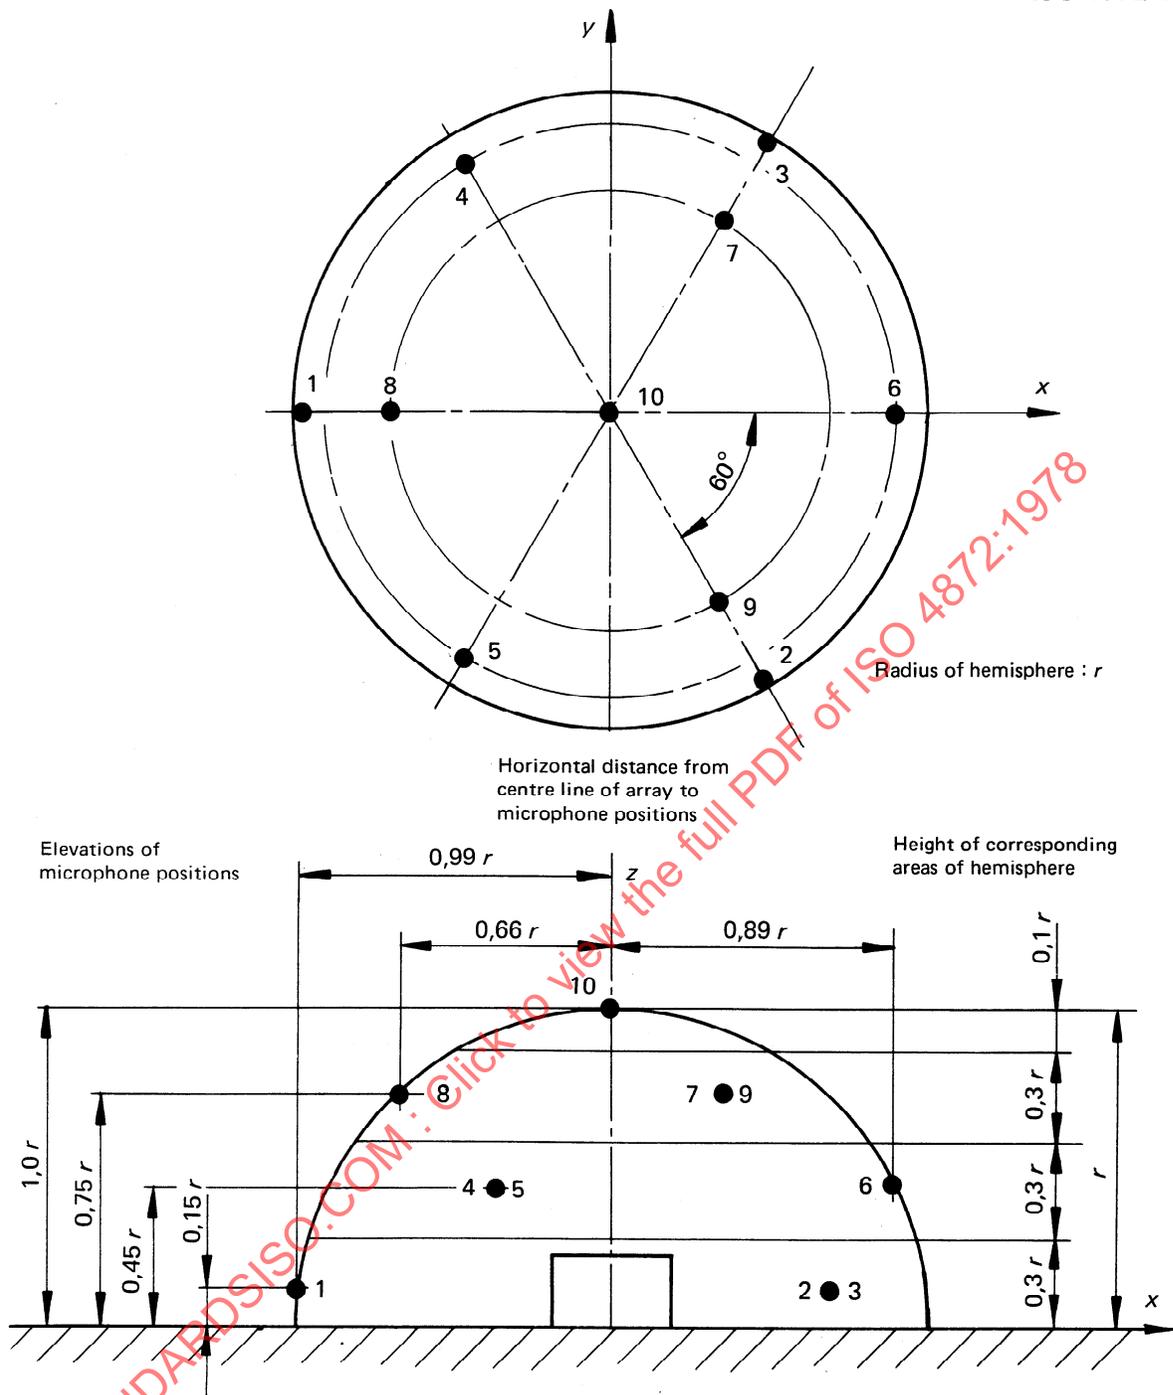


FIGURE 1 – Microphone array on the hemisphere (Alternative A) (see 7.2.2)

TABLE 1 – Co-ordinates of the 10 measurement points

No.	$\frac{x}{r}$	$\frac{y}{r}$	$\frac{z}{r}$
1	-0,99	0	0,15
2	0,50	-0,85	0,15
3	0,50	0,85	0,15
4	-0,45	0,77	0,45
5	-0,45	-0,77	0,45
6	0,89	0	0,45
7	0,33	0,57	0,75
8	-0,66	0	0,75
9	0,33	-0,57	0,75
10	0	0	1

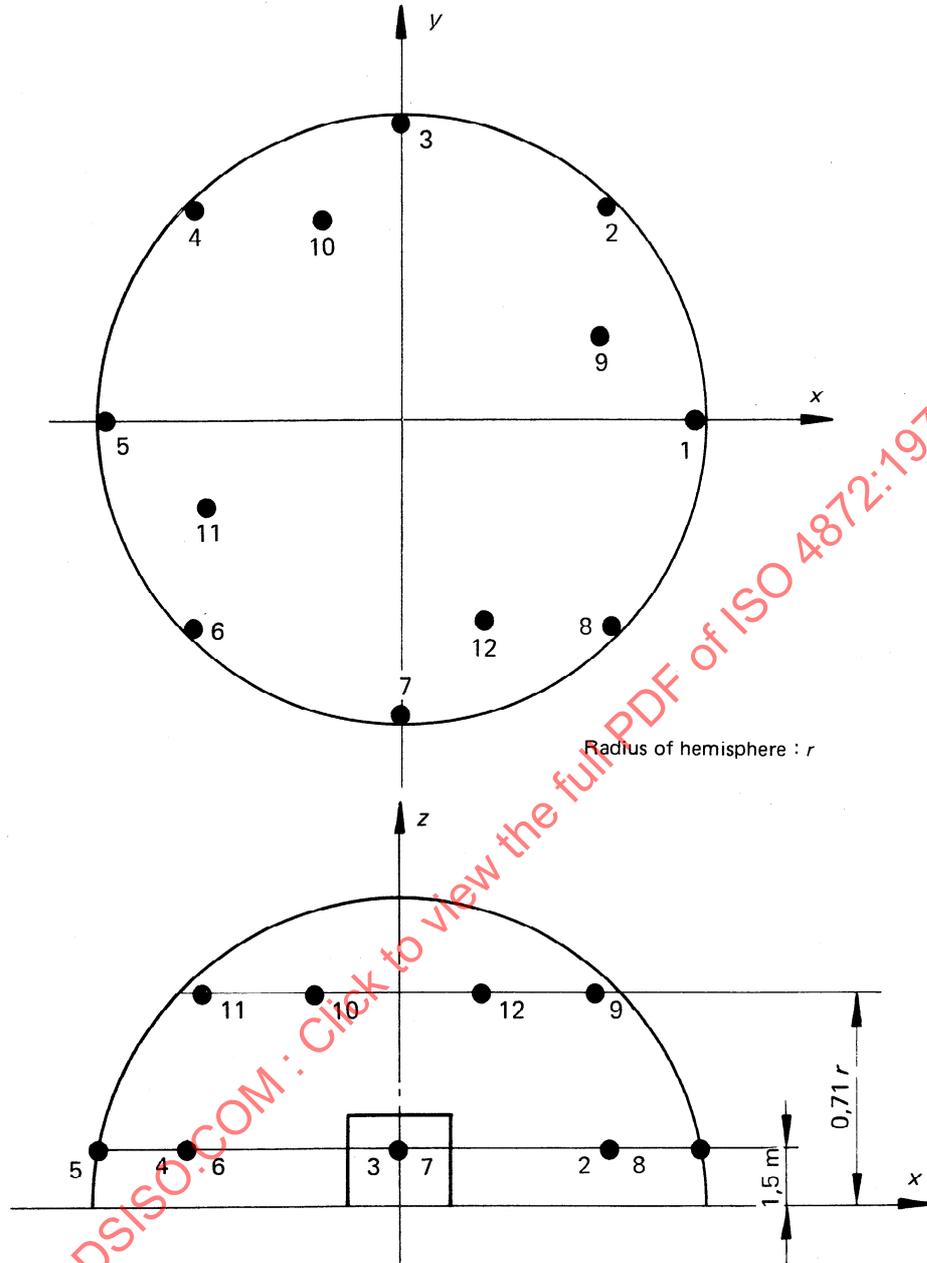


FIGURE 2 – Microphone array on the hemisphere (Alternative B) (see 7.2.3)

TABLE 2 – Co-ordinates of the 12 measurement points

No.	$\frac{x}{r}$	$\frac{y}{r}$	$z$
1	1	0	1,5 m
2	0,7	0,7	1,5 m
3	0	1	1,5 m
4	-0,7	0,7	1,5 m
5	-1	0	1,5 m
6	-0,7	-0,7	1,5 m
7	0	-1	1,5 m
8	0,7	-0,7	1,5 m
9	0,65	0,27	0,71 $r$
10	-0,27	0,65	0,71 $r$
11	-0,65	-0,27	0,71 $r$
12	0,27	-0,65	0,71 $r$

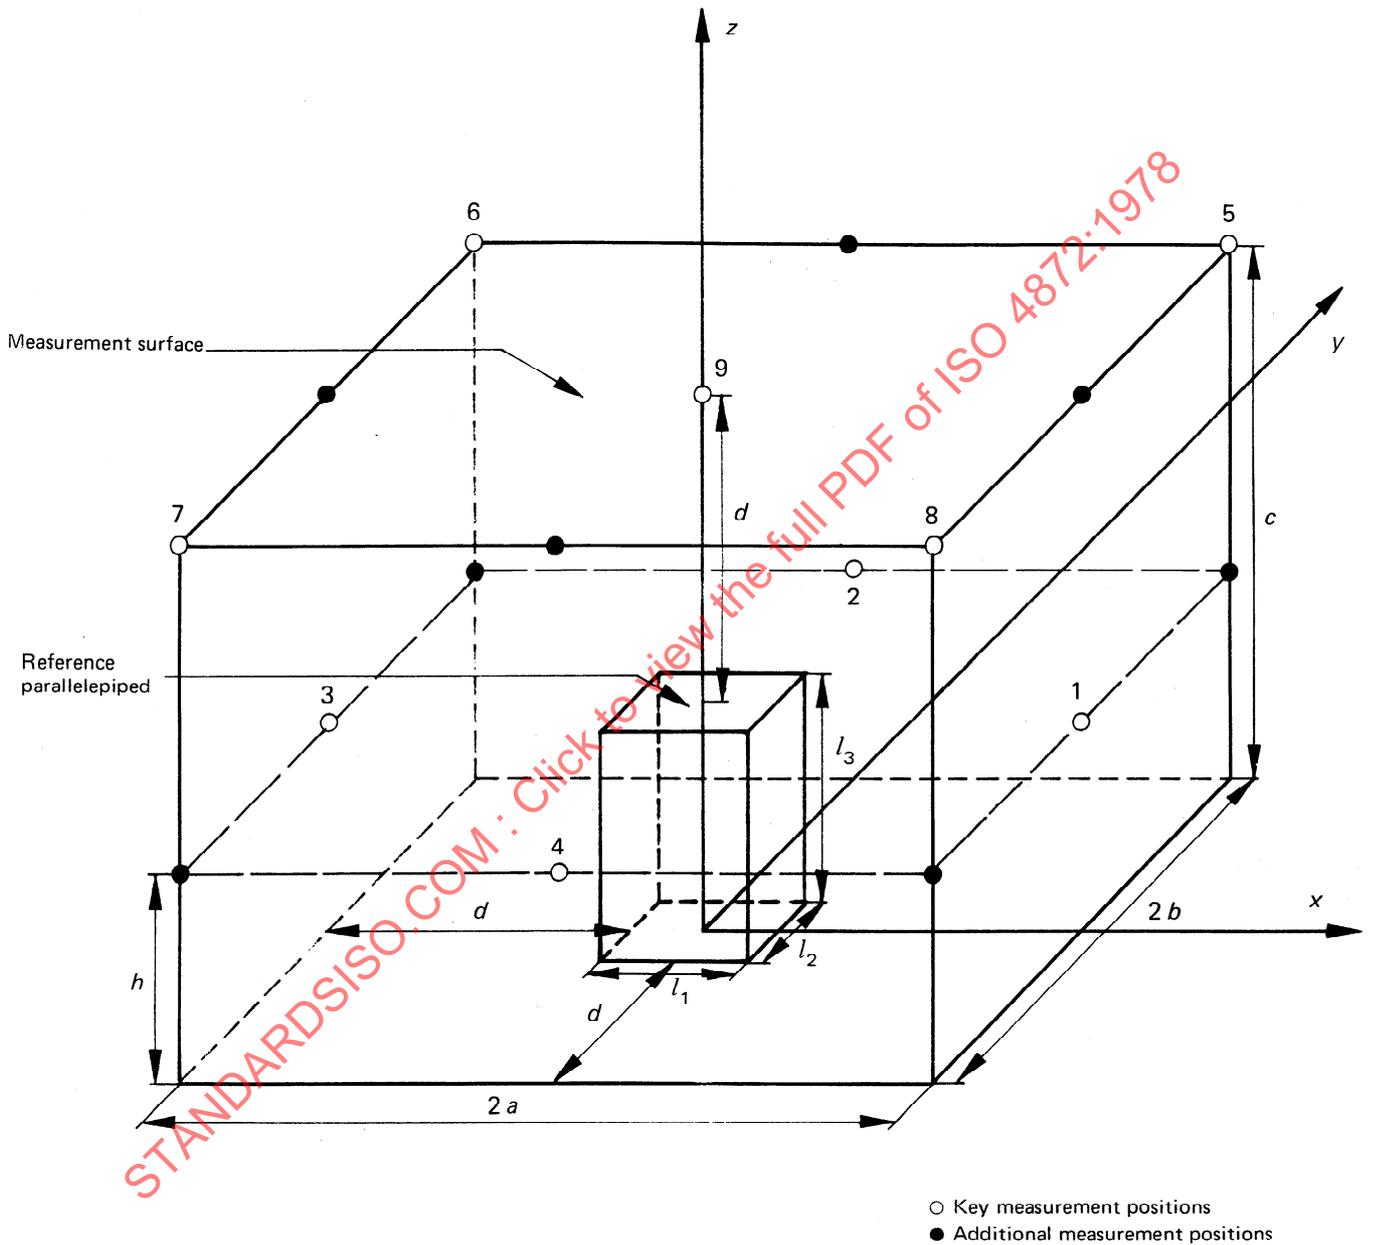


FIGURE 3 – Microphone array on the parallelepiped (see 7.3)

**7.5 Corrections for background noise**

The A-weighted sound pressure levels recorded at the microphone positions shall be corrected for the influence of background noise according to table 3.

TABLE 3 – Corrections for background noise

Difference between sound pressure level measured with sound source operating and background sound pressure level alone	Correction to be subtracted from sound pressure level measured with sound source operating to obtain sound pressure level due to sound source alone
dB	dB
< 6	Measurements invalid
6	1,0
7	1,0
8	1,0
9	0,5
10	0,5
>10	0,0

**7.6 Measurements with sound level meter**

If a sound level meter is used for the measurements, the "slow" characteristic shall be used. When the fluctuations of the indicating pointer on the meter are less than ± 3,0 dB, the noise is considered to be steady for the purposes of this International Standard and the level is taken to be the average of the maximum and minimum levels during the period of observation. If the meter fluctuations during the period of observation are greater than ± 3,0 dB, time-averaging is necessary to determine the sound pressure level on an energy basis. Time-averaging procedures are described in ISO/R 1996; alternatively, an integrating meter may be used to determine the sound pressure level on a mean-square basis.

**7.7 Period of observation**

For a time-varying noise, it is important to specify the period of observation and the number of cycles of operation of the source that occur during the period of observation. In general, the measurement should be performed over at least three cycles of operation of the machine. In principle, the total measuring time at each measurement position shall be at least 15 s. If the machine has two typical modes of operation having different noise levels, it may be necessary to select a different period of observation for each mode.

**7.8 Measurement of impulsive noise**

Comparing the readings of a sound level meter on "slow" response with those obtained when the sound level meter is set for "impulsive" response (see IEC Publication 179A)

may be helpful in determining whether the noise contains important impulsive components. If the difference between the "slow" and "impulsive" readings is equal to or greater than 4 dB, then the noise shall be considered to be impulsive in character. This comparison is to be made at one or more of the microphone positions on the measurement surface. An appropriate entry shall be made according to 9.4 in the event that the noise is found to be impulsive in character.

**8 CALCULATION OF SURFACE SOUND PRESSURE LEVEL AND SOUND POWER LEVEL**

**8.1 Calculation of surface sound pressure level,  $\overline{L_{pA}}$**

The surface sound pressure level  $\overline{L_{pA}}$ , shall be calculated from the measured values of the A-weighted sound pressure level  $L_{pi}$  (after corrections are applied according to 7.5, if necessary), by using the following equation :

$$\overline{L_{pA}} = 10 \lg \frac{1}{N} \left[ \sum_{i=1}^N 10^{0,1 L_{pi}} \right] - K \quad \dots (1)$$

where

$\overline{L_{pA}}$  is the surface sound pressure level, in decibels. Reference : 20 μPa;

$L_{pi}$  is the A-weighted sound pressure level resulting from the *i*th measurement corrected for background noise, in decibels. Reference : 20 μPa;

*N* is the total number of measurements;

*K* is the environmental correction, in decibels (see annex A).

**NOTES**

1 When the range of values of  $L_{pi}$  does not exceed 5 dB, a simple arithmetic average may be used. This average will not differ by more than 0,7 dB from the value calculated using equation (1).

2 Corrections for the effects of temperature, humidity, altitude of test site and wind shall be made to the measured values of the A-weighted sound pressure levels according to the instructions of the manufacturer of the acoustical instrumentation.

**8.2 Calculation of sound power level**

The A-weighted sound power level of the source,  $L_{WA}$ , shall be calculated from the following equation :

$$L_{WA} = \overline{L_{pA}} + 10 \lg \frac{S}{S_0} - K \quad \dots (2)$$

where

*S* is the area of the measurement surface, in square metres. Reference :  $S_0 = 1 \text{ m}^2$ .

For the hemispherical measurement surface

$$S = 2\pi r^2$$

For the rectangular parallelepipedal measurement surface

$$S = 4(ab + bc + ac)$$

where

$$a = \frac{l_1}{2} + d; \quad b = \frac{l_2}{2} + d; \quad c = l_3 + d$$

$l_1, l_2, l_3$  being the dimensions of the reference parallelepiped and  $d$  the measurement distance.

## 9 INFORMATION TO BE RECORDED

The following information, when applicable, shall be compiled and recorded for measurements that are made according to the requirements of this International Standard.

### 9.1 Sound source under test

- Description of the sound source under test (including its dimensions).
- Dimensions of the reference parallelepiped.
- Operating conditions.
- Mounting conditions.
- The date and time when the measurements were performed.

### 9.2 Acoustic environment

- Description of the test environment (include a sketch showing the location of source with respect to reflecting objects and surrounding terrain, including a physical description of the test environment).
- Acoustical qualification of test environment according to annex A.
- Air temperature in degrees Celsius, barometric pressure in millibars, relative humidity in per cent and wind velocity and direction measured at a height of 2 m above the ground.

### 9.3 Instrumentation

- Equipment used for the measurements, including name, type, serial number and manufacturer.

- Method used to calibrate the instrumentation system as prescribed in 5.4.

- The date and place of calibration of the acoustical calibrator.

## 9.4 Acoustical data

- The location of the microphone positions (a sketch may be included, if necessary), and the measurement distance. For the case of the hemispherical array, it shall be indicated which of the alternatives, A or B, (see 7.2) has been chosen.
- The shape and area  $S$  of the measurement surface.
- The A-weighted sound pressure level at each microphone position.
- The A-weighted sound pressure level of the background noise at each measuring point and the corresponding correction, if any.
- The environmental correction  $K$  calculated according to annex A.
- The surface sound pressure level  $\overline{L_{pA}}$ , with reference to  $20 \mu\text{Pa}$ , in decibels.
- The calculated A-weighted sound power level, with reference to  $1 \text{ pW}$  ( $= 10^{-12} \text{ W}$ ), in decibels. The value shall be tabulated or plotted to the nearest whole decibel.
- The difference between "impulse" and "slow" readings of the sound pressure level at one or more microphone positions, if this difference is equal to or greater than 4 dB.
- Remarks on subjective impression of noise (audible discrete tones, impulsive character, spectral content, temporal characteristics, etc.).
- Directivity index calculated according to the requirements of annex B.

## 10 INFORMATION TO BE REPORTED

The report shall contain the statement that the A-weighted sound power level has been obtained in full conformity with the procedures of this International Standard. The report shall state that the A-weighted sound power level, re  $1 \text{ pW}$  ( $= 10^{-12} \text{ W}$ ), is expressed in decibels.

## ANNEX A

## TEST ENVIRONMENT

## A.1 GENERAL

Environmental conditions on the test site shall be verified before the tests are conducted. The following factors shall be considered :

- a) properties of the reflecting plane;
- b) background noise;
- c) atmospheric conditions, including wind, temperature, relative humidity and atmospheric pressure.

## A.2 PROPERTIES OF REFLECTING PLANE

Ideally, measurements should be made in a test environment that provides a free field over a perfectly reflecting plane. The environment should be free of reflecting objects with the exception of the reflecting plane. This annex gives a procedure for determining the influence of a departure from ideal conditions on the test site. A method is given for determining an environmental correction  $K$  to account for differences between the actual test environment and the ideally free field over a reflecting plane. The test, which yields the environmental correction  $K$ , is carried out with a reference sound source which has characteristics that meet the requirements of ISO 3741 (annex B) and which has been calibrated in a free field over a reflecting plane.

The reference sound source is mounted in the test environment in essentially the same position as that to be occupied by the source under test. The A-weighted sound power level of the reference sound source is determined according to the procedures of clauses 7 and 8 without the environmental correction  $K$  (i.e.  $K$  is initially assumed to equal 0). The same measurement surface is used as during the measurements of the machine under test. The environmental correction  $K$  is then given, in decibels, by the formula

$$K = L_W - L_{W_r}$$

where

$L_W$  is the calculated A-weighted sound power level, in decibels, of the reference sound source, using the procedures of clauses 7 and 8. Reference : 1 pW;

$L_{W_r}$  is the name plate A-weighted sound power level, in decibels, of the reference sound source. Reference : 1 pW.

For test sites which consist of a hard, flat, ground surface such as asphalt or concrete and with no sound-reflecting obstacles within a distance from the source equal to three times the greatest distance from the source centre to the lower measurement points, it may be assumed that the environmental correction  $K$  is less than or equal to 0,5 dB and is, therefore, negligible.

NOTE — An obstacle in the proximity of the source may be considered to be sound reflecting if its width (for example diameter of a pole or supporting member) exceeds one-tenth of its distance from the reference parallelepiped.

The reflecting surface shall in all cases be larger than the projection of the measurement surface on the ground plane.

## A.3 ENVIRONMENTAL CORRECTION FOR REFLECTING AND NON-REFLECTING SURFACES

No environmental correction  $K$  need be determined if the surface of the test site is constructed of concrete or non-porous asphalt and is free of reflecting objects. For other test sites, it is important that an environmental correction  $K$  describing the acoustic quality of the site be determined according to clause A.2. Whenever a test code requires the use of a partially non-reflecting surface (for example a grass-covered ground), the properties of the absorptive surface will be determined by means of an environmental correction  $K$ .

If the environmental correction  $K$ , in decibels, as determined according to the procedure described in clause A.2 is less than 2 and greater than -1, the test environment is satisfactory for measurements according to the requirements of this International Standard. The value of  $K$  so determined is used in equation (1) of 8.1.

In certain cases prescribed by the special test code, the absorptive surface is considered to be part of the machine under test and no environmental correction  $K$  is to be used. In this case the test environment must be free of reflecting objects.

## A.4 BACKGROUND NOISE

The A-weighted sound pressure levels recorded at the microphone positions on the measurement surface with the source not operating shall be at least 6 dB below the A-weighted sound pressure level recorded with the source in operation. Corrections for the A-weighted sound pressure levels of the background noise are to be made according to table 3 in 7.5.

## A.5 METEOROLOGICAL CONDITIONS AND ALTITUDE OF TEST SITE

Care should be taken to ensure that adverse meteorological conditions (for example temperature, relative humidity, wind, precipitation) as well as the altitude of the test site above sea level do not affect the sound measurements. Corrections for adverse conditions should be applied to the measured data as prescribed by note 2 in 8.1.