

# INTERNATIONAL STANDARD

# ISO 492

Fourth edition  
2002-04-15

---

---

## Rolling bearings — Radial bearings — Tolerances

*Roulements — Roulements radiaux — Tolérances*

STANDARDSISO.COM : Click to view the full PDF of ISO 492:2002



Reference number  
ISO 492:2002(E)

© ISO 2002

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 492:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

# Contents

Page

Foreword.....	iv
<b>1</b> <b>Scope</b> .....	<b>1</b>
<b>2</b> <b>Normative references</b> .....	<b>1</b>
<b>3</b> <b>Terms and definitions</b> .....	<b>1</b>
<b>4</b> <b>Symbols</b> .....	<b>2</b>
4.1 <b>General</b> .....	2
4.2 <b>Symbols for boundary dimensions and running accuracy</b> .....	2
4.3 <b>Additional symbols for tapered roller bearings</b> .....	4
<b>5</b> <b>Tolerances</b> .....	<b>5</b>
5.1 <b>Radial bearings except tapered roller bearings</b> .....	<b>5</b>
5.1.1 <b>General</b> .....	5
5.1.2 <b>Normal tolerance class</b> .....	5
5.1.3 <b>Tolerance class 6</b> .....	7
5.1.4 <b>Tolerance class 5</b> .....	9
5.1.5 <b>Tolerance class 4</b> .....	10
5.1.6 <b>Tolerance class 2</b> .....	11
5.2 <b>Tapered roller bearings</b> .....	12
5.2.1 <b>General</b> .....	12
5.2.2 <b>Normal tolerance class</b> .....	12
5.2.3 <b>Tolerance class 6 X</b> .....	15
5.2.4 <b>Tolerance class 5</b> .....	16
5.2.5 <b>Tolerance class 4</b> .....	18
5.2.6 <b>Tolerance class 2</b> .....	20
5.3 <b>Radial bearings, outer ring flanges</b> .....	21
5.4 <b>Basically tapered bores, tapers 1:12 and 1:30</b> .....	22
<b>Bibliography</b> .....	<b>25</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 492 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 4, *Tolerances*.

This fourth edition cancels and replaces the third edition (ISO 492:1994), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 492:2002

# Rolling bearings — Radial bearings — Tolerances

## 1 Scope

This International Standard specifies tolerances for boundary dimensions (except chamfer dimensions) and the running accuracy of radial rolling bearings specified in ISO 15, ISO 355 and ISO 8443.

This International Standard does not apply to certain radial bearings of particular types (e.g., drawn cup needle roller bearings) or for particular fields of application (e.g., airframe bearings and instrument precision bearings). Tolerances for such bearings are given in the relevant International Standards.

Chamfer dimension limits are given in ISO 582.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 15:1998, *Rolling bearings — Radial bearings — Boundary dimensions, general plan*

ISO 355:1977, *Rolling bearings — Metric tapered roller bearings — Boundary dimensions and series designations*

ISO 582:1995, *Rolling bearings — Chamfer dimensions — Maximum values*

ISO 1132-1:2000, *Rolling bearings — Tolerances — Part 1: Terms and definitions*

ISO 5593:1997, *Rolling bearings — Vocabulary*

ISO 8443:1999, *Rolling bearings — Radial ball bearings with flanged outer ring — Flange dimensions*

ISO 15241:2001, *Rolling bearings — Symbols for quantities*

## 3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 1132-1 and ISO 5593 apply.

## 4 Symbols

### 4.1 General

For the purposes of this International Standard, the symbols given in ISO 15241 and the following apply.


The symbols (except those for tolerances) shown in Figures 1 to 4 and the values given in Tables 1 to 26 denote nominal dimensions unless specified otherwise.

### 4.2 Symbols for boundary dimensions and running accuracy

See Figure 1 for symbols for the dimensions.

$B$	inner ring width
$V_{Bs}$	variation of inner ring width
$\Delta_{Bs}$	deviation of a single inner ring width
$C$	outer ring width
$C_1$	outer ring flange width
$V_{Cs}$	variation of outer ring width
$V_{C1s}$	variation of outer ring flange width
$\Delta_{Cs}$	deviation of a single outer ring width
$\Delta_{C1s}$	deviation of a single outer ring flange width
$d$	bore diameter
$d_1$	diameter at the theoretical large end of a basically tapered bore
$V_{dmp}$	variation of mean bore diameter (this applies only to a basically cylindrical bore)
$V_{dsp}$	variation of bore diameter in a single plane
$\Delta_{dmp}$	deviation of mean bore diameter in a single plane (for a basically tapered bore, $\Delta_{dmp}$ refers to the theoretical small end of the bore)
$\Delta_{ds}$	deviation of a single bore diameter
$\Delta_{d1mp}$	deviation of mean bore diameter in a single plane at the theoretical large end of a basically tapered bore
$D$	outside diameter
$D_1$	outside diameter of outer ring flange
$V_{Dmp}$	variation of mean outside diameter
$V_{Dsp}$	variation of outside diameter in a single plane

$\Delta_{Ds}$	deviation of a single outside diameter
$\Delta_{Dmp}$	deviation of mean outside diameter in a single plane
$\Delta_{D1s}$	deviation of a single outside diameter of outer ring flange
$K_{ea}$	radial runout of outer ring of assembled bearing
$K_{ia}$	radial runout of inner ring of assembled bearing
$S_d$	perpendicularity of inner ring face with respect to the bore
$S_D$	perpendicularity of outer ring outside surface with respect to the face
$S_{D1}$	perpendicularity of outer ring outside surface with respect to the flange back face
$S_{ea}$	axial runout of outer ring of assembled bearing
$S_{ea1}$	axial runout of outer ring flange back face of assembled bearing
$S_{ia}$	axial runout of inner ring of assembled bearing
$\alpha$	angle of taper (half the cone angle) of inner ring bore

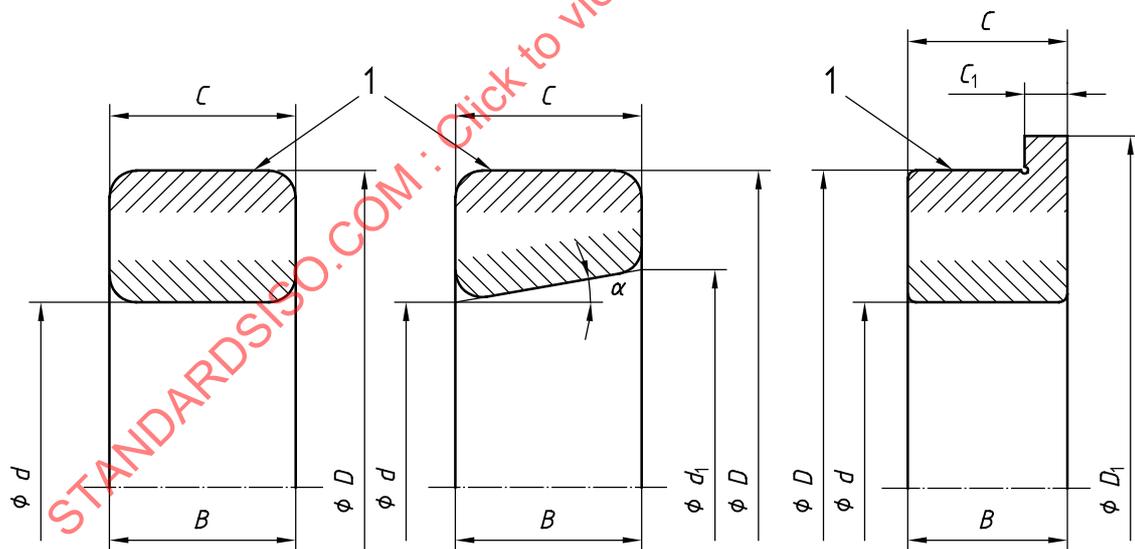

**Key**


- 1 Bearing outside surface

**Figure 1 — Symbols for boundary dimensions**

4.3 Additional symbols for tapered roller bearings

See Figure 2.

- $T$  assembled bearing width
- $T_1$  effective width of inner subunit
- $T_2$  effective width of outer ring
- $\Delta T_s$  deviation of the actual (assembled) bearing width
- $\Delta T_{1s}$  deviation of the actual effective width of inner subunit
- $\Delta T_{2s}$  deviation of the actual effective width of outer ring

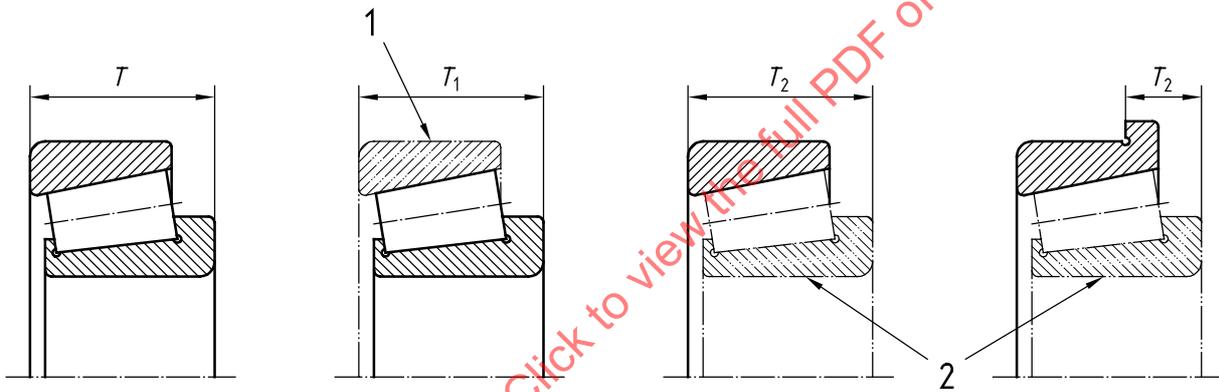

Key

- 1 Master outer ring
- 2 Master inner subunit

Figure 2 — Additional symbols for tapered roller bearings

## 5 Tolerances

### 5.1 Radial bearings except tapered roller bearings

#### 5.1.1 General

The bore diameter tolerances given in this subclause apply to basically cylindrical bores. Tolerances for tapered bores are given in 5.4.

The diameter series referred to in Tables 1 to 8 are those defined in ISO 15.

#### 5.1.2 Normal tolerance class

See Tables 1 and 2.

Table 1 — Inner ring

Tolerance values in micrometres

d mm		$\Delta_{dmp}$		$V_{dsp}$			$V_{dmp}$	$K_{ia}$	$\Delta_{Bs}$			$V_{Bs}$
				Diameter series					all	normal	modified <sup>a</sup>	
				9	0, 1	2, 3, 4						
>	≤	high	low	max.			max.	max.	high	low	max.	
—	0,6	0	−8	10	8	6	6	10	0	−40	—	12
0,6	2,5	0	−8	10	8	6	6	10	0	−40	—	12
2,5	10	0	−8	10	8	6	6	10	0	−120	−250	15
10	18	0	−8	10	8	6	6	10	0	−120	−250	20
18	30	0	−10	13	10	8	8	13	0	−120	−250	20
30	50	0	−12	15	12	9	9	15	0	−120	−250	20
50	80	0	−15	19	19	11	11	20	0	−150	−380	25
80	120	0	−20	25	25	15	15	25	0	−200	−380	25
120	180	0	−25	31	31	19	19	30	0	−250	−500	30
180	250	0	−30	38	38	23	23	40	0	−300	−500	30
250	315	0	−35	44	44	26	26	50	0	−350	−500	35
315	400	0	−40	50	50	30	30	60	0	−400	−630	40
400	500	0	−45	56	56	34	34	65	0	−450	—	50
500	630	0	−50	63	63	38	38	70	0	−500	—	60
630	800	0	−75	—	—	—	—	80	0	−750	—	70
800	1 000	0	−100	—	—	—	—	90	0	−1 000	—	80
1 000	1 250	0	−125	—	—	—	—	100	0	−1 250	—	100
1 250	1 600	0	−160	—	—	—	—	120	0	−1 600	—	120
1 600	2 000	0	−200	—	—	—	—	140	0	−2 000	—	140

<sup>a</sup> Applies to inner rings and outer rings of single bearings made for paired and stack assemblies. Also applies to inner rings with tapered bore with  $d \geq 50$  mm.

Table 2 — Outer ring

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$		$V_{Dsp}^a$				$V_{Dmp}^a$	$K_{ea}$	$\Delta_{Cs}$  $\Delta_{C1s}^b$		$V_{Cs}$  $V_{C1s}^b$	
				Open bearings		Capped bearings							
				Diameter series									
				9	0, 1	2, 3, 4	2, 3, 4						
>	≤	high	low	max.				max.	max.	high	low	max.	
—	2,5	0	-8	10	8	6	10	6	15	Identical to $\Delta_{Bs}$ and $V_{Bs}$ of inner ring of the same bearing as the outer ring.			
2,5	6	0	-8	10	8	6	10	6	15				
6	18	0	-8	10	8	6	10	6	15				
18	30	0	-9	12	9	7	12	7	15				
30	50	0	-11	14	11	8	16	8	20				
50	80	0	-13	16	13	10	20	10	25				
80	120	0	-15	19	19	11	26	11	35				
120	150	0	-18	23	23	14	30	14	40				
150	180	0	-25	31	31	19	38	19	45				
180	250	0	-30	38	38	23	—	23	50				
250	315	0	-35	44	44	26	—	26	60				
315	400	0	-40	50	50	30	—	30	70				
400	500	0	-45	56	56	34	—	34	80				
500	630	0	-50	63	63	38	—	38	100				
630	800	0	-75	94	94	55	—	55	120				
800	1 000	0	-100	125	125	75	—	75	140				
1 000	1 250	0	-125	—	—	—	—	—	160				
1 250	1 600	0	-160	—	—	—	—	—	190				
1 600	2 000	0	-200	—	—	—	—	—	220				
2 000	2 500	0	-250	—	—	—	—	—	250				

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Applies before mounting and after removal of internal or external snap ring.

<sup>b</sup> Applies to groove ball bearings only.

5.1.3 Tolerance class 6

See Tables 3 and 4.

Table 3 — Inner ring

Tolerance values in micrometres

d mm		$\Delta_{amp}$		$V_{dsp}$			$V_{amp}$	$K_{ia}$	$\Delta_{Bs}$			$V_{Bs}$
				Diameter series					all	normal	modified <sup>a</sup>	
				9	0, 1	2, 3, 4						
>	≤	high	low	max.			max.	max.	high	low	max.	
—	0,6	0	−7	9	7	5	5	5	0	−40	—	12
0,6	2,5	0	−7	9	7	5	5	5	0	−40	—	12
2,5	10	0	−7	9	7	5	5	6	0	−120	−250	15
10	18	0	−7	9	7	5	5	7	0	−120	−250	20
18	30	0	−8	10	8	6	6	8	0	−120	−250	20
30	50	0	−10	13	10	8	8	10	0	−120	−250	20
50	80	0	−12	15	15	9	9	10	0	−150	−380	25
80	120	0	−15	19	19	11	11	13	0	−200	−380	25
120	180	0	−18	23	23	14	14	18	0	−250	−500	30
180	250	0	−22	28	28	17	17	20	0	−300	−500	30
250	315	0	−25	31	31	19	19	25	0	−350	−500	35
315	400	0	−30	38	38	23	23	30	0	−400	−630	40
400	500	0	−35	44	44	26	26	35	0	−450	—	45
500	630	0	−40	50	50	30	30	40	0	−500	—	50

<sup>a</sup> Applies to inner rings and outer rings of single bearings made for paired and stack assemblies. Also applies to inner rings with tapered bore with  $d \geq 50$  mm.

Table 4 — Outer ring

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$		$V_{Dsp}^a$				$V_{Dmp}^a$	$K_{ea}$	$\Delta_{Cs}$ $\Delta_{C1s}^b$		$V_{Cs}$ $V_{C1s}^b$	
				Open bearings		Capped bearings							
				Diameter series									
				9	0, 1	2, 3, 4	0, 1, 2, 3, 4						
>	$\leq$	high	low	max.				max.	max.	high	low	max.	
—	2,5	0	-7	9	7	5	9	5	8	Identical to $\Delta_{Bs}$ and $V_{Bs}$ of inner ring of the same bearing as the outer ring.			
2,5	6	0	-7	9	7	5	9	5	8				
6	18	0	-7	9	7	5	9	5	8				
18	30	0	-8	10	8	6	10	6	9				
30	50	0	-9	11	9	7	13	7	10				
50	80	0	-11	14	11	8	16	8	13				
80	120	0	-13	16	16	10	20	10	18				
120	150	0	-15	19	19	11	25	11	20				
150	180	0	-18	23	23	14	30	14	23				
180	250	0	-20	25	25	15	—	15	25				
250	315	0	-25	31	31	19	—	19	30				
315	400	0	-28	35	35	21	—	21	35				
400	500	0	-33	41	41	25	—	25	40				
500	630	0	-38	48	48	29	—	29	50				
630	800	0	-45	56	56	34	—	34	60				
800	1 000	0	-60	75	75	45	—	45	75				

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Applies before mounting and after removal of internal or external snap ring.

<sup>b</sup> Applies to groove ball bearings only.

5.1.4 Tolerance class 5

See Tables 5 and 6.

Table 5 — Inner ring

Tolerance values in micrometres

d mm		$\Delta_{dmp}$		$V_{dsp}$		$V_{dmp}$	$K_{ia}$	$S_d$	$S_{ia}^a$	$\Delta_{Bs}$			$V_{Bs}$
				Diameter series						all	normal	modified <sup>b</sup>	
				9	0, 1, 2, 3, 4								
>	≤	high	low	max.		max.	max.	max.	high	low		max.	
—	0,6	0	-5	5	4	3	4	7	7	0	-40	-250	5
0,6	2,5	0	-5	5	4	3	4	7	7	0	-40	-250	5
2,5	10	0	-5	5	4	3	4	7	7	0	-40	-250	5
10	18	0	-5	5	4	3	4	7	7	0	-80	-250	5
18	30	0	-6	6	5	3	4	8	8	0	-120	-250	5
30	50	0	-8	8	6	4	5	8	8	0	-120	-250	5
50	80	0	-9	9	7	5	5	8	8	0	-150	-250	6
80	120	0	-10	10	8	5	6	9	9	0	-200	-380	7
120	180	0	-13	13	10	7	8	10	10	0	-250	-380	8
180	250	0	-15	15	12	8	10	11	13	0	-300	-500	10
250	315	0	-18	18	14	9	13	13	15	0	-350	-500	13
315	400	0	-23	23	18	12	15	15	20	0	-400	-630	15

<sup>a</sup> Applies to groove ball bearings only.

<sup>b</sup> Applies to inner rings and outer rings of single bearings made for paired and stack assemblies. Also applies to inner rings with tapered bore with  $d \geq 50$  mm.

Table 6 — Outer ring

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$		$V_{Dsp}$		$V_{Dmp}$	$K_{ea}$	$S_D^a$	$S_{D1}^b$	$S_{ea}^{a,b}$	$S_{ea1}^b$	$\Delta_{Cs}$		$V_{Cs}$
				Diameter series								high	low	
				9	0, 1, 2, 3, 4									
>	≤	high	low	max.		max.	max.	max.	max.	max.	high	low	max.	
—	2,5	0	-5	5	4	3	5	8	8	11			5	
2,5	6	0	-5	5	4	3	5	8	8	11			5	
6	18	0	-5	5	4	3	5	8	8	11			5	
18	30	0	-6	6	5	3	6	8	8	11			5	
30	50	0	-7	7	5	4	7	8	8	11			5	
50	80	0	-9	9	7	5	8	8	10	14	Identical to $\Delta_{Bs}$ of inner ring of the same bearing as the outer ring.		6	
80	120	0	-10	10	8	5	10	9	11	16			8	
120	150	0	-11	11	8	6	11	10	13	18			8	
150	180	0	-13	13	10	7	13	10	14	20			8	
180	250	0	-15	15	11	8	15	11	15	21			10	
250	315	0	-18	18	14	9	18	13	18	25			11	
315	400	0	-20	20	15	10	20	13	20	28			13	
400	500	0	-23	23	17	12	23	15	23	33			15	
500	630	0	-28	28	21	14	25	18	25	35			18	
630	800	0	-35	35	26	18	30	20	30	42			20	

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Does not apply to bearings with flanged outer ring.

<sup>b</sup> Applies to groove ball bearings only.

5.1.5 Tolerance class 4

See Tables 7 and 8.

Table 7 — Inner ring

Tolerance values in micrometres

d mm		$\Delta_{dmp}$ $\Delta_{ds}^a$		$V_{dsp}$		$V_{dmp}$	$K_{ia}$	$S_d$	$S_{ia}^b$	$\Delta_{Bs}$			$V_{Bs}$
				Diameter series						all	normal	modified <sup>c</sup>	
				9	0, 1, 2, 3, 4								
>	≤	high	low	max.		max.	max.	max.	high	low		max.	
—	0,6	0	-4	4	3	2	2,5	3	3	0	-40	-250	2,5
0,6	2,5	0	-4	4	3	2	2,5	3	3	0	-40	-250	2,5
2,5	10	0	-4	4	3	2	2,5	3	3	0	-40	-250	2,5
10	18	0	-4	4	3	2	2,5	3	3	0	-80	-250	2,5
18	30	0	-5	5	4	2,5	3	4	4	0	-120	-250	2,5
30	50	0	-6	6	5	3	4	4	4	0	-120	-250	3
50	80	0	-7	7	5	3,5	4	5	5	0	-150	-250	4
80	120	0	-8	8	6	4	5	5	5	0	-200	-380	4
120	180	0	-10	10	8	5	6	6	7	0	-250	-380	5
180	250	0	-12	12	9	6	8	7	8	0	-300	-500	6

- a These deviations apply to diameter series 0, 1, 2, 3 and 4 only.
- b Applies to groove ball bearings only.
- c Applies to inner rings and outer rings of single bearings made for paired or stack assemblies.

Table 8 — Outer ring

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$ $\Delta_{Ds}^a$		$V_{Dsp}$		$V_{Dmp}$	$K_{ea}$	$S_D^b$	$S_{ea}^{b,c}$	$S_{ea1}^c$	$\Delta_{Cs}$		$V_{Cs}$
				Diameter series							high	low	
				9	0, 1, 2, 3, 4								
>	≤	high	low	max.		max.	max.	max.	max.	max.	high	low	max.
—	2,5	0	-4	4	3	2	3	4	5	7	Identical to $\Delta_{Bs}$ of inner ring of the same bearing as the outer ring.		2,5
2,5	6	0	-4	4	3	2	3	4	5	7			2,5
6	18	0	-4	4	3	2	3	4	5	7			2,5
18	30	0	-5	5	4	2,5	4	4	5	7			2,5
30	50	0	-6	6	5	3	5	4	5	7			2,5
50	80	0	-7	7	5	3,5	5	4	5	7			3
80	120	0	-8	8	6	4	6	5	6	8			4
120	150	0	-9	9	7	5	7	5	7	10			5
150	180	0	-10	10	8	5	8	5	8	11			5
180	250	0	-11	11	8	6	10	7	10	14			7
250	315	0	-13	13	10	7	11	8	10	14		7	
315	400	0	-15	15	11	8	13	10	13	18		8	

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

- a These deviations apply to diameter series 0, 1, 2, 3 and 4 only.
- b Does not apply to bearings with flanged outer ring.
- c Applies to groove ball bearings only.

5.1.6 Tolerance class 2

See Tables 9 and 10.

Table 9 — Inner ring

Tolerance values in micrometres

d mm		$\Delta_{dmp}$ $\Delta_{ds}^a$		$V_{dsp}^a$ max.	$V_{dmp}$ max.	$K_{ia}$ max.	$S_d$ max.	$S_{ia}^b$ max.	$\Delta_{Bs}$			$V_{Bs}$ max.
									all	normal	modified <sup>c</sup>	
>	≤	high	low						high	low		
—	0,6	0	-2,5	2,5	1,5	1,5	1,5	1,5	0	-40	-250	1,5
0,6	2,5	0	-2,5	2,5	1,5	1,5	1,5	1,5	0	-40	-250	1,5
2,5	10	0	-2,5	2,5	1,5	1,5	1,5	1,5	0	-40	-250	1,5
10	18	0	-2,5	2,5	1,5	1,5	1,5	1,5	0	-80	-250	1,5
18	30	0	-2,5	2,5	1,5	2,5	1,5	2,5	0	-120	-250	1,5
30	50	0	-2,5	2,5	1,5	2,5	1,5	2,5	0	-120	-250	1,5
50	80	0	-4	4	2	2,5	1,5	2,5	0	-150	-250	1,5
80	120	0	-5	5	2,5	2,5	2,5	2,5	0	-200	-380	2,5
120	150	0	-7	7	3,5	2,5	2,5	2,5	0	-250	-380	2,5
150	180	0	-7	7	3,5	5	4	5	0	-250	-380	4
180	250	0	-8	8	4	5	5	5	0	-300	-500	5

<sup>a</sup> Applies to diameter series 0, 1, 2, 3 and 4 only.  
<sup>b</sup> Applies to groove ball bearings only.  
<sup>c</sup> Applies to inner rings and outer rings of single bearings made for paired or stack assemblies.

Table 10 — Outer ring

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$ $\Delta_{Ds}^a$		$V_{Dsp}^a$ max.	$V_{Dmp}$ max.	$K_{ea}$ max.	$S_D^b$ $S_{D1}^c$ max.	$S_{ea}^{b,c}$ max.	$S_{ea1}^c$ max.	$\Delta_{Cs}$		$V_{Cs}$ $V_{Cs1s}^c$ max.
										high	low	
>	≤	high	low							high	low	
—	2,5	0	-2,5	2,5	1,5	1,5	1,5	1,5	3			1,5
2,5	6	0	-2,5	2,5	1,5	1,5	1,5	1,5	3			1,5
6	18	0	-2,5	2,5	1,5	1,5	1,5	1,5	3			1,5
18	30	0	-4	4	2	2,5	1,5	2,5	4			1,5
30	50	0	-4	4	2	2,5	1,5	2,5	4			1,5
50	80	0	-4	4	2	4	1,5	4	6	Identical to $\Delta_{Bs}$ of inner ring of the same bearing as the outer ring.		1,5
80	120	0	-5	5	2,5	5	2,5	5	7			2,5
120	150	0	-5	5	2,5	5	2,5	5	7			2,5
150	180	0	-7	7	3,5	5	2,5	5	7			2,5
180	250	0	-8	8	4	7	4	7	10			4
250	315	0	-8	8	4	7	5	7	10			5
315	400	0	-10	10	5	8	7	8	11			7

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Applies to open and capped bearings of diameter series 0, 1, 2, 3 and 4 only.  
<sup>b</sup> Does not apply to bearings with flanged outer ring.  
<sup>c</sup> Applies to groove ball bearings only.

5.2 Tapered roller bearings

5.2.1 General

Bore diameter tolerances given in this subclause apply to basically cylindrical bores. Tolerances for tapered bores are given in 5.4.

5.2.2 Normal tolerance class

See Tables 11 to 13.

Table 11 — Inner ring

Tolerance values in micrometres

$d$ mm		$\Delta_{dmp}$		$V_{dsp}$	$V_{dmp}$	$K_{ia}$
>	$\leq$	high	low	max.	max.	max.
—	10	0	- 12	12	9	15
10	18	0	- 12	12	9	15
18	30	0	- 12	12	9	18
30	50	0	- 12	12	9	20
50	80	0	- 15	15	11	25
80	120	0	- 20	20	15	30
120	180	0	- 25	25	19	35
180	250	0	- 30	30	23	50
250	315	0	- 35	35	26	60
315	400	0	- 40	40	30	70
400	500	0	- 45	45	34	80
500	630	0	- 60	60	40	90
630	800	0	- 75	75	45	100
800	1 000	0	- 100	100	55	115
1 000	1 250	0	- 125	125	65	130
1 250	1 600	0	- 160	160	80	150
1 600	2 000	0	- 200	200	100	170

Table 12 — Outer ring

Tolerance values in micrometres

$D$ mm		$\Delta_{Dmp}$		$V_{Dsp}$	$V_{Dmp}$	$K_{ea}$
>	$\leq$	high	low	max.	max.	max.
—	18	0	– 12	12	9	18
18	30	0	– 12	12	9	18
30	50	0	– 14	14	11	20
50	80	0	– 16	16	12	25
80	120	0	– 18	18	14	35
120	150	0	– 20	20	15	40
150	180	0	– 25	25	19	45
180	250	0	– 30	30	23	50
250	315	0	– 35	35	26	60
315	400	0	– 40	40	30	70
400	500	0	– 45	45	34	80
500	630	0	– 50	60	38	100
630	800	0	– 75	80	55	120
800	1 000	0	– 100	100	75	140
1 000	1 250	0	– 125	130	90	160
1 250	1 600	0	– 160	170	100	180
1 600	2 000	0	– 200	210	110	200
2 000	2 500	0	– 250	265	120	220

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

Table 13 — Width — Inner rings, outer rings, single-row bearings and single-row subunits

Tolerance values in micrometres

$d$ mm		$\Delta_{Bs}$		$\Delta_{Cs}$		$\Delta_{Ts}$		$\Delta_{T1s}$		$\Delta_{T2s}$	
>	$\leq$	high	low	high	low	high	low	high	low	high	low
—	10	0	-120	0	-120	+200	0	+100	0	+100	0
10	18	0	-120	0	-120	+200	0	+100	0	+100	0
18	30	0	-120	0	-120	+200	0	+100	0	+100	0
30	50	0	-120	0	-120	+200	0	+100	0	+100	0
50	80	0	-150	0	-150	+200	0	+100	0	+100	0
80	120	0	-200	0	-200	+200	-200	+100	-100	+100	-100
120	180	0	-250	0	-250	+350	-250	+150	-150	+200	-100
180	250	0	-300	0	-300	+350	-250	+150	-150	+200	-100
250	315	0	-350	0	-350	+350	-250	+150	-150	+200	-100
315	400	0	-400	0	-400	+400	-400	+200	-200	+200	-200
400	500	0	-450	0	-450	+450	-450	+225	-225	+225	-225
500	630	0	-500	0	-500	+500	-500	—	—	—	—
630	800	0	-750	0	-750	+600	-600	—	—	—	—
800	1 000	0	-1 000	0	-1 000	+750	-750	—	—	—	—
1 000	1 250	0	-1 250	0	-1 250	+900	-900	—	—	—	—
1 250	1 600	0	-1 600	0	-1 600	+1 050	-1 050	—	—	—	—
1 600	2 000	0	-2 000	0	-2 000	+1 200	-1 200	—	—	—	—

### 5.2.3 Tolerance class 6 X

The diameter tolerances and radial runout for inner and outer rings of this tolerance class are the same as those given in Tables 11 and 12 for the normal class.

Width tolerances are given in Table 14.

**Table 14 — Width — Inner rings, outer rings, single-row bearings and single-row subunits**

Tolerance values in micrometres

$d$ mm		$\Delta_{Bs}$		$\Delta_{Cs}$		$\Delta_{Ts}$		$\Delta_{T1s}$		$\Delta_{T2s}$	
>	$\leq$	high	low	high	low	high	low	high	low	high	low
—	10	0	-50	0	-100	+100	0	+50	0	+50	0
10	18	0	-50	0	-100	+100	0	+50	0	+50	0
18	30	0	-50	0	-100	+100	0	+50	0	+50	0
30	50	0	-50	0	-100	+100	0	+50	0	+50	0
50	80	0	-50	0	-100	+100	0	+50	0	+50	0
80	120	0	-50	0	-100	+100	0	+50	0	+50	0
120	180	0	-50	0	-100	+150	0	+50	0	+100	0
180	250	0	-50	0	-100	+150	0	+50	0	+100	0
250	315	0	-50	0	-100	+200	0	+100	0	+100	0
315	400	0	-50	0	-100	+200	0	+100	0	+100	0
400	500	0	-50	0	-100	+200	0	+100	0	+100	0

5.2.4 Tolerance class 5

See Tables 15 to 17.

Table 15 — Inner ring

Tolerance values in micrometres

$d$ mm		$\Delta_{dmp}$		$V_{dsp}$	$V_{dmp}$	$K_{ia}$	$S_d$
>	≤	high	low	max.	max.	max.	max.
—	10	0	− 7	5	5	5	7
10	18	0	− 7	5	5	5	7
18	30	0	− 8	6	5	5	8
30	50	0	− 10	8	5	6	8
50	80	0	− 12	9	6	7	8
80	120	0	− 15	11	8	8	9
120	180	0	− 18	14	9	11	10
180	250	0	− 22	17	11	13	11
250	315	0	− 25	19	13	13	13
315	400	0	− 30	23	15	15	15
400	500	0	− 35	28	17	20	17
500	630	0	− 40	35	20	25	20
630	800	0	− 50	45	25	30	25
800	1 000	0	− 60	60	30	37	30
1 000	1 250	0	− 75	75	37	45	40
1 250	1 600	0	− 90	90	45	55	50

Table 16 — Outer ring

Tolerance values in micrometres

$D$ mm		$\Delta_{Dmp}$		$V_{Dsp}$	$V_{Dmp}$	$K_{ea}$	$S_D^a$ $S_{D1}$
>	$\leq$	high	low	max.	max.	max.	max.
—	18	0	– 8	6	5	6	8
18	30	0	– 8	6	5	6	8
30	50	0	– 9	7	5	7	8
50	80	0	– 11	8	6	8	8
80	120	0	– 13	10	7	10	9
120	150	0	– 15	11	8	11	10
150	180	0	– 18	14	9	13	10
180	250	0	– 20	15	10	15	11
250	315	0	– 25	19	13	18	13
315	400	0	– 28	22	14	20	13
400	500	0	– 33	26	17	24	17
500	630	0	– 38	30	20	30	20
630	800	0	– 45	38	25	36	25
800	1 000	0	– 60	50	30	43	30
1 000	1 250	0	– 80	65	38	52	38
1 250	1 600	0	– 100	90	50	62	50
1 600	2 000	0	– 125	120	65	73	65

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Does not apply to bearings with flanged outer ring.

**Table 17 — Width — Inner rings, outer rings, single-row bearings and single-row subunits**

Tolerance values in micrometres

<i>d</i> mm		$\Delta_{Bs}$		$\Delta_{Cs}$		$\Delta_{Ts}$		$\Delta_{T1s}$		$\Delta_{T2s}$	
>	$\leq$	high	low	high	low	high	low	high	low	high	low
—	10	0	-200	0	-200	+200	-200	+100	-100	+100	-100
10	18	0	-200	0	-200	+200	-200	+100	-100	+100	-100
18	30	0	-200	0	-200	+200	-200	+100	-100	+100	-100
30	50	0	-240	0	-240	+200	-200	+100	-100	+100	-100
50	80	0	-300	0	-300	+200	-200	+100	-100	+100	-100
80	120	0	-400	0	-400	+200	-200	+100	-100	+100	-100
120	180	0	-500	0	-500	+350	-250	+150	-150	+200	-100
180	250	0	-600	0	-600	+350	-250	+150	-150	+200	-100
250	315	0	-700	0	-700	+350	-250	+150	-150	+200	-100
315	400	0	-800	0	-800	+400	-400	+200	-200	+200	-200
400	500	0	-900	0	-900	+450	-450	+225	-225	+225	-225
500	630	0	-1 100	0	-1 100	+500	-500	—	—	—	—
630	800	0	-1 600	0	-1 600	+600	-600	—	—	—	—
800	1 000	0	-2 000	0	-2 000	+750	-750	—	—	—	—
1 000	1 250	0	-2 000	0	-2 000	+750	-750	—	—	—	—
1 250	1 600	0	-2 000	0	-2 000	+900	-900	—	—	—	—

**5.2.5 Tolerance class 4**

See Tables 18 to 20.

**Table 18 — Inner ring**

Tolerance values in micrometres

<i>d</i> mm		$\Delta_{dmp}$ $\Delta_{ds}$		$V_{dsp}$	$V_{dmp}$	$K_{ia}$	$S_d$	$S_{ia}$
>	$\leq$	high	low	max.	max.	max.	max.	max.
—	10	0	-5	4	4	3	3	3
10	18	0	-5	4	4	3	3	3
18	30	0	-6	5	4	3	4	4
30	50	0	-8	6	5	4	4	4
50	80	0	-9	7	5	4	5	4
80	120	0	-10	8	5	5	5	5
120	180	0	-13	10	7	6	6	7
180	250	0	-15	11	8	8	7	8
250	315	0	-18	12	9	9	8	9

**Table 19 — Outer ring**

Tolerance values in micrometres

D mm		$\Delta_{Dmp}$ $\Delta_{Ds}$		$V_{Dsp}$	$V_{Dmp}$	$K_{ea}$	$S_D^a$ $S_{D1}$	$S_{ea}^a$	$S_{ea1}$
		high	low						
>	≤								
—	18	0	− 6	5	4	4	4	5	7
18	30	0	− 6	5	4	4	4	5	7
30	50	0	− 7	5	5	5	4	5	7
50	80	0	− 9	7	5	5	4	5	7
80	120	0	− 10	8	5	6	5	6	8
120	150	0	− 11	8	6	7	5	7	10
150	180	0	− 13	10	7	8	5	8	11
180	250	0	− 15	11	8	10	7	10	14
250	315	0	− 18	14	9	11	8	10	14
315	400	0	− 20	15	10	13	10	13	18

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Does not apply to bearings with flanged outer ring.

**Table 20 — Width — Inner rings, outer rings, single-row bearings and single-row subunits**

Tolerance values in micrometres

d mm		$\Delta_{Bs}$		$\Delta_{Cs}$		$\Delta_{Ts}$		$\Delta_{T1s}$		$\Delta_{T2s}$	
		high	low	high	low	high	low	high	low	high	low
—	10	0	− 200	0	− 200	+ 200	− 200	+ 100	− 100	+ 100	− 100
10	18	0	− 200	0	− 200	+ 200	− 200	+ 100	− 100	+ 100	− 100
18	30	0	− 200	0	− 200	+ 200	− 200	+ 100	− 100	+ 100	− 100
30	50	0	− 240	0	− 240	+ 200	− 200	+ 100	− 100	+ 100	− 100
50	80	0	− 300	0	− 300	+ 200	− 200	+ 100	− 100	+ 100	− 100
80	120	0	− 400	0	− 400	+ 200	− 200	+ 100	− 100	+ 100	− 100
120	180	0	− 500	0	− 500	+ 350	− 250	+ 150	− 150	+ 200	− 100
180	250	0	− 600	0	− 600	+ 350	− 250	+ 150	− 150	+ 200	− 100
250	315	0	− 700	0	− 700	+ 350	− 250	+ 150	− 150	+ 200	− 100

5.2.6 Tolerance class 2

See Tables 21 to 23.

Table 21 — Inner ring

Tolerance values in micrometres

$d$ mm		$\Delta_{dmp}$ $\Delta_{ds}$		$V_{dsp}$	$V_{dmp}$	$K_{ia}$	$S_d$	$S_{ia}$
>	$\leq$	high	low	max.	max.	max.	max.	max.
—	10	0	-4	2,5	1,5	2	1,5	2
10	18	0	-4	2,5	1,5	2	1,5	2
18	30	0	-4	2,5	1,5	2,5	1,5	2,5
30	50	0	-5	3	2	2,5	2	2,5
50	80	0	-5	4	2	3	2	3
80	120	0	-6	5	2,5	3	2,5	3
120	180	0	-7	7	3,5	4	3,5	4
180	250	0	-8	7	4	5	5	5
250	315	0	-8	8	5	6	5,5	6

Table 22 — Outer ring

Tolerance values in micrometres

$D$ mm		$\Delta_{Dmp}$ $\Delta_{Ds}$		$V_{Dsp}$	$V_{Dmp}$	$K_{ea}$	$S_D^a$ $S_{D1}$	$S_{ea}^a$	$S_{ea1}$
>	$\leq$	high	low	max.	max.	max.	max.	max.	max.
—	18	0	-5	4	2,5	2,5	1,5	2,5	4
18	30	0	-5	4	2,5	2,5	1,5	2,5	4
30	50	0	-5	4	2,5	2,5	2	2,5	4
50	80	0	-6	4	2,5	4	2,5	4	6
80	120	0	-6	5	3	5	3	5	7
120	150	0	-7	5	3,5	5	3,5	5	7
150	180	0	-7	7	4	5	4	5	7
180	250	0	-8	8	5	7	5	7	10
250	315	0	-9	8	5	7	6	7	10
315	400	0	-10	10	6	8	7	8	11

NOTE The tolerances for the outside diameter  $D_1$  of an outer ring flange are given in Table 24.

<sup>a</sup> Does not apply to bearings with flanged outer ring.