
**Gas welding equipment — Safety
devices —**

Part 1:
**Devices incorporating a flame
(flashback) arrestor**

*Matériel de soudage au gaz — Dispositifs de sécurité —
Partie 1: Dispositifs avec arrêt de flamme*

STANDARDSISO.COM : Click to view the full PDF of ISO 5175-1:2017



STANDARDSISO.COM : Click to view the full PDF of ISO 5175-1:2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Design and materials	4
4.1 Connection	4
4.2 Materials	4
5 Requirements	4
5.1 General	4
5.2 Gas tightness	5
5.3 Pressure resistance	6
5.4 Flame arrestor	6
5.5 Flame arrestor with non-return valve	6
5.6 Flame arrestor with temperature-sensitive cut-off valve	6
5.7 Flame arrestor with pressure-sensitive cut-off valve	6
5.8 Other multifunctional safety devices	6
6 Methods for type testing	6
6.1 General	6
6.2 Accuracy of pressure and flow measurements	7
6.3 Test gases	7
6.4 Gas tightness test	7
6.5 Pressure resistance test	7
6.6 Non-return valve test	7
6.7 Flame arrestor test	8
6.8 Temperature-sensitive cut-off valve test	9
6.9 Pressure-sensitive cut-off valve test	10
6.10 Internal leakage test for cut-off valves	10
7 Further tests	10
8 Manufacturer's instructions	10
9 Marking	11
Annex A (informative) Gas flow measurement	12
Annex B (informative) Third party testing information	14
Annex C (informative) Production tests	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 8, *Equipment for gas welding, cutting and allied processes*.

This first edition of ISO 5175-1, together with ISO 5175-2, cancels and replaces ISO 5175:1987, which has been technically revised. It also incorporates the Amendment ISO 5175:1987/Amd 1:2015.

A list of all parts in the ISO 5175 series can be found on the ISO website.

Requests for official interpretations of any aspect of this document should be directed to the Secretariat of ISO/TC 44/SC 8 via your national standards body. A complete listing of these bodies can be found at www.iso.org.

Gas welding equipment — Safety devices —

Part 1: Devices incorporating a flame (flashback) arrestor

1 Scope

This document specifies the general requirements and tests for safety devices for fuel gases and oxygen or compressed air incorporating a flame (flashback) arrestor used downstream of manifold, cylinder and/or pipeline outlet regulators, and upstream of blowpipes for welding, cutting and allied processes.

This document does not specify the location of these devices in the gas system.

This document is not applicable to safety devices not incorporating a flame arrestor, covered by ISO 5175-2.

This document does not apply to the use of safety devices incorporating flame arrestors for applications with premixed oxy/fuel or air/fuel gas supply systems, e.g. downstream of gas mixers or a generator to produce hydrogen/oxygen mixture by electrolytic decomposition of water.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 554, *Standard atmospheres for conditioning and/or testing — Specifications*

ISO 5175-2, *Gas welding equipment — Safety devices — Part 2: Not incorporating a flame (flashback) arrestor*

ISO 7289, *Gas welding equipment — Quick-action couplings with shut-off valves for welding, cutting and allied processes*

ISO 9090, *Gas tightness of equipment for gas welding and allied processes*

ISO 9539, *Gas welding equipment — Materials for equipment used in gas welding, cutting and allied processes*

ISO 10225, *Gas welding equipment — Marking for equipment used for gas welding, cutting and allied processes*

ISO 15296, *Gas welding equipment — Vocabulary*

EN 560, *Gas welding equipment — Hose connections for equipment for welding, cutting and allied processes*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15296 and the following apply.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

**3.1
flame arrester**

device which arrests a flame front

EXAMPLE The good thermal conductivity, high porosity and small pore size (larger surface) of sintered metal elements lead to flame quenching. An example is given in [Figure 1](#).

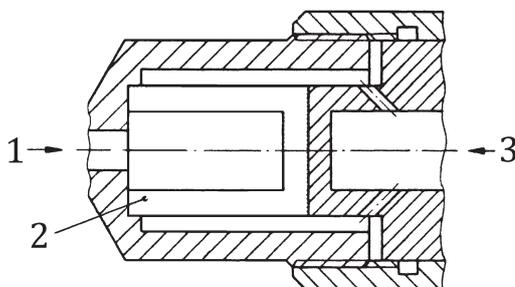

Key

- 1 normal direction of gas flow
- 2 e.g. sintered metal element
- 3 flame

Figure 1 — Flame arrester (example)

**3.2
maximum operating pressure**

maximum pressure to which the equipment may be subjected in service

**3.3
multifunctional safety device**

device that incorporates two or more of the safety functions


EXAMPLE *Flame arrester (3.1) with non-return valve (3.4) and cut-off valve.*

Note 1 to entry: The *temperature sensitive cut-off valve (3.6)* is normally used in combination with a flame arrester as its purpose is to cut-off the gas flow before the temperature at the flame arrester reaches a point where flame transmission across the flame arrester takes place. It is normal for pressure and or temperature cut-off valves only to be used in combination with flame arrestors. Due to the burning characteristics of hydrogen, it is recommended that all flame arrestors for hydrogen incorporate a temperature-sensitive cut-off valve.

**3.4
non-return valve**

device that prevents passage of gas in the direction opposite to the intended flow

EXAMPLE Valve is held open by energy in gas stream and closes when downstream pressure is approximately equal to or greater than that in normal direction of flow. An example is given in [Figure 2](#).

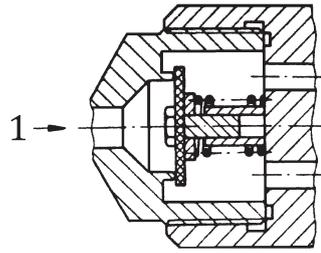**Key**

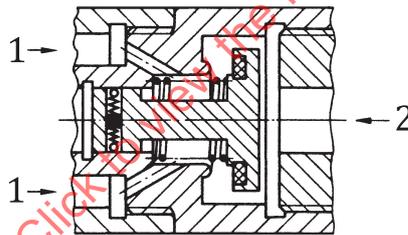
1 normal direction of gas flow

Figure 2 — Non-return valve (example)

3.5**pressure-sensitive cut-off valve**

device that stops the gas flow when the downstream pressure is higher than the upstream pressure by more than a predetermined value

EXAMPLE Valve is held open, e.g. by a spring; it is actuated by a pressure wave from downstream and is then automatically held closed by a special device. An example is given in [Figure 3](#).

**Key**

1 normal direction of gas flow


2 back-pressure wave

Figure 3 — Pressure-sensitive cut-off valve (example)

3.6**temperature-sensitive cut-off valve**

device which stops the gas flow when a predetermined temperature is exceeded

EXAMPLE Valve is held open, e.g. by a fusible metal, and actuated by sustained temperature rise. An example is given in [Figure 4](#).

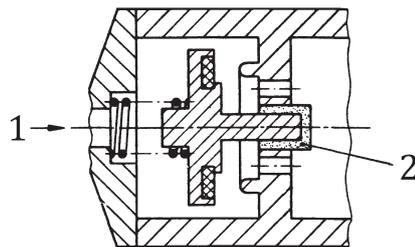

Key

- 1 normal direction of gas flow
- 2 e.g. fusible metal

Figure 4 — Temperature-sensitive cut-off valve (example)

3.7 safety device

device which prevents the damage resulting from misuse or malfunction of gas equipment and gas installations

4 Design and materials

4.1 Connection

Threaded connections up to G1 shall be in accordance with EN 560. Quick release connections shall be in accordance with ISO 7289.

4.2 Materials

Materials used for safety devices shall conform to the requirements laid down in ISO 9539.

5 Requirements

5.1 General

Requirements for each safety device vary depending upon the device and combination of functions in the device. A summary of the requirements and test sequence is given in [Table 1](#).

Table 1 — Summary of requirements and test sequence for the most commonly available safety devices

Safety device function(s)	Requirements (Subclause no.)	Tests (in test order) (Subclause no.)	Number of devices required for each test	Total number of devices required
Flame arrestor	5.2.1 5.3 5.4	6.4 External gas tightness 6.5 Pressure resistance 6.7 Flashback resistance	5 1 ^a 5	6
Flame arrestor + non-return valve	5.2.1 5.2.2 5.3 5.5	6.4 External gas tightness 6.5 Pressure resistance 6.6 Reverse flow 6.7 Flashback resistance 6.6 Reverse flow	5 1 ^a 5 5 5	6
Flame arrestor + temperature-sensitive cut-off valve	5.2.1 5.2.2 5.3 5.6	6.4 External gas tightness 6.5 Pressure resistance 6.7 Flashback resistance 6.8 Temperature cut-off 6.10 Internal leakage	5 1 ^a 5 1 ^a 5	7
Flame arrestor + non-return valve + temperature-sensitive cut-off valve	5.2.1 5.2.2 5.3 5.5 5.6	6.4 External gas tightness 6.5 Pressure resistance 6.6 Reverse flow 6.7 Flashback resistance 6.6 Reverse flow 6.8 Temperature cut-off 6.10 Internal leakage	5 1 ^a 5 5 5 1 ^a 5	7
Flame arrestor + non-return valve + pressure-sensitive cut-off valve	5.2.1 5.2.2 5.3 5.5 5.7	6.4 External gas tightness 6.5 Pressure resistance 6.6 Reverse flow 6.7 Flashback resistance 6.9 Pressure cut-off 6.10 Internal leakage	5 1 ^a 5 5 5 5	6
Flame arrestor + non-return valve + temperature-sensitive cut-off valve + pressure-sensitive cut-off valve	5.2.1 5.2.2 5.3 5.5 5.6 5.7	6.4 External gas tightness 6.5 Pressure resistance 6.6 Reverse flow 6.7 Flashback resistance 6.8 Temperature cut-off 6.9 Pressure cut-off 6.10 Internal leakage	5 1 ^a 5 5 1 ^a 5 5	7

^a Use a new device for this test. Do not use for any other test.

NOTE In the following subclauses, the terms “upstream” and “downstream” refer to the normal direction of gas flow in the device.

5.2 Gas tightness

5.2.1 External gas tightness

The general requirements on external gas tightness and the test procedures shall be in accordance with ISO 9090.

5.2.2 Internal gas tightness

Where internal gas tightness is required in this document, the leakage rate shall not exceed 50 cm³/h for devices with a connection internal bore (diameter) less than 11 mm or 0,41 d^2 for larger diameters (see [6.6](#) and/or [6.10](#) for tests).

NOTE The value 0,41 d^2 is the flow in cm³/h where d is the internal bore (diameter) in mm of the largest connection of the device.

5.3 Pressure resistance

The housings of the safety devices shall resist a pressure equal to ten times the maximum operating pressure, with the test pressure in all cases not less than 6 MPa (60 bar).

NOTE 1 bar = 0,1 MPa = 10⁵ Pa. 1 Pa = 1 N/m². All pressures are gauge pressure.

When the device is tested in accordance with 6.5, no permanent deformation of the pressure retaining components shall occur after a test duration of at least 5 min.

5.4 Flame arrestor

Flame arrestors shall quench flashbacks when tested in accordance with 6.7.

5.5 Flame arrestor with non-return valve

Flame arrestor with non-return valve shall quench flashbacks when tested in accordance with 6.7 and shall not allow the reverse flow of gases when tested in accordance with 6.6 both before and after the flashback test in 6.7.

5.6 Flame arrestor with temperature-sensitive cut-off valve

Flame arrestor with temperature-sensitive cut-off valve shall quench flashbacks when tested in accordance with 6.7 and shall stop the gas flow before the upstream gas is ignited when tested in accordance with 6.8.

It shall not be possible to reset the temperature-sensitive cut-off valve.

If the temperature-sensitive cut-off valve operates before the fifth flashback in the test in 6.7 and the flame is not transmitted upstream, the unit shall be considered to meet the flashback test requirement, but the test in 6.8 shall still be carried out on a new unit.

5.7 Flame arrestor with pressure-sensitive cut-off valve

Flame arrestor with pressure-sensitive cut-off valve shall quench flashbacks when tested in accordance with 6.7 and the pressure-sensitive cut-off function shall activate at each flashback. The pressure-sensitive cut-off valve shall remain closed until it is manually reset.

The pressure-sensitive cut-off valve shall be reset after each flashback during the test in 6.7.

Flame arrestor with pressure-sensitive cut-off valve shall also stop the gas flow when tested in accordance with 6.9, both before and after completing the flashback test in 6.7.

5.8 Other multifunctional safety devices

Multifunctional safety devices not included in Table 1, but incorporating functions described in this document or in ISO 5175-2, shall be tested according to the relevant requirements. Functions in this document shall be tested before the functions in ISO 5175-2.

6 Methods for type testing

6.1 General

The test methods in this clause are not intended as production inspection tests, but are to be applied to sample devices to be tested for compliance with this document. Tests shall be carried out on new devices with all safety functions operational as designed.

Third party conformity testing is not a requirement of this document. See [Annex B](#) for information relating to third party conformity testing if required.

6.2 Accuracy of pressure and flow measurements

The allowable total error of the measured values are as follows:

- flow: $\pm 10\%$;
- pressure: $\pm 3\%$.

All flows and pressures shall be expressed in standard atmospheric conditions in accordance with ISO 554. All pressure values are given as gauge pressure, expressed in bars.

6.3 Test gases

Unless otherwise stated, tests shall be carried out at ambient pressure conditions and at $(20 \pm 5)^\circ\text{C}$ with air or nitrogen free from oil and grease.

Air is considered as oil-free if it comprises

- a mass fraction of oil vapour of less than 5×10^{-6} , and
- less than 1 mg/m^3 of suspended droplets.

In all cases, tests shall be carried out with dry gas with a maximum moisture content corresponding to a dew point of 0°C .

Safety devices for hydrogen shall be tested with hydrogen or helium for the gas tightness test only.

6.4 Gas tightness test

Conformity with the requirements of [5.2.1](#) shall be checked on five samples in accordance with ISO 9090.

6.5 Pressure resistance test

Conformity with the requirements of [5.3](#) shall be checked by means of a hydraulic pressure test on one sample. No other tests shall be carried out on the sample either before or after this test nor shall the sample tested be used for any other purposes.

6.6 Non-return valve test

6.6.1 General

Conformity with the requirements of [5.5](#) shall be checked on five samples as follows. Before proceeding with this test, pass the test gas through the device in the normal direction of flow for 5 s to operate the valve. Connect the downstream side of the device under test to a gas source, with the upstream side at atmospheric pressure and connected to a leak detection device. Proceed to pressurize in the reverse direction according to [6.6.2](#). For the tests, the samples shall be installed in the most disadvantageous position (gravity acting to open the valve).

6.6.2 Tests with reverse flow of gas

Pressurize the device in the reverse direction as follows:

- a) increase the back-pressure at a rate of 600 Pa/min (6 mbar/min) up to $3\,000 \text{ Pa}$ (30 mbar);
- b) increase the back-pressure within 1 s from 0 to maximum operating pressure.

The maximum reverse flow during the period of reverse pressure application and for 1 min afterwards shall meet the requirements of 5.2.2.

When the device incorporates a pressure-sensitive cut-off valve, it is acceptable for the valve to operate during the non-return valve test.


6.7 Flame arrestor test

A diagram of the test equipment is shown in Figure 5.

The gas mixture and pressure for testing flame arrestors depend on the gas application and the maximum operating pressure specified by the manufacturer (see Table 2).

Five flame arrestors shall each be subjected to five flashbacks with a static mixture of fuel gas and oxygen given in Table 2. Between two flashbacks, a sufficient delay is required to return the initial conditions. Each flame arrestor shall prevent the upstream gas igniting for all five flashbacks.

WARNING — All precaution shall be taken to protect personnel from the effect of fire and explosion.

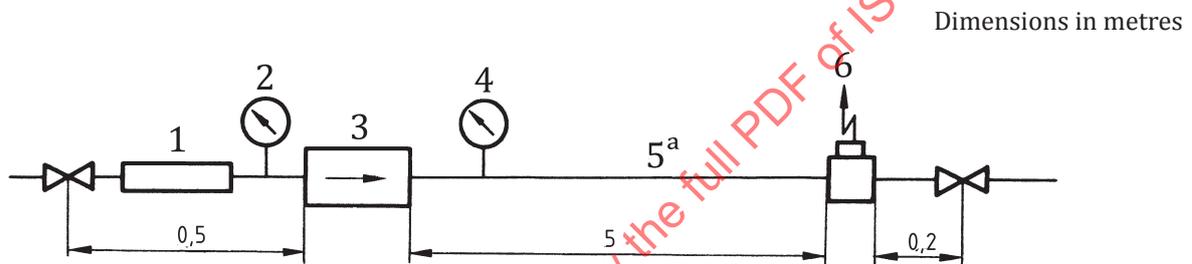

- Key
- 1 flame detector
 - 2 inlet pressure, p_1
 - 3 sample
 - 4 outlet pressure, p_2
 - 5 steel tube
 - 6 ignition

Pressure gauges: class 1,0 at least.

^a For connections up to G 3/8 LH (left-hand thread): internal diameter, $d_i = 10$ mm. For connections larger than G 3/8 LH (left-hand thread): d_i shall be equal to the nominal outlet bore, the steel tube shall be straight.


Figure 5 — Test equipment for testing efficiency of flame arrestors

Table 2 — Gas applications concerning test pressures and test mixtures

Gas application	Test pressure	Test mixture volume fraction in percentage % of fuel gas in oxygen
Acetylene Oxygen Air	0,15 MPa (1,5 bar)	32 % to 35 % Acetylene
LPG	maximum operating pressure	13 % to 15 % Propane
Hydrogen	maximum operating pressure	40 % to 50 % Hydrogen
Other fuel gases	maximum operating pressure	80 % to 90 % of stoichiometric mixture

6.8 Temperature-sensitive cut-off valve test

A diagram of the test equipment is shown in [Figure 6](#).

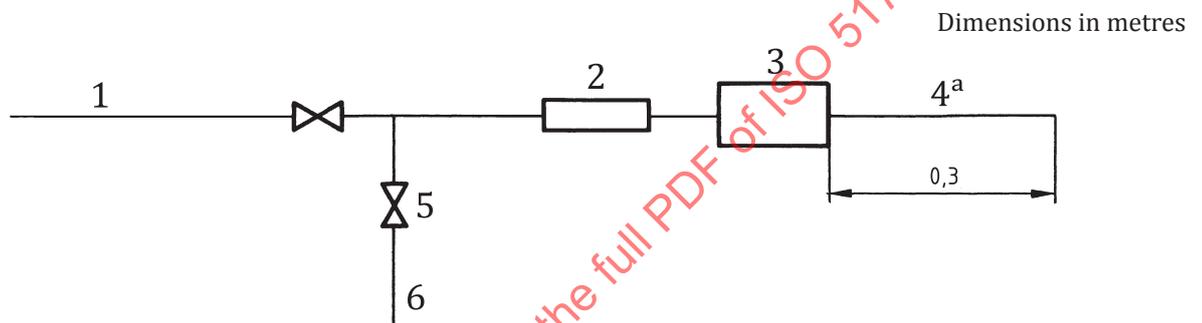

Key

- 1 fuel gas
- 2 flame detector
- 3 sample
- 4 steel tube
- 5 needle vale
- 6 oxygen
- a Internal diameter of tube shall be equal to internal diameter of the outlet of the device.

Figure 6 — Test equipment for testing temperature-sensitive cut-off valves

This test is to be carried out on one new unit. The fuel gas used for the test shall be as given in [Table 3](#). Adjust the fuel gas valve so that the flame at the outlet side of the steel tube is stable. Slowly open the oxygen valve until the flame retreats into the tube and device. The cut-off valve shall automatically cut off the gas flow before the upstream gas is ignited. After the cut-off valve has closed, the device shall be tested in accordance with [6.10](#) to test for internal leakage.

When the device incorporates a pressure-sensitive cut-off valve which operates during the test, the pressure-sensitive cut-off valve shall be disabled and the test repeated.

Table 3 — Test gas for the temperature-sensitive cut-off valve test

Gas application	Fuel test gas in oxygen
Acetylene Hydrogen LPG	Acetylene
Hydrogen LPG	Hydrogen
Acetylene	Acetylene
Hydrogen	Hydrogen
LPG	Propane
For other fuel gases, the test shall be conducted with the fuel gas.	

6.9 Pressure-sensitive cut-off valve test

The requirements specified in [5.7](#) shall be checked on five samples as follows. Connect the downstream side of the device under test to a gas source, with the upstream side open to the atmosphere. Progressively increase the downstream pressure to check that the device is actuated by a pressure less than or equal to 0,12 MPa (1,2 bar). After the cut-off valve has closed, the device shall be tested in accordance with [6.10](#) to test for internal leakage.

6.10 Internal leakage test for cut-off valves

With the device under test in the tripped condition, connect the upstream side to a gas source at the maximum operating pressure, with the downstream side open to atmosphere. Check that internal leaks at the device outlet meet the requirement of [5.2.2](#).

7 Further tests

A further test concerning the flame arrestor function is given in [Annex C](#) and should be performed.

8 Manufacturer's instructions

When distributed, the safety device shall be accompanied by the manufacturer's instructions which shall contain, as a minimum, the following information:

- a) the function of the safety device;
- b) operational and performance data (maximum working pressure, gas flow characteristics; see [Annex A](#));
- c) permissible types of gas;
- d) an explanation of the abbreviations marked on the device;
- e) instruction for installation of equipment [The method of installing these devices (e.g. types selected, order of installation, etc) varies with operating conditions. It is essential to follow the manufacturer's instructions regarding installation and operation to ensure that the overall pressure drop due to the combination is as low as possible.];
- f) procedures to be carried out prior to operation;
- g) procedures for safe operation;
- h) instructions in case of malfunction;

- i) recommendations for inspection, testing and maintenance;
- j) explanation of the marking.

9 Marking

All marking shall be legible and durable. The following information shall be included:

- a) reference to this document (i.e. ISO 5175-1);
- b) the name or trade mark of the manufacturer and/or distributor;
- c) the model designation or code number relating to the manufacturer's installation instructions;
- d) the direction of normal gas flow (arrow);
- e) the name of the gas or its abbreviation;
- f) the maximum operating pressure, p_{\max} , expressed in bar;
- g) the indication of the safety functions incorporated in the device as shown below.

Abbreviations for the safety functions shall be marked as follows:

- flame arrestor FA
- non-return valve NV
- pressure-sensitive cut-off valve PV
- temperature-sensitive cut-off valve TV

The appropriate letters shall be enclosed in a square as in the following examples:

flame arrestor only

FA

flame arrestor +
non-return valve

FA	NV
----	----

flame arrestor +
non-return valve +
pressure-sensitive cut-off valve

FA	NV	PV
----	----	----

flame arrestor +
non-return valve +
pressure-sensitive cut-off valve +
temperature-sensitive cut-off valve

FA	NV	PV	TV
----	----	----	----

If the full name of the gas cannot be marked, the letter codes according to ISO 10225 shall be used for marking of equipment. If in addition, a colour coding is used, red shall be used for fuel gases, blue for oxygen, black for compressed air.

Annex A (informative)

Gas flow measurement

A.1 General


The gas flow characteristics for each safety device (single or multifunction) can be measured by means of a performance test using the circuit shown in [Figure A.1](#). The results can be reported graphically; a typical example is shown in [Figure A.2](#).

A.2 Procedure

With the device discharging directly to the atmosphere, the upstream pressure should progressively be increased to the maximum operating pressure, p_{\max} , and the gas flow rate should be measured at different intermediate pressures.

The same test should be repeated with upstream pressures equal to $0,25 p_{\max}$, $0,5 p_{\max}$ and $0,75 p_{\max}$, and the gas flow rate for different pressure drops, Δp , should be measured.

The average of the results obtained from 5 samples shall be considered to be the nominal value. The flow rates of the 5 samples should not diverge by more than $\pm 10\%$.

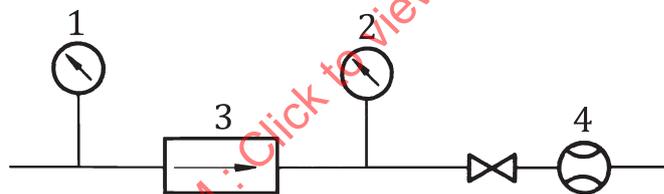

Key

- 1 inlet pressure, p_1
- 2 outlet pressure, p_2
- 3 sample
- 4 flow meter

Pressure gauges: class 1,0 at least.

Pressure drop, $\Delta p = p_1 - p_2$.

Figure A.1 — Typical example of circuit for gas flow measurement