

INTERNATIONAL
STANDARD

ISO
5608

Third edition
1995-09-01

**Turning and copying tool holders and
cartridges for indexable inserts —
Designation**

Porte-plaquette de tournage et de copiage et cartouches — Désignation



Reference number
ISO 5608:1995(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 5608 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with cutting edges made of hard cutting materials*.

This third edition cancels and replaces the second edition (ISO 5608:1989), of which subclause 4.3 has been technically revised (addition of tool holders and cartridges style P).

Annex A of this International Standard is for information only.

© ISO 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Turning and copying tool holders and cartridges for indexable inserts — Designation

1 Scope

This International Standard establishes a code for the designation of turning and copying tool holders and cartridges with a rectangular shank having a standardized dimension f (see ISO 5610 and ISO 5611), intended for indexable inserts, thus simplifying orders and specifications for such tools.

The designation of boring bars (tool holders with cylindrical shank) is given in ISO 6261.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 5610:1995, *Single-point tool holders for turning and copying, for indexable inserts — Dimensions.*

ISO 5611:1995, *Cartridges, type A, for indexable inserts — Dimensions.*

3 Explanation of the designation code

The designation code comprises ten symbols for the designation of dimensions and other characteristics of the tool and the insert, of which the first nine symbols shall be used in any designation. The last symbol may be used when necessary.

In addition to the standardized designation [symbols in positions (1) to (10)], a supplementary symbol consisting of a maximum of three letters and/or numbers may be added by the manufacturer for a better description of his products, on condition that this symbol is separated from the standardized designation by a dash and that it does not contain letters specified for position (10).

No addition to or extension of the code specified in this International Standard shall be made without consultation with Technical Committee ISO/TC 29 and its agreement. Rather than adding symbols not provided for in this system, it is preferable to add to the designation conforming with this International Standard all necessary explanations in detailed sketches or specifications.

The meaning of the nine compulsory symbols and one optional symbol constituting the code is as follows:

- | | | |
|---|---|--------------------|
| (1) Letter symbol identifying the method of holding the insert (see 4.1) | } | Compulsory symbols |
| (2) Letter symbol identifying insert shape (see 4.2) | | |
| (3) Letter symbol identifying tool style (see 4.3) | | |
| (4) Letter symbol identifying insert normal clearance (see 4.4) | | |
| (5) Letter symbol identifying hand of tool (see 4.5) | | |
| (6) Number symbol identifying tool height (shank height of tool holders and height of cutting edge) (see 4.6) | | |
| (7) Number symbol identifying tool holder shank width or, for cartridges, letter C followed by a letter symbol identifying the cartridge type (see 4.7) | | |
| (8) Letter symbol identifying tool length (see 4.8) | | |
| (9) Number symbol identifying indexable insert size (see 4.9) | | |
| (10) Letter symbol indicating special tolerances (see clause 5) | | Optional symbol |

NOTE 1 The codes (2), (4) and (9) are in accordance with ISO 1832.

EXAMPLE

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
C	T	G	N	R	32	25	M	16	Q

4 Compulsory symbols

4.1 Symbol for the method of holding the horizontally mounted insert — Reference position (1)

Table 1

Letter symbol	Method of holding the insert
C	Top clamping (insert without hole)
M	Top and hole clamping (insert with hole)
P	Hole clamping (insert with hole)
S	Screw clamping through hole (insert with hole)

4.2 Symbol for insert shape — Reference position (2)




Table 2










Letter symbol	Insert shape	Insert type
H	Hexagonal	Equilateral and equiangular
O	Octagonal	
P	Pentagonal	
S	Square	
T	Triangular	
C	Rhombic with 80° included angle	Equilateral and non-equiangular
D	Rhombic with 55° included angle	
E	Rhombic with 75° included angle	
M	Rhombic with 86° included angle	
V	Rhombic with 35° included angle	
W	Hexagonal with 80° included angle	
L	Rectangular	Non-equilateral and equiangular
A	Parallelogram-shaped with 85° included angle	Non-equilateral and non-equiangular
B	Parallelogram-shaped with 82° included angle	
K	Parallelogram-shaped with 55° included angle	
R	Round	Round







NOTE — The included angle is always the smaller angle.

4.3 Symbol for tool style — Reference position (3)

Table 3

Letter symbol	Tool style	Tool style
A		90° cutting edge angle, straight shank, for side cutting
B		75° cutting edge angle, straight shank, for side cutting
C		90° cutting edge angle, straight shank, for end cutting

Letter symbol	Tool style	
D 1)		45° cutting edge angle, straight shank, for side cutting
E		60° cutting edge angle, straight shank, for side cutting
F		90° cutting edge angle, offset shank, for end cutting
G		90° cutting edge angle, offset shank, for side cutting
H		107,5° cutting edge angle, offset shank, for side cutting
J		93° cutting edge angle, offset shank, for side cutting
K		75° cutting edge angle, offset shank, for end cutting
L		95° cutting edge angles on both cutting edges, offset shank, for side and end cutting
M		50° cutting edge angle, straight shank, for side cutting
N		63° cutting edge angle, straight shank, for side cutting

Letter symbol	Tool style	
P		117,5° cutting edge angle, offset shank, for side cutting
R		75° cutting edge angle, offset shank, for side cutting
S 1)		45° cutting edge angle, offset shank, for side cutting
T		60° cutting edge angle, offset shank, for side cutting
U		93° cutting edge angle, offset shank, for end cutting
V		72,5° cutting edge angle, straight shank, for side cutting
W		60° cutting edge angle, offset shank, for end cutting
Y		85° cutting edge angle, offset shank, for end cutting
1) Tools of styles D and S may be equipped also with round inserts (shape R).		

STANDARDSISO.COM · Click to view the full PDF of ISO 5608:1995

4.4 Symbol for the insert normal clearance — Reference position (4)

Table 4

Letter symbol	Insert normal clearance
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°

NOTE — For non-equilateral inserts, the letter symbol applies to the normal clearance of the longer side.

4.5 Symbol for hand of tool — Reference position (5)

Table 5

Letter symbol	Hand of tool
R	Right hand
L	Left hand
N	Either hand

4.6 Symbol for tool height — Reference position (6)

4.6.1 Tool holders with rectangular shank cross-section and height of cutting edge h_1 equal to shank height h (see figure 1)

The number symbol for the tool height is the value of the shank height h , in millimetres. If the resulting symbol has only one digit, it shall be preceded by 0 (zero).

EXAMPLES

For $h = 32$ mm, the symbol is 32.

For $h = 8$ mm, the symbol is 08.

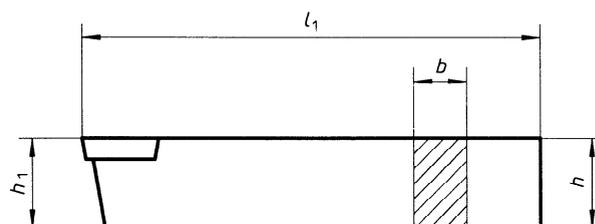


Figure 1

4.6.2 Cartridges with height of cutting edge h_1 not equal to shank height h (see figure 2)

The number symbol for the tool height is the value of the height of the cutting edge, h_1 , in millimetres. If the resulting symbol has only one digit, it shall be preceded by 0 (zero).

EXAMPLES

For $h_1 = 12$ mm, the symbol is 12.

For $h_1 = 8$ mm, the symbol is 08.

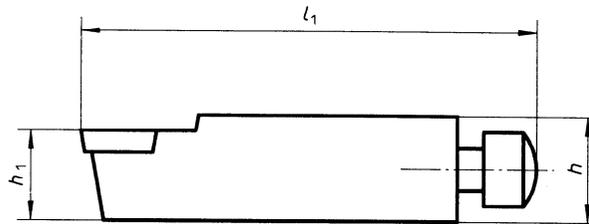


Figure 2

4.7 Symbol for tool width — Reference position (7)

4.7.1 Tool holders with rectangular shank cross-section (see figure 1)

The number symbol for the tool width is the value of the shank width b , in millimetres. If the resulting symbol has only one digit, it shall be preceded by 0 (zero).

EXAMPLES

For $b = 25$ mm, the symbol is 25.

For $b = 8$ mm, the symbol is 08.

4.7.2 Cartridges (see figure 2)

When no indication of shank width is given, a two-letter symbol is indicated instead. The first letter is always **C** (cartridge) and the second letter identifies the cartridge type. The second letter is specified in the dimensional standards, for example type A in accordance with ISO 5611.

4.8 Symbol for tool length — Reference position (8)

The letter symbol for the tool length shall be chosen from table 6.

For standardized tools where for each tool dimension only one length is specified, the letter symbol for tool length may be replaced by a dash.

For standardized cartridges having a tool length l_1 for which no letter symbol is provided in table 6 (for example $l_1 = 44$ mm), the symbol in position (8) shall be a dash.

Table 6

Letter symbol	Tool length, mm (l_1 in figures 1 and 2)
A	32
B	40
C	50
D	60
E	70
F	80
G	90
H	100
J	110
K	125
L	140
M	150
N	160
P	170
Q	180
R	200
S	250
T	300
U	350
V	400
W	450
X	Special length, to be specified
Y	500

STANDARDSISO.COM : Click to view the full PDF of ISO 5608:1995

4.9 Symbol for indexable insert size — Reference position (9)

Table 7

Insert type	Number symbol
Equilateral and equiangular (H, O, P, S, T) and equilateral and non-equilateral (C, D, E, M, V, W)	The symbol of designation for the insert size is the edge length, disregarding any decimals. EXAMPLE Edge length: 16,5 mm Symbol of designation: 16
Non-equilateral and equiangular (L) and non-equilateral and non-equilateral (A, B, K)	The symbol of designation for the insert size is always the length of the major cutting edge or of the longer cutting edge, disregarding any decimals. EXAMPLE Length of the major cutting edge: 19,5 mm Symbol of designation: 19
Round (R)	The symbol of designation for the insert size is always the diameter, disregarding any decimals. EXAMPLE Diameter: 15,875 mm Symbol of designation: 15
NOTE — When the symbol resulting from the retained part of the value of a metric dimension has only one digit, it shall be preceded by 0 (zero). EXAMPLE Edge length: 9,525 mm Symbol of designation: 09	

STANDARDSISO.COM : Click to view the full PDF of ISO 5608:1995

5 Optional symbol: Symbol for special tolerances — Reference position (10)

A qualified tool is a tool with dimensions f_1 , f_2 and l_1 (see the sketches in table 8) having tolerances of $\pm 0,08$ mm.

Table 8

Tolerances in millimetres

Letter symbol	Qualification of tool	Sketch
Q	Back and end qualified tool	
F	Front and end qualified tool	
B	Front, back and end qualified tool	

STANDARDSISO.COM · Click to view the full PDF of ISO 5608:1995