
**Tool holders with rectangular shank
for indexable inserts —**

**Part 8:
Style K**

*Porte-plaquette à queue rectangulaire pour plaquettes amovibles —
Partie 8: Forme K*

STANDARDSISO.COM : Click to view the full PDF of ISO 5610-8:2014



STANDARDSISO.COM : Click to view the full PDF of ISO 5610-8:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Dimensions	1
3.1 General.....	1
3.2 Tool holder style K for rhombic indexable insert shape C.....	2
3.3 Tool holder style K for square indexable insert shape S.....	3
4 Designation	5
5 Material	6
6 Design	6
6.1 Type of mounting.....	6
6.2 Corner radius, r_{ϵ}	6
6.3 Thickness, s , of indexable insert.....	7
7 Extent of delivery	7
8 Marking	7
Bibliography	8

STANDARDSISO.COM : Click to view the full PDF of ISO 5610-8:2014

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with defined cutting edges, cutting items*.

This second edition cancels and replaces the first edition (ISO 5610-8:2010), of which it constitutes a minor revision.

ISO 5610 consists of the following parts, under the general title *Tool holders with rectangular shank for indexable inserts*:

- Part 1: *General survey, correlation and determination of dimensions*
- Part 2: *Style A*
- Part 3: *Style B*
- Part 4: *Style D*
- Part 5: *Style F*
- Part 6: *Style G*
- Part 7: *Style J*
- Part 8: *Style K*
- Part 9: *Style L*
- Part 10: *Style N*
- Part 11: *Style R*
- Part 12: *Style S*
- Part 13: *Style T*

- Part 14: Style H
- Part 15: Style V

STANDARDSISO.COM : Click to view the full PDF of ISO 5610-8:2014

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 5610-8:2014

Tool holders with rectangular shank for indexable inserts —

Part 8: Style K

1 Scope

This part of ISO 5610 specifies tool holders with rectangular shank, style K, i.e. with offset shank and cutting edge angle $\kappa_r = 75^\circ$ for end cutting.

These tool holders are primarily intended for indexable inserts made of hard metal or other cutting materials to be mounted by clamping and to be used for turning operations.

NOTE The symbols for the dimensions shown in the tables of this part of ISO 5610 and the corresponding preferred symbols of properties defined in ISO/TS 13399-2 and ISO/TS 13399-3 are given in ISO 5610-1:2014, Table A.1.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5608:2012, *Turning and copying tool holders and cartridges for indexable inserts — Designation*

ISO 5610-1:2014, *Tool holders with rectangular shank for indexable inserts — Part 1: General survey, correlation and determination of dimensions*

3 Dimensions

3.1 General


It is not necessary for tool holders to comply with the pictorial representation; only the dimensions given shall be observed.

For determination of dimensions h_1 , f , and l_1 , see ISO 5610-1.

For explanation of the designation code for tool holders, see ISO 5608.

NOTE The values of rake angles and inclination angles shown in the figures are recommended values; they can vary according to the application.

3.2 Tool holder style K for rhombic indexable insert shape C

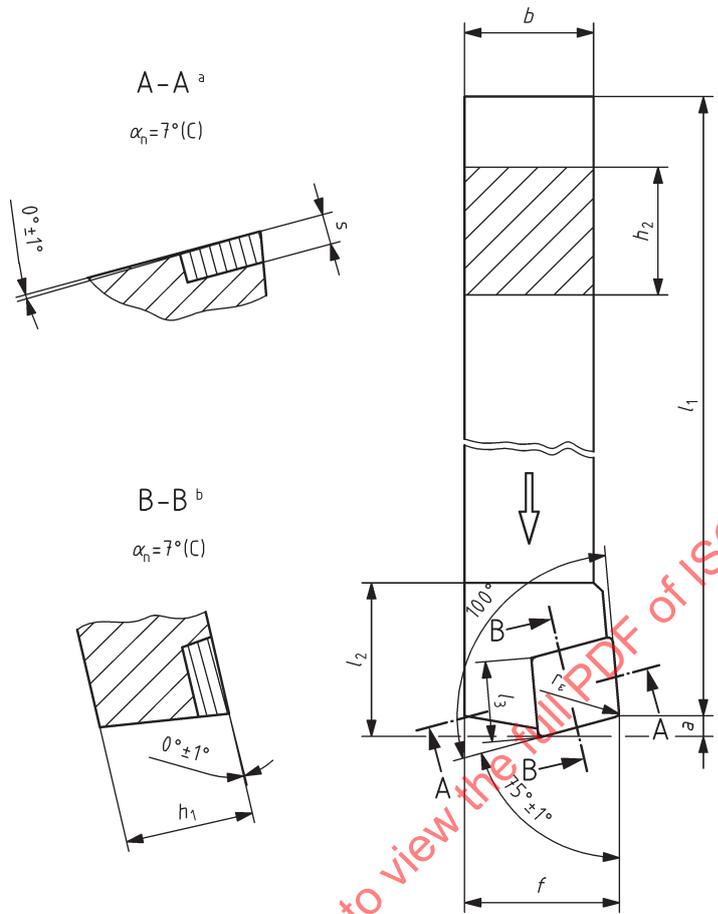

Key

- a Inclination angle, λ_s .
- b Rake angle, γ_o .

NOTE This figure shows a right-hand tool holder (R); left-hand tool holder (L) laterally reversed.

Figure 1 — Tool holder style K for rhombic indexable insert — C

Table 1


Dimensions in millimetres

Symbol ^a	h_1 js13	b h13	l_3 ≈	a	f $^{+0,5}_0$	h_2 h13	l_1^a k16	l_2 max.	s^b
SCKCR 0808 — 06	8	8	6,4	1,6	10	8	—	12	2,38
SCKCL 0808 — 06									
SCKCR 1010 — 06	10	10	6,4	1,6	12	10	—	12	2,38
SCKCL 1010 — 06									

^a For the selection of length l_1 , the dash can be replaced by the dimensions of ISO 5610-1:2014, Table 2. For letter symbols identifying the tool length, see ISO 5608:2012, Table 6.

^b Insert thickness without shim, if applicable.

3.3 Tool holder style K for square indexable insert shape S

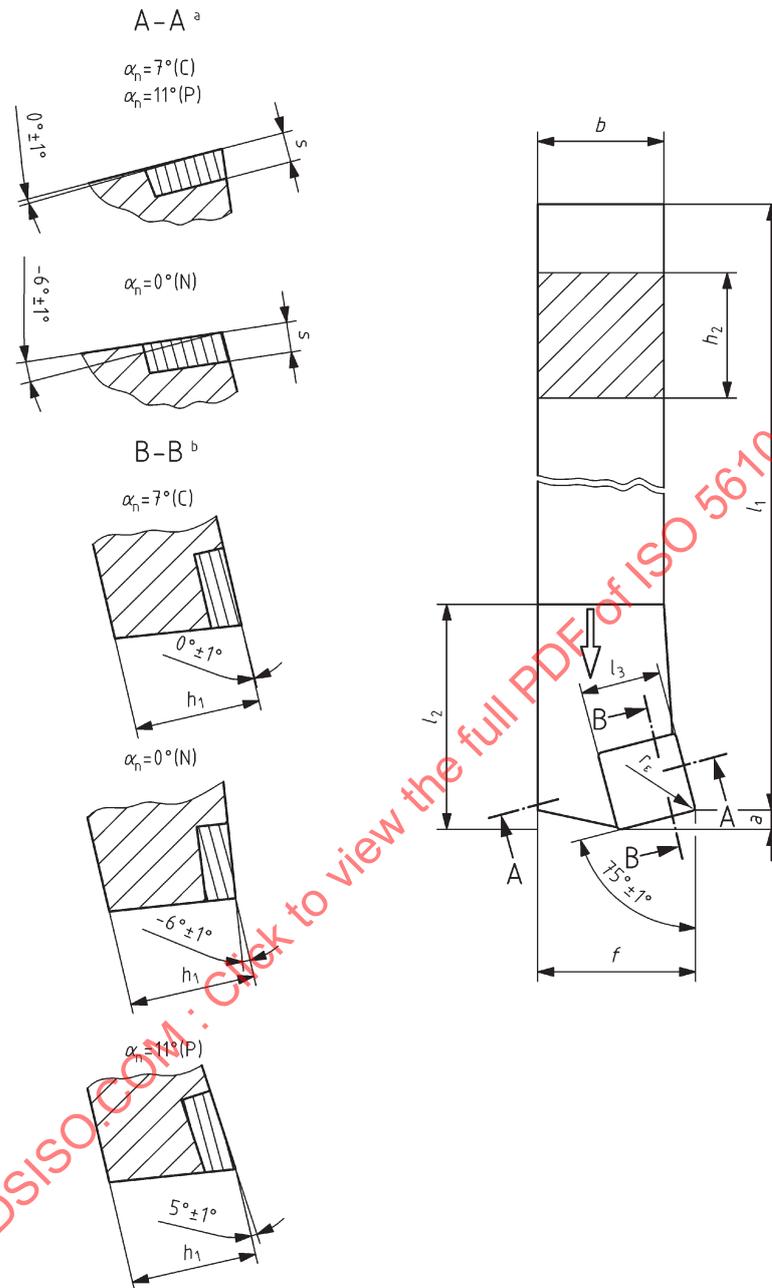

Key

- a Inclination angle, λ_s .
- b Rake angle, γ_0 .

NOTE This figure shows a right-hand tool holder (R); left-hand tool holder (L) laterally reversed.

Figure 2 — Tool holder style K for square indexable insert — S

Table 2

Dimensions in millimetres

Symbol ^a	h_1 js13	b h13	l_3 ≈	a	f $^{+0,5}_0$	h_2 h13	l_1^a k16	l_2 max.	s^b
SSKCR 1212 — 09	12	12	9,52	2,2	16	12	—	32	3,97
SSKCL 1212 — 09									3,18
PSKNR 1212 — 09									
PSKNL 1212 — 09									
CSKPR 1212 — 09									
CSKPL 1212 — 09									16
SSKCL 1616 — 09	3,18								
PSKNR 1616 — 09									
PSKNL 1616 — 09									
CSKPR 1616 — 09									
CSKPL 1616 — 09	16	16	12,7	3,1	20	16	—	36	
SSKCR 1616 — 12									3,18
SSKCL 1616 — 12									
PSKNR 1616 — 12									
PSKNL 1616 — 12									
CSKPR 1616 — 12									20
SSKCR 2020 — 12	3,18								
SSKCL 2020 — 12									
PSKNR 2020 — 12									
PSKNL 2020 — 12									
CSKPR 2020 — 12	25	25	12,7	3,9	32	25	—	36	
SSKCR 2525 — 12									3,18
SSKCL 2525 — 12									
PSKNR 2525 — 12									
PSKNL 2525 — 12									
CSKPR 2525 — 12									25
SSKCR 2525 — 15	6,35								
SSKCL 2525 — 15									
PSKNR 2525 — 15									
PSKNL 2525 — 15									

^a For the selection of length l_1 , the dash can be replaced by the dimensions of ISO 5610-1:2014, Table 2. For letter symbols identifying the tool length, see ISO 5608:2012, Table 6.

^b Insert thickness without shim, if applicable.

Table 2

Symbol ^a	h_1 js13	b h13	l_3 \approx	a	f $^{+0,5}_0$	h_2 h13	l_1^a k16	l_2 max.	s^b
CSKPR 2525 — 19	25	25	19,05	4,6	32	25	—	45	4,76
CSKPL 2525 — 19									
SSKCR 3225 — 12	32	25	12,7	3,9	32	32	—	36	4,76
SSKCL 3225 — 12									
PSKNR 3225 — 12									
PSKNL 3225 — 12									
CSKPR 3225 — 12									
CSKPL 3225 — 12	32	25	15,88	4,6	32	32	—	40	3,18
SSKCR 3225 — 15									
SSKCL 3225 — 15									
PSKNR 3225 — 15									
PSKNL 3225 — 15	32	25	19,05	4,6	32	32	—	45	5,56
CSKPR 3225 — 19									
CSKPL 3225 — 19	32	32	19,05	4,6	40	32	—	45	6,35
SSKCR 3232 — 19									
SSKCL 3232 — 19									
PSKNR 3232 — 19									
PSKNL 3232 — 19									
CSKPR 3232 — 19									
CSKPL 3232 — 19	40	40	19,05	4,6	50	40	—	45	4,76
SSKCR 4040 — 19									
SSKCL 4040 — 19									
PSKNR 4040 — 19	40	40	19,05	4,6	50	40	—	45	6,35
PSKNL 4040 — 19									
CSKPR 4040 — 19	40	40	25,4	5,9	50	40	—	50	4,76
CSKPL 4040 — 19									
PSKNR 4040 — 25	40	40	25,4	5,9	50	40	—	50	7,94
PSKNL 4040 — 25									

^a For the selection of length l_1 , the dash can be replaced by the dimensions of ISO 5610-1:2014, Table 2. For letter symbols identifying the tool length, see ISO 5608:2012, Table 6.

^b Insert thickness without shim, if applicable.

4 Designation

A tool holder in accordance with this part of ISO 5610 shall be designated by the following:

- “Tool holder”;
- a reference to this part of ISO 5610 (i.e. ISO 5610-8);
- type of mounting, in accordance with ISO 5608;
- symbol for indexable insert shape, in accordance with ISO 5608;

- e) symbol for tool style, in accordance with ISO 5608;
- f) symbol for the indexable insert normal clearance, in accordance with ISO 5608;
- g) symbol for hand of tool, in accordance with ISO 5608;
- h) its height, h_1 , width, b , and length, l_1 (symbol for tool length in accordance with ISO 5608);
- i) its cutting edge length, l_3 .

EXAMPLE 1 Tool holder for a screw-clamped (S) rhombic indexable insert shape C (C), tool holder style K (K), for normal clearance of indexable insert $\alpha_n = 7^\circ$ (C), right-hand type (R), with height $h_1 = 10$ mm and width $b = 10$ mm (1010), length $l_1 = 70$ mm (E), for cutting edge length $l_3 = 6,4$ mm (06) is designated as follows:

Tool holder ISO 5610-8 - SCKCR 1010 E06

EXAMPLE 2 Tool holder for a horizontally mounted, top-clamped (C) square indexable insert shape S (S), tool holder style K (K), normal clearance of indexable insert $\alpha_n = 11^\circ$ (P), right-hand type (R), with height $h_1 = 32$ mm and width $b = 25$ mm (3225), length $l_1 = 170$ mm (P), for cutting edge length $l_3 = 19,05$ mm (19) is designated as follows:

Tool holder ISO 5610-8 - CSKPR 3225 P19

5 Material

The material should be steel with a tensile strength of at least 1 200 N/mm².

6 Design

6.1 Type of mounting

Standard design of tool holders with indexable insert shall be mounted in accordance with [Tables 1](#) and [2](#).

Other types of mounting are at the manufacturer's discretion or upon agreement. The letter symbol in the designation, symbol 1, shall then be replaced by the respective symbol for the chosen or agreed-upon type of mounting in accordance with ISO 5608.

For the modified type of mounting deviating from [Tables 1](#) and [2](#), the relevant indexable insert thickness shall also be considered.

6.2 Corner radius, r_ϵ

Tool holders in accordance with this part of ISO 5610 can be equipped with indexable inserts with cutting edge length, l_3 , as specified in [Tables 1](#) and [2](#), and any corner radius, r_ϵ .

The values for l_1 given in ISO 5610-1:2014, Table 2, apply to tool holders with indexable inserts having corner radii, r_ϵ , in accordance with [Table 3](#).

Table 3

Dimensions in millimetres

l_3	r_ϵ
6,4	0,4
9,52	0,8
12,7	
NOTE The values given for r_ϵ are nominal values. The accurate values converted from the inch dimensions are 0,397 mm, 0,794 mm, 1,191 mm, and 2,381 mm.	