

---

# International Standard



# 5746

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## **Pliers and nippers — Engineer's and lineman's pliers — Dimensions**

*Pinces et tenailles — Pinces universelles et pinces «lineman's» — Dimensions*

**First edition — 1982-09-01**

STANDARDSISO.COM : Click to view the full PDF of ISO 5746:1982

---

**UDC 621.881.4**

**Ref. No. ISO 5746-1982 (E)**

**Descriptors :** hand tools, pliers, dimensions.

Price based on 3 pages

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5746 was developed by Technical Committee ISO/TC 29, *Small tools*, and was circulated to the member bodies in April 1979.

It has been approved by the member bodies of the following countries :

Australia	Germany, F.R.	Poland
Austria	Hungary	Romania
Belgium	India	South Africa, Rep. of
Bulgaria	Israel	Spain
Canada	Italy	Sweden
Chile	Japan	Switzerland
Czechoslovakia	Korea, Dem. P. Rep. of	USSR
France	Libyan Arab Jamahiriya	Yugoslavia

The member bodies of the following countries expressed disapproval of the document on technical grounds :

United Kingdom  
USA

# Pliers and nippers — Engineer's and lineman's pliers — Dimensions

## 1 Scope and field of application

This International Standard lays down the principal dimensions of engineer's and lineman's pliers and specifies the test values for the pliers in order to verify their aptitude to function in conformity with ISO 5744. General technical requirements are given in ISO 5743.


The figures in this International Standard are only examples and are not intended to affect the manufacturer's design.

## 2 References

ISO 5743, *Pliers and nippers — General technical requirements.*

ISO 5744, *Pliers and nippers — Methods of test.*

3 Engineer's pliers

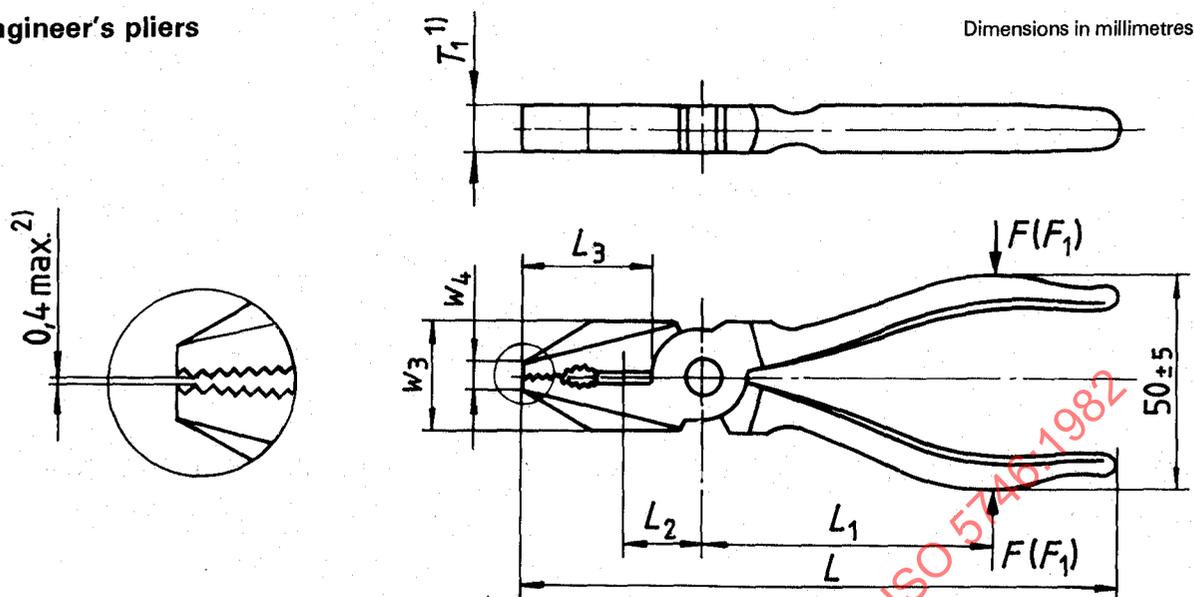

- 1) The jaws can be tapered to the point over the length  $L_3$ .
- 2) Referred to closed pliers.

Figure 1

Table 1

Dimensions in millimetres

$L$	$L_3$	$w_3$ max.	$w_4$ max.	$T_1$ max.
$160 \pm 8$	$32 \pm 4$	25	6,3	11
$180 \pm 9$	$36 \pm 4$	28	7,1	12
$200 \pm 10$	$40 \pm 4$	32	8	14

Engineer's pliers can be made with or without a joint cutter, at the manufacturer's discretion.

Engineer's pliers shall be tested in accordance with ISO 5744.

After the load test, the permanent set ( $s$ ) shall not exceed the value given in table 2. If the distance  $L_1$  is not suitable for the load test, the following formula may be applied :

$$F' = \frac{F \times L_1}{L_1'}$$

where

$F'$  is the load which is not given in table 2;

$F$  is the load given in table 2;

$L_1$  is the distance from the centre of the joint rivet to the applied load given in table 2;

$L_1'$  is the measured distance from the centre of the joint rivet to the applied load.

The maximum cutting force ( $F_1$ ) and diameter ( $D$ ) of the test wire shall not exceed the values given in table 2.

Table 2

$L$	$L_1$	$L_2$	Medium hard test wire diameter ( $D$ ) <sup>1)</sup>	Maximum cutting force ( $F_1$ )	Load test	
					load ( $F$ )	maximum permanent set ( $s$ ) <sup>2)</sup>
mm	mm	mm	mm	N	N	mm
160	80	16	1,6	580	1 120	1
180	90	18	1,6	580	1 260	1
200	100	20	2,6	580	1 400	1

1) Data for hard test wire are given in ISO 5744.

2)  $s = w_1 - w_2$  (See ISO 5744.)

Pliers having a lever ratio differing from the values given in table 2 may be checked for compliance with the following formula :

$$F_1' = \frac{F_2 \times 1,6 \times L_2'}{L_1'}$$

where

$F_1'$  is the maximum cutting force which is not given in table 2;


$F_2$  is the cutting force of medium hard test wire (see ISO 5744);

1,6 is the correction factor for medium hard test wire;

$L_1'$  is the measured distance from the centre of the joint rivet to the applied load;

$L_2'$  is the measured distance from the centre of the joint rivet to the location of the test wire.

4 Lineman's pliers

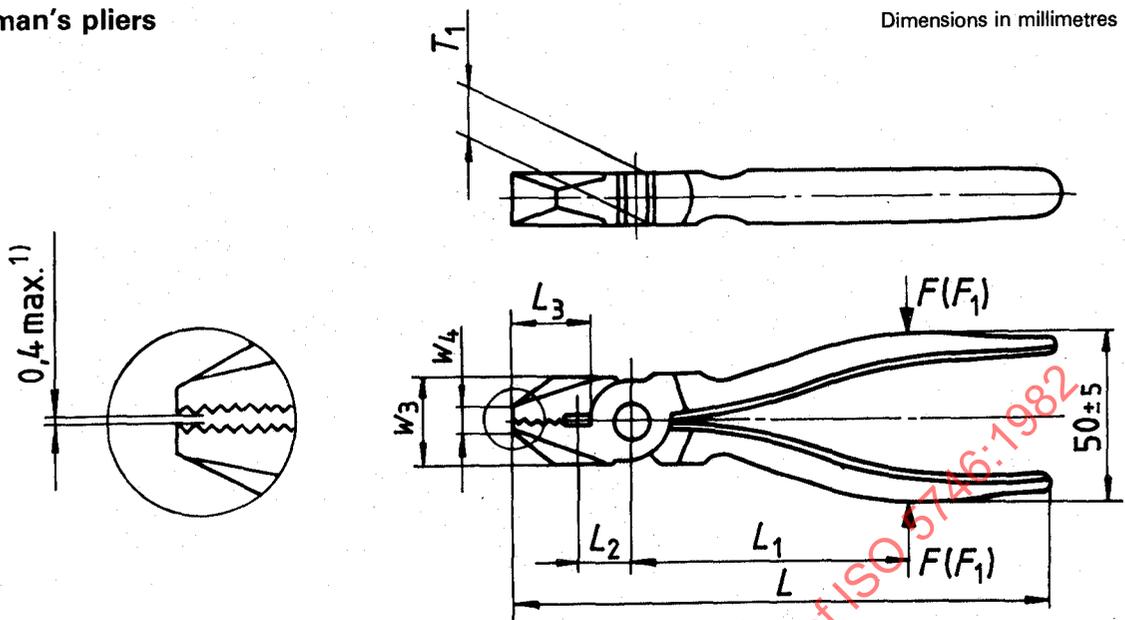

1) Referred to closed pliers.

Figure 2

Table 3

Dimensions in millimetres

L	L <sub>3</sub>	w <sub>3</sub> max.	w <sub>4</sub> max.	T <sub>1</sub> max.
160 ± 8	28 ± 4	25	6,3	11
180 ± 9	32 ± 4	28	7,1	12
200 ± 10	36 ± 4	32	8	14

Table 4

L	L <sub>1</sub>	L <sub>2</sub>	Medium hard test wire diameter (D) <sup>1)</sup>	Maximum cutting force (F <sub>1</sub> )	Load test	
					load (F)	maximum permanent set (s) <sup>2)</sup>
mm	mm	mm	mm	N	N	mm
160	80	16	1,6	580	1 120	1
180	90	18	1,6	580	1 260	1
200	100	20	1,6	580	1 400	1

Lineman's pliers can be made with or without a joint cutter, at the manufacturer's discretion.

Lineman's pliers shall be tested in accordance with ISO 5744.

After the load test, the permanent set (s) shall not exceed the value given in table 4. If the distance L<sub>1</sub> is not suitable for the load test, the following formula may be applied :

$$F' = \frac{F \times L_1}{L_2}$$

where

F' is the load which is not given in table 4;

F is the load given in table 4;

L<sub>1</sub> is the distance from the centre of the joint rivet to the applied load given in table 4;

L<sub>2</sub> is the measured distance from the centre of the joint rivet to the applied load.

The maximum cutting force (F<sub>1</sub>) and diameter (D) of the test wire shall not exceed the values given in table 4.

1) Data for hard test wire are given in ISO 5744.

2) s = w<sub>1</sub> - w<sub>2</sub> (See ISO 5744.)

Pliers having a lever ratio differing from the values given in table 4 may be checked for compliance with the following formula :

$$F'_1 = \frac{F_2 \times 1,6 \times L_2}{L_1}$$

where

F'<sub>1</sub> is the maximum cutting force which is not given in table 4;

F<sub>2</sub> is the cutting force of medium hard test wire (see ISO 5744);

1,6 is the correction factor for medium hard test wire;

L<sub>1</sub> is the measured distance from the centre of the joint rivet to the applied load;

L<sub>2</sub> is the measured distance from the centre of the joint rivet to the location of the test wire.

STANDARDSISO.COM : Click to view the full PDF of ISO 5746:1982