
INTERNATIONAL STANDARD



5751 / I

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Motorcycle tyres and rims (Future series) — Part I : Tyres

Pneumatiques et jantes pour motocycles (Séries futures) — Partie I : Pneumatiques

First edition — 1978-03-15

STANDARDSISO.COM : Click to view the full PDF of ISO 5751-1:1978

UDC 629.11.012.55 : 629.118.6

Ref. No. ISO 5751/I-1978 (E)

Descriptors : road vehicles, motorcycles, pneumatic tyres, tyres, designation, dimensions, capacity of load.

Price based on 6 pages

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 5751/1 was developed by Technical Committee ISO/TC 31, *Tyres, rims and valves*, and was circulated to the member bodies in March 1977.

It has been approved by the member bodies of the following countries :

Australia	Israel	Spain
Austria	Italy	Sweden
Brazil	Korea, Rep. of	Switzerland
Canada	Japan	United Kingdom
Chile	Mexico	U.S.A.
France	Netherlands	U.S.R.R.
Germany	Poland	
Ireland	Romania	

The member body of the following country expressed disapproval of the document on technical grounds :

South Africa, Rep. of

Motorcycle tyres and rims (Future series) — Part I : Tyres

1 SCOPE

This International Standard establishes the designation, dimensions and load ratings of future series of motorcycle tyres.

ISO 5751/II will deal with requirements for rims.

NOTE — ISO 4249 deals with requirements for existing series.

2 FIELD OF APPLICATION

This International Standard applies to motorcycle tyres with reduced height/width ratio (100 and lower). It is applicable to tyres that can be fitted on cylindrical bead seat rims or 5° tapered bead/seat rims.

It is also applicable to different concepts of tyres and rims; in that case, however, appropriate rim/section ratios K_1 and coefficients K_2 , a and b (see clause 6) will be established.

3 REFERENCE

ISO 4223, *Definitions of some terms used in the tyre industry.*

4 DEFINITIONS

For definitions of terms relating to tyres, see ISO 4223.

SECTION ONE : TYRE DESIGNATION AND DIMENSIONS

5 TYRE DESIGNATION

The designation of the tyre shall be shown on the sidewall of the tyre and shall include the following markings to be shown close to each other: "size and construction" (see 5.1 and "service condition characteristics" (see 5.2).

5.1 Size and construction

The characteristics shall be indicated as follows :

Nominal section width	Nominal aspect ratio	Tyre construction code	Nominal rim diameter
-----------------------------	-------------------------	------------------------------	-------------------------

5.1.1 Nominal section width

The nominal section width shall be expressed in millimetres.

5.1.2 Nominal aspect ratio

The nominal aspect ratio shall be expressed as a percentage and shall be a multiple of 10.

5.1.3 Tyre construction code

The tyre construction code shall be "-" for diagonal ply tyres.

NOTE — Other codes will be established for new concepts (constructions) of tyres.

5.1.4 Nominal rim diameter

The nominal rim diameter shall be expressed by a code (see table 1 for code correlations).

However, it shall be expressed in millimetres for new and future concepts where the application of existing tyres on new concept rims would be incompatible or where the use of new concept tyres on existing rims would be incompatible.

5.2 Service condition characteristics

The characteristics shall be indicated as follows :

Load Index	Speed code
------------	------------

5.2.1 Load Index

The Load Index is a numerical code associated with the maximum load a tyre can carry at the speed indicated by its speed symbol under the specified conditions. See table 3.

5.2.2 Speed code

Speed symbol indicates the speed at which the tyre can carry a load corresponding with its Load Index under specified service conditions. See table 4.

TABLE 1 — Nominal rim diameter code and rim width code

a) Nominal rim diameter code

Code	Nominal rim diameter (D_r) mm
14	356
15	381
16	406
17	432
18	457
19	483
20	508
21	533

b) Rim width code

Code	Measuring rim width (R_M) mm
1,50	38,0
1,60	40,5
1,85	47,0
2,15	55,0
2,50	63,5
2,75	70,0
3,00	76,0
3,50	89,0

5.3 Other service characteristics

5.3.1 In the case of tubeless tyres, the marking "TUBELESS" shall be shown on the tyre.

5.3.2 In the case of a preferred direction of rotation of the tyre, an arrow shall be used to indicate that direction.

5.4 Example

A tyre having a nominal section width of 120 mm, nominal aspect ratio 80, nominal rim diameter code 18, load-carrying capacity 290 kg, maximum speed 180 km/h, will be marked :

120/80 — 18	65 S
-------------	------

6 TYRE DIMENSIONS

6.1 Calculation of "design new tyre" dimensions

6.1.1 Theoretical rim width (R_{Th})

The theoretical rim width is equal to the product of the nominal section width (S_N) by the rim/section ratio (K_1) :

$$R_{Th} = K_1 S_N$$

NOTE — For tyres of existing concepts, $K_1 = 0,6$, for aspect ratios 100, 90, 80. For aspect ratios 70 and lower, K_1 will be defined later.

6.1.2 Measuring rim width (R_M)

The measuring rim width is the width of the existing rim nearest to the theoretical rim width (R_{Th}). See table 1 for rim widths of existing rims.

6.1.3 Design new tyre section width (S)

The design new tyre section width is the nominal section width (S_N) transferred from the theoretical rim (R_{Th}) to the measuring rim (R_M):

$$S = S_N + K_2 (R_M - R_{Th})$$

rounded to the nearest whole number.

NOTE — For tyres of existing concepts, $K_2 = 0,4$.

6.1.4 Design new tyre section height (H)

The design new tyre section height is equal to the product of the nominal section width (S_N) and the nominal aspect ratio (H/S , expressed as a percentage), divided by 100:

$$H = S_N \frac{H}{S} / 100$$

rounded to the nearest whole number.

6.1.5 Design new tyre overall diameter (D_o)

The design new tyre overall diameter is the sum of the nominal rim diameter (D_r) plus twice the design new tyre section height (H):

$$D_o = D_r + 2 H$$

For those tyres using a nominal rim diameter code, see in table 1 the value of D_r to be used.

6.1.6 Values

The annex gives the dimensions for future series of tyres measuring rim width, design section width and design section height according to 6.1.1, 6.1.2, 6.1.3 and 6.1.4.

6.2 Calculation of "maximum overall tyre dimensions in service"

(for use by vehicle manufacturers in designing for tyre clearances)

6.2.1 Maximum overall width in service (W_{max})

The maximum overall width in service is equal to the product of the design new tyre section width (S) and the appropriate coefficient "a" (see table 2):

$$W_{max} = S a$$

It includes: protective ribs, lettering, embellishments, manufacturing tolerances and growth due to service.

6.2.2 Maximum overall diameter in service ($D_{o max}$)

The maximum overall diameter in service is equal to the nominal rim diameter (D_r) plus twice the product of the design new tyre section height (H) and the appropriate coefficient "b" (see table 2):

$$D_{o max} = D_r + 2 H b$$

It includes: manufacturing tolerances and growth due to service.

7 METHOD OF MEASUREMENT OF TYRE DIMENSIONS

Before measuring, tyres shall be mounted on the measuring rim, inflated to the recommended pressure, and allowed to stand for a minimum of 24 h at normal room temperature, after which the inflation pressure shall be readjusted to the original value.

8 TREAD CONFIGURATIONS

The figure shows various tread configurations.

NOTE — Type A is commonly adopted for normal highway service tyres.

Type B is commonly adopted for special tyres of speed category S or higher.

Type C is commonly adopted for tyres used in on-and-off the-road service.

Type D is commonly adopted for tyres used specifically in off-the-road-service.

The above attributions of tread type configurations to the service are to be considered as examples only. The choice of a given tread type configuration for a given tyre depends on the tyre manufacturer only.

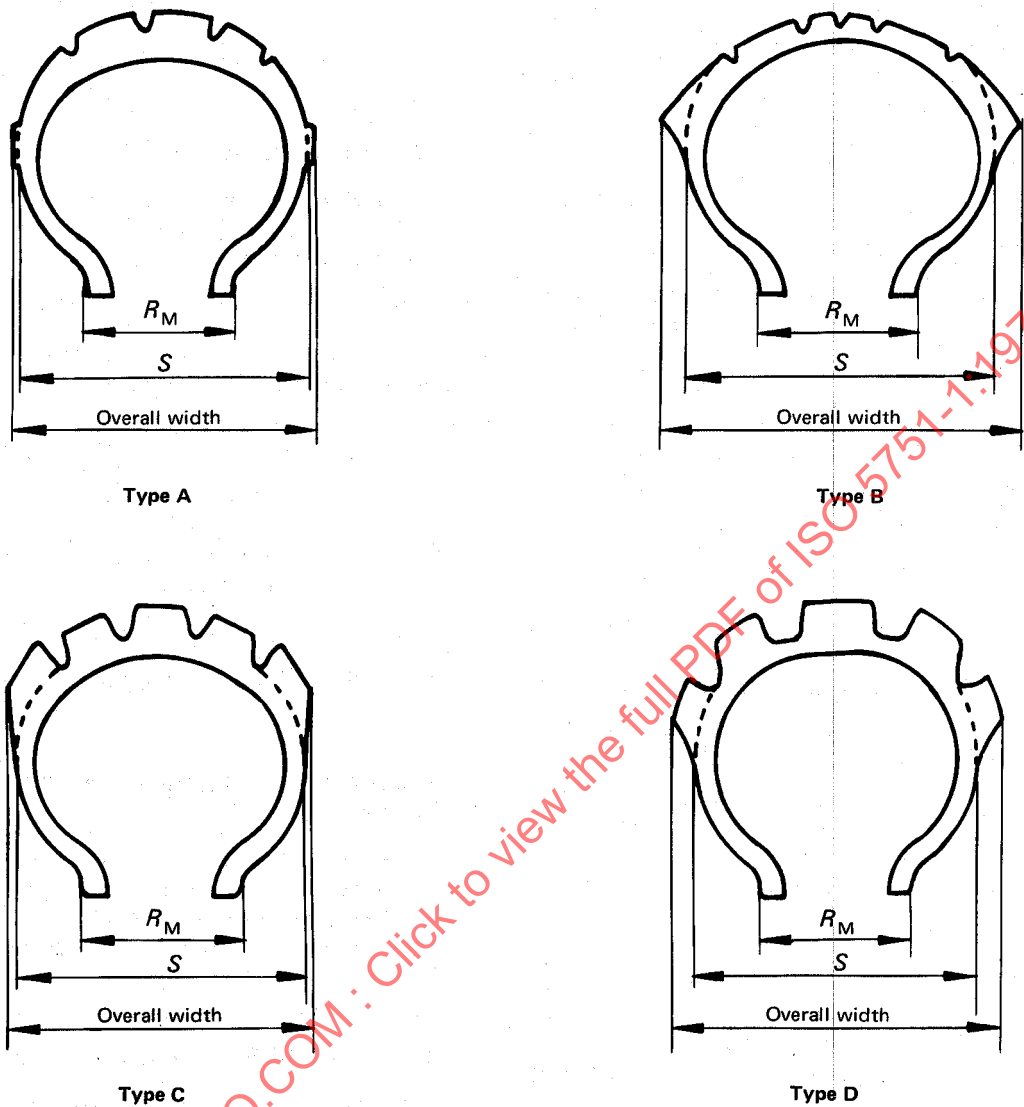


FIGURE — Tread configurations

TABLE 2 — Coefficients for the calculation of the maximum overall dimensions in service

Tread configuration	Coefficient	
	a	b
Type A	1,08	1,06*
Type B	1,15	1,06*
Type C	1,15	1,12**
Type D	1,30	1,12**

* Subject to the condition that $D_{o \text{ max}} - D_o$ is at least 5 mm.

** Subject to the condition that $D_{o \text{ max}} - D_o$ is at least 8 mm.