
**Hydraulic fluid power — Mounting
dimensions for single rod cylinders,
16 MPa (160 bar) series —**

**Part 1:
Medium series**

*Transmissions hydrauliques — Dimensions d'interchangeabilité des vérins
16 MPa (160 bar) à simple tige —*

Partie 1: Série moyenne



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 6020-1 was prepared by ISO Technical Committee 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

This second edition cancels and replaces the first edition (ISO 6020-1:1981) which has been technically revised.

ISO 6020 consists of the following parts, under the general title *Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series*:

- Part 1: *Medium series*
- Part 2: *Compact series*
- Part 3: *Compact series with bores from 250 mm to 500 mm*

Annex A of this part of ISO 6020 is given for information only.

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit.

One component of such systems is the fluid power cylinder. This is a device which converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston and piston rod, operating within a cylindrical bore.

Two mounting standards have been provided to meet the needs required in the application of interchangeable cylinders. This part of ISO 6020 is one of three parts relating to mounting dimensions for 16 MPa (160 bar) hydraulic cylinders. Of the other parts of ISO 6020, ISO 6020-2, relates to the compact series and ISO 6020-3 relates to compact series cylinders with larger bores.

STANDARDSISO.COM : Click to view the full text of ISO 6020-1:1998

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 6020-1:1998

Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series —

Part 1: Medium series

1 Scope

This part of ISO 6020 establishes metric mounting dimensions for 16 MPa [160 bar¹⁾] medium series cylinders as required for interchangeability of commonly used hydraulic cylinders.

The medium series dimensions are applicable to round head cylinders with bores from 25 mm to 200 mm and to both round or square head cylinders with bores larger than 200 mm, thus allowing a wider range of applications. They admit larger ports with longer cushions that are particularly suitable for applications requiring higher velocity and rapid decelerations.

NOTE — This part of ISO 6020 allows manufacturers of hydraulic equipment, freedom in the design of metric cylinders and does not restrict technical development but does provide basic guidelines.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 6020. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 6020 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1179-1:— 2), *Connections for general use and fluid power — Ports and stud ends with ISO 228-1 threads with elastomeric or metal-to-metal sealing — Part 1: Threaded ports.*

ISO 3320:1987, *Fluid power systems and components — Cylinder bores and piston rod diameters — Metric series.*

ISO 4395:1978, *Fluid power systems and components — Cylinders — Piston rod thread dimensions and types.*

ISO 5598:1985, *Fluid power systems and components — Vocabulary.*

ISO 6099:1985, *Fluid power systems and components — Cylinders — Identification code for mounting dimensions and mounting types.*

ISO 6149-1:1993, *Connections for fluid power and general use — Ports and stud ends with ISO 261 threads and O-ring sealing — Part 1: Ports with O-ring seal in truncated housing.*

1) 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm²

2) To be published. (Revision of ISO 1179:1981)

ISO 6162-1:—³⁾, *Hydraulic fluid power — Flange connectors with split or one-piece flange clamps and metric or inch screws — Part 1: Flange connectors for use at pressures of 3,5 MPa (35 bar) to 35 MPa (350 bar), DN 13 to DN 127.*

ISO 6164:1994, *Hydraulic fluid power — Four-screw, one-piece square-flange connections for use at pressures of 25 MPa and 40 MPa (250 bar and 400 bar).*

ISO 8135:—⁴⁾, *Hydraulic fluid power — Single rod cylinders, 16 MPa (160 bar) medium and 25 MPa (250 bar) series — Tolerances.*

3 Definitions

For the purposes of this part of ISO 6020, the definitions of ISO 5598 and the following apply:

3.1 piston rod: Element that transmits mechanical force and motion from the piston.

4 Dimensions

Select dimensions for cylinders manufactured in accordance with this part of ISO 6020 from tables 1 to 6, inclusive. Select dimensions for ports and flanges from table 7 and the relevant International Standards cited therein.

All dimensions and mounting styles in this part of ISO 6020 are labelled with codes in accordance with ISO 6099.

All cylinder tolerances shall be in accordance with ISO 8135.

5 Bore sizes

This part of ISO 6020 includes the following bore sizes, in millimetres, for this medium series:

25 – 32 – 40 – 50 – 63 – 80 – 100 – 125 – 160 – 200 – 250 – 320 – 400 – 500

6 Mounting styles

This part of ISO 6020 includes the following mounting styles:

- MF1: Head rectangular flange mounting (see figure 2 and table 2)
- MF2: Cap rectangular flange mounting (see figure 2 and table 2)
- MF3: Head circular flange mounting (see figure 3 and table 3)
- MF4: Cap circular flange mounting (see figure 3 and table 3)
- MP3: Cap fixed eye mounting (see figure 4 and table 4)
- MP4: Cap detachable eye mounting (see figure 4 and table 4)
- MP5: Cap fixed eye with spherical plain bearing mounting (see figure 4 and table 4)
- MP6: Cap detachable eye with spherical plain bearing mounting (see figure 4 and table 4)
- MS2: Side lugs mounting (see figure 5 and table 5)
- MT4: Intermediate fixed or movable trunnion (male) mounting (see figure 6 and table 6)

3) To be published. (Partial revision of ISO 6162:1994)

4) To be published. (Revision of ISO 8135:1986)

7 Piston rod characteristics

7.1 This part of ISO 6020 covers piston rods having a shouldered male thread end; see figure 1 and table 1 for basic dimensions.

7.2 Internally threaded rod ends shall be in conformance with ISO 4395.

8 Identification statement (reference to this part of ISO 6020)

Use the following statement in test reports, catalogues and sales literature when electing to comply with this International Standard:

"Interchangeable cylinder mounting dimensions selected in accordance with ISO 6020-1, *Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 1: Medium series.*"

STANDARDSISO.COM : Click to view the full PDF of ISO 6020-1:1998

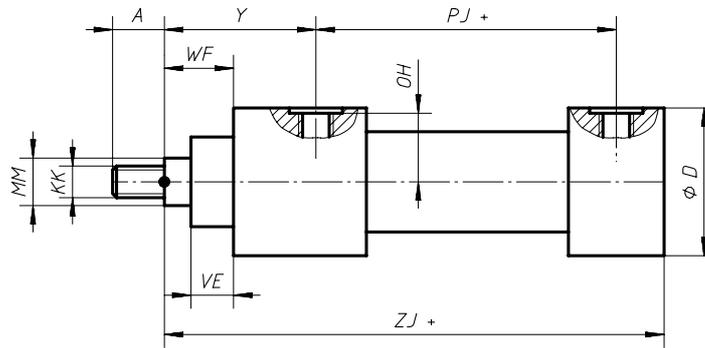


Figure 1 — General dimensions

Table 1 — General dimensions

Dimensions in millimetres

Bore	VE	WF	ZJ	KK	MM	A	Y	PJ	D	OH ⁽¹⁾
25	15	28	150	M12 × 1,25	16	16	58	77	56	25,5
				M12 × 1,25	18	16				
				M14 × 1,5	18	18				
32	19	32	170	M14 × 1,5	18	18	64	89	67	30
				M14 × 1,5	22	18				
				M16 × 1,5	22	22				
40	19	32	190	M16 × 1,5	22	22	71	97	78	35
				M16 × 1,5	28	22				
				M20 × 1,5	28	28				
50	24	38	205	M20 × 1,5	28	28	72	111	95	44
				M20 × 1,5	36	28				
				M27 × 2	36	36				
63	29	45	224	M27 × 2	36	36	82	117	116	54
				M27 × 2	45	36				
				M33 × 2	45	45				
80	36	54	250	M33 × 2	45	45	91	134	130	62
				M33 × 2	56	45				
				M42 × 2	56	56				
100	37	57	300	M42 × 2	56	56	108	162	158	75
				M42 × 2	70	56				
				M48 × 2	63	63				
125	37	60	325	M48 × 2	70	63	121	174	192	92
				M48 × 2	90	63				
				M64 × 3	85	85				

Table 1 (concluded)

Dimensions in millimetres

Bore	VE	WF	ZJ	KK	MM	A	Y	PJ	D	OH ¹⁾
160	41	66	370	M64 × 3	90	85	143	191	238	115
				M64 × 3	110	85				
				M80 × 3		95				
200	45	75	450	M80 × 3	110	95	190	224	285	138
				M80 × 3	140	95				
				M100 × 3		112				
250	64	96	550	M100 × 3	140	112		—	365	—
				M100 × 3	180	112				
				M125 × 4		125				
320	71	108	660	M125 × 4	180	125	—	—	455	—
				M125 × 4	220	125				
				M160 × 4		160				
400	90	130	740	M160 × 4	220	160	—	—	565	—
				M160 × 4	280	160				
				M200 × 4		200				
500	110	163	890	M200 × 4	280	200	—	—	645	—
				M200 × 4	360	200				
				M250 × 6		250				

NOTE — If other piston rod diameters or other thread types are required, use those identified in ISO 3320 and ISO 4395.

1) Dimension OH is optional and only pertains to threaded ports.

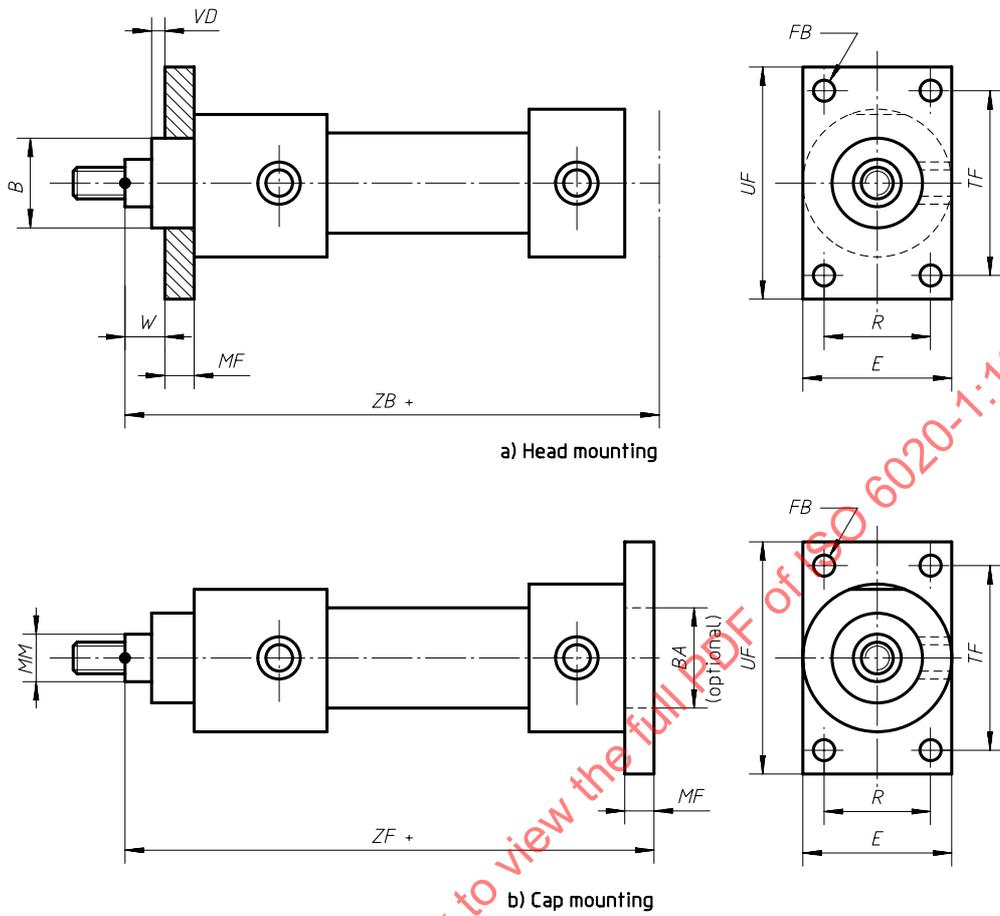


Figure 2 — MF1 — Head rectangular flange mounting and MF2 — Cap rectangular flange mounting

Table 2 — Dimensions of rectangular flange mounting

Dimensions in millimetres

Bore	W	TF	FB	R	ZF	ZB	VD	B, BA	UF	E	MF
25	16	69,2	6,6	28,7	162	158	3	32	85	60	12
32	16	85	9	35,2	186	178	3	40	105	70	16
40	16	98	9	40,6	206	198	3	50	115	80	16
50	18	116,4	11	48,2	225	213	4	60	140	100	20
63	20	134	13,5	55,5	249	234	4	70	160	120	25
80	22	152,5	17,5	63,1	282	260	4	85	185	135	32
100	25	184,8	22	76,5	332	310	5	106	225	160	32
125	28	217,1	22	90,2	357	335	5	132	255	195	32


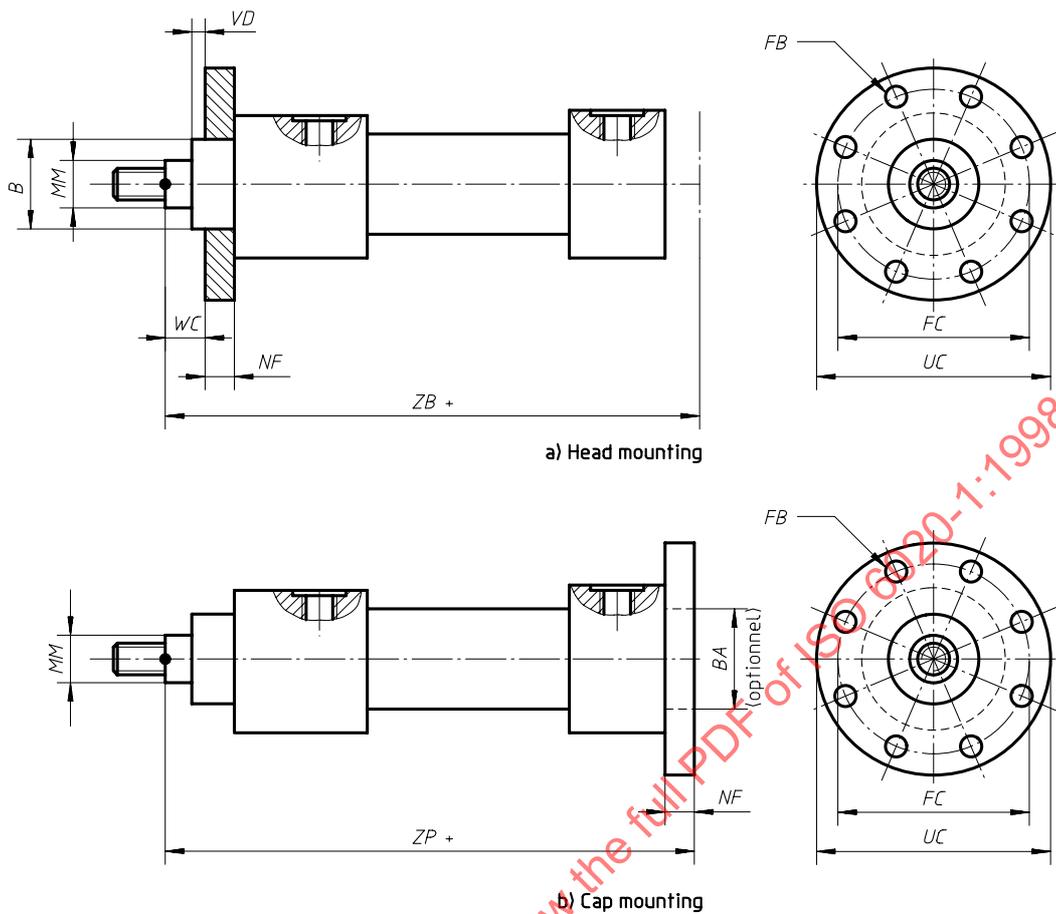


Figure 3 — MF3 — Head circular flange mounting and MF4 — Cap circular flange mounting

Table 3 — Dimensions of circular flange mounting

Dimensions in millimetres

Bore	VD	WC	FB	FC	ZP	ZB	B, BA	UC	NF
25	3	16	8 × Ø6,6	75	162	158	32	90	12
32	3	16	8 × Ø9	92	186	178	40	110	16
40	3	16	8 × Ø9	106	206	198	50	125	16
50	4	18	8 × Ø11	126	225	213	60	150	20
63	4	20	8 × Ø13,5	145	249	234	70	170	25
80	4	22	8 × Ø17,5	165	282	260	85	195	32
100	5	25	8 × Ø22	200	332	310	106	240	32
125	5	28	8 × Ø22	235	357	335	132	275	32
160	5	30	8 × Ø22	280	406	380	160	320	36
200	5	35	8 × Ø26	340	490	480	200	385	40
250	8	40	8 × Ø33	420	606	580	250	490	56
320	8	45	8 × Ø39	520	723	710	320	600	63
400	10	50	8 × Ø45	640	820	790	400	730	80
500	10	63	12 × Ø45	720	990	940	500	810	100

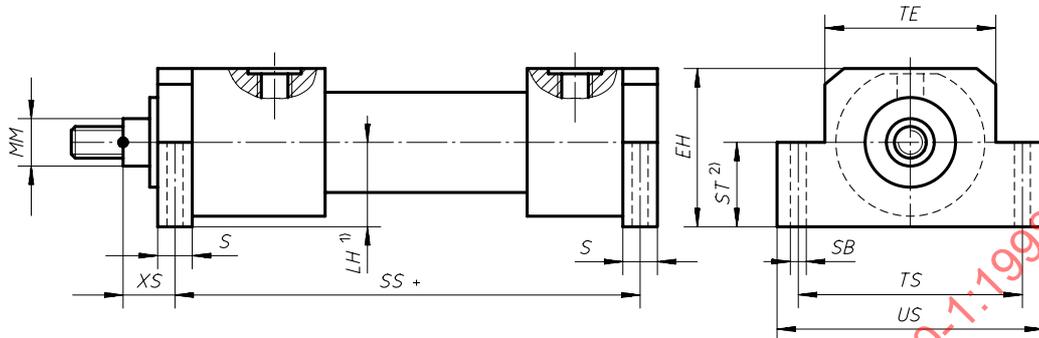

- 1) Dimension LH is the distance from the centreline of the cylinder to the bottom of the mounting lug.
- 2) Dimension ST is the height of the mounting lug.

Figure 5 — MS2 — Side lugs mounting

Table 5 — Dimensions of side lugs mounting

Dimensions in millimetres

Bore	S	XS	SS	TE	TS	US	SB	EH	LH	ST
25	20	18	142	56	75	92	9	60	32	32
32	25	19,5	163	67	90	110	11	72	38	38
40	25	19,5	183	78	100	120	11	82	43	43
50	32	22	199	95	120	145	14	100	52	52
63	32	29	211	116	150	180	18	120	62	62
80	40	34	236	130	170	210	22	135	70	70
100	50	32	293	158	205	250	26	161	82	82
125	56	32	321	192	245	300	33	196	100	100
160	60	36	364	238	295	350	33	238	119	119
200	72	39	447	285	350	415	39	288	145	145

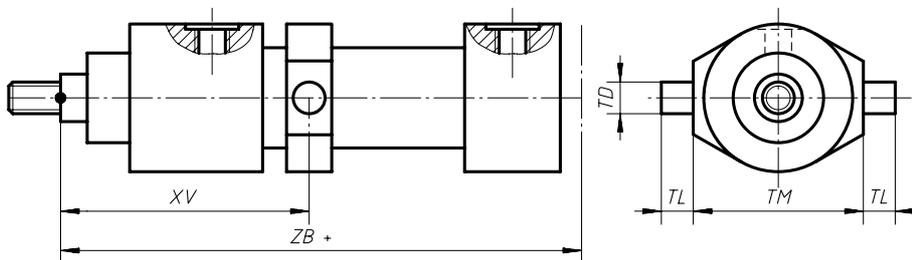


Figure 6 — MT4 — Intermediate trunnion (male) mounting

Table 6 — Dimensions of intermediate trunnion (male) mounting

Dimensions in millimetres

Bore	TD	TL	TM	XV	ZB
25	12	10	63	As agreed between manufacturer and user	158
32	16	12	75		178
40	20	16	90		198
50	25	20	105		213
63	32	25	120		234
80	40	32	135		260
100	50	40	160		310
125	63	50	195		335
160	80	63	240		380
200	100	80	295		480
250	125	100	370		580
320	160	125	470		710
400	200	160	570		790
500	250	250	700	940	