
**Motorcycles — Measurement method for
gaseous exhaust emissions and fuel
consumption —**

**Part 2:
Test cycles and specific test conditions**

*Motorcycles — Méthode de mesure des émissions de gaz
d'échappement et de la consommation de carburant —*

Partie 2: Conditions d'essai spécifiques et cycles d'essai



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 6460-2:2007



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Test cycle	1
3.1 Introduction	1
3.2 Type 1 test	2
3.3 Type 2 test	8
4 Presentation of results	9
Annex A (normative) Presentation of results for gaseous exhaust emissions	10
Annex B (normative) Presentation of results of fuel consumption	13
Annex C (informative) Test cycles	16
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6460-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 22, *Motorcycles*.

ISO 6460-2, together with ISO 6460-1 and ISO 6460-3, cancels and replaces ISO 6460:1981 and ISO 7860:1995, which have been technically revised.

ISO 6460 consists of the following parts, under the general title *Motorcycles — Measurement method for gaseous exhaust emissions and fuel consumption*:

- *Part 1: General test requirements*
- *Part 2: Test cycles and specific test conditions*
- *Part 3: Fuel consumption measurement at a constant speed*

Introduction

This part of ISO 6460 has been prepared to provide details of the typical test cycles for measurement of exhaust gas and fuel consumption. The measurements can be carried out by referring to this part of ISO 6460 and to ISO 6460-1.

STANDARDSISO.COM : Click to view the full PDF of ISO 6460-2:2007

STANDARDSISO.COM : Click to view the full PDF of ISO 6460-2:2007

Motorcycles — Measurement method for gaseous exhaust emissions and fuel consumption —

Part 2: Test cycles and specific test conditions

1 Scope

This part of ISO 6460 defines test cycles for measurement for the gaseous emissions from motorcycles, as well as for determining the fuel consumption of motorcycles as defined in ISO 3833, equipped with a spark ignition engine (four-stroke engine, two-stroke engine or rotary piston engine) or a compression ignition engine.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4106, *Motorcycles — Engine test code — Net power*

ISO 7117, *Motorcycles — Measurement of maximum speed*

3 Test cycle

3.1 Introduction

The test cycle is equivalent to the test cycle specified in European Union Commission Directive 2003/77/EC^[7].

The motorcycle shall be placed on a chassis dynamometer equipped with a brake and flywheel. The urban driving cycle (UDC) test shall be conducted over six elementary urban cycles lasting a total 1 170 s without interruption. The urban driving cycle (UDC)/extra-urban driving cycle (EUDC) test shall be conducted over six elementary urban cycles plus one extra-urban cycle lasting a total of 1 570 s without interruption.

During the test, the exhaust gases shall be diluted with air so that the flow volume of the mixture remains constant. Throughout the test, a continuous flow of samples of the mixture shall be passed into one or more bags so that concentrations (average test values) of carbon monoxide, unburnt hydrocarbons, oxides of nitrogen and carbon dioxide can be determined.

A selection of other test cycles adopted or to be adopted by several countries is described in Annex C for information purposes.

3.2 Type 1 test

3.2.1 Operating cycle on the chassis dynamometer

3.2.1.1 Description of cycle

The operating cycles on the chassis dynamometer are indicated in 3.2.4.

3.2.1.2 General conditions for carrying out the cycle

Preliminary test cycles shall be carried out if necessary to determine how best to actuate the accelerator and brake controls so as to achieve a cycle approximating the theoretical cycle within the prescribed limits.

3.2.1.3 Use of the gearbox

3.2.1.3.1 Use of the gearbox is determined as described below.

- a) At constant speed, the engine speed shall as far as possible remain between 50 % and 90 % of the maximum speed. If this speed can be achieved using more than one gear, the engine is tested using the highest gear.
- b) With respect to the urban cycle, during acceleration the engine shall be tested using the gear which allows maximum acceleration. The next higher gear is engaged, at the latest, when the engine speed has reached 110 % of the speed at which the maximum net power output occurs. If a motorcycle reaches a speed of 20 km/h in first gear or 35 km/h in second gear, the next higher gear shall be engaged at these speeds.

In these cases, no other change into higher gears is permitted. If, during the acceleration phase, the gears are changed at fixed motorcycle speeds, the constant speed phase which follows shall be performed with the gear which is engaged when the motorcycle begins the constant speed phase, irrespective of the engine speed.

- c) During deceleration, the next lower gear shall be engaged before the engine reaches virtual idling speed or when the engine speed has fallen to 30 % of the speed of the maximum net power, whichever occurs first. First gear shall not be engaged during deceleration.

3.2.1.3.2 Motorcycles equipped with automatic gearboxes shall be tested with the highest gear engaged (drive). The accelerator shall be operated in such a way as to obtain as steady an acceleration as possible, so that the transmission engages the different gears in the normal order. The tolerances specified in 3.2.1.4 apply.

3.2.1.3.3 For carrying out the extra-urban cycle, the gearbox shall be used in accordance with the manufacturer's recommendation.

Acceleration shall continue throughout the period represented by the straight line connecting the end of each period of idling with the beginning of the next following period of constant speed. The tolerances given in 3.2.1.4 apply.

3.2.1.4 Tolerances

3.2.1.4.1 The theoretical speed shall be maintained to a tolerance of ± 2 km/h during all phases. Speed tolerances greater than those prescribed are permitted during phase changes provided that the tolerances are never exceeded for more than 0,5 s on any one occasion, in all cases subject to the provisions of 3.2.2.5.2 and 3.2.2.6.3.

3.2.1.4.2 A tolerance of $\pm 0,5$ s above or below the theoretical times shall be allowed.

3.2.1.4.3 The speed and time tolerances are combined as indicated in 3.2.4.

3.2.1.4.4 The distance travelled during the cycle shall be measured with a tolerance of $\pm 2\%$.

3.2.2 Procedure for chassis dynamometer tests

3.2.2.1 Special conditions for carrying out the cycle

3.2.2.1.1 The temperature in the premises where the chassis dynamometer bench is situated shall be between 293 K and 303 K throughout the test, and shall be as close as possible to the temperature of the premises where the motorcycle was conditioned.

3.2.2.1.2 The motorcycle shall as far as possible be horizontal during the test so as to avoid any abnormal distribution of the fuel.

3.2.2.1.3 During the test, the motorcycle speed shall be plotted against time in order to check that the cycles have been performed correctly.

3.2.2.1.4 The temperatures of the cooling water and the crankcase oil may be recorded.

3.2.2.2 Starting up the engine

3.2.2.2.1 Once the preliminary operations on the equipment for collecting, diluting, analysing and measuring the gases have been carried out, the engine is started up by means of the devices provided for that purpose, such as the choke, the starter valve, etc., in accordance with the manufacturer's instructions.

3.2.2.2.2 The first cycle begins when the taking of samples and the measuring of the pump rotations commence.

3.2.2.3 Use of the manual choke

The choke shall be cut out as soon as possible and in principle before acceleration from 0 km/h to 50 km/h. If this requirement cannot be met, the moment of actual cut-out shall be indicated. The choke shall be adjusted in accordance with the manufacturer's instructions.

3.2.2.4 Idling

3.2.2.4.1 Manual-shift gearboxes

3.2.2.4.1.1 During periods of idling, the clutch shall be engaged and the gears shall be in neutral.

3.2.2.4.1.2 To enable the accelerations to be performed in accordance with the normal cycle, the vehicle shall be put in first gear, with the clutch disengaged, 5 s before the start of the acceleration following the idling period in question.

3.2.2.4.1.3 The first idling period at the beginning of the cycle consists of 6 s of idling in neutral with the clutch engaged, and 5 s in first gear with the clutch disengaged.

3.2.2.4.1.4 For the idling periods during each cycle, the corresponding times are 16 s in neutral and 5 s in first gear with the clutch disengaged.

3.2.2.4.1.5 The last idling period in the cycle consists of 7 s in neutral with the clutch engaged.

3.2.2.4.2 Semi-automatic gearboxes

The manufacturer's instructions for driving in town or, in their absence, instructions applicable to manual gearboxes shall be followed.

3.2.2.4.3 Automatic gearboxes

The selector shall not be operated at any time during the test unless the manufacturer specifies otherwise. In the latter case, the procedure for manual gearboxes applies.

3.2.2.5 Accelerations

3.2.2.5.1 Accelerations shall be effected so as to ensure that the rate of acceleration is as constant as possible throughout the operation.

3.2.2.5.2 If the acceleration capacities of the motorcycle are not sufficient to perform the acceleration cycles within the prescribed tolerances, the motorcycle shall be driven with the throttle completely open until the speed prescribed for the cycle has been reached. The cycle may then continue normally.

3.2.2.6 Decelerations

3.2.2.6.1 All decelerations shall be effected by completely closing the throttle, the clutch remaining engaged. The engine shall be disengaged at a speed of 10 km/h.

3.2.2.6.2 If the period of deceleration is longer than that prescribed for the corresponding phase, the vehicle's brakes are used to keep to the cycle.

3.2.2.6.3 If the period of deceleration is shorter than that prescribed for the corresponding phase, the timing of the theoretical cycle is restored by a steady-state or an idling period merging into the following steady-state or idling operation. In this case, 3.2.1.4.3 is not applicable.

3.2.2.6.4 At the end of the deceleration period (stopping motorcycle on the rollers), the gear shall be put into neutral and the clutch engaged.

3.2.2.7 Constant speeds

3.2.2.7.1 "Pumping" or the closing of the throttle shall be avoided when passing from acceleration to the following constant speed.

3.2.2.7.2 Periods of constant speed shall be achieved by keeping the accelerator position fixed.

3.2.3 Analysis

The exhaust gases contained in the bag shall be analysed as soon as possible and in any event not later than 20 min after the end of the test cycle.

3.2.4 Breakdown of the operating cycles

The operating cycle of the urban driving cycle (UDC) on the chassis dynamometer is described in Table 1, and the operation cycle of the extra-urban driving cycle (EUDC) on the chassis dynamometer is described in Table 2. The operating cycle of UDC is described in Figure 1 and the operating cycle of UDC/EUDC is described in Figure 2.

In EUDC on the chassis dynamometer, for motorcycles with a permitted maximum speed of 110 km/h, the maximum speed for EUDC shall be restricted to 90 km/h and the operation cycle on the chassis dynamometer is described in Table 3. The operating cycle of UDC/EUDC for motorcycles with a permitted maximum speed of 110 km/h is described in Figure 2.

Table 1 — UDC operating cycle on the chassis dynamometer

Operation no.	Operation	Phase	Acceleration m/s ²	Speed km/h	Duration of each		Cumulative time s	Distance covered m
					operation s	phase s		
1	Idling	1	0	0	11	11	11	0
2	Acceleration	2	1,04	0 to 15	4	4	15	8
3	Constant speed	3	0	15	8	8	23	34
4	Deceleration	4	-0,69	15 to 10	2	5	25	7
5	Deceleration, clutch disengaged		-0,92	10 to 0	3		28	4
6	Idling	5	0	0	21	21	49	0
7	Acceleration	6	0,74	0 to 32	12	12	61	54
8	Constant speed	7	0	32	24	24	85	214
9	Deceleration	8	-0,75	32 to 10	8	11	93	48
10	Deceleration, clutch disengaged		-0,92	10 to 0	3		96	4
11	Idling	9	0	0	21	21	117	0
12	Acceleration	10	0,53	0 to 50	26	26	143	183
13	Constant speed	11	0	50	12	12	155	167
14	Deceleration	12	-0,52	50 to 35	8	8	163	95
15	Constant speed	13	0	35	13	13	176	127
16	Deceleration	14	-0,68	35 to 10	9	12	185	64
17	Deceleration, clutch disengaged		-0,92	10 to 0	3		188	4
18	Idling	15	0	0	7	7	195	0
Total distance covered								1 013


Table 2 — EUDC operating cycle on the chassis dynamometer

Operation no.	Operation	Phase	Acceleration m/s ²	Speed km/h	Duration of each operation phase s s		Cumulative time s	Gear to be used in the case of a manual gearbox
1	Idling	1			20	20	20	See 3.2.1.3.3, use of the gearbox over the extra-urban cycle in accordance with the manufacturer's recommendations.
2	Acceleration	2	0,47	0-70	41	41	61	
3	Constant speed	3		70	50	50	111	
4	Deceleration	4	-0,69	70-50	8	8	119	
5	Constant speed	5		50	69	69	188	
6	Acceleration	6	0,43	50-70	13	13	201	
7	Constant speed	7		70	50	50	251	
8	Acceleration	8	0,24	70-100	35	35	286	
9	Constant speed	9		100	30	30	316	
10	Acceleration	10	0,28	100-120	20	20	336	
11	Constant speed	11		120	10	10	346	
12	Deceleration	12	-0,69	120-80	16	34	362	
13	Deceleration		-1,04	80-50	8		370	
14	Deceleration, clutch disengaged		-1,39	50-0	10		380	
15	Idling	13			20	20	400	

NOTE This table is the result of reformatting section 3 of Appendix 1 to Annex III of Directive 91/441/EEC^[8], in accordance with 3.2.1.3.3.

Table 3 — EUDC operating cycle on the chassis dynamometer for motorcycles with a permitted maximum speed of 110 km/h

Operation no.	Operation	Phase	Acceleration m/s ²	Speed km/h	Duration of each		Cumulative time s	Gear to be used in the case of a manual gearbox
					operation s	phase s		
1	Idling	1			20	20	20	See 3.2.1.3.3, use of the gearbox over the extra-urban cycle in accordance with the manufacturer's recommendations.
2	Acceleration	2	0,47	0-70	41	41	61	
3	Constant speed	3		70	50	50	111	
4	Deceleration	4	-0,69	70-50	8	8	119	
5	Constant speed	5		50	69	69	188	
6	Acceleration	6	0,43	50-70	13	13	201	
7	Constant speed	7		70	50	50	251	
8	Acceleration	8	0,24	70-90	23,1	23,1	274,1	
9	Constant speed	9		90	84	84	358,1	
10	Deceleration	10	-0,69	90-80	3,9	21,9	362	
11	Deceleration		-1,04	80-50	8		370	
12	Deceleration, clutch disengaged		-1,39	50-0	10		380	
13	Idling	11			20	20	400	

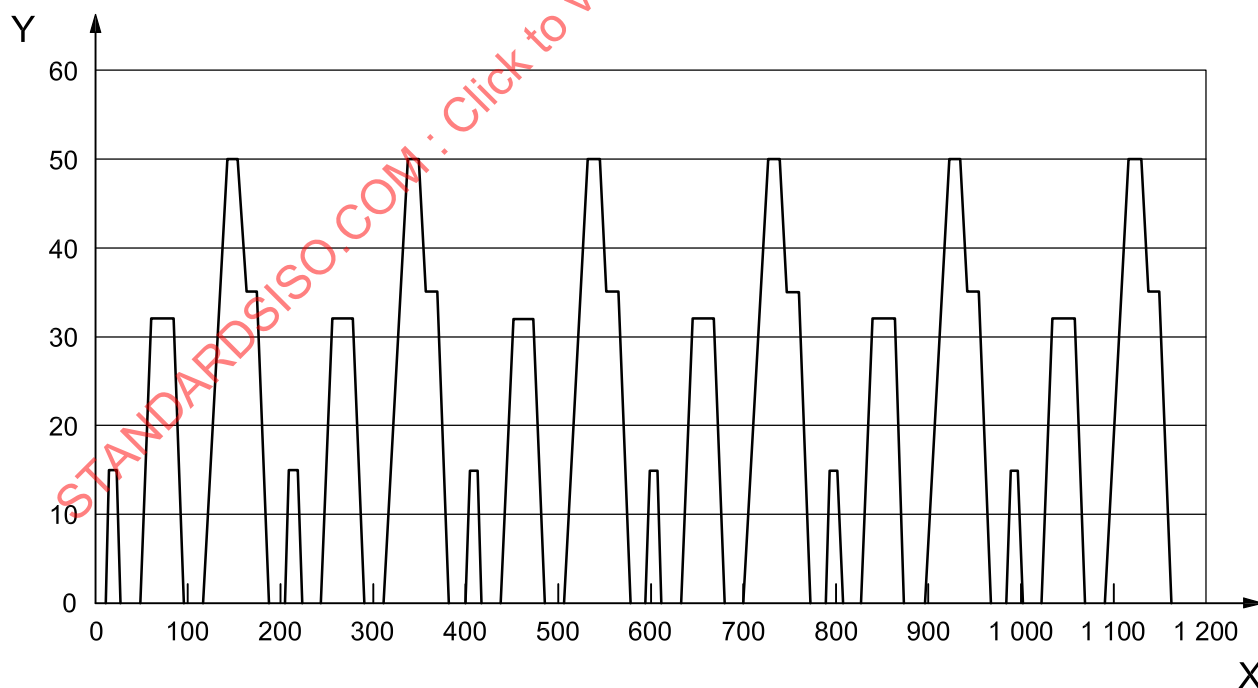


Key

X time, s

Y speed, km/h

Figure 1 — Operating cycle on chassis dynamometer (UDC)

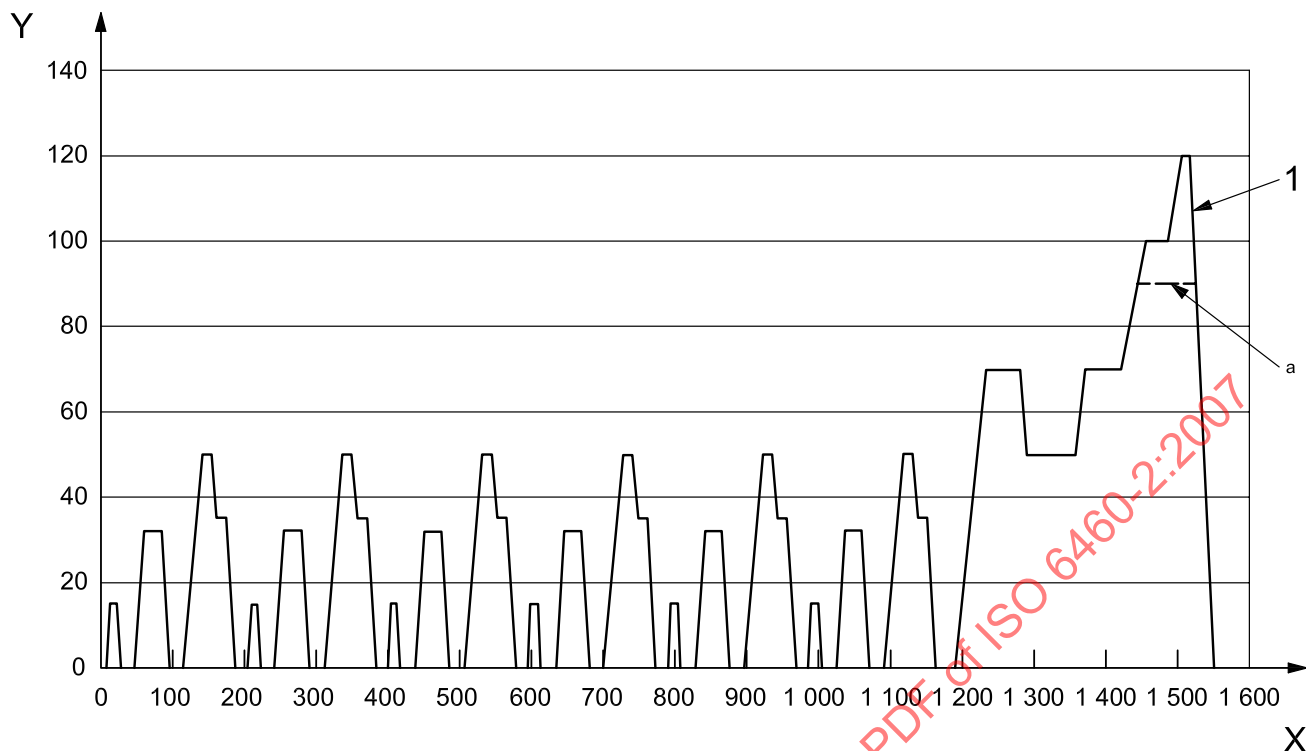

Key

- X time, s
- Y speed, km/h
- 1 UDC/EUDC
- a For motorcycles with a permitted maximum speed of 110 km/h.

Figure 2 — Operating cycle on chassis dynamometer (UDC/EUDC)

3.3 Type 2 test

3.3.1 Measurement conditions

The type 2 test shall be measured immediately after the type 1 test with the engine at normal idling speed and at high idle.

In the case of motorcycles with manual or semi-automatic gearboxes, the test is carried out with the gear lever in the “neutral” position and with the clutch engaged.

In the case of motorcycles with automatic transmissions, the test is carried out with the selector in position “zero” or “park”.

3.3.2 Sampling of gases

The exhaust outlet shall be fitted with a sufficiently leak-tight extension piece such that the exhaust-gas sampling probe can be inserted to at least 60 cm without increasing back-pressure by more than 1,25 kPa and without affecting operation of the motorcycle. Nevertheless, the shape of the extension piece shall be such as to avoid appreciable dilution of exhaust gases by air at the point of the sampling probe. If the motorcycle is equipped with more than one exhaust outlet, either these outlets shall be connected up to a common pipe or carbon monoxide concentrations shall be tested at each outlet, with the results of the measurements being the arithmetical mean of these concentrations.

The concentrations for carbon monoxide, $c_{\text{CO,e}}$, and carbon dioxide, $c_{\text{CO}_2,\text{e}}$, are determined by reading off the results shown by the instruments or recording devices and using the appropriate calibration tables.

The corrected concentration of carbon monoxide in two-stroke engines, $c_{\text{CO,ec2}}$, calculated in percent volume, is:

$$c_{\text{CO,ec2}} = c_{\text{CO,e}} \frac{10}{c_{\text{CO,e}} + c_{\text{CO}_2,\text{e}}} \quad (1)$$

The corrected concentration of carbon monoxide in four-stroke engines, $c_{\text{CO,ec4}}$, calculated in percent volume, is:

$$c_{\text{CO,ec4}} = c_{\text{CO,e}} \frac{15}{c_{\text{CO,e}} + c_{\text{CO}_2,\text{e}}} \quad (2)$$

It is not necessary to correct the concentration of $c_{\text{CO,e}}$ measured in accordance with Equations (1) or (2) if the sum of the concentrations measured ($c_{\text{CO,e}} + c_{\text{CO}_2,\text{e}}$) is 10 or more for two-stroke engines, and 15 or more for four-stroke engines.

3.3.3 Normal and high idling speed tests

3.3.3.1 When tested in accordance with 3.3.1 and 3.3.2 at normal idling speed:

- a) the carbon monoxide content by volume of the exhaust gases emitted is recorded;
- b) the engine speed during the test shall be recorded, including any tolerances.

3.3.3.2 When tested at "high idle" speed (i.e. $>2000 \text{ min}^{-1}$):

- a) the carbon monoxide content by volume of the exhaust gases emitted is recorded;
- b) the engine speed during the test shall be recorded, including any tolerances.

The engine oil temperature at the time of the test shall be measured and recorded.

4 Presentation of results

The results of gaseous exhaust emissions shall be reported as specified in Annex A and the results of specific fuel consumption shall be reported as specified in Annex B.

Annex A (normative)

Presentation of results for gaseous exhaust emissions

A.1 Motorcycle

Category: two wheeler/three wheeler (delete as applicable)

Trade name (-mark):

Model:

Engine model:

Cycle: two-stroke/four-stroke (delete as applicable)

Number and layout of cylinders:

Engine displacement: cm³

Gear-box: manual/automatic (delete as applicable)

Number of gear ratios (speeds):

Drive ratios: — primary: — final:

Maximum speed, measured in accordance with ISO 7117: km/h

Maximum net power, measured in accordance with ISO 4106: kW at min⁻¹

Idling speed: min⁻¹

Mileage accumulated at test: km

Rear wheel: Tyre size Static radius: mm

Make:

Motorcycle mass: — kerb : kg — reference: kg

Rider mass: kg

Instruments mass: kg

Test motorcycle mass: kg

Equivalent inertia mass: kg

Others, if there is any alteration:

A.2 Test cycle

Description of the cycle: reduced speed/normal speed (delete as applicable)

A.3 Test fuel

Test fuel:

Fuel density: g/mL at K

Octane number or cetane number:

Hydrogen/carbon atom number ratio:

Oxygen/carbon atom number ratio:

Mixed with lubrication oil: yes/no (delete as applicable)

If yes, the volume ratio of fuel to lubrication oil:

A.4 Chassis dynamometer

Chassis dynamometer with: polygonal function/coefficient control/ F^* polygonal digital setter/ f_0^*, f_2^* coefficient digital setter (delete as applicable)

Road-load curve fitting equation $f = a + bv^2$: a N b N/(km/h)²

Cooling fan wind speed is proportional to the roller speed: yes/no (delete as applicable)

A.5 Test room conditions

Test room dry-bulb temperature: start K end K

Test room wet-bulb temperature: start K end K

Test room mean humidity: %

Test room mean pressure: kPa

A.6 Sampling and analysing systems

Exhaust gas emission analyser:

CVS system: positive displacement pump/critical flow venturi (delete as applicable)

If other sampling system is used, detailed description:

Pressure at exhaust pipe outlet: Pa

Hydrogen/carbon atom number ratio in exhaust gas:

Oxygen/carbon atom number ratio in exhaust gas:

A.7 Test results

A.7.1 Type I test results

Sampling volume: m³/min

Dilution factor:

Diluted exhaust mixture volume: L/km

Concentration in diluted exhaust mixture A	Concentration in dilution air B	Quantity
CO: ppm	 ppm	g/km
THC: ppmC	 ppmC	g/km
NO _x : ppm	 ppm	g/km
CO ₂ : %	 %	g/km
Driving distance:		km

A.7.2 Type II test results

Idling speed: min⁻¹

CO: %

HC (if necessary): ppm

High idling speed (if applicable): min⁻¹

CO: %

HC (if necessary): ppm

Annex B (normative)

Presentation of results of fuel consumption

B.1 Motorcycle

Category: two wheeler/three wheeler (delete as applicable)

Trade name (-mark):

Model:

Engine model:

Cycle: two-stroke/four-stroke (delete as applicable)

Number and layout of cylinders:

Engine displacement: cm³

Gear-box: manual/automatic (delete as applicable)

Number of gear ratios (speeds):

Drive ratios: — primary: — final:

Maximum speed, measured in accordance with ISO 7117: km/h

Maximum net power, measured in accordance with ISO 4106: kW at min⁻¹

Idling speed: min⁻¹

Mileage accumulated at test: km

Rear wheel: Tyre size Static radius: mm

Make:

Motorcycle mass: — kerb : kg — reference: kg

Rider mass: kg

Instruments mass: kg

Test motorcycle mass: kg

Equivalent inertia mass: kg

Others, if there is any alteration:

B.2 Test cycle

Description of the cycle: reduced speed/normal speed (delete as applicable)

B.3 Test fuel

Test fuel:

Fuel density: g/mL at K

Octane number or cetane number:

Hydrogen/carbon atom number ratio:

Oxygen/carbon atom number ratio:

Mixed with lubrication oil: yes/no (delete as applicable)

If yes, the volume ratio of fuel to lubrication oil:

B.4 Chassis dynamometer

Chassis dynamometer with: polygonal function/coefficient control/ F^* polygonal digital setter/ f_0^*, f_2^* coefficient digital setter (delete as applicable)

Road-load curve fitting equation $f = a + bv^2$: a N b N/(km/h)²

Cooling fan wind speed is proportional to the roller speed: yes/no (delete as applicable)

B.5 Test room conditions

Test room dry-bulb temperature: start K end K

Test room wet-bulb temperature: start K end K

Test room mean humidity: %

Test room mean pressure: kPa

B.6 Fuel consumption measurement system

Fuel consumption measurement: carbon balance method/fuel flow measurement method (delete as applicable)

B.7 Carbon balance method

If the test is carried out by the fuel flow measurement method, B.7 shall be omitted.

B.7.1 Sampling and analysing systems

Exhaust gas emission analyser:

CVS system: positive displacement pump/critical flow venturi *(delete as applicable)*

If other sampling system is used, detailed description:

Pressure at exhaust pipe outlet: Pa

Hydrogen/carbon atom number ratio in exhaust gas:

Oxygen/carbon atom number ratio in exhaust gas:

B.7.2 Test resultsSampling volume: m³/min

Dilution factor:

Diluted exhaust mixture volume: L/km

Concentration in diluted exhaust mixture A	Concentration in dilution air B	Quantity
CO: ppm	 ppm	g/km
THC: ppmC	 ppmC	g/km
NO _x : ppm	 ppm	g/km
CO ₂ : %	 %	g/km
Driving distance:	 km	
Fuel consumption:	 L	
Specific fuel consumption: km/L	 L/100 km	

B.8 Fuel flow measurement method

If the test is carried out by the carbon balance method, B.8 shall be omitted.

B.8.1 Fuel consumption measurement methodFuel consumption measurement method: volumetric method/gravimetric method/flow meter method
(delete as applicable)

Other method:

B.8.2 Test results

Driving distance: km

Fuel consumption: L

Specific fuel consumption: km/L L/100 km


Annex C (informative)

Test cycles

C.1 Test cycle 1

Test cycle 1 is equivalent to the test cycle specified in UNECE Regulation No. 40 (E/ECE/TRANS/505/Rev.1/Add.39 of 7 May 1979)^[6].

The operating cycle of test cycle 1 is illustrated in Figure C.1.

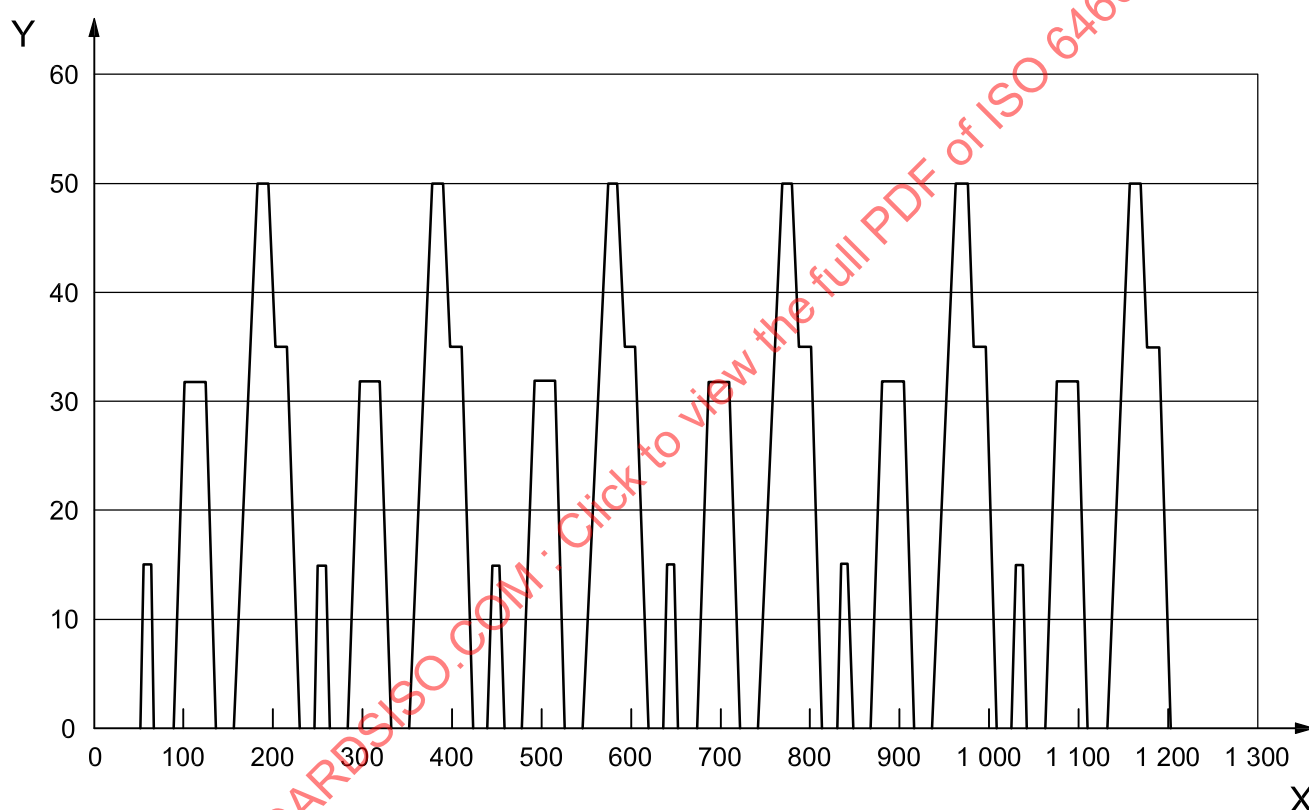

Key

X time, s
Y speed, km/h

Figure C.1 — Operating cycle on chassis dynamometer

C.2 Test cycle 2

Test cycle 2 is equivalent to the test cycle specified in the Directive 2002/51/EC^[9] of the European Parliament and of the Council of 19 July 2002 (Official Journal of the European Communities L252 of 20 September 2002).

The operating cycle of test cycle 2 is illustrated in Figure C.2.