
**Internal combustion engines — Piston
rings — Expander/segment oil-control
rings**

*Moteurs à combustion interne — Segments de piston — Segments
racleurs régulateurs d'huile/Ressorts d'expansion*

STANDARDSISO.COM : Click to view the full PDF of ISO 6627:2011



STANDARDSISO.COM : Click to view the full PDF of ISO 6627:2011



COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Symbols and abbreviated terms	1
4 Ring types and designations	3
4.1 Types of expander/segment oil-control rings	3
4.2 General features	4
4.3 Designation examples.....	5
5 Common features	5
5.1 Expander-spacer	5
5.2 Segment features	7
5.3 Expander/segment assembly	10
6 Dimensions	10
7 Materials	13
7.1 Expander-spacer	13
7.2 Segments	13
8 Tangential force and nominal contact pressure	13
8.1 Tangential force.....	13
8.2 Classes of nominal contact pressure.....	13
Bibliography.....	15

STANDARDSISO.COM : Click to view the full PDF of ISO 6627:2011

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6627 was prepared by Technical Committee ISO/TC 22, *Road vehicles*.

This second edition cancels and replaces the first edition (ISO 6627:2000), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 6627:2011

Introduction

ISO 6627 is one of a series of International Standards dealing with piston rings for reciprocating internal combustion engines. Others are ISO 6621, ISO 6622, ISO 6623; ISO 6624, ISO 6625 and ISO 6626 (see Clause 2 and the Bibliography).

The common features and dimensional tables included in ISO 6627 represent a broad range of variables. In selecting a ring type, the designer will above all need to consider the particular operating conditions. Moreover, it is essential that the designer refer to the specifications and requirements of ISO 6621-3 and ISO 6621-4 before completing the selection.

STANDARDSISO.COM : Click to view the full PDF of ISO 6627:2011

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 6627:2017

Internal combustion engines — Piston rings — Expander/segment oil-control rings

1 Scope

This International Standard specifies the essential dimensional features of expander/segment oil-control rings, without providing a complete product description (because expander-spacer design varies from piston-ring manufacturer to piston-ring manufacturer, the interaction between the manufacturer and the client will determine specific design details).

This International Standard applies to expander/segment oil-control rings of nominal diameters ranging from 40 mm to 125 mm for reciprocating internal combustion engines for road vehicles and other applications. It also applies to piston rings for compressors working under analogous conditions.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6621-2, *Internal combustion engines — Piston rings — Part 2: Inspection measuring principles*

ISO 6621-3, *Internal combustion engines — Piston rings — Part 3: Material specifications*

ISO 6621-4, *Internal combustion engines — Piston rings — Part 4: General specifications*

ISO 6626, *Internal combustion engines — Piston rings — Coil-spring-loaded oil control rings*

3 Symbols and abbreviated terms

For the purposes of this International Standard, the symbols and abbreviated terms in Table 1 apply.

Table 1 — Symbols and abbreviated terms





Symbol abbreviated terms	Description
a_1	Segment radial wall thickness
a_8	Spacer radial thickness
a_9	Expander radial thickness
a_{11}	Assembly radial thickness
a_{14}	Seating tab height
d_1	Nominal ring assembly diameter (nominal diameter)
h_1	Nominal assembly width

Table 1 (continued)

Symbol abbreviated terms	Description
h_{24}	Segment contact face width
h_9	Expander width
h_{10}	Segment width near inside diameter (ID), after coiling
h_{11}	Segment width near outside diameter (OD), after coiling and surface treatment or plating
h_{12}	Nominal segment width
h_{13}	Spacer width
p_0	Nominal contact pressure
p_{0u}	Unit contact pressure
s_1	Segment closed gap; stagger gap
F_t	Tangential force
F_{tc}	Specific tangential force
θ	Tab angle
CR1...CR2	Chromium-plating thickness
LM	Piston rings with partly cylindrical machined peripheral faced
LP	Piston rings with lapped stripe over the whole circumference
ES1...ES4	Types of expander/segment oil-control rings
PNH	High nominal pressure
PNL	Low nominal pressure
PNM	Medium nominal pressure
PNR	Reduced nominal pressure
PNV	Very high nominal pressure
TT00...TT30	Nominal seating tab angle
NS010...NS050	Nitrided surface (segment)
NX003...NX025	Nitrided surface (expander-spacer)

4 Ring types and designations

4.1 Types of expander/segment oil-control rings

ES1	
ES2	
ES3	
ES4	




Key

1 centring pad (optional)

Figure 1 — Expander/segment oil-control ring designs

4.2 General features

The expander/segment assembly shall be in accordance with Figure 2.

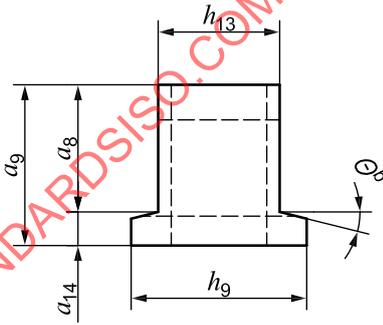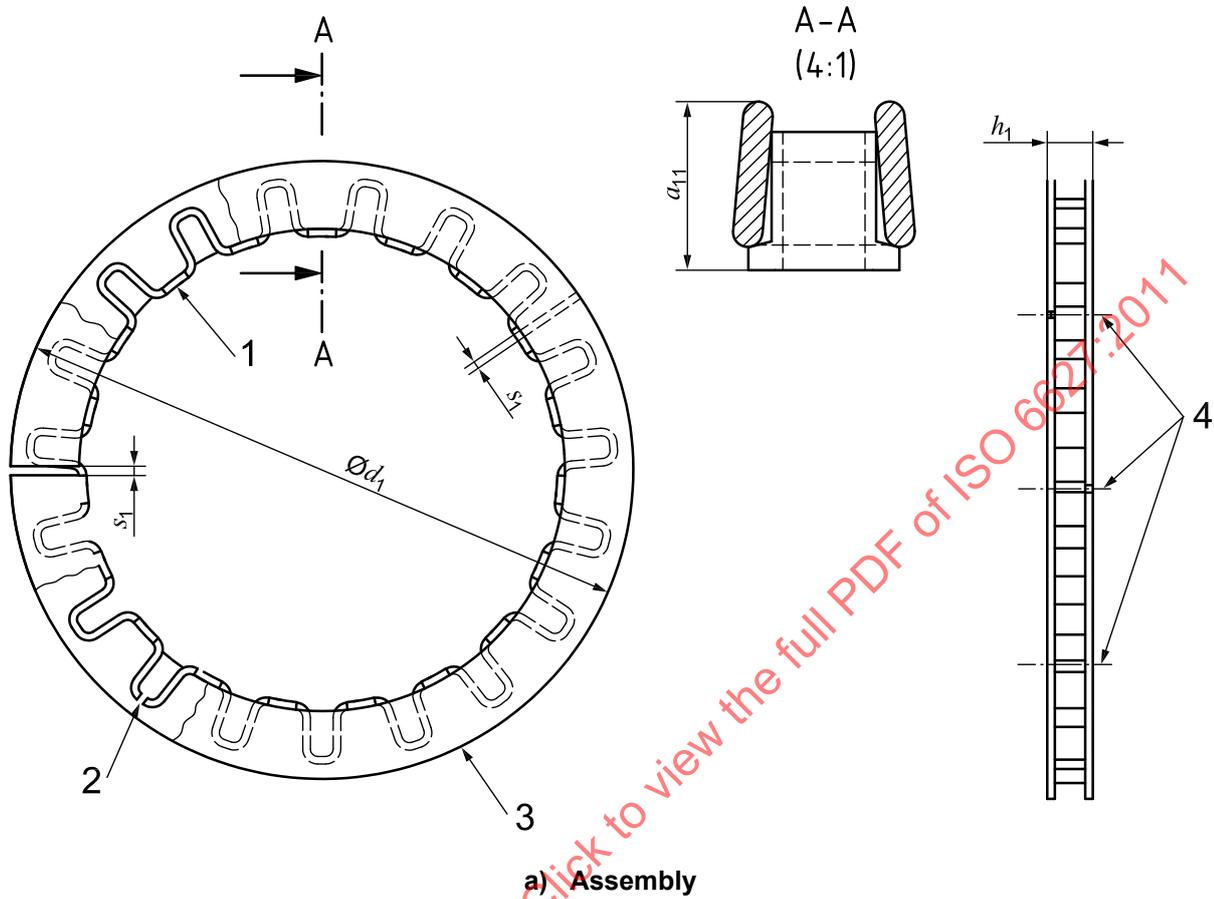

b) Expander-spacer

c) Segment

Key

- 1 seating tab
- 2 expander-spacer ends
- 3 peripheral surface
- 4 stagger segments gaps and expander ends (all three components); stagger angle should be larger than 30°^a

^a For assembly arrangement regarding tangential force, see ISO 6621-2.

^b Seating tab angle dimensions are defined in Table 3.

NOTE This is a schematic drawing of the four spring types shown in Figure 1.

Figure 2 — Expander/segment assembly

4.3 Designation examples

The following are examples of piston ring designations in accordance with this International Standard.

EXAMPLE 1 Expander/segment oil-control ring type ES1 (ES1) of nominal diameter $d_1 = 90$ mm (90) and nominal assembly width $h_1 = 3$ mm (3,0), with segments made of unalloyed steel subclass 68 (MC68), a chromium-plated peripheral surface of minimum thickness 0,05 mm (CR1), and with an expander made of 16 % Cr (min.) austenitic steel, of material subclass 67 (MC67) and tangential force, F_t , according to the medium nominal contact pressure class (PNM):

Piston ring ISO 6627 - ES1-90 × 3,0-MC68/CR1-MC67/PNM

EXAMPLE 2 Expander/segment oil-control ring type ES2 (ES2) of nominal diameter $d_1 = 90$ mm (90) and nominal assembly width $h_1 = 2,5$ mm (2,5), with segments made of 11 % Cr (min.) martensitic steel, subclass 65 (MC65), nitrided on the peripheral and inside surfaces (NS020) to a minimum depth of 0,020 mm on the peripheral surface, and with an expander made of 16 % Cr (min.) austenitic steel, of material subclass 67 (MC67), nitrided on the surface (NX), and tangential force, F_t , according to the reduced nominal contact pressure class (PNR):

Piston ring ISO 6627 - ES2-90 × 2,5-MC65/NS020-MC67/NXPNR

EXAMPLE 3 Expander/segment oil-control ring type ES3 (ES3) of nominal diameter $d_1 = 90$ mm (90) and nominal assembly width $h_1 = 4,0$ mm (4,0), with segments made of unalloyed steel subclass 68 (MC68), a chromium-plated peripheral surface of minimum thickness 0,05 mm (CR1) with lapped stripe (h24) of 0,30 mm, and with an expander made of 16 % Cr (min.) austenitic steel, of material subclass 67 (MC67) and tangential force, F_t , according to the high nominal contact pressure class (PNH):

Piston ring ISO 6627 - ES3-90 × 4,0-MC68/CR1-MC67/PNH

5 Common features

5.1 Expander-spacer

5.1.1 Design considerations

In order to optimize the fit of the oil ring assembly into the engine cylinder bore, the following should be considered in the design of the expander/segment oil-control rings:

- total circumferential deflection of the expander;
- piston groove depth;
- features on the lands adjacent to the oil ring groove;
- groove-corner radius.

5.1.2 Without surface treatment

The expander-spacer without surface treatment is typically used together with chromium-plated segments (see 5.2.1).

5.1.3 Nitrided surface (NX)

The expander-spacer with a nitrided surface is typically used together with nitrided segments (see 5.2.2).


Table 2 — Expander-spacer nitrided case

Dimensions in millimetres

Code	Nitrided case depth	Tolerance
NX003	0,003	+ 0,012 0
NX010	0,010	
NX015	0,015	
NX020	0,020	
NX025	0,025	
NOTE 1 The tolerance for NX applies at the contact area between the segment internal diameter and the expander.		
NOTE 2 For the definition of the nitrided case depth, see ISO 6621-2.		

5.1.4 Seating tab angle

The expander-spacer is usually designed with the seating tabs at a slight angle. These results in side sealing between the segment and the side of the piston groove (see Figure 3). Table 3 presents the recommended tab angles.

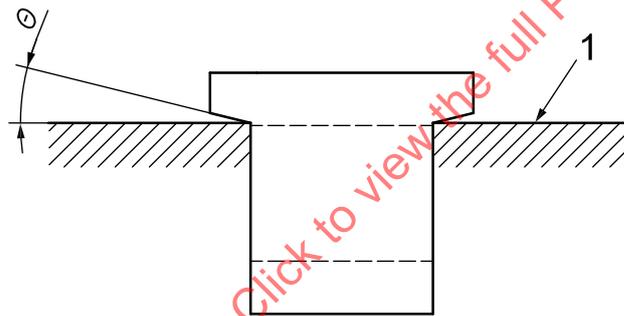

Key

1 reference plane

Figure 3 — Expander-spacer seating tab angle

Table 3 — Seating tab angle θ

Values in degrees

Code	Nominal value	Tolerance
TT00	0	+ 5
TT05	5	± 5
TT10	10	
TT15	15	
TT20	20	
TT25	25	
TT30	30	
NOTE Code TT00 is only applicable for ES2 type expander.		

5.1.5 Expander-spacer dimensions

No values are given for features a_8 , a_9 , a_{14} , h_9 and h_{13} (see Figure 2), as these dimensions depend on the expander-spacer design and shall be defined by the manufacturer.

5.2 Segment features

5.2.1 Chromium-plated peripheral surface

The common features of a chromium-plated segment are shown in Figure 4, with chromium-plating thickness given in Table 4.

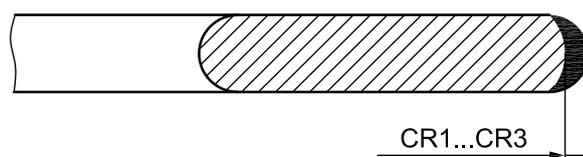


Figure 4 — Chromium-plated segment

Table 4 — Chromium-plating thickness

Dimensions in millimetres

Code	Thickness min.
CR1	0,05
CR2	0,10

5.2.2 Nitrided surface codes NS010 to NS050

The common features of a nitrided segment are shown in Figure 5. The nitriding case depth (NS010 to NS050) is specified according to its reference to the peripheral surface, inside surface or the sides of the segment (see Table 5).

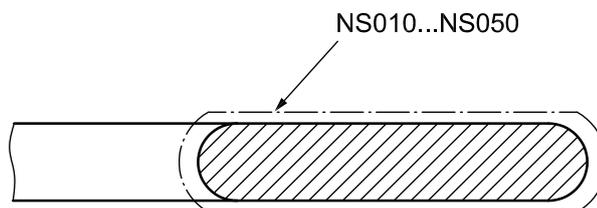


Figure 5 — Nitrided segment

Table 5 — Nitrided case depth

Dimensions in millimetres

Code	Nitrided case depth ^a		
	Peripheral surface min.	Inside surface min.	Side faces
NS010	0,010	0,005	nitrided surface permissible
NS020	0,020	0,005	
NS030	0,030	0,010	
NS050	0,050	0,020	

^a For tolerances, see ISO 6621-4.

5.2.3 Segment dimensions

The nominal segment width (h_{12}) is defined as the width at the mid-point of the segment radial-wall thickness. The segment width defined near the internal diameter of the segment (h_{10}) and the outside diameter (h_{11}) is shown in Figure 6, while typical values are given in Table 7.

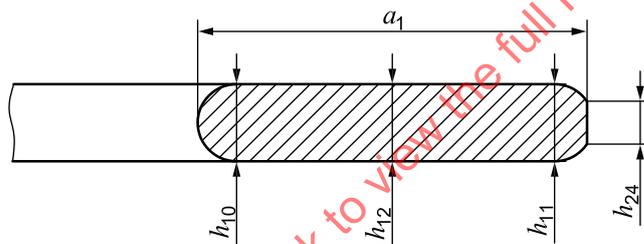


Figure 6 — Segment width

Table 6 — Typical ring width and segment width combinations

Dimensions in millimetres

h_1	h_{12}					
	0,30	0,35	0,40	0,45	0,50	0,60
1,5	x	x	x			
2,0		x	x	x		
2,5			x	x		
3,0			x	x	x	
3,5				x	x	x
4,0					x	x

Table 7 — Typical segment width and segment radial wall thickness combinations

Dimensions in millimetres

h_{12}	a_1								
	1,50	1,70	1,85	2,00	2,10	2,30	2,50	2,70	3,00
0,30	x	x	x	x					
0,35	x	x	x	x	x	x			
0,40	x	x	x	x	x	x			
0,45				x	x	x	x	x	x
0,50				x	x	x	x	x	x
0,60					x	x	x	x	x

Table 8 — Typical ring width and segment radial wall thickness combinations

Dimensions in millimetres

h_1	a_1								
	1,50	1,70	1,85	2,00	2,10	2,30	2,50	2,70	3,00
1,5	x	x	x	x					
2,0	x	x	x	x	x	x	x		
2,5	x	x	x	x	x	x	x		
3,0				x	x	x	x	x	x
3,5								x	x
4,0								x	x

Table 9 — Segment width due to processing

Dimensions in millimetres

h_{12}	Plated segment width			Nitrided segment width		
	max.			max.		
	h_{10}	h_{11}	h_{24}	h_{10}	h_{11}^a	h_{24}
0.30	0.34	0.36	0.20	0.34	0.33	0.20
0.35	0.39	0.41	0.25	0.39	0.38	0.25
0.40	0.44	0.46	0.25	0.44	0.43	0.25
0.45	0.49	0.51	0.25	0.49	0.48	0.25
0.50	0.54	0.56	0.30	0.54	0.53	0.30
0.60	0.64	0.66	0.30	0.64	0.63	0.30

NOTE h_{24} is applicable only for segments with specified segment contact face width.

^a Dimension h_{11} optional.

The radial wall thickness of the segment will vary in accordance with the expander-spacer design. Common ratios d_1/a_1 are between 45 and 20.

Table 10 (continued)

Dimensions in millimetres

Nominal diameter d_1	Segment width h_{12} (Column)						Segment closed gap s_1		Specific tangential force $F_{tc}[N]$ (pou = 1 N/mm ²) (Column)							Nominal assembly width h_1 (using available h_{12}) (Column)						
	1	2	3	4	5	6	Tolerance		1	2	3	4	5	6	Tolerance	1-2-3	2-3-4	3-4	3-4-5	4-5-6	5-6	
60									18,00	21,00	24,00	27,00	30,00	36,00								
61									18,30	21,35	24,40	27,45	30,50	36,60								
62									18,60	21,70	24,80	27,90	31,00	37,20								
63									18,90	22,05	25,20	28,35	31,50	37,80								
64									19,20	22,40	25,60	28,80	32,00	38,40								
65									19,50	22,75	26,00	29,25	32,50	39,00								
66									19,80	23,10	26,40	29,70	33,00	39,60								
67							0,20		20,10	23,45	26,80	30,15	33,50	40,20								
68									20,40	23,80	27,20	30,60	34,00	40,80								
69									20,70	24,15	27,60	31,05	34,50	41,40								
70									21,00	24,50	28,00	31,50	35,00	42,00								
71									21,30	24,85	28,40	31,95	35,50	42,60								
72									21,60	25,20	28,80	32,40	36,00	43,20								
73									21,90	25,55	29,20	32,85	36,50	43,80								
74								+0,75 0	22,20	25,90	29,60	33,30	37,00	44,40								
75									22,50	26,25	30,00	33,75	37,50	45,00								
76									22,80	26,60	30,40	34,20	38,00	45,60								
77	0,30	0,35	0,40	0,45	0,50	0,60			23,10	26,95	30,80	34,65	38,50	46,20	1,5	2,0	2,5	3,0	3,5	4,0		
78									23,40	27,30	31,20	35,10	39,00	46,80								
79									23,70	27,65	31,60	35,55	39,50	47,40								
80									24,00	28,00	32,00	36,00	40,00	48,00								
81									24,30	28,35	32,40	36,45	40,50	48,60								
82							0,25		24,60	28,70	32,80	36,90	41,00	49,20								
83									24,90	29,05	33,20	37,35	41,50	49,80								
84									25,20	29,40	33,60	37,80	42,00	50,40								
85									25,50	29,75	34,00	38,25	42,50	51,00								
86									25,80	30,10	34,40	38,70	43,00	51,60								
87									26,10	30,45	34,80	39,15	43,50	52,20								
88									26,40	30,80	35,20	39,60	44,00	52,80								
89									26,70	31,15	35,60	40,05	44,50	53,40								
90									27,00	31,50	36,00	40,50	45,00	54,00								
91										31,85	36,40	40,95	45,50	54,60	± 20 % if $F_{tc} > 25$ N ± 5 N if $F_{tc} \leq 25$ N							
92							0,30	+0,75 0	—	32,20	36,80	41,40	46,00	55,20								
93										32,55	37,20	41,85	46,50	55,80								
94										32,90	37,60	42,30	47,00	56,40								