
**Earth-moving machinery —
Laboratory evaluation of operator seat
vibration**

*Engins de terrassement — Évaluation en laboratoire des vibrations
transmises à l'opérateur par le siège*

STANDARDSISO.COM : Click to view the full PDF of ISO 7096:2020



STANDARDSISO.COM : Click to view the full PDF of ISO 7096:2020



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	vi
1 Scope	1
2 Normative references	2
3 Terms, definitions, symbols and abbreviated terms	2
3.1 Terms and definitions.....	2
3.2 Symbols and abbreviated terms.....	3
4 General	4
5 Test conditions and test procedure	4
5.1 General.....	4
5.2 Simulation of vibration.....	5
5.3 Test seat.....	5
5.3.1 General.....	5
5.3.2 Run-in.....	5
5.3.3 Seat adjustment.....	5
5.4 Test person and posture.....	5
5.5 Input vibration.....	6
5.5.1 Simulated input vibration test to evaluate the SEAT factor.....	6
5.5.2 Damping test.....	6
5.5.3 Damping test for active and semi-active suspension systems.....	7
5.6 Tolerances on input vibration.....	7
5.6.1 General.....	7
5.6.2 Distribution function.....	7
5.6.3 Power spectral density and rms values.....	7
6 Acceptance values	8
6.1 SEAT factor.....	8
6.2 Damping performance.....	8
7 Seat identification	9
8 Information for use	9
8.1 General.....	9
8.2 Test report.....	9
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 2, *Safety, ergonomics and general requirements*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 151, *Construction equipment and building material machines - Safety*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This fourth edition cancels and replaces the third edition (ISO 7096:2000), which has been technically revised.

The main changes compared to the previous edition are as follows:

- [Clause 1](#), horizontal direction drills added to the list of machines with low vertical vibration inputs;
- crawler dumpers added to [Table 4](#) and aligned with [Figure 7](#);
- whole document, update of normative references;
- skid steer loaders with tracks have been added;
- [5.4](#), reference to the posture of the test person added and total mass of heavy person updated;
- [5.5.2](#), informative note for bag filling;
- [5.5.3](#), damping test for active and semi-active suspension systems added;
- [Table 2](#), Power Spectral Density of class EM 1 and EM 3 modified;
- [Table 3](#), Filter cut-off frequencies of class EM 1 modified;
- [Table 4](#), Characteristics of the simulated input vibration modified for the following machine types:
 - Articulated or rigid frame dumper >4 500 kg;
 - Wheel loader >4 500 kg.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO 7096:2020

Introduction

This document is a type-C standard as stated in ISO 12100.

This document is of relevance, in particular, for the following stakeholder groups representing the market players with regard to machinery safety:

- machine manufacturers (small, medium and large enterprises);
- health and safety bodies (regulators, accident prevention organisations, market surveillance etc.)

Others can be affected by the level of machinery safety achieved with the means of the document by the above-mentioned stakeholder groups:

- machine users/employers (small, medium and large enterprises);
- machine users/employees (e.g. trade unions, organizations for people with special needs);
- service providers, e. g. for maintenance (small, medium and large enterprises);
- consumers (in case of machinery intended for use by consumers).

The above-mentioned stakeholder groups have been given the possibility to participate at the drafting process of this document.

The machinery concerned and the extent to which hazards, hazardous situations or hazardous events are covered are indicated in the Scope of this document.

When requirements of this type-C standard are different from those which are stated in type-A or type-B standards, the requirements of this type-C standard take precedence over the requirements of the other standards for machines that have been designed and built according to the requirements of this type-C standard.

The operators of earth-moving machinery are often exposed to a low frequency vibration environment partly caused by the movement of the machines over uneven ground and the tasks carried out. The seat constitutes the last stage of suspension before the operator. To be efficient at attenuating the vibration, the suspension seat should be chosen according to the dynamic characteristics of the machine. The design of the seat and its suspension are a compromise between the requirements of reducing the effect of vibration and shock on the operator and providing him with stable support so that he can control the machine effectively.

Thus, seat vibration attenuation is a compromise of a number of factors and the selection of seat vibration parameters needs to be taken in context with the other requirements for the seat.

The performance criteria provided in this document have been set in accordance with what is attainable using what is at present the best design practice. They do not necessarily ensure the complete protection of the operator against the effects of vibration and shock. They could be revised in the light of future developments and improvements in suspension design.

The test inputs included in this document are based on a very large number of measurements taken in situ on earth-moving machinery used under severe but typical operating conditions. The test methods are based on ISO 10326-1:2016, which is a general method applicable to seats for different types of machines.

Earth-moving machinery — Laboratory evaluation of operator seat vibration

1 Scope

1.1 This document specifies, in accordance with ISO 10326-1:2016, a laboratory method for measuring and evaluating the effectiveness of the seat suspension in reducing the vertical whole-body vibration transmitted to the operator of earth-moving machines at frequencies between 1 Hz and 20 Hz. It also specifies acceptance criteria for application to seats on different machines.

1.2 This document is applicable to operator seats used on earth-moving machines as defined in ISO 6165.

1.3 This document defines the input spectral classes required for the following earth-moving machines. Each class defines a group of machines having similar vibration characteristics:

- rigid-frame dumpers >4 500 kg operating mass;
- articulated-frame dumpers;
- scrapers without axle or frame suspension¹⁾;
- wheeled loaders >4 500 kg operating mass;
- graders;
- wheeled dozers;
- soil compactors;
- backhoe loaders;
- crawler dumpers;
- crawler loaders;
- crawler-dozers ≤50 000 kg operating mass²⁾;
- compact dumpers ≤4 500 kg operating mass;
- wheeled compact loaders ≤4 500 kg operating mass;
- skid-steer loaders, wheeled ≤4 500 kg and tracked ≤6 000 kg operating mass.

1.4 The following machines impart sufficiently low vertical vibration inputs at frequencies between 1 Hz and 20 Hz to the seat during operation that these seats do not require suspension for the attenuation of transmitted vibration:

- excavators, including walking excavators and cable excavators³⁾;

1) For scrapers with suspension, either a seat with no suspension can be used, or one having a suspension with high damping.

2) For crawler dozers greater than 50 000 kg, the seat performance requirements are suitably provided by a cushion type seat.

3) For excavators, the predominant vibration is generally in the fore and aft (X) axis.

- trenchers;
- landfill compactors;
- non-vibratory rollers, except soil compactors;
- vibratory rollers, except soil compactors;
- pipelayers;
- horizontal directional drills (HDD).

1.5 The tests and criteria defined in this document are intended for operator seats used in earth-moving machines of conventional design.

NOTE Other tests can be appropriate for machines with design features that result in significantly different vibration characteristics.

1.6 Vibration which reaches the operator other than through the seat, for example that sensed by the operator's feet on the platform or control pedals or by the operator's hands on the steering-wheel, is not covered.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2041:2018, *Mechanical vibration, shock and condition monitoring — Vocabulary*

ISO 2631-1:1997/Amd 1:2010, *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements; Amendment 1*

ISO 8041-1:2017, *Human response to vibration — Measuring instrumentation — Part 1: General purpose vibration meters*

ISO 10326-1:2016, *Mechanical vibration — Laboratory method for evaluating vehicle seat vibration — Part 1: Basic requirements*

ISO 12100:2010, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

ISO 13090-1:1998, *Mechanical vibration and shock — Guidance on safety aspects of tests and experiments with people — Part 1: Exposure to whole-body mechanical vibration and repeated shock*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12100, ISO 2041 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>.
- IEC Electropedia: available at <http://www.electropedia.org/>.

3.1.1

whole-body vibration

vibration transmitted to the body as a whole through the buttocks of a seated operator

3.1.2**input spectral class**

ride vibration characteristics at the seat attachment point for machines, grouped by virtue of various vibration characteristics

3.1.3**operating mass**

mass of the base machine, with equipment and empty attachment in the most usual configuration as specified by the manufacturer, and with the operator (75 kg), full fuel tank and all fluid systems (i.e. hydraulic oil, transmission oil, engine oil, engine coolant) at the levels specified by the manufacturer and, when applicable, with sprinkler water tank(s) half full

[SOURCE: ISO 6016:2008, 3.2.1, modified — Notes 1 and 2 to entry have been deleted.]

3.1.4**operator seat**

portion of the machine provided for the purpose of supporting the buttocks and back of the seated operator, including any suspension system and other mechanisms provided (for example, for adjusting the seat position)

3.1.5**active and semi-active suspension systems**

seat suspension system with a control system that changes seat suspension performance automatically

3.1.6**frequency analysis**

process of arriving at a quantitative description of a vibration amplitude as a function of frequency

3.1.7**measuring period**

time duration in which vibration data for analysis is obtained

3.2 Symbols and abbreviated terms

$a_p(f_r)$	Unweighted rms value of the measured vertical acceleration at the platform at the resonance frequency
a^*_{P12}, a^*_{P34}	Unweighted rms value of the target vertical acceleration at the platform under the seat (see Figure 3) between frequencies f_1 and f_2 , or f_3 and f_4
a_{P12}, a_{P34}	Unweighted rms value of the measured vertical acceleration at the platform between frequencies f_1 and f_2 , or f_3 and f_4
$a_s(f_r)$	Unweighted rms value of the measured vertical acceleration at the seat disk at the resonance frequency
a^*_{WP12}, a^*_{WP34}	Weighted rms value of the target vertical acceleration at the platform between frequencies f_1 and f_2 , or f_3 and f_4
a_{WP12}	Weighted rms value of the measured vertical acceleration at the platform between frequencies f_1 and f_2
a_{WS12}	Weighted rms value of the measured vertical acceleration at the seat disk (see Figure 3) between frequencies f_1 and f_2
B_e	Resolution bandwidth, in hertz
f	Frequency, in hertz
f_r	Frequency at resonance

$G_p(f)$	Measured PSD of the vertical vibration at the platform (seat base)
$G_p^*(f)$	Target PSD of the vertical vibration at the platform (seat base)
$G_{PL}^*(f)$	Lower limit for the measured PSD of the vertical vibration at the platform (seat base)
$G_{PU}^*(f)$	Upper limit for the measured PSD of the vertical vibration at the platform (seat base)
$H(f_r)$	Transmissibility at resonance
PSD	Power Spectral Density, expressed as acceleration squared per unit bandwidth $(m/s^2)^2/Hz$
rms	root mean square
SEAT	Seat Effective Amplitude Transmissibility
T_s	Sampling time, in seconds

4 General

4.1 Machinery shall comply with the safety requirements and/or protective/risk reduction measures of this clause. In addition, the machine shall be designed according to the principles of ISO 12100:2010 for relevant but not significant hazards which are not dealt with by this document.

4.2 The laboratory-simulated machine vertical vibration, specified as input spectral class, is based on representative measured data from machines in severe but typical working conditions. The input spectral class is a representative envelope for the machines within the class, as measured under severe conditions.

4.3 Two criteria are used for the evaluation of seat:

- the Seat Effective Amplitude Transmissibility (SEAT) factor according to ISO 10326-1:2016, 10.2, but with frequency weighting according to ISO 2631-1:1997/Amd 1:2010;
- the maximum transmissibility ratio in the damping test according to ISO 10326-1:2016, 10.2.

4.4 The measuring equipment shall be in accordance with ISO 8041-1:2017 (type 1 instrument) and ISO 10326-1:2016, Clauses 4 and 5. The frequency weighting shall include the effects of the band limiting filters, and be in accordance with ISO 2631-1:1997/Amd 1:2010.

4.5 Safety precautions shall be in accordance with ISO 13090-1:1998.

Any compliant end-stops or devices normally fitted to production versions of the seat to be tested to minimise the effect of suspension overtravel shall be in place for the dynamic tests.

5 Test conditions and test procedure

5.1 General

The test conditions and test procedure shall be in accordance with ISO 10326-1:2016, Clauses 8 and 10.

5.2 Simulation of vibration

A platform, the dimensions of which correspond approximately to those of the operator's platform of an earth-moving machine, shall be mounted on a vibrator which is capable of generating vibration along the vertical axis (see [Figure 1](#)).

In the case of classes EM 1 and EM 2 the vibrator should be capable of simulating sinusoidal vibration having a displacement amplitude of at least $\pm 7,5$ cm at a frequency of 2 Hz; see [5.5.1](#).

5.3 Test seat

5.3.1 General

The operator seat for the test shall be representative of series-produced models, with regard to construction, static and vibration characteristics and other features which can affect the vibration test result.

5.3.2 Run-in

Before the test, the suspension seats shall be run-in under conditions stipulated by the manufacturer. If the manufacturer does not state such conditions, then the seat shall be run-in for 5 000 cycles, with measurements at 1 000 cycle intervals.

For this purpose, the seat shall be loaded with an inert mass of 75 kg and adjusted to the mass in accordance with the manufacturer's instructions. The seat and suspension shall be mounted on the platform of a vibrator, and a sinusoidal input vibration shall be applied to the platform at approximately the suspension natural frequency. This input vibration shall have a peak to peak displacement sufficient to cause movement of the seat suspension over approximately 75 % of its stroke. A platform peak to peak displacement of approximately 40 % of the seat suspension stroke is likely to achieve this. Care should be taken to ensure against overheating of the suspension damper during the running-in, for which forced cooling is acceptable.

The seat shall be considered to have been run-in if the value for the vertical transmissibility remains within a tolerance of ± 5 % when three successive measurements are performed under the condition described above. The time interval between two measurements shall be half an hour, or 1 000 cycles (whichever is less), with the seat being constantly run-in.

5.3.3 Seat adjustment

The seat shall be adjusted to the weight of the test person in accordance with the manufacturer's instructions.

With seats where the suspension stroke available is **unaffected** by the adjustment for seat height or test person weight, testing shall be performed with the seat adjusted to the centre of the stroke.

With seats where the suspension stroke available is **affected** by the adjustment of the seat height or by test person weight, testing shall be performed in the lowest position which provides the full working suspension stroke as specified by the seat manufacturer.

When the inclination of the backrest is adjustable, it shall be set approximately upright, inclined slightly backwards (approximately $10^\circ \pm 5^\circ$).

5.4 Test person and posture

The posture of the test person during the testing shall be in accordance with [Figure 1](#).

NOTE 1 See ISO 10326-1:2016, 8.2.

NOTE 2 The differences in the posture of the test person can cause a 10 % difference between test results. For this reason, recommended angles of knees and ankles have been specified in [Figure 1](#).

The simulated input vibration test shall be performed with two persons. The light person shall have a total mass of 52 kg to 55 kg, of which not more than 5 kg may be carried in a belt around the waist. The heavy person shall have a total mass of 110 kg to 115 kg, of which not more than 12 kg may be carried in a belt around the waist.

5.5 Input vibration

5.5.1 Simulated input vibration test to evaluate the SEAT factor

This document specifies the input vibration in nine input spectral classes (EM 1 through EM 9) for earth-moving machinery for the purpose of determining the SEAT factor.

In accordance with ISO 10326-1:2016, 10.2.2, the SEAT factor is defined as

$$\text{SEAT} = a_{\text{wS12}} / a_{\text{wP12}}$$

The simulated input vibration used to determine the SEAT factor is defined in accordance with ISO 10326-1:2016, 9.2, but the frequency weighting shall be in accordance with ISO 2631-1:1997/Amd 1:2010. The test input for each class is defined by a power spectral density, $G_p^*(f)$, of the vertical (Z axis) acceleration of the vibrating platform, and by the unweighted rms vertical accelerations on that platform (a_{p12}^* , a_{p34}^*).

The vibration characteristics for each input spectral class EM 1 through EM 9 are shown in [Figures 2](#) through [10](#), respectively. Formulae for the acceleration power spectral density curves of [Figures 2](#) to [10](#) are included in [Table 2](#). The curves defined by these equations are the target values to be produced at the base of the seat for the simulated input vibration test of [5.6.2](#).

The input vibration shall be determined (calculated) without components at frequencies outside the frequency range defined by f_1 and f_2 .

[Table 4](#) further defines the test input values for the actual test input PSD at the base of the seat.

Three tests shall be performed for each test person and each input vibration in accordance with ISO 10326-1:2016, Clause 10. The effective duration of each test shall be at least 180 s.

If none of the SEAT factor values relating to one particular test configuration deviate by more than ± 5 % from the arithmetic mean, then, in terms of repeatability, the three tests mentioned above shall be deemed to be valid. If this is not the case, as many series of three tests as are necessary to satisfy this requirement shall be carried out.

The sampling time T_s and resolution bandwidth B_e shall satisfy the following:

$$2 \times B_e \times T_s > 140$$

$$B_e < 0,5 \text{ Hz}$$

NOTE 1 Class EM 7 is also used to test agricultural wheeled tractor seats for class I tractor (see ISO 5007:2003).

NOTE 2 Any means, including double integrators, analog signal generators and filters, and digital signal generators with digital-to-analog converters, can be used to produce the required PSD and rms characteristics at the base of the seat for the simulated input vibration test.

5.5.2 Damping test

The damping test is comprised of two steps: the first is a search to determine the resonant frequency of the suspension; the second determines the transmissibility of the suspension at that frequency.

The seat shall be loaded with an inert mass of 75 kg and then excited by a sinusoidal vibration in the range from 0,5 to 2 times the expected resonance frequency of the suspension. The inert mass shall, if necessary, be secured to the seat in order to prevent the mass from moving on the seat or from falling off it.

Bags filled with lead shot or other material with similar density should be used as inert mass.

To determine the resonance frequency, the frequency range shall be investigated with either a linear frequency sweep or in maximum steps of 0,05 Hz. With either method, the frequency should be varied from a lower frequency (equal to 0,5 times the expected resonance of the suspension) to an upper frequency (equal to 2 times the expected resonance frequency of the suspension) and back again to the lower frequency. The frequency sweeping shall be made over a duration of at least 80 s at a constant peak to peak displacement of the platform that is equal to 40 % of the total suspension travel (stroke) specified by the seat manufacturer, or 50 mm, whichever is the smaller.

The damping test and the calculation of the transmissibility $H(f_r)$ at resonance shall be performed according to ISO 10326-1:2016, 9.5. In all cases, the damping test itself at the resonance frequency shall be carried out with a peak to peak displacement of the platform of 40 % of the total suspension travel even if the 40 % value exceeds 50 mm.

Only one measurement needs to be carried out at the resonance frequency of the seat's suspension.

5.5.3 Damping test for active and semi-active suspension systems

For active and semi-active suspension systems, the simulated input vibration test shall be performed as for passive systems. The damping test shall be performed at the frequency of highest response in the range of (0,1 to 10) Hz. The frequency of highest response can be different than the suspension's resonant frequency.

5.6 Tolerances on input vibration

5.6.1 General

See in ISO 10326-1:2016, 9.3.

The input excitation for the seat as defined in 5.5.1 can only be created on a simulator in an approximate manner. In order to be valid the test input shall comply with the following requirements.

5.6.2 Distribution function

Under the condition that the acceleration on the platform shall be sampled at a minimum of 50 data points per second and analyzed into amplitude cells of not greater than 20 % of the total true rms acceleration, the probability density function must be within ± 20 % of the ideal Gaussian function between ± 200 % of the total true rms acceleration, and with no data exceeding ± 350 % of the total true rms acceleration. For the purposes of this requirement, the total true rms acceleration is a^*_{p12} as defined in Table 4.

5.6.3 Power spectral density and rms values

The power spectral density of the acceleration measured on the platform is considered to be representative of $G^*_p(f)$ if, and only if:

a) for $f_1 \leq f \leq f_2$

$$G^*_{pL}(f) \leq G_p(f) \leq G^*_{pU}(f)$$

where

$$G^*_{pL}(f) = G^*_p(f) - 0,1 \times \max[G^*_p(f)]$$

$$\text{if } \{G^*_p(f) - 0,1 \times \max[G^*_p(f)]\} > 0$$

$$G^*_{pL}(f) = 0$$

$$\text{if } \{G^*_p(f) - 0,1 \times \max[G^*_p(f)]\} \leq 0$$

$$G^*_{pU}(f) = G^*_p(f) + 0,1 \times \max[G^*_p(f)]$$

b) $0,95 \times a^*_{p12} \leq a_{p12} \leq 1,05 \times a^*_{p12}$

c) $0,95 \times a^*_{p34} \leq a_{p34} \leq 1,05 \times a^*_{p34}$

The tolerances on $G_p(f)$ are illustrated in [Figures 2](#) through [10](#). The shape of $G^*_p(f)$ is defined by values and filters as set down in [Table 2](#). The values for $f_1, f_2, f_3, f_4, \max[G^*_p(f)], a^*_{p12}$ and a^*_{p34} are shown in [Table 4](#).

6 Acceptance values

6.1 SEAT factor

The seat specified for a particular input spectral class shall meet the SEAT factors given in [Table 1](#):

Table 1 — SEAT factors by input spectral class

Input spectral class	SEAT factors
EM 1	<1,1
EM 2	<0,9
EM 3	<1,0
EM 4	<1,1
EM 5	<0,7
EM 6	<0,7
EM 7	<0,6
EM 8	<0,8
EM 9	<0,9

NOTE Good seats cause a slight increase of vibration at the low frequency range, whereas vibration in the higher frequency range, depending on the suspension system, are significantly reduced. The test PSD for the input spectral classes EM 1 and EM 4 are limited to the low frequency range. The low frequency range is of importance because of the shock loads which require good damping performance. This results in SEAT factors close to and slightly above 1 when performing the seat test.

6.2 Damping performance

The transmissibility $H(f_r) = a_s(f_r)/a_p(f_r)$ at resonance along the vertical axis shall be less than:

- 1,5 for input spectral classes EM 1, EM 2, EM 3, EM 4 and EM 6,
- 2,0 for input spectral classes EM 5, EM 7, EM 8 and EM 9.

7 Seat identification

The seat shall be identified by a permanent mark at a clearly visible location. The mark shall include the following information:

- manufacturer's name or logo-type;
- type denomination (e.g. part number);
- input spectral class (or classes) (e.g. EM 1, EM 2 etc.) followed by the text: "according to ISO 7096:2020".

8 Information for use

8.1 General

For information to be provided to the user, the content of this clause, together with ISO 12100:2010, 6.4, shall apply.

8.2 Test report

The test report shall contain all the information necessary to understand, interpret and use the results arising from the application of this document.

The results shall be compared with the acceptance criteria for a seat and recorded in the report forms given in [Tables 5](#) and [6](#).

The test report should contain the following:

- a) name and address of seat manufacturer;
- b) model of seat, product and serial number;
- c) date of test;
- d) details of running-in;
- e) type of measuring disc used: semi-rigid, rigid;
- f) input spectral vibration class;
- g) vibration transmission to the persons with the simulated input vibration test:
 - platform vibration a_{wP12} ;
 - seat disk vibration a_{wS12} ;
 - test person mass, in kilograms;
 - SEAT factor;
- h) calculated transmissibility at the resonance and the resonance frequency;
- i) the name of the person responsible for the test;
- j) identification of test laboratory;
- k) location of marking (see [Clause 7](#)).

Table 2 — Definition of input spectral classes

Spectral class of input vibrations	$G_p^*(f)$
EM 1	2,20 (HP24) ² (LP24) ²
EM 2	2,72 (HP24) ² (LP24) ²
EM 3	1,60 (HP24) ² (LP24) ²
EM 4	0,60 (HP24) ² (LP24) ²
EM 5	1,11 (HP24) ² (LP6) ²
EM 6	0,79 (HP12) ² (LP12) ²
EM 7	9,25 (HP48) ² (LP48) ²
EM 8	1,45 (HP24) ² (LP12) ²
EM 9	2,10 (HP24) ² (LP12) ²

(LP6) = 1/(1 + S)
 (LP12) = 1/(1 + 1,414S + S²)
 (LP24) = 1/(1 + 2,613S + 3,414S² + 2,613S³ + S⁴)
 (LP48) = 1/(1 + 5,126S + 13,137S² + 21,846S³ + 25,688S⁴ + 21,846S⁵ + 13,137S⁶ + 5,126S⁷ + S⁸)
 (HP12) = S²/(1 + 1,414S + S²)
 (HP24) = S⁴/(1 + 2,613S + 3,414S² + 2,613S³ + S⁴)
 (HP48) = S⁸/(1 + 5,126S + 13,137S² + 21,846S³ + 25,688S⁴ + 21,846S⁵ + 13,137S⁶ + 5,126S⁷ + S⁸)
 where: S = j f / f_c; j = √-1; f = frequency, in hertz.
 f_c = Filter cut-off frequency, in hertz, as given in [Table 3](#).
 NOTE HP and LP designate high-pass and low-pass filters of the Butterworth type.

Table 3 — Filter cut-off frequencies

Input spectral class	Filter cut-off frequencies, f _c , Hz						
	Filter designations						
	(LP6)	(LP12)	(LP24)	(LP48)	(HP12)	(HP24)	(HP48)
EM 1	—	—	2,4 Hz	—	—	1,2 Hz	—
EM 2, EM 3, EM 4	—	—	3,0 Hz	—	—	1,5 Hz	—
EM 5	3,5 Hz	—	—	—	—	1,5 Hz	—
EM 6	—	9,0 Hz	—	—	6,5 Hz	—	—
EM 7	—	—	—	3,5 Hz	—	—	3,0 Hz
EM 8	—	3,0 Hz	—	—	—	3,0 Hz	—
EM 9	—	4,0 Hz	—	—	—	3,5 Hz	—

NOTE HP and LP designate high-pass and low-pass filters of the Butterworth type. The subordinated numbers state the filter slope in decibels per octave. The table above completely defines band pass filters in terms of cut-off frequencies and slopes.

Table 4 — Characteristics of the simulated input vibration for different types of machines


Type of machine	Input spectral class	Target PSD of vertical vibration at the platform $G^*_p(f)$ (m/s ²) ² /Hz max.	Frequency range f_1 to f_2			Frequency range f_3 to f_4		
			f_1 and f_2 Hz	Unweighted target rms acceleration on the platform a^*_{p12} m/s ²	Weighted target rms acceleration on the platform a^*_{wp12} m/s ²	f_3 and f_4 Hz	Unweighted target rms acceleration on the platform a^*_{p34} m/s ²	Weighted target rms acceleration on the platform a^*_{wp34} m/s ²
Articulated- or rigid- frame dumper >4 500 kg ^a	EM 1	1,94	$f_1 = 0,89$ $f_2 = 11,22$	1,65	0,93	$f_3 = 1,25$ $f_4 = 2,25$	1,35	0,69
Scraper without axis or frame suspension ^b	EM 2	2,41	$f_1 = 0,89$ $f_2 = 11,22$	2,05	1,34	$f_3 = 1,50$ $f_4 = 3,00$	1,75	1,04
Wheeled loader >4 500 kg ^a	EM 3	1,42	$f_1 = 0,89$ $f_2 = 11,22$	1,57	1,03	$f_3 = 1,50$ $f_4 = 3,00$	1,39	0,81
Grader	EM 4	0,53	$f_1 = 0,89$ $f_2 = 11,22$	0,96	0,63	$f_3 = 1,50$ $f_4 = 3,00$	0,82	0,49
Wheeled dozer, Soil compactor, Backhoe loader	EM 5	0,77	$f_1 = 0,89$ $f_2 = 17,78$	1,94	1,68	$f_3 = 1,50$ $f_4 = 5,00$	1,42	1,11
Crawler dumper, Crawler loader, Crawler dozer ^c ≤50 000 kg ^a	EM 6	0,34	$f_1 = 0,89$ $f_2 = 17,78$	1,65	1,61	$f_3 = 5,00$ $f_4 = 12,00$	1,39	1,42
Compact dumper ≤4 500 kg ^a	EM 7	5,55	$f_1 = 0,89$ $f_2 = 11,22$	2,26	1,89	$f_3 = 2,90$ $f_4 = 3,60$	1,82	1,51
Compact loader ≤4 500 kg ^a	EM 8	0,40	$f_1 = 0,89$ $f_2 = 17,78$	1,05	0,96	$f_3 = 2,50$ $f_4 = 5,00$	0,87	0,77
Skid steer loader, wheeled ≤4 500 kg ^a and tracked ≤6 000 kg ^a	EM 9	0,78	$f_1 = 0,89$ $f_2 = 17,78$	1,63	1,59	$f_3 = 3,00$ $f_4 = 6,00$	1,33	1,31

NOTE The above values were calculated using $f = 0,001$ Hz and the complex analytical functions (with band limiting) given in ISO 2631-1:1997/Amd 1:2010, Annex D. The use of other f values and/or the approximate equations can give slightly different values.

^a Operating mass.

^b For scrapers with suspension, either a seat with no suspension or having a suspension with high damping, may be used.


^c For crawler dozers greater than 50 000 kg, the seat performance requirements are suitably provided by a cushion type seat.

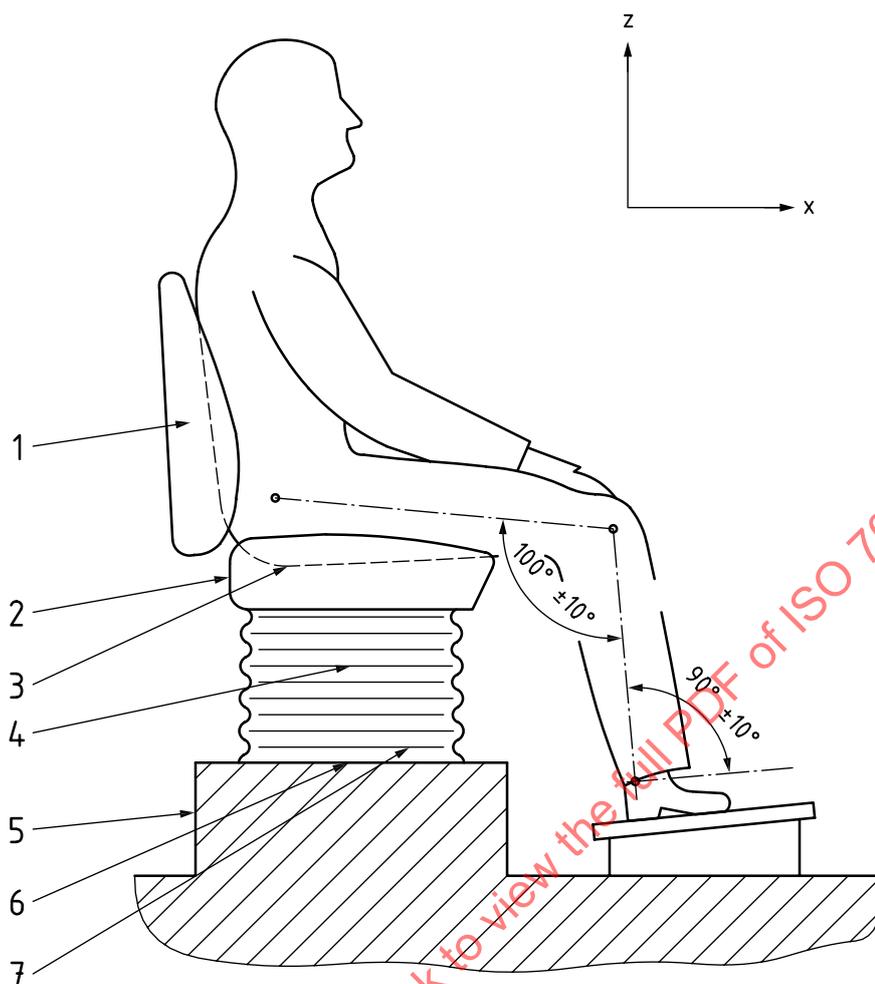

Key

- 1 seat backrest
- 2 seat pan
- 3 accelerometer disc on the seat pan (S)
- 4 seat suspension
- 5 platform
- 6 accelerometer on the platform (P)
- 7 base of the seat


Figure 1 — Posture of the test person

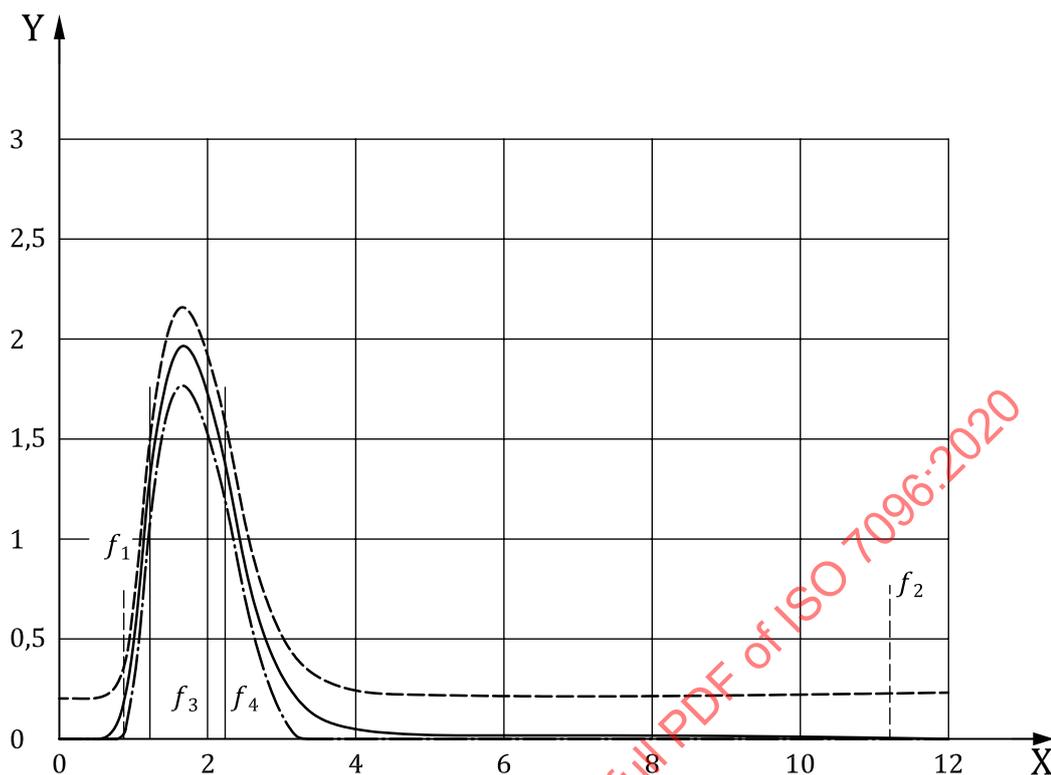**Key**

X frequency, Hz

Y PSD, $(\text{m/s}^2)^2/\text{Hz}$


Figure 2 — PSD for input spectral class EM 1 (articulated- or rigid-frame dumper >4 500 kg)

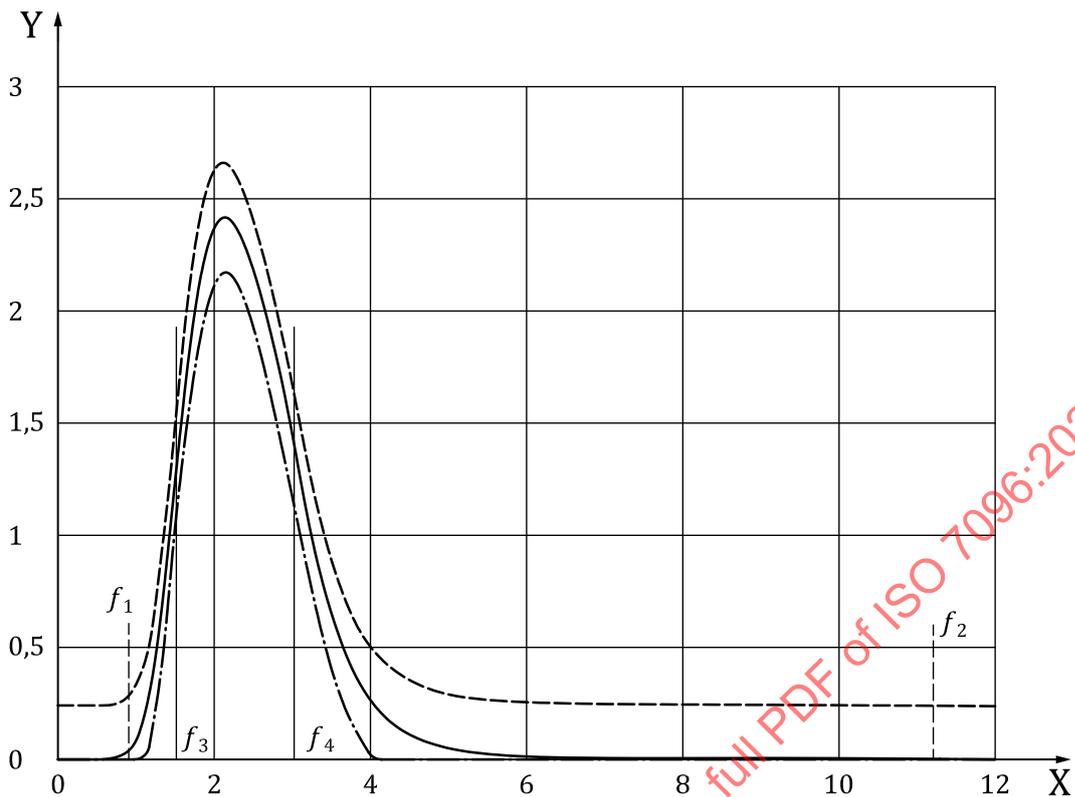

Key

- X frequency, Hz
- Y PSD, (m/s²)²/Hz

Figure 3 — PSD for input spectral class EM 2 (scraper without axle or frame suspension)

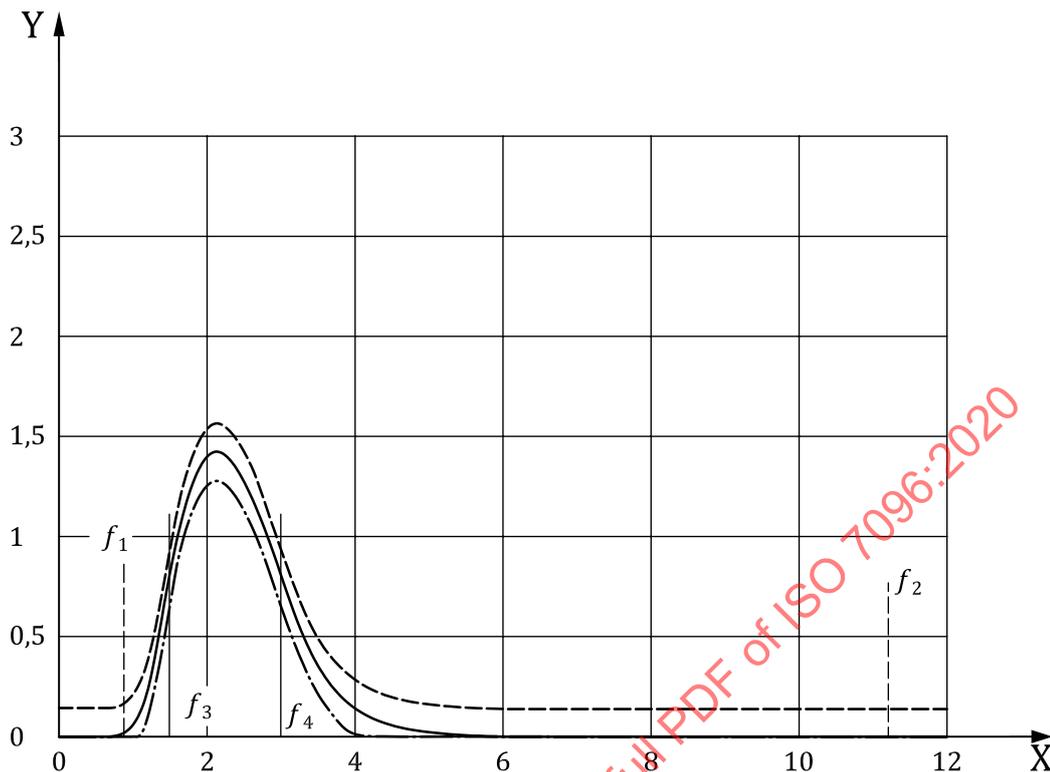


Key

- X frequency, Hz
- Y PSD, (m/s²)²/Hz

Figure 4 — PSD for input spectral class EM 3 (wheeled loader > 4 500 kg)


STANDARDSISO.COM : Click to view the full PDF of ISO 7096:2020

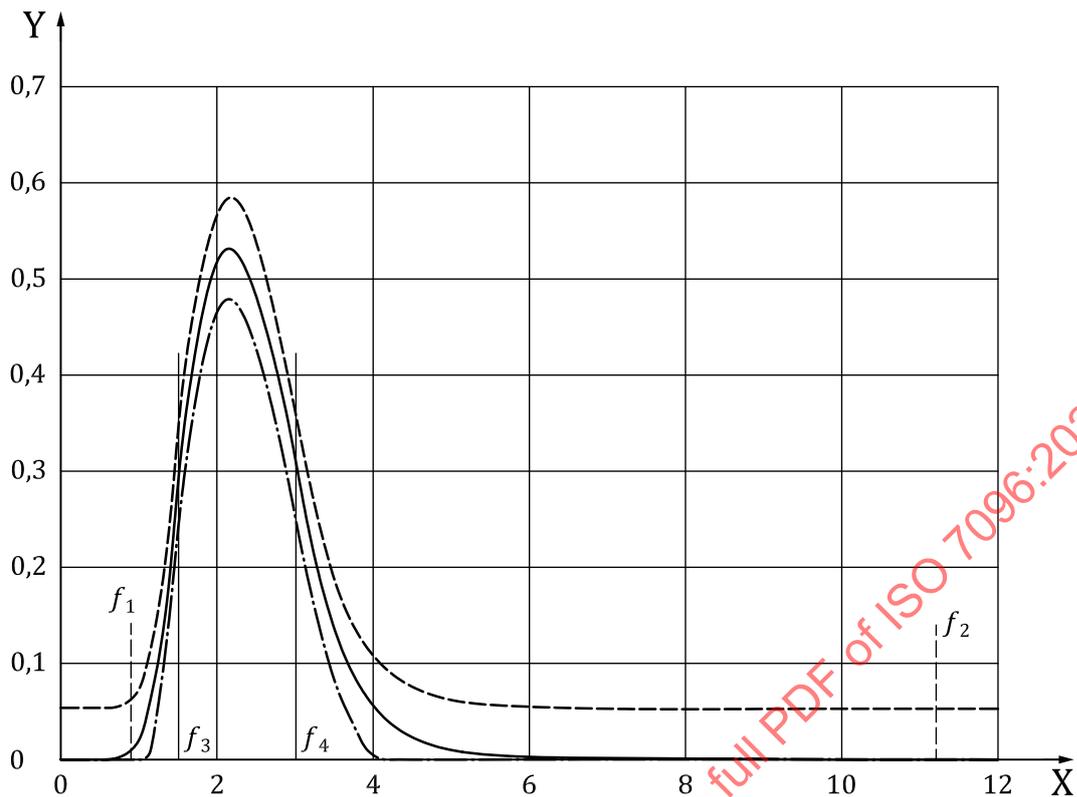

Key

- X frequency, Hz
- Y PSD, (m/s²)²/Hz


Figure 5 — PSD for input spectral class EM 4 (grader)

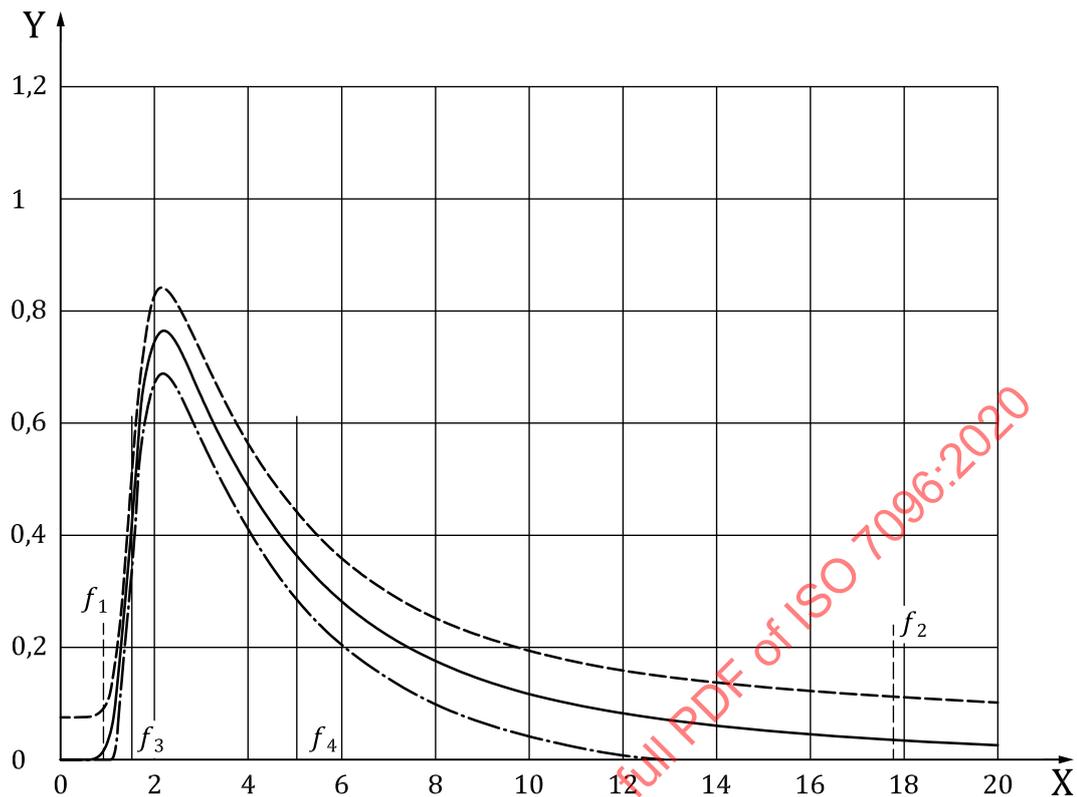**Key**

X frequency, Hz

Y PSD, $(\text{m/s}^2)^2/\text{Hz}$

Figure 6 — PSD for input spectral class EM 5 [wheeled dozer, soil compactor, backhoe loader]

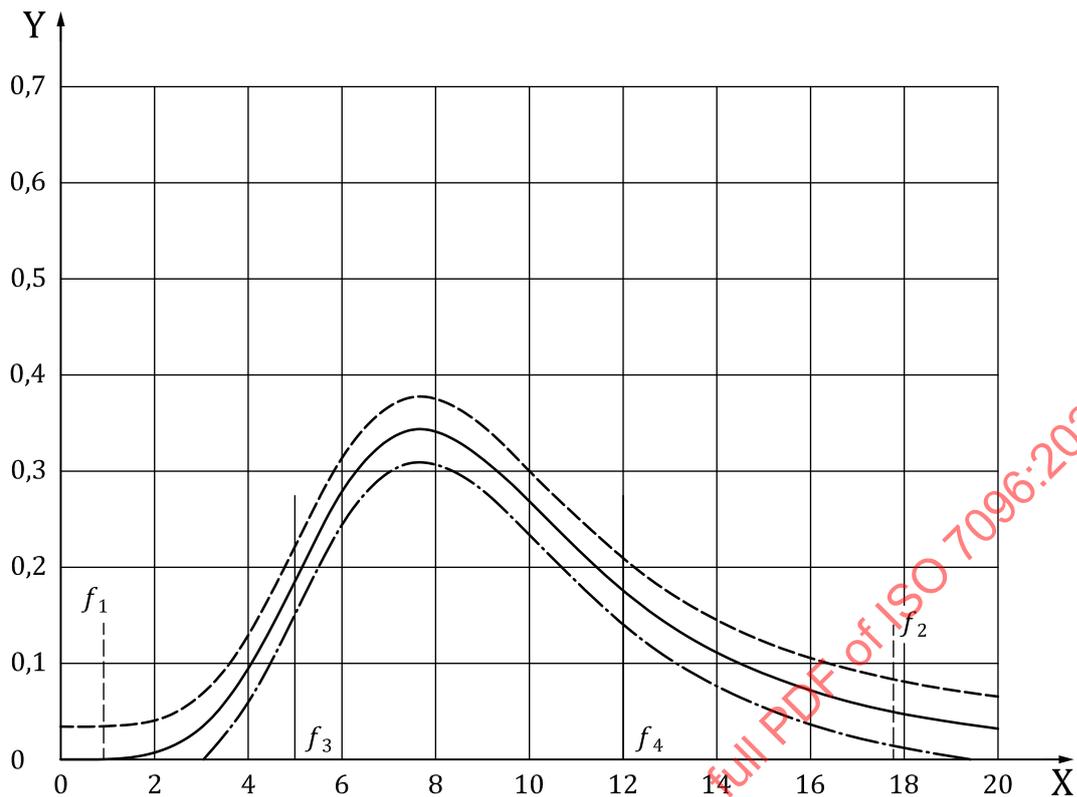

Key

- X frequency, Hz
- Y PSD, $(m/s^2)^2/Hz$

Figure 7 — PSD for input spectral class EM 6 (crawler dumper, crawler dozer, crawler loader $\leq 50\ 000$ kg)