
Earth-moving machinery — Hydraulic excavators — Terminology and commercial specifications

Engins de terrassement — Pelles hydrauliques — Terminologie et spécifications commerciales

STANDARDSISO.COM : Click to view the full PDF of ISO 7135:2009



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 7135:2009



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 General	2
3.2 Masses	3
3.3 Attachments	3
3.4 Equipment	4
4 Base machine	5
4.1 Classification by type	5
4.2 Component nomenclature	6
4.3 Dimensions	7
5 Equipment and attachments	9
5.1 Equipment and attachments nomenclature	9
5.2 Dimensions	16
5.3 Manoeuvring, road travelling and shipping	20
6 Performance terminology	22
6.1 ISO net power (engine)	22
6.2 Maximum travel speed	22
6.3 Maximum swing speed	22
6.4 Braking performance	22
6.5 Steering (wheeled excavators only)	22
6.6 Digging force	22
6.7 Rated lift capacity	23
7 Commercial literature specifications (SI units)	23
7.1 Engine	23
7.2 Hydraulic system	23
7.3 System fluid capacities	23
7.4 Filtration system	24
7.5 Crawler excavator	24
7.6 Wheeled excavator	24
7.7 Operating mass	25
7.8 Shipping mass	25
Annex A (normative) Base-machine dimensions	26
Annex B (normative) Dimensions of equipment and attachments	30
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7135 was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 4, *Terminology, commercial nomenclature, classification and ratings*.

This second edition cancels and replaces the first edition (ISO 7135:1993), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 7135:2009

Earth-moving machinery — Hydraulic excavators — Terminology and commercial specifications

1 Scope

This International Standard establishes terminology and the content of commercial literature specifications for self-propelled crawler and wheeled hydraulic excavators and their equipment and attachments.

It is applicable to common components and does not cover terms or commercial specifications specific to walking excavators.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3450, *Earth-moving machinery — Braking systems of rubber-tyred machines — Systems and performance requirements and test procedures for braking systems*

ISO 5010, *Earth-moving machinery — Rubber-tyred machines — Steering requirements*

ISO 6014, *Earth-moving machinery — Determination of ground speed*

ISO 6015, *Earth-moving machinery — Hydraulic excavators and backhoe loaders — Methods of determining tool forces*

ISO 6165:2006, *Earth-moving machinery — Basic types — Identification and terms and definitions*

ISO 6746-1, *Earth-moving machinery — Definitions of dimensions and codes — Part 1: Base machine*

ISO 6746-2:2003, *Earth-moving machinery — Definitions of dimensions and codes — Part 2: Equipment and attachments*

ISO 9249, *Earth-moving machinery — Engine test code — Net power*

ISO 10265, *Earthmoving machinery — Crawler machines — Performance requirements and test procedures for braking systems*

ISO 10567, *Earth-moving machinery — Hydraulic excavators — Lift capacity*

ISO 14396, *Reciprocating internal combustion engines — Determination and method for the measurement of engine power — Additional requirements for exhaust emission tests in accordance with ISO 8178*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6165, ISO 6746-1 and ISO 6746-2 and the following apply.

3.1 General

3.1.1

excavator

self-propelled machine on crawlers, wheels or legs, having an upper structure capable of a 360° swing and with mounted equipment, which is primarily designed for excavating with a bucket, without movement of the undercarriage during the work cycle

NOTE 1 An excavator work cycle normally comprises excavating, elevating, swinging and discharging of material.

NOTE 2 An excavator can also be used for object or material handling/transportation.

NOTE 3 Figures 1 to 3 describe the types of excavator defined in 3.1.1.1 to 3.1.1.3.

3.1.1.1

minimal swing radius excavator

MSRX

excavator designed for operation in a confined space, having an upper structure with a short swinging radius, with its equipment and attachment swinging within 120 % of the width of the undercarriage

3.1.1.2

compact excavator

excavator with an operating mass less than or equal to 6 000 kg

3.1.1.3

walking excavator

excavator with three or more supporting legs, which can be articulated, telescopic or both, and that can be fitted with wheels

3.1.2

base machine

excavator with a cab or canopy and operator-protective structures if required, without equipment or attachments, but possessing the necessary mountings for such equipment and attachments

NOTE Figures 4 and 5 describe the base machine and its dimensions.

3.1.3

cab riser

any spacer that increases the height of the SIP greater than 250 mm relative to the normal configuration or a system that raises the cab away from the excavator in an upward direction either through a mechanical or hydraulic system

NOTE For the SIP (seat index point), see ISO 5353.

3.1.4 Equipment and attachment positions

3.1.4.1

transport position

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned for shipment or transport on a flat level surface, such as a rail car or flat bed trailer, as recommended by the manufacturer

NOTE The minimal overall length and height of the excavator will result from this position.

3.1.4.2

manoeuvring position

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned as recommended by the manufacturer for travel requiring numerous turns

3.1.4.3**travel position**

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned as recommended by the manufacturer for long-distance straight-line travel

3.2 Masses**3.2.1****operating mass****OM**

mass of the base machine, with equipment and empty attachment in the most usual configuration as specified by the manufacturer, and with the operator (75 kg), full fuel tank and all fluid systems (i.e. hydraulic oil, transmission oil, engine oil, engine coolant) at the levels specified by the manufacturer and, when applicable, with sprinkler water tank(s) half full

[ISO 6016:2008, definition 3.2.1]

3.2.2**shipping mass****SM**

mass of the base machine without an operator, and with fuel level at 10 % of tank capacity or with minimum fuel level needed for machine shipping purposes as specified by the manufacturer, whichever is higher, with all fluid systems at the levels specified by the manufacturer, and with empty sprinkler tank(s), if required, and with or without equipment, ballast, attachment, cab, canopy, operator-protective structures, wheels and counterweights as stated by the manufacturer

NOTE If the manufacturer intends that the machine be partially disassembled for shipping purposes, the masses of the disassembled items will also be stated.

[ISO 6016:2008, definition 3.2.6]

3.3 Attachments**3.3.1****attachment**

assembly of components that can be mounted onto the base machine or equipment for specific use

[ISO 6746-2:2003, definition 3.5]

NOTE Attachments for hydraulic excavators normally are the working tool attached to the end of the arm or a telescopic boom that provides the digging, cutting, grabbing and processing function of the excavator.

3.3.2**hoe bucket****hoe-type bucket**

bucket attached to the arm or telescopic boom and linkage equipment that generally cuts towards the machine

See Figure 12.

3.3.3**grab-type bucket****grab bucket****clamshell bucket****clamshell-type bucket**

bucket attached to the arm and linkage equipment that digs or grabs in a generally vertical direction, discharging below and above the ground reference plane (GRP)

See Figures 16 and 17.

3.3.4

shovel bucket

shovel-type bucket

bucket attached to the arm and linkage equipment that cuts away from the machine and generally upwards, discharging above the ground reference plane (GRP)

See Figure 18.

3.3.5

quick coupler

assembly of components attached to the end of the arm and linkage that facilitates the quick mounting and removal of the attachment from the arm and linkage

NOTE A quick coupler can be considered as part of the equipment if integrated directly into the arm.

3.3.6

blade

component mounted on the undercarriage of the base machine that is generally used for backfilling trenches and for limited excavation, and which can also be used as a stabilizer

3.4 Equipment

3.4.1

equipment

set of components mounted onto the base machine to provide the primary design function of the excavator

NOTE 1 The definitions given in 3.4.2 to 3.4.6 are based on the main geometrical digging curves of most common applications of hydraulic excavators.

NOTE 2 Other equipment and derivatives are available.

NOTE 3 Figures 6 to 21 show types of equipment.

3.4.2

telescopic boom equipment

boom, with the necessary mountings for an attachment, which can be extended and retracted, and that generally cuts toward the machine through the telescoping action of the boom

See Figure 21.

NOTE It is primarily used for excavation and/or grading of slopes either above or below ground level.

3.4.3

hoe equipment

boom, arm and linkage with the mountings for a hoe-type bucket that generally cuts towards the machine

See Figure 6.

NOTE It is primarily used for below-ground level excavation.

3.4.4

shovel equipment

boom, arm and linkage that use a shovel-type bucket attached at the end of the arm that cuts away from the machine and generally upwards

See Figure 18.

NOTE It is primarily used for above-ground level excavation.

3.4.5**grab equipment
clamshell equipment**

boom, arm and linkage that uses a grab-type or clamshell-type bucket that digs or grabs in a generally vertical direction, discharging below and above the GRP

See Figure 25.

3.4.6**swing-type boom**

boom assembly mounted on the front of the undercarriage that can articulate, allowing the machine to excavate at various angles relative to the longitudinal centreline of the machine

NOTE A swing-type boom can allow the machine to excavate adjacent to a vertical surface.

4 Base machine**4.1 Classification by type**

The excavators shall be classified by their undercarriage and by their equipment.

See also Clause 5.

a) Undercarriage

- Crawler excavator (see Figure 1)
- Wheeled excavator (see Figure 2)
- Walking excavator (see Figure 3)

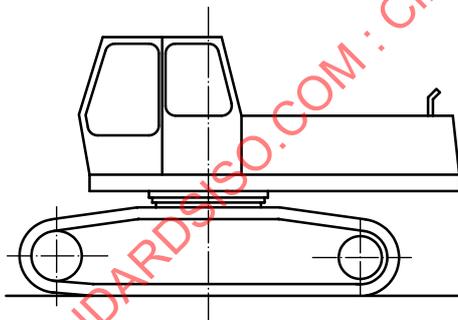


Figure 1 — Crawler excavator

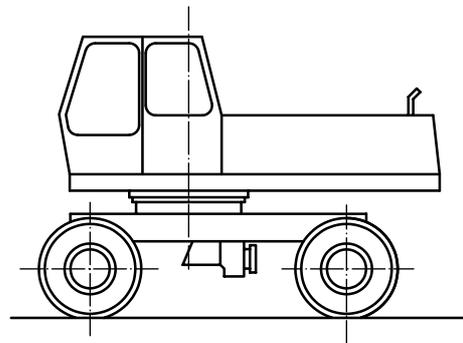


Figure 2 — Wheeled excavator

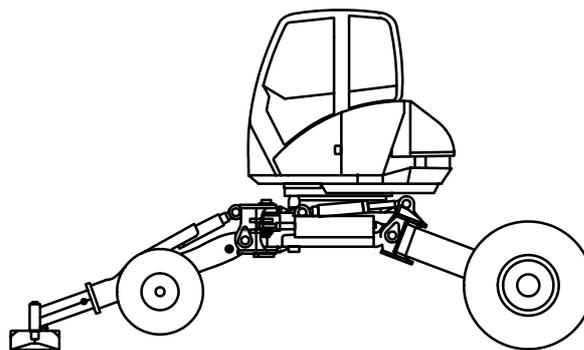



Figure 3 — Walking excavator

b) **Equipment**

- Backhoe (see Figure 23)
- Shovel (see Figure 24)
- Clamshell (see Figure 25)
- Telescoping boom (see Figure 26)

4.2 Component nomenclature

Component nomenclature shall be in accordance with Figure 4 a) or b), according to whether the base machine is a crawler or wheeled excavator.

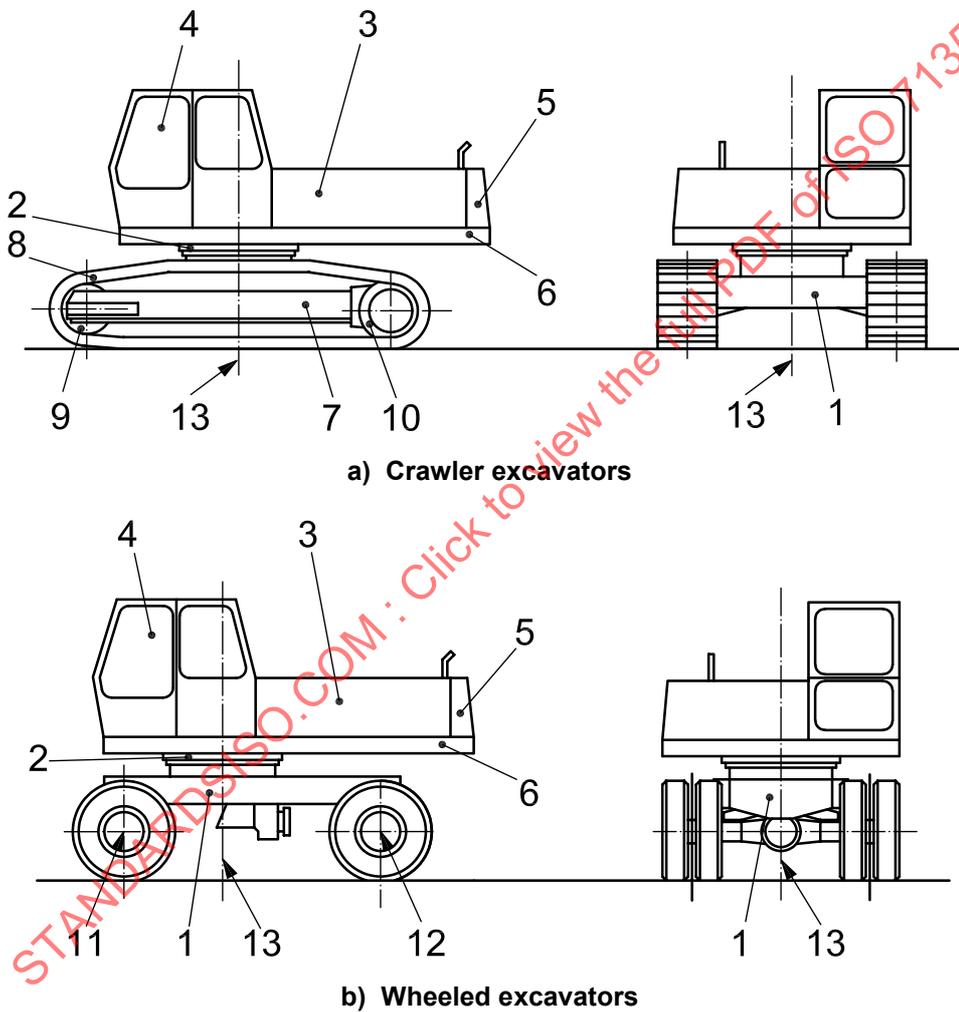

Key

- | | | | |
|---|-----------------|----|-----------------------|
| 1 | undercarriage | 8 | crawler tracks |
| 2 | swing bearing | 9 | idler |
| 3 | upper structure | 10 | sprocket |
| 4 | cab | 11 | steering axle (front) |
| 5 | counterweight | 12 | rigid axle (rear) |
| 6 | revolving frame | 13 | axis of rotation |
| 7 | track frame | | |


Figure 4 — Base machine nomenclature

4.3 Dimensions

The base-machine dimensions shall be in accordance with Figure 5.


The definitions of those base-machine dimensions common to earth-moving machinery are given in ISO 6746-1.

The base-machine dimensions shown in Figure 5 that are specific to hydraulic excavators are defined in Annex A.

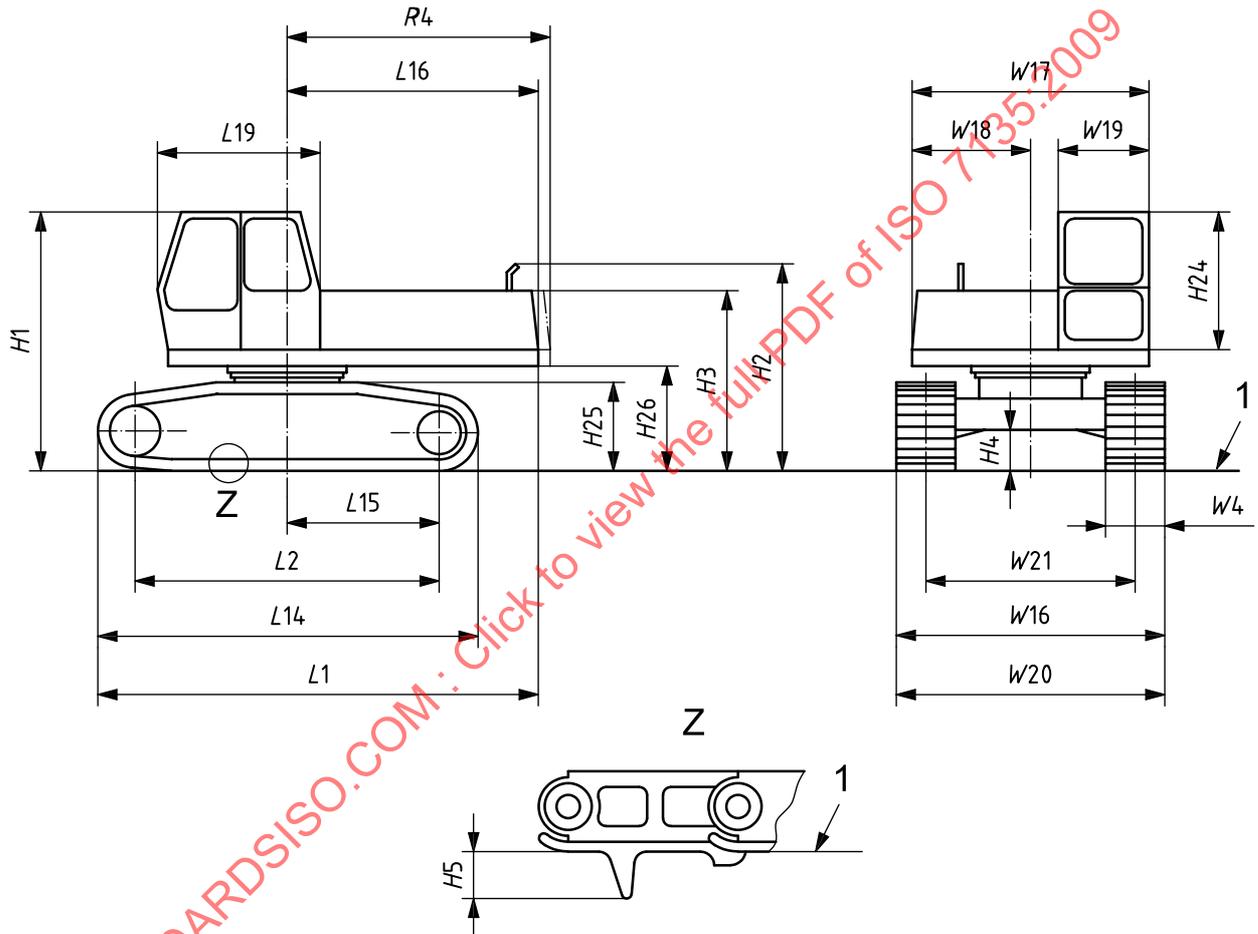

a) Crawler excavators

Figure 5 — Base machine dimensions

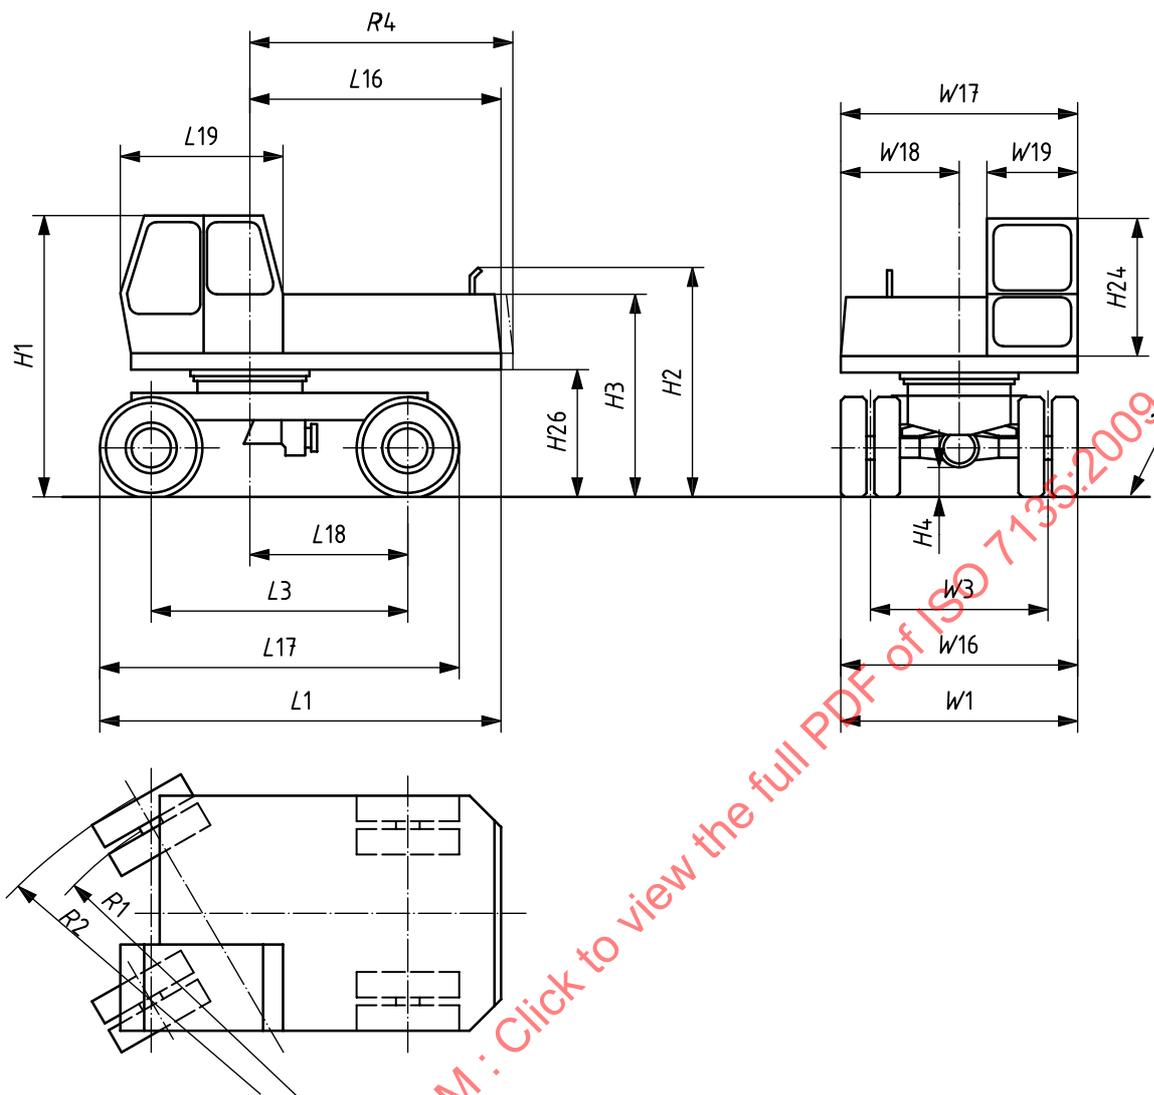

b) Wheeled excavators

Key


- 1 ground reference plane (GRP)

Figure 5 — Base machine dimensions (continued)

5 Equipment and attachments

5.1 Equipment and attachments nomenclature


Equipment and attachments nomenclature shall be in accordance with Figures 6 to 22.

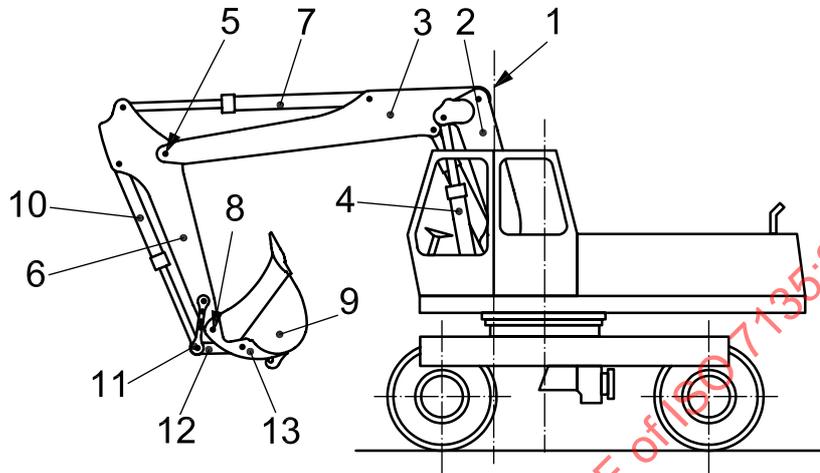

Key

- | | |
|---------------------|-----------------------|
| 1 boom pivot | 8 bucket pivot |
| 2 stub | 9 bucket |
| 3 intermediate boom | 10 bucket cylinder |
| 4 boom cylinder | 11 guide linkage |
| 5 arm pivot | 12 bucket linkage |
| 6 arm | 13 attachment bracket |
| 7 arm cylinder | |


Figure 6 — Hoe

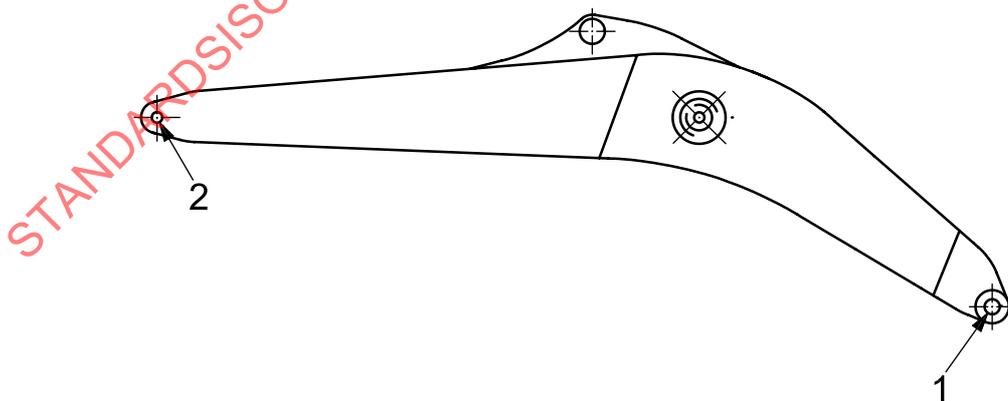

Key

- | |
|--------------|
| 1 boom pivot |
| 2 arm pivot |


Figure 7 — Front-mounted one-piece boom

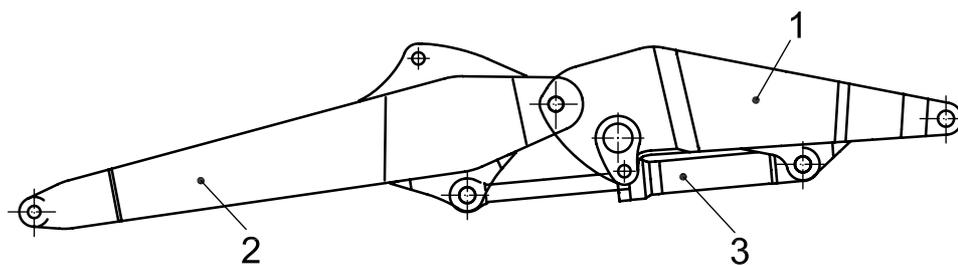

Key

- 1 stub
- 2 intermediate boom
- 3 cylinder, boom adjustment


Figure 8 — Hydraulic boom, adjustable height attachment

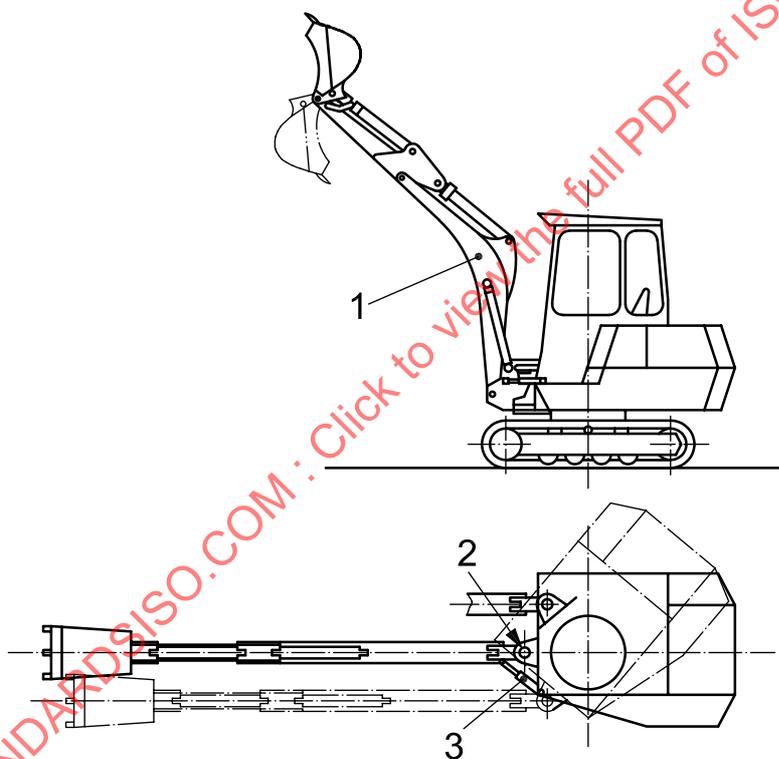

Key

- 1 boom
- 2 articulation bearing
- 3 articulation cylinder


Figure 9 — Swing-type boom

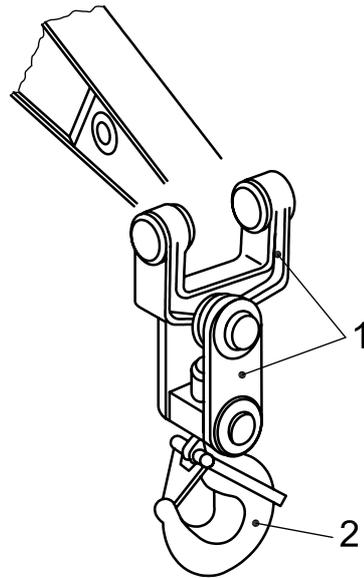

Key

- 1 attachment linkage
- 2 hook with safety latch


Figure 10 — Hook attachment

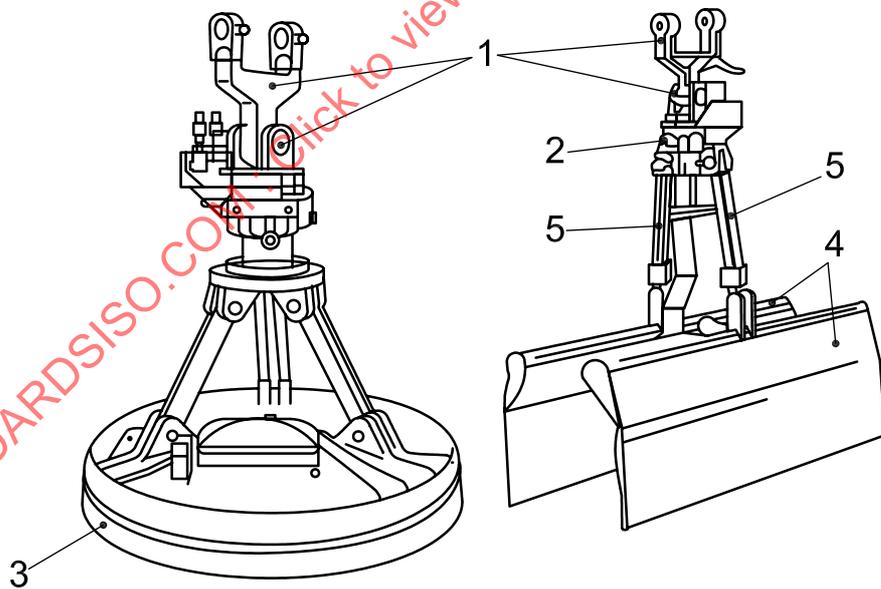

Key

- 1 attachment linkage
- 2 rotator
- 3 magnetic plate
- 4 special clamp plate
- 5 cylinder

Figure 11 — Magnet and clamp attachments

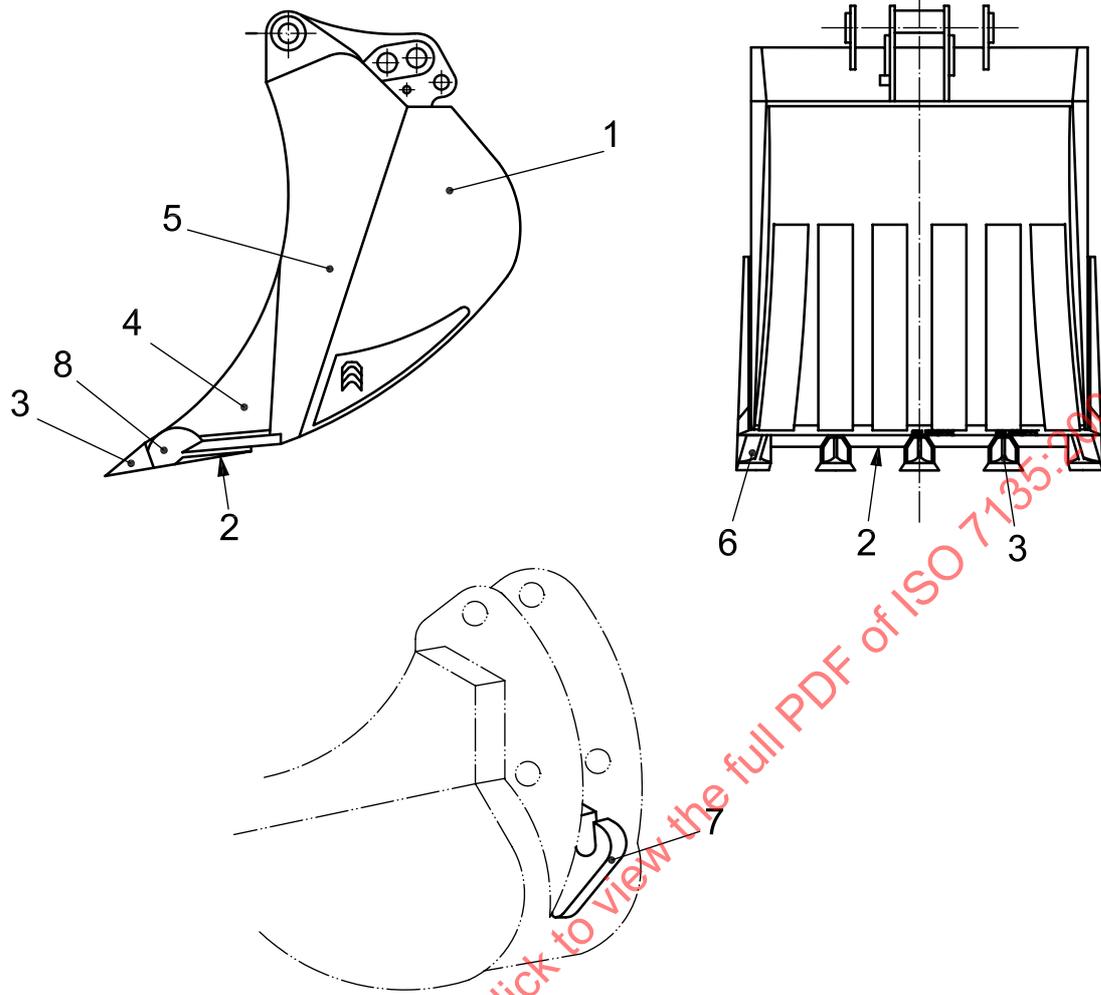

Key

- | | |
|----------------|---------------------|
| 1 bucket body | 5 cutting side wall |
| 2 cutting edge | 6 side tooth |
| 3 tooth | 7 hook or eye |
| 4 side cutter | 8 tooth adapter |

Figure 12 — Hoe bucket

Key

- | |
|-----------|
| 1 ejector |
|-----------|

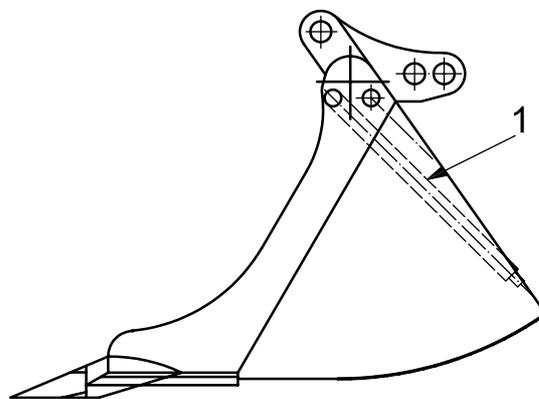


Figure 13 — Drainage [ejector] bucket

Key

- 1 cutting edge
- 2 tooth
- 3 cutting blade (replaceable)

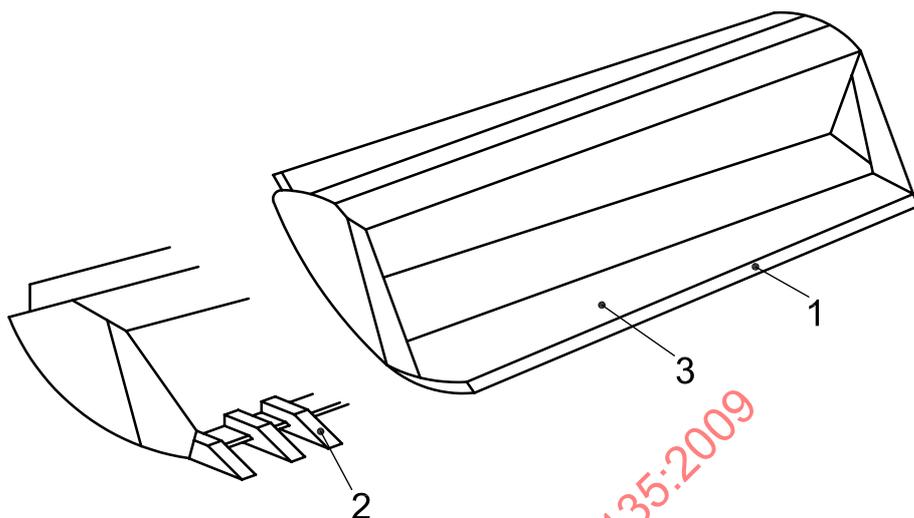


Figure 14 — Trench [ditch] cleaning bucket

Key

- 1 cutting edge

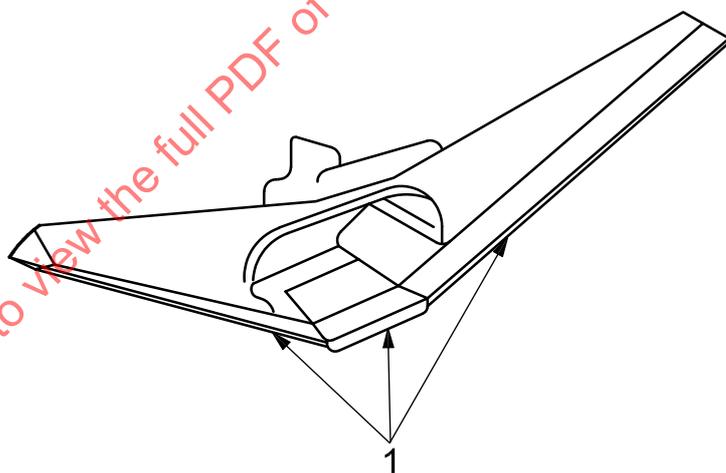


Figure 15 — Profile bucket

Key

- 1 hook
- 2 shell
- 3 linkage


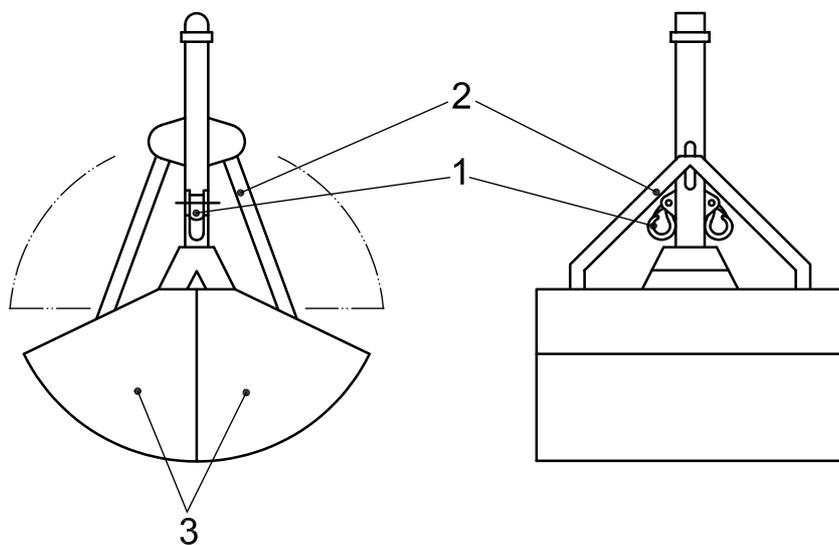


Figure 16 — Clamshell bucket

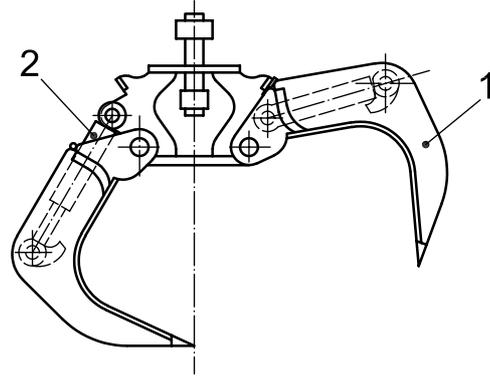

Key

- 1 arm
- 2 arm cylinder

Figure 17 — Multi-claw grab

Key

- 1 boom pivot
- 2 boom
- 3 boom cylinder
- 4 arm pivot
- 5 arm
- 6 arm cylinder
- 7 bucket pivot
- 8 bucket
- 9 bucket cylinder
- 10 guide linkage
- 11 shovel linkage

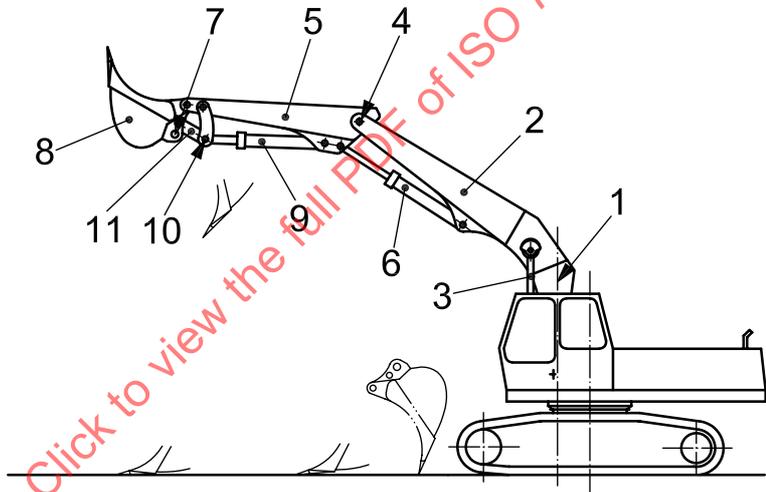


Figure 18 — Shovel

Key

- 1 bucket body
- 2 cutting edge
- 3 tooth
- 4 side cutter
- 5 cutting side wall
- 6 tooth adapter



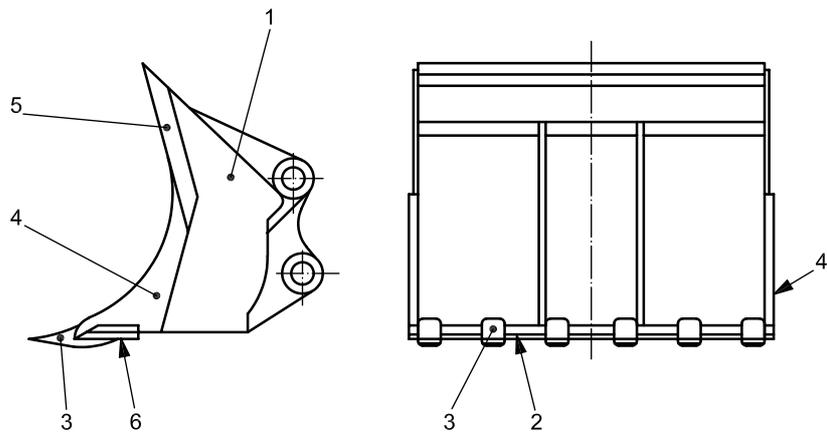


Figure 19 — Shovel bucket

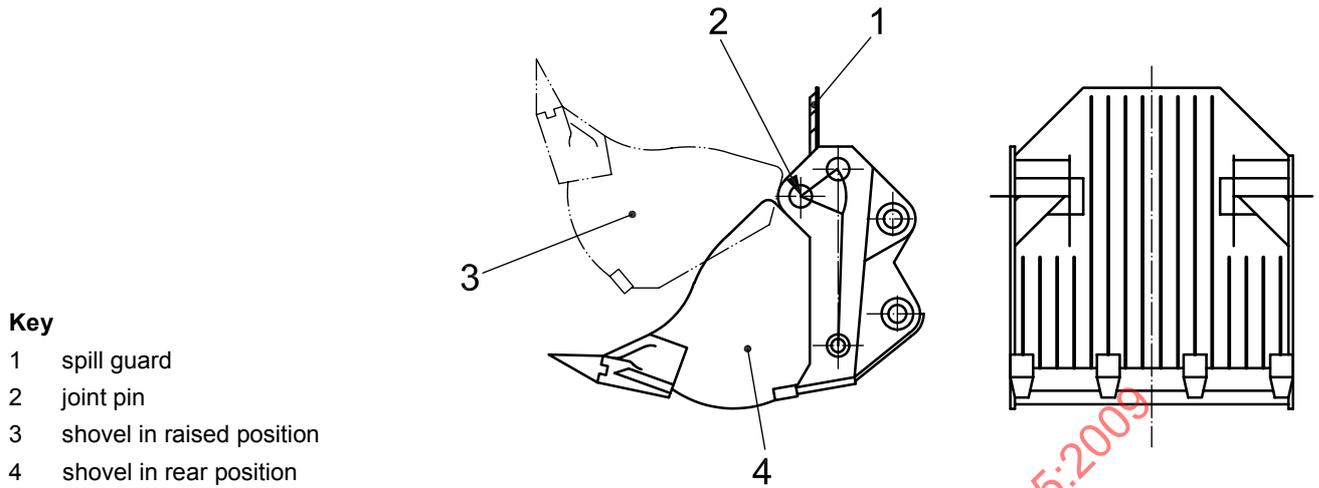


- Key**
- 1 spill guard
 - 2 joint pin
 - 3 shovel in raised position
 - 4 shovel in rear position

Figure 20 — Bottom-dump-type shovel bucket

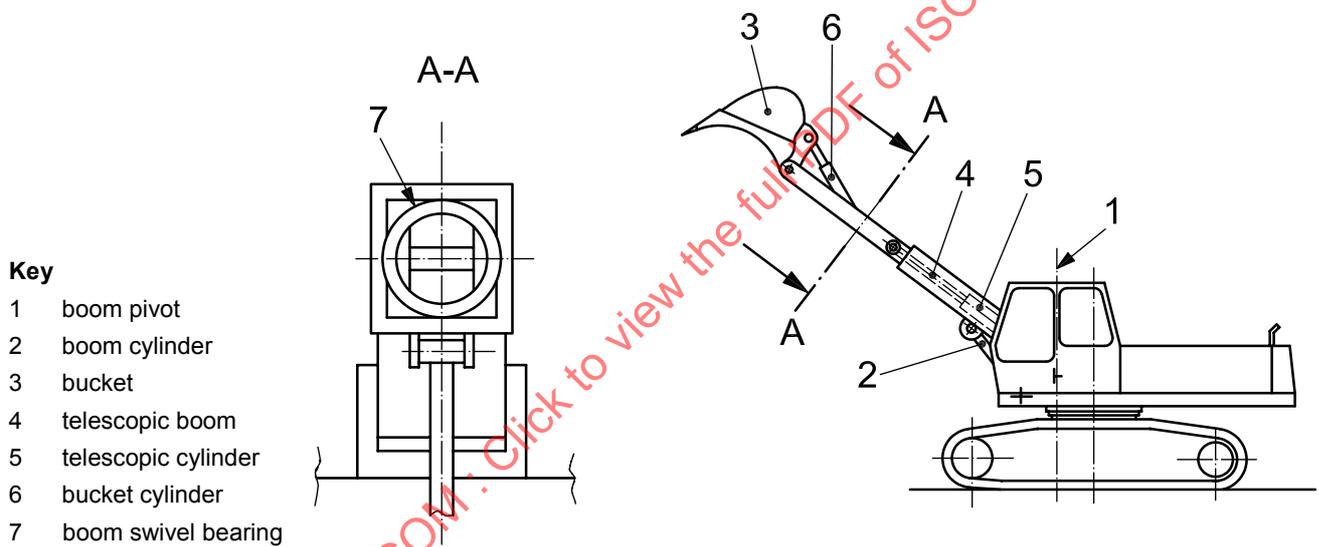

- Key**
- 1 boom pivot
 - 2 boom cylinder
 - 3 bucket
 - 4 telescopic boom
 - 5 telescopic cylinder
 - 6 bucket cylinder
 - 7 boom swivel bearing

Figure 21 — Telescopic boom

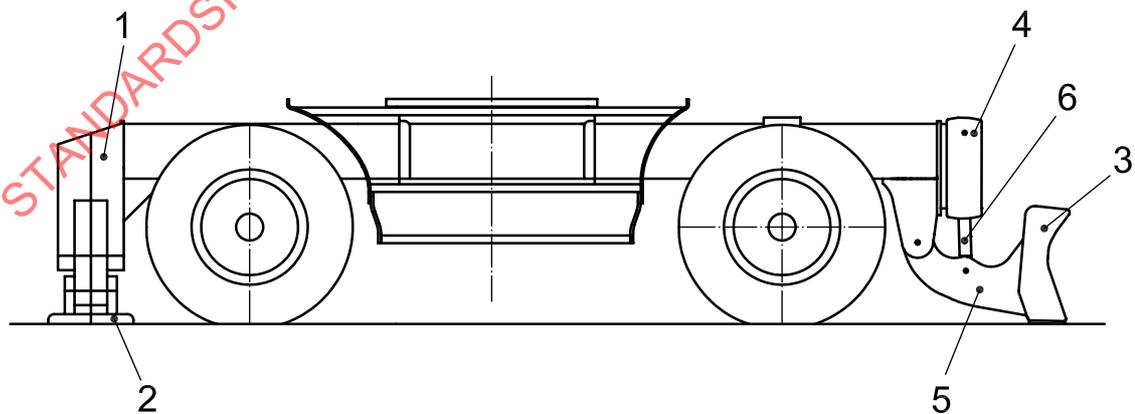

- Key**
- 1 rear outriggers
 - 2 outrigger pad
 - 3 blade
 - 4 cylinder, lift
 - 5 beam, push
 - 6 blade linkage


Figure 22 — Dozer blade and outrigger

5.2 Dimensions

The dimensions of the equipment and attachments on hydraulic excavators shall be in accordance with Figures 23 to 26.

For the definitions of the dimensions, see Annex B.


Dimensions in metres

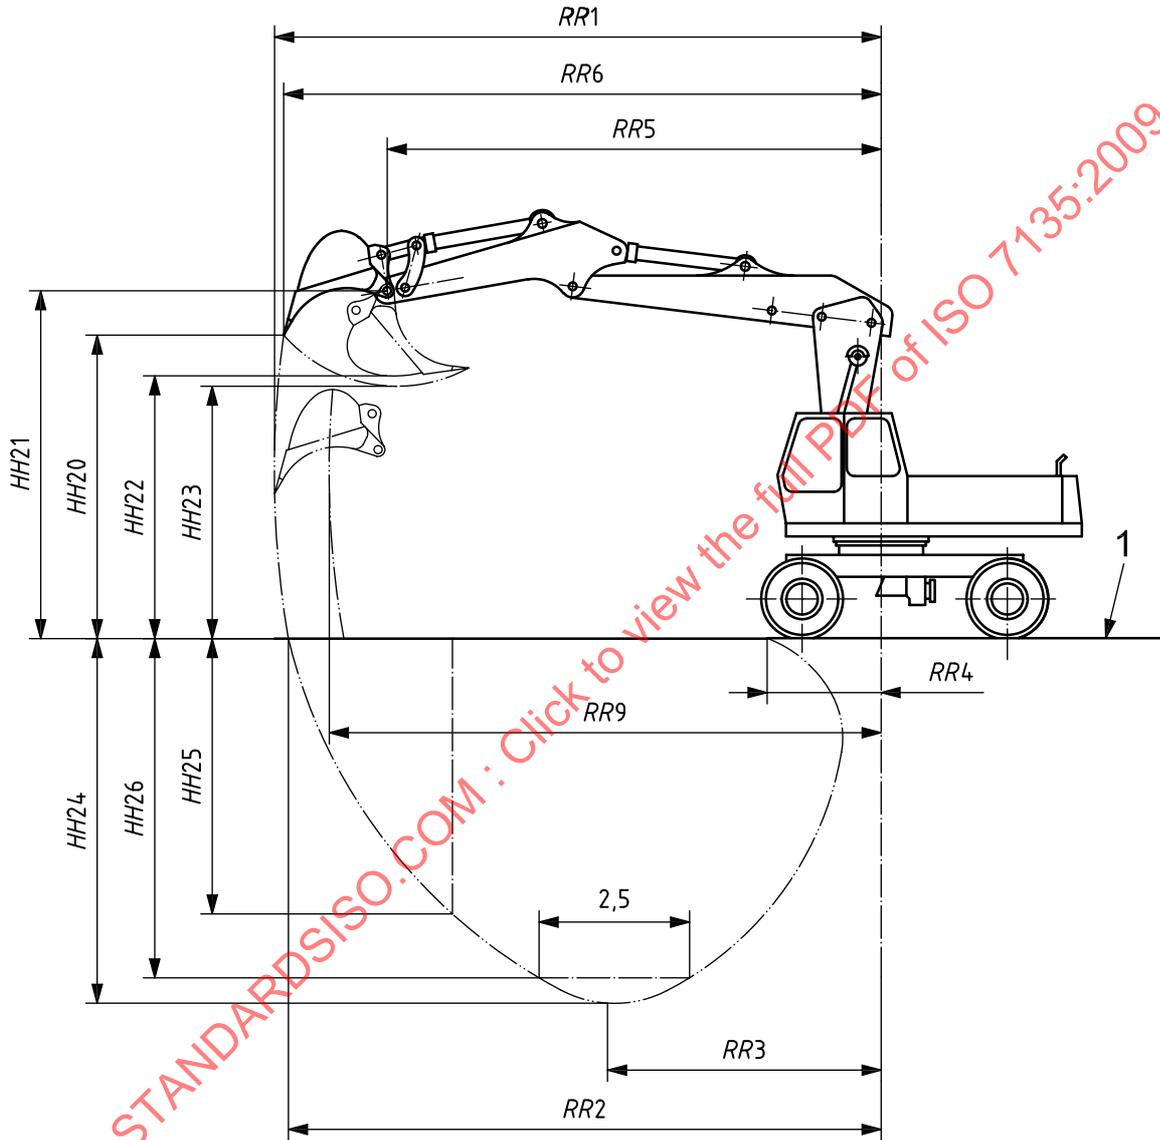

Key

- 1 ground reference plane (GRP)

Figure 23 — Hoe equipment dimensions

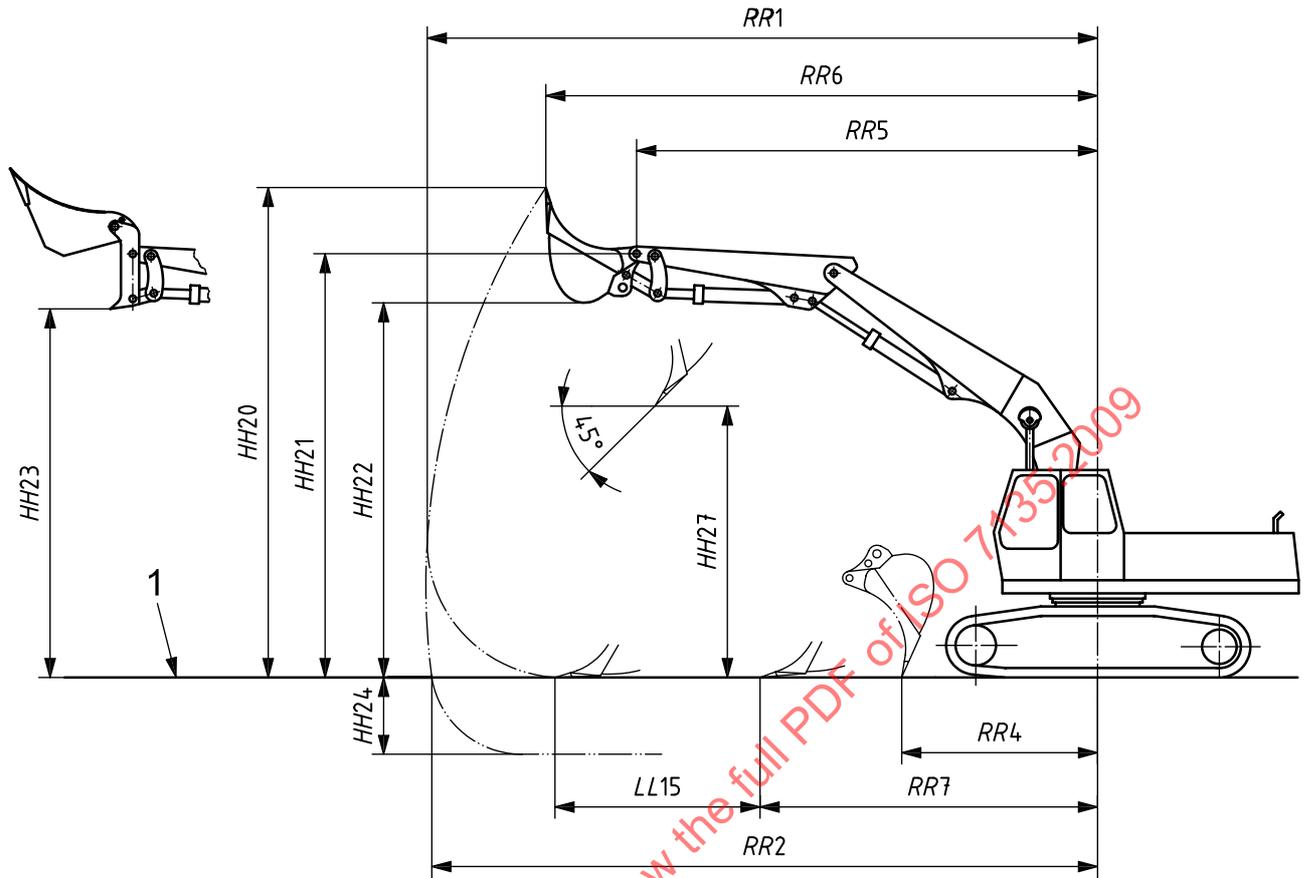


Key

- 1 ground reference plane (GRP)

Figure 24 — Shovel equipment dimensions


STANDARDSISO.COM : Click to view the full PDF of ISO 7135:2009

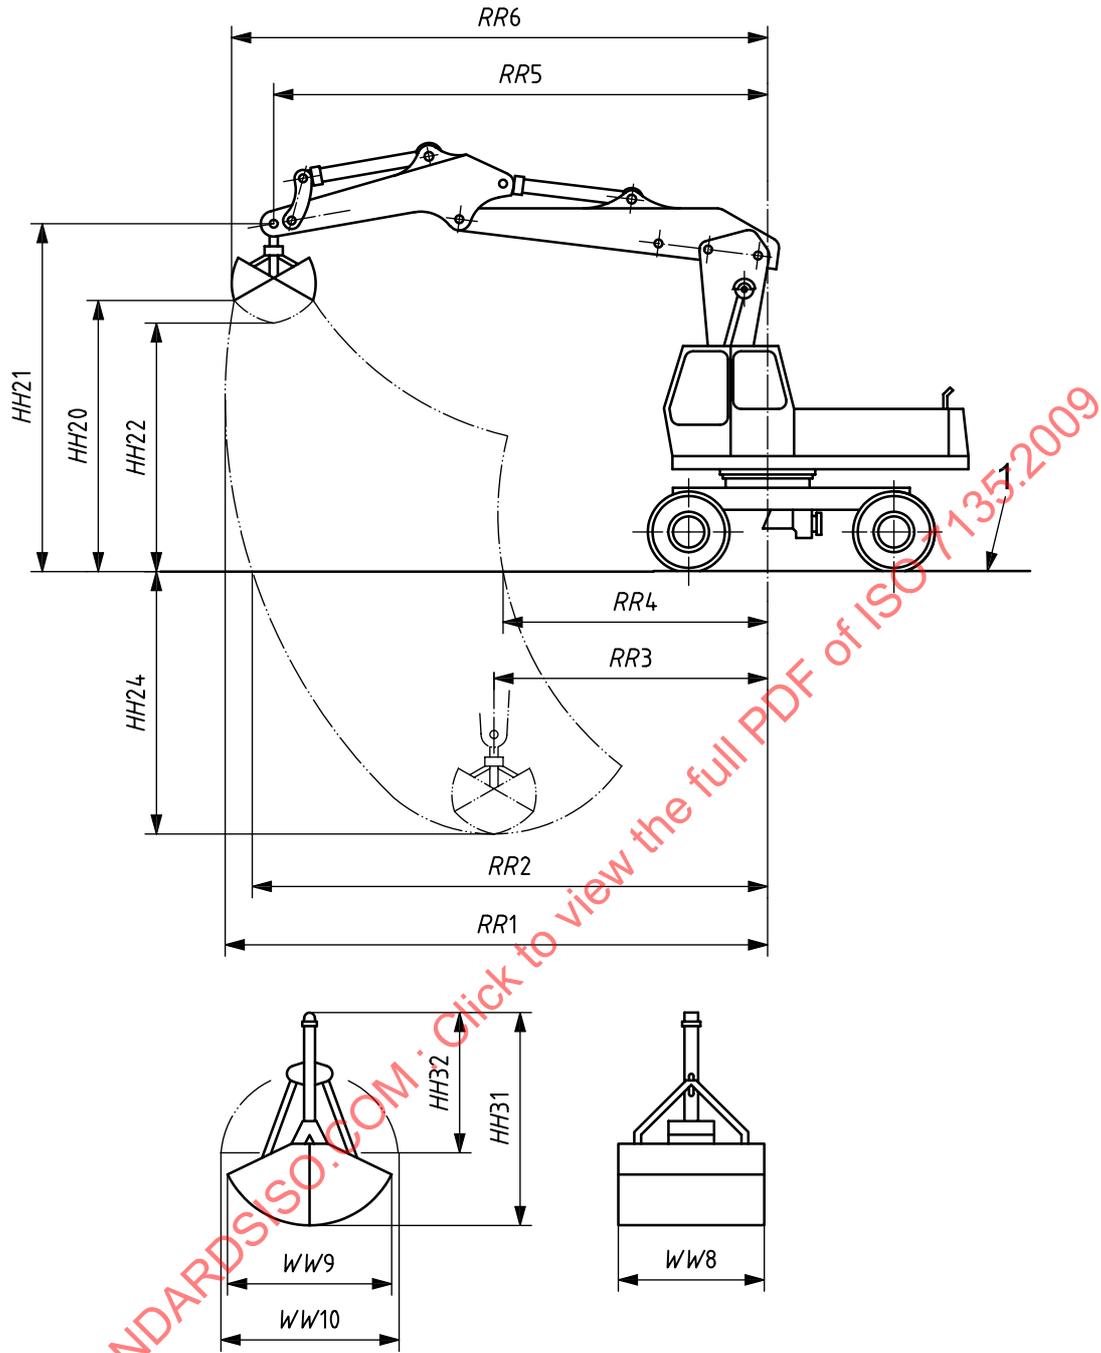

Key

- 1 ground reference plane (GRP)

Figure 25 — Grab/clamshell equipment dimensions

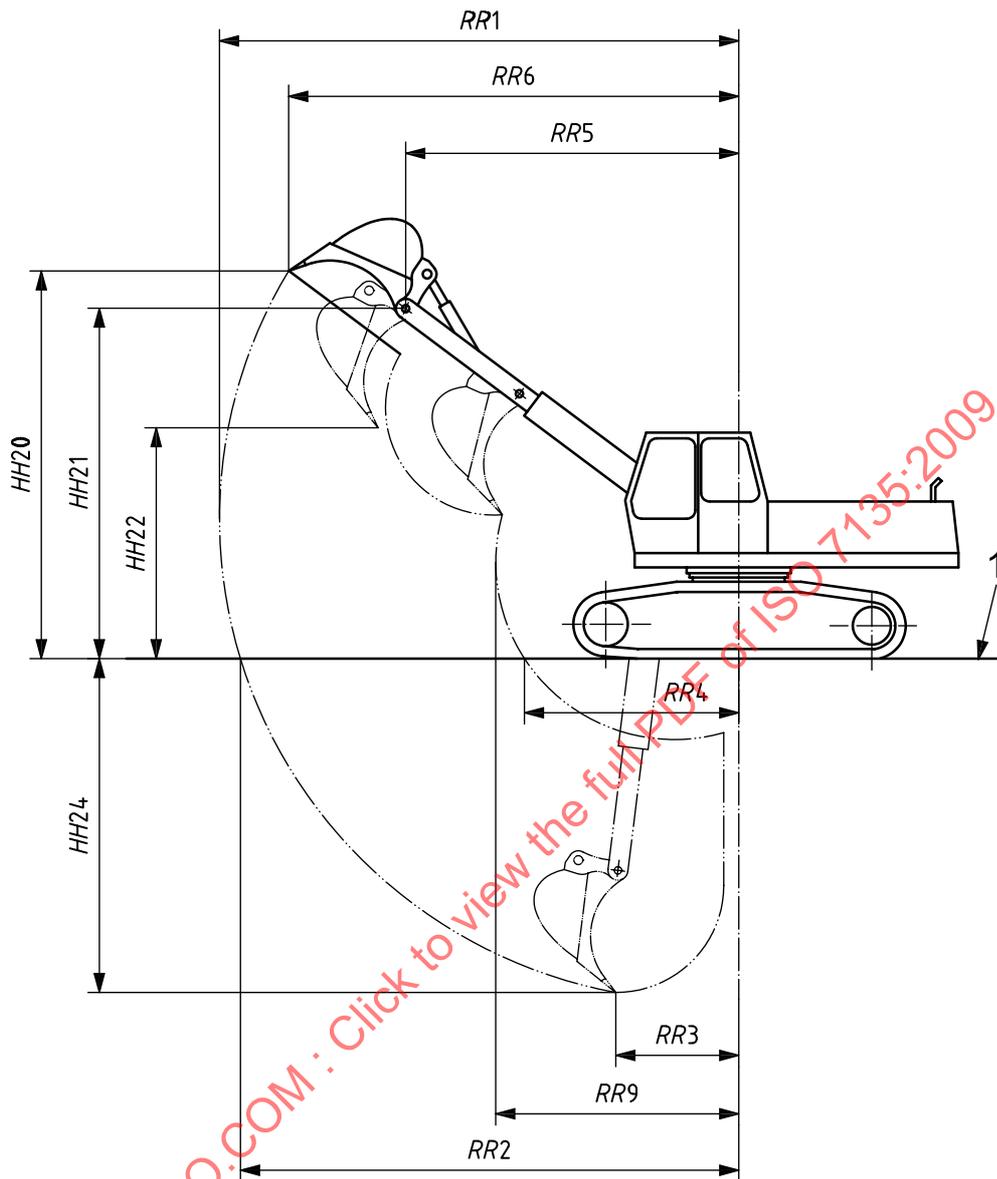

Key


- 1 ground reference plane (GRP)

Figure 26 — Telescopic boom equipment dimensions

5.3 Manoeuvring, road travelling and shipping

Dimensions related to the manoeuvring, road travelling and shipping of hydraulic excavators shall be in accordance with Figures 27 to 30.


For the definitions of the dimensions, see Annex B.

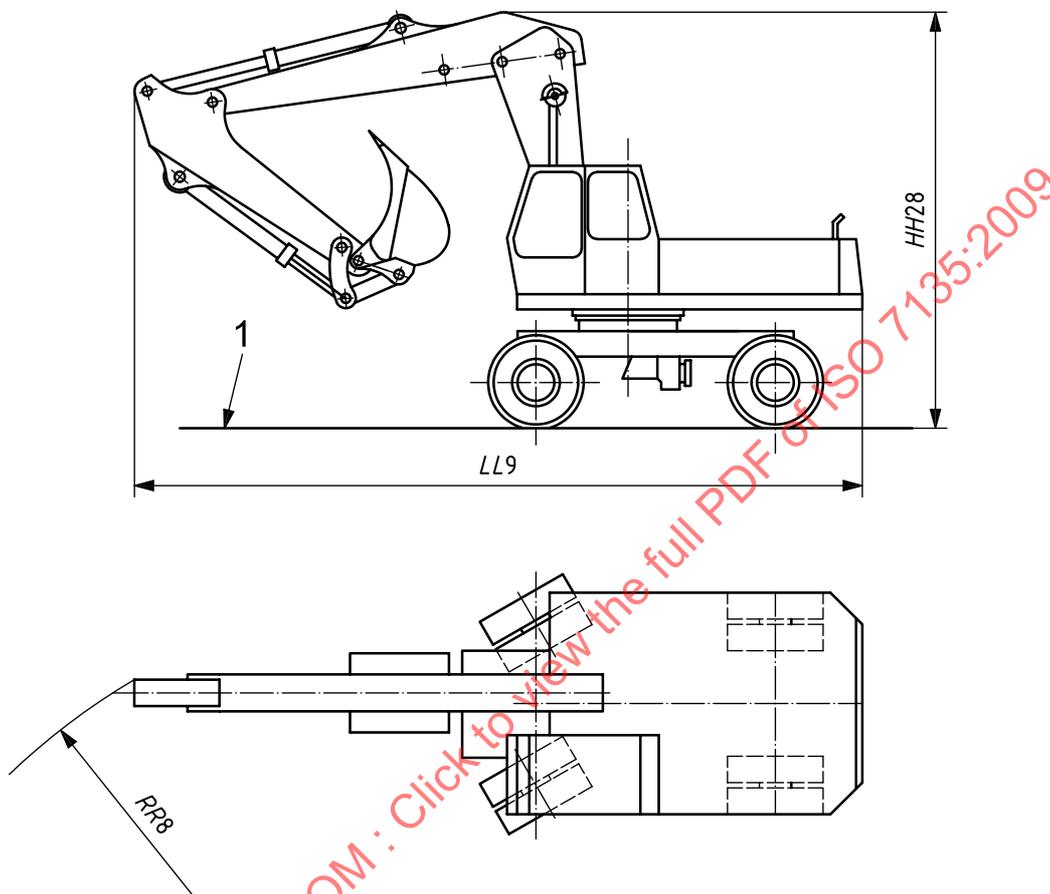

Key

- 1 ground reference plane (GRP)


Figure 27 — Dimensions of wheeled excavator in manoeuvring position

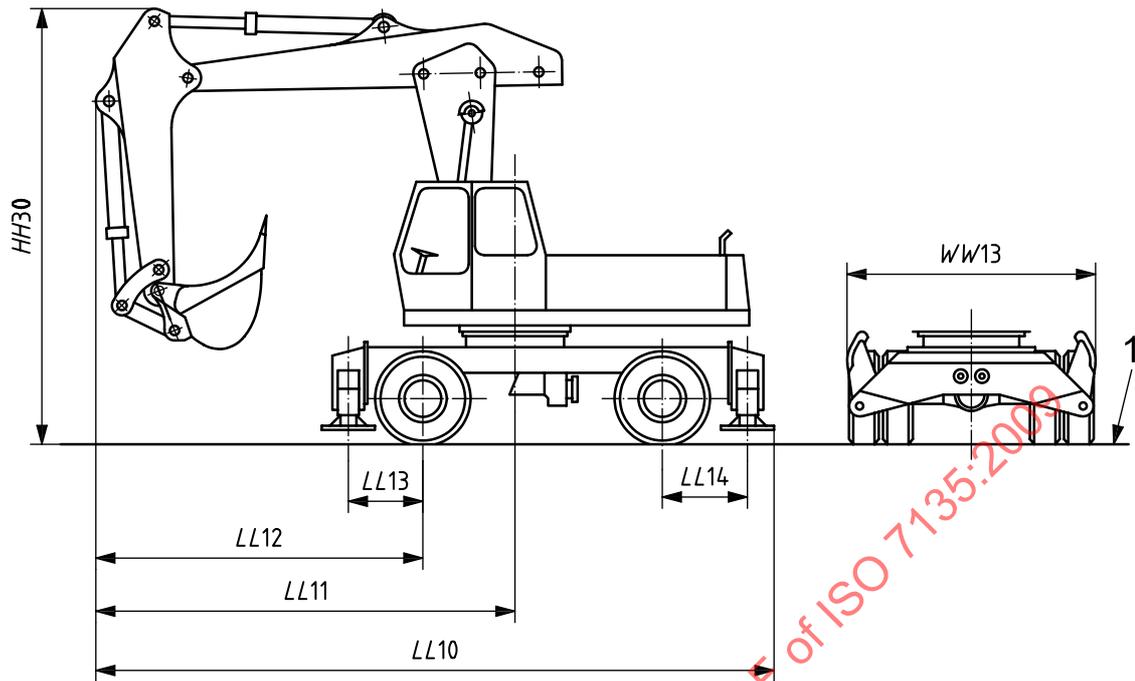

Key

- 1 ground reference plane (GRP)


Figure 28 — Dimensions of wheeled excavator in travel position

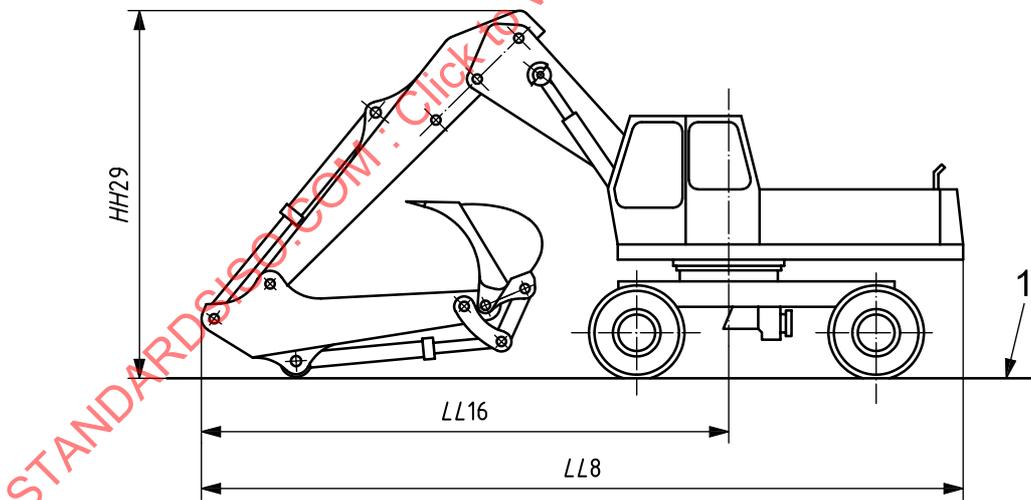

Key

- 1 ground reference plane (GRP)

Figure 29 — Dimensions of wheeled excavator in transport position

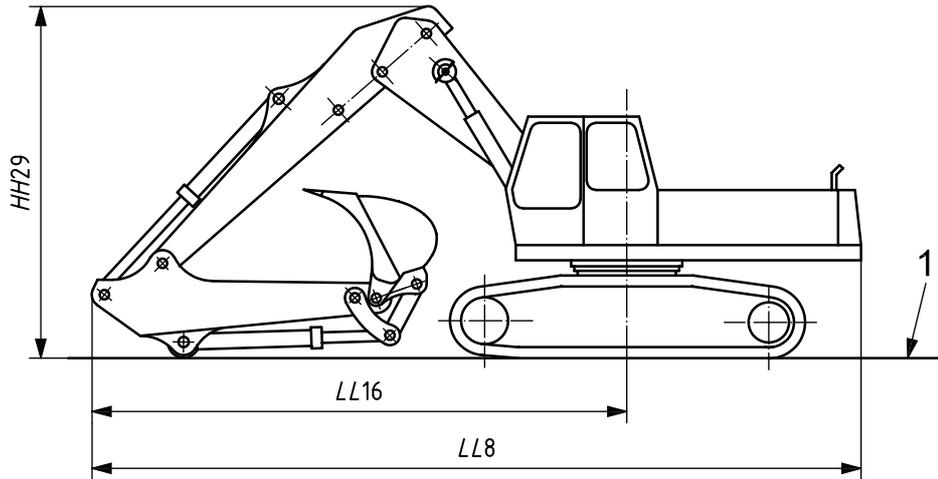

Key

- 1 ground reference plane (GRP)

Figure 30 — Dimensions of crawler excavator in transport position

6 Performance terminology

6.1 ISO net power (engine)

See ISO 9249 and ISO 14396.

6.2 Maximum travel speed

This is maximum speed obtained on a hard, level surface with an empty bucket, determined according to ISO 6014.

6.3 Maximum swing speed

This is maximum rotation speed in revolutions per minute of the revolving frame and equipment.

6.4 Braking performance

See ISO 3450 for wheeled excavators.

See ISO 10265 for crawler excavators.

6.5 Steering (wheeled excavators only)

See ISO 5010.

6.6 Digging force

See ISO 6015.

- Maximum hoe tool force using bucket cylinder
- Maximum hoe tool force using arm cylinder
- Maximum shovel tool force using bucket cylinder
- Maximum shovel tool force using arm cylinder

6.7 Rated lift capacity

See ISO 10567.

7 Commercial literature specifications (SI units)

7.1 Engine

Specify the following:

- a) ignition type, i.e. diesel or spark-ignition;
- b) type of cycle, i.e. two or four stroke;
- c) form of air aspiration, i.e. naturally aspirated, mechanically supercharged or turbocharged;
- d) number of cylinders;
- e) bore;
- f) stroke;
- g) displacement;
- h) ISO net flywheel power at given engine speed;
- i) maximum torque at a given engine.

The following are examples of other information relating to the engine that may be specified:

- manufacturer and model;
- cooling system, i.e. air- or liquid-cooled;
- type of fuel;
- starter type;
- electrical system voltage.

7.2 Hydraulic system

Specify the following:

- a) pump flow at a given pressure and a given engine speed;
- b) maximum normal system operating pressure.

Other information may be specified if desired.

7.3 System fluid capacities

Specify the capacities of

- a) the fuel tank, and
- b) the hydraulic system.

The following are examples of related information that may be specified:

- hydraulic tank;
- cooling system;
- engine crankcase;
- final drive case;
- pump drives;
- swing drive case.

7.4 Filtration system

The type of filtration system may be specified.

7.5 Crawler excavator

7.5.1 Steering and braking

Specify the type and actuation of the steering and braking systems.

EXAMPLE Drum or disc; wet or dry; hydraulic or mechanical.

7.5.2 Final drive

The type of final drive and related information may be specified.

EXAMPLE Single or double reduction, planetary; ratio; lubrication.

7.5.3 Track

Specify

- a) type, and
- b) dimensions.

The following are examples of other information that may be specified:

- ground contact area (calculation method to be defined);
- number of shoes (on each side);
- number of carrier rollers (on each side);
- number of track rollers (on each side).

7.6 Wheeled excavator

7.6.1 Driving axle

The type of driving axle may be specified.

EXAMPLE Fixed versus oscillating; bevel gear and pinion; differential; two-speed; hydrostatic; planetary final drive.

7.6.2 Steering

Specify the type of steering.

The following are examples of other information that may be specified:

- turning radius (left and right);
- articulation angle;
- machine clearance diameter.

7.6.3 Brakes

The following is information that may be specified:

- type and actuating system of the service brake;
- type and actuating system of the parking brake;
- type and actuating system of the secondary brakes;
- brake performance.

7.6.4 Tyres

Specify the size and type of the tyres.

The following are examples of other information that may be specified:

- tread;
- ply rating;
- rim size.

7.7 Operating mass

Specify the OM.





7.8 Shipping mass





Specify the SM.

Annex A
(normative)






Base-machine dimensions




This annex defines base-machine height, width, length, radial and angular dimensions for excavators. See also Figure 5.

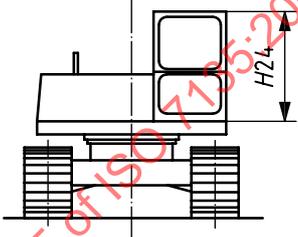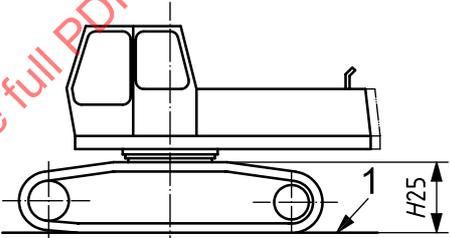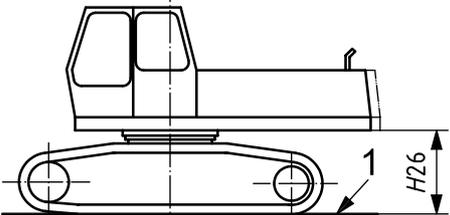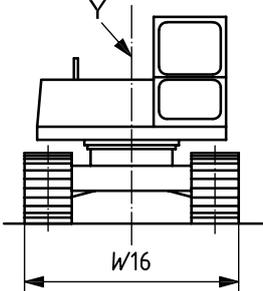Code	Term and definition	Illustration
<p><i>H24</i></p> <p>cab height</p> <p>distance on Z coordinate between platform of upper structure and highest point of the cab</p>		
<p><i>H25</i></p> <p>crawler track height</p> <p>distance on Z coordinate between the GRP (1) and the highest point of the crawler tracks</p>		
<p><i>H26</i></p> <p>clearance height under upper structure</p> <p>distance on Z coordinate between the GRP (1) and the lowest point of the upper structure</p>		
<p><i>W16</i></p> <p>undercarriage overall width</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the sides of the undercarriage</p>		

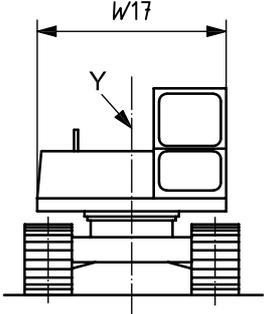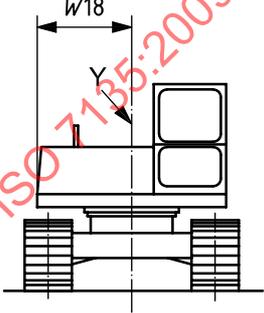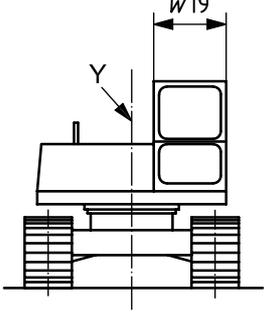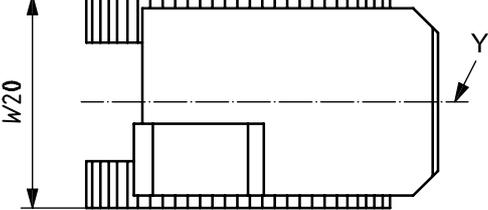Code	Term and definition	Illustration
W17	<p>upper structure overall width</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the sides of the upper structure</p>	
W18	<p>right-side upper structure distance from axis of rotation</p> <p>distance on Y coordinate between two Y planes passing respectively through the axis of rotation and the furthest right side of the upper structure</p>	
W19	<p>cab width overall</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the side of the cab</p>	
W20	<p>maximum width with track extended or retracted</p> <p>distance on Y coordinate between two Y planes passing through the extended or furthest points of the track for extended track or distance on Y coordinate between two Y planes passing through the outer surfaces of the track when the track is in the retracted position for retracted track</p>	

STANDARDS.PDF.COM: Click to view the full PDF of ISO 7135:2009

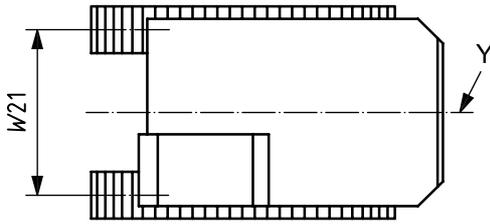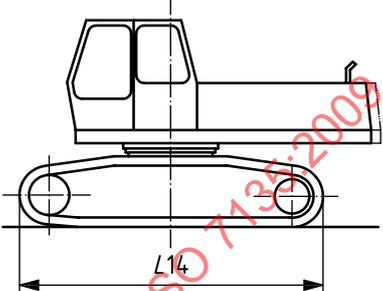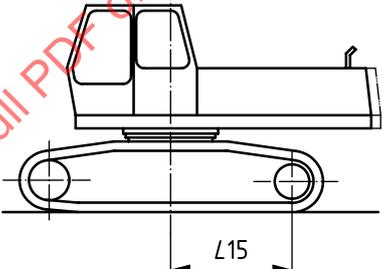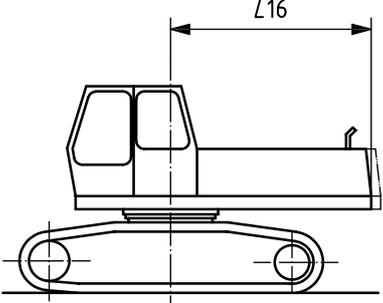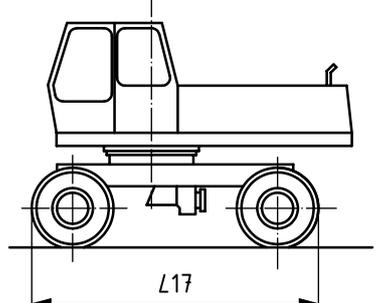Code	Term and definition	Illustration
W21	<p>track gauge with track extended or retracted</p> <p>distance on Y coordinate between two Y planes passing through the mid-width of the sprocket teeth</p>	
L14	<p>crawler overall length</p> <p>distance on X coordinates between two X planes passing through the furthest points on the front and rear of the crawler</p>	
L15	<p>sprocket axis to axis of rotations</p> <p>distance on X coordinate between two X planes passing respectively through the sprocket axis and the axis of rotation</p>	
L16	<p>upper structure rearmost distance from axis of rotation</p> <p>distance on X coordinate between two X planes passing respectively through the furthest point on the rear of upper structure and the axis of rotation</p>	
L17	<p>undercarriage overall length</p> <p>distance on X coordinate between two X planes passing respectively through the furthest points on the front and rear of the undercarriage</p>	

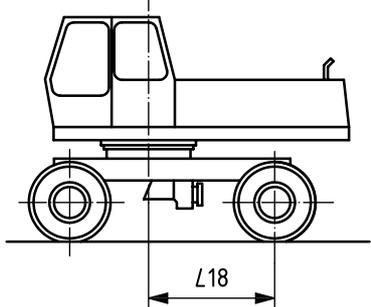
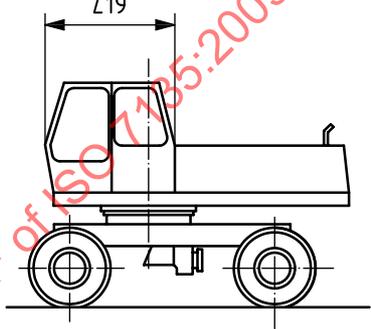
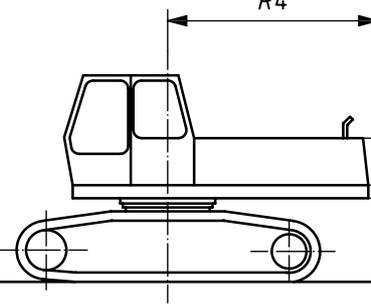
Code	Term and definition	Illustration
L18	<p>rear axle to axis of rotation</p> <p>distance on X coordinate between two X planes passing respectively through the centre of the rear axle and the axis of rotation</p>	 <p>The illustration shows a side view of a tracked vehicle. A vertical dashed line represents the axis of rotation. A horizontal dimension line labeled 'L18' indicates the distance from the center of the rear axle to this axis.</p>
L19	<p>cab overall length</p> <p>distance on X coordinate between two X planes passing through the furthest points on the front and rear of the cab</p>	 <p>The illustration shows a side view of a tracked vehicle. A horizontal dimension line labeled 'L19' indicates the length of the cab, measured between the furthest front and rear points.</p>
R4	<p>swing radius rear-end radius</p> <p>distance on Y coordinate (Z plane) between the axis of rotation and the furthest point of the upper structure</p>	 <p>The illustration shows a side view of a tracked vehicle. A horizontal dimension line labeled 'R4' indicates the distance from the axis of rotation to the furthest point of the upper structure.</p>




The X, Y and Z coordinates and X, Y and Z planes comprise the three-dimensional coordinate system used for defining the dimensions of earth-moving machinery in accordance with ISO 6746-1; the ground reference plane (GRP), indicated by "1" in the illustrations, is also defined therein.

Annex B
(normative)

Dimensions of equipment and attachments

This annex defines height, width, length, radial and reach and angular dimensions for equipment and attachments used on hydraulic excavators. See also Figures 23 to 30.

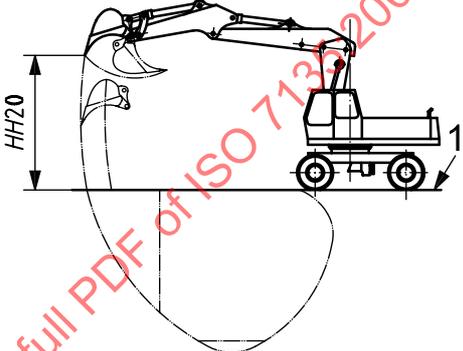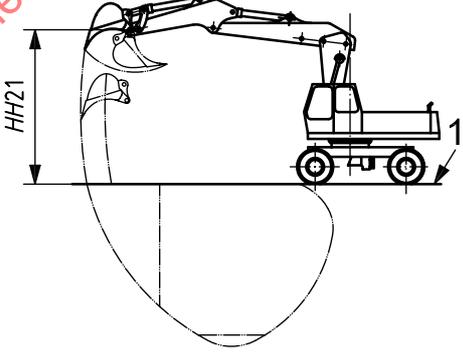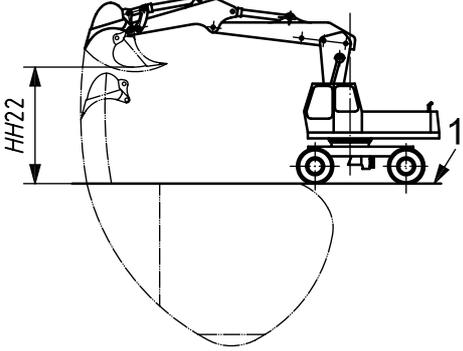Code	Term and definition	Illustration
HH20	<p>maximum height of cutting edge</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the highest point which can be reached</p>	
HH21	<p>maximum bucket hinge pin height</p> <p>distance on Z coordinate between the GRP (1) and the bucket hinge pin at the highest point which can be reached</p>	
HH22	<p>maximum bucket [grab] loading clearance</p> <p>distance on Z coordinate between the GRP (1) and the lowest point of the bucket [grab] closed position when the bucket pivot is in the highest position</p>	

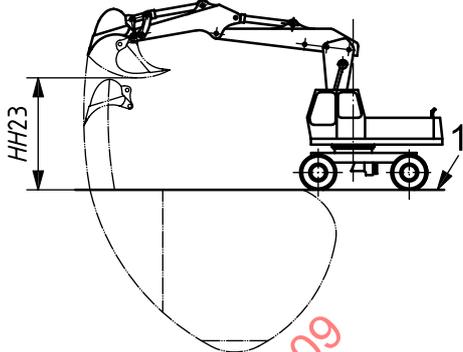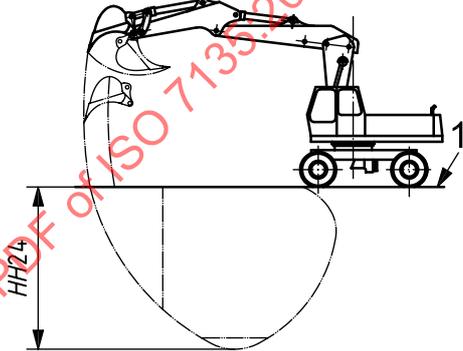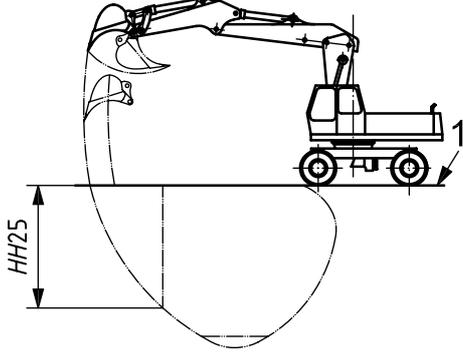Code	Term and definition	Illustration
HH23	<p>maximum dumping height</p> <p>distance on Z coordinate between the GRP (1) and the lowest attainable point of the bucket when the bucket pivot is in the highest position</p>	
HH24	<p>maximum digging depth</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which can be reached</p>	
HH25	<p>maximum vertical digging depth</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which can be reached vertically</p>	
HH26	<p>maximum digging depth at 2,5 m floor length</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which allows a 2,5 m floor length parallel to the X coordinate</p>	