
**Earth-moving machinery — Pipelayers —
Terminology and commercial
specifications**

*Engins de terrassement — Tracteurs poseurs de canalisations —
Terminologie et spécifications commerciales*

STANDARDSISO.COM : Click to view the full PDF of ISO 7136:2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 7136:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Nomenclature	13
5 Commercial literature specifications (SI units)	15

STANDARDSISO.COM : Click to view the full PDF of ISO 7136:2006

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7136 was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 4, *Commercial nomenclature, classification and rating*.

This third edition cancels and replaces the second edition (ISO 7136:1998), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 7136:2006

Earth-moving machinery — Pipelayers — Terminology and commercial specifications

1 Scope

This International Standard establishes terminology and the content of commercial literature specifications for self-propelled pipelayers and their equipment. It is applicable to pipelayers as defined in ISO 6165.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6014, *Earth-moving machinery — Determination of ground speed*

ISO 6016:1998, *Earth-moving machinery — Methods of measuring the masses of whole machines, their equipment and components*

ISO 6165:2006, *Earth-moving machinery — Basic types — Identification and terms and definitions*

ISO 6746 (all parts), *Earth-moving machinery — Definitions of dimensions and codes*

ISO 9249, *Earth-moving machinery — Engine test code — Net power*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6165 and the following apply.

3.1 General

3.1.1

pipelayer

⟨pipelayers with rigid upper structure⟩ self-propelled crawler or wheeled machine, having pipe-laying equipment with main frame, load-hoist mechanism, vertically pivotable side boom and counterweight, primarily designed to handle and lay pipes

[ISO 6165:2006, definition 4.11]

3.1.2

rotating pipelayer

self-propelled crawler or wheeled machine, having pipe-laying equipment with main frame, load hoist mechanism with either a load hoist drum or a winch, vertically pivotable boom, fitted on a rotating upper structure, and counterweight, primarily designed to handle and lay pipes

[ISO 6165:2006, definition 4.12]

3.1.3

side boom

equipment added to a tractor or a loader (wheel or crawler type machine), which is designed to handle and lay pipes and carry pipe-laying equipment

NOTE The equipment includes boom and load hoist mechanisms and a vertically pivotable side boom. It can be with or without counterweights.

3.1.4

rotating upper structure

upper portion of the machine, capable of at least 90° rotation around a vertical axis passing through the longitudinal axis of the machine

NOTE It includes machine cab, boom and counterweight(s).

3.1.5

base machine

machine with a cab or canopy and operator-protective structures if required, without equipment and attachments but possessing the necessary mountings for such equipment and attachments

See Figure 1.

3.1.6

equipment

set of components (boom and counterweights) mounted onto the base machine to fulfil the primary design function of a pipelayer

NOTE Equipment for pipelayers includes load hoist mechanisms with either a load hoist drum or a winch and a vertically pivotable side boom.

3.1.7

boom

fixed length structural member that supports the load

3.1.8

counterweight

any additional removable weight and its removable (or fixed) support added to increase tipping load

NOTE There are two types of counterweights, defined in 3.1.8.1 and 3.1.8.2.

3.1.8.1

adjustable counterweight

that portion of the counterweight that is movable

3.1.8.2

nonadjustable counterweight

counterweight fixed in one location on the machine

3.1.9

attachment

assembly of components that can be mounted on the base machine, or equipment, for a specific use

3.1.10**component**

part or an assembly of parts of a base machine, equipment or attachment

3.2 Masses**3.2.1****operating mass**

mass of the base machine with equipment and empty attachment as specified by the manufacturer, and with the operator (75 kg), full fuel tank and all fluid systems at the levels specified by the manufacturer

[ISO 6016:1998, definition 3.2.1]

3.2.2**shipping mass**

mass of the base machine without an operator, and with fuel level at 10 % of tank capacity, all fluid systems at their levels specified by the manufacturer and with or without equipment, attachment, cab, canopy, ROPS and/or FOPS, wheels and counterweights as stated by the manufacturer

[ISO 6016:1998, definition 3.2.5]

3.3 Dimensions

For definitions and codes of dimensions strictly related to pipelayers, the following apply. See also ISO 6746-1 and ISO 6746-2 for definitions of dimensions and codes.

3.3.1**overall width without counterweight**

$W1$

overall width of the machine with the boom, counterweight, and counterweight support removed (if removable)

See Figure 1.

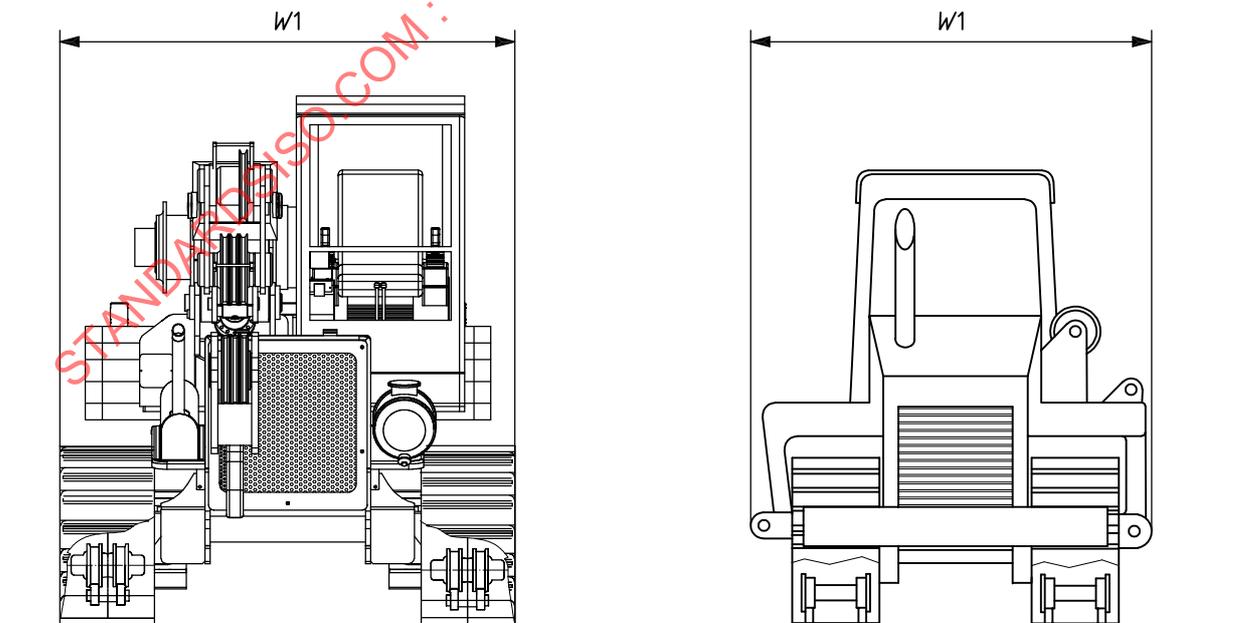


Figure 1 — Dimension $W1$


3.3.2
width with counterweight retracted

WW2


overall width of the machine with the boom removed and the adjustable counterweight retracted

NOTE The rotating upper structure is at 90°.

See Figure 2 a) and b).

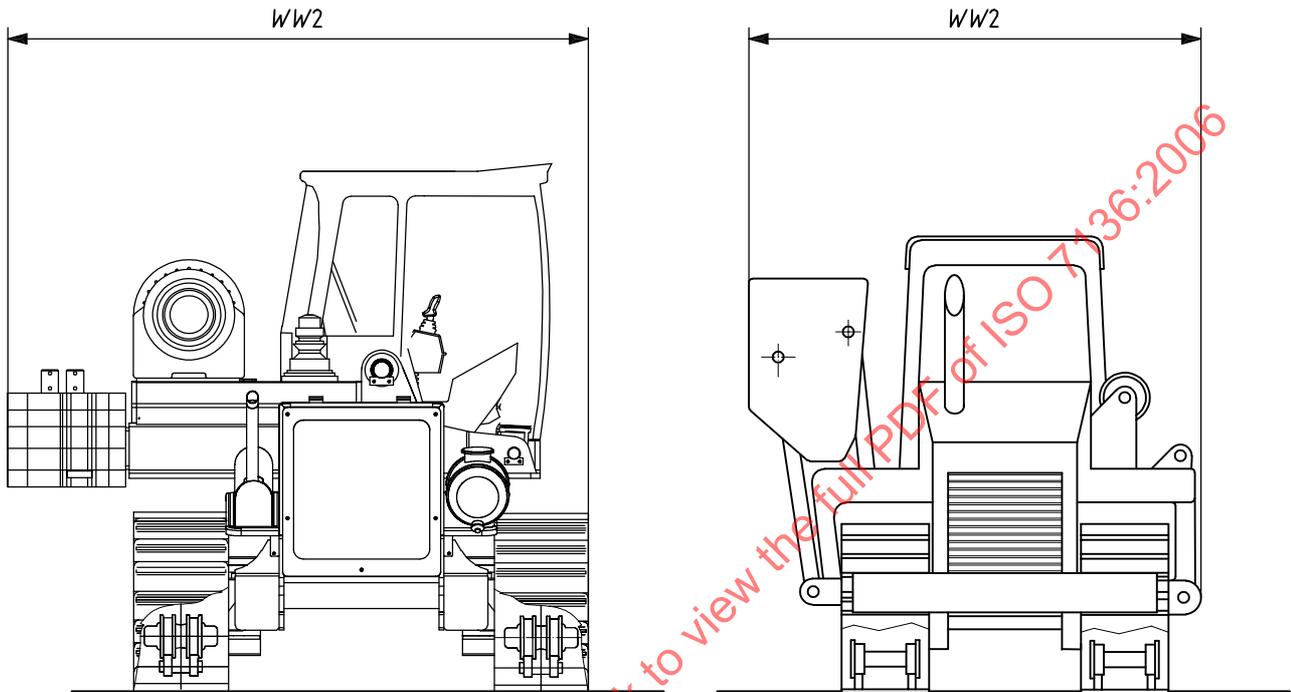

a) Dimension *WW2* for crawler machine

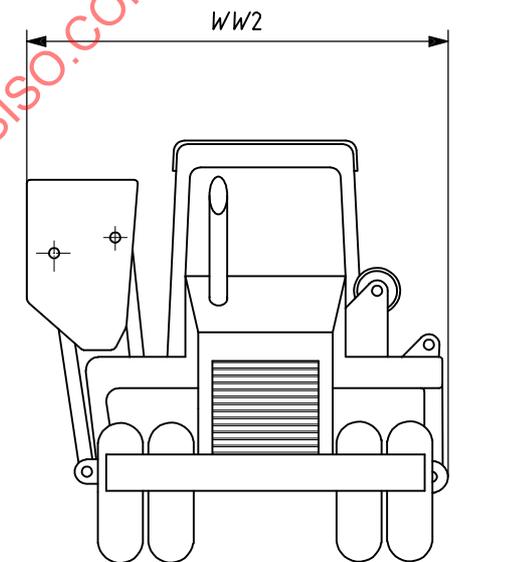

b) Dimension *WW2* for wheeled machine



Figure 2 — Dimension *WW2* for wheeled and crawler machines

3.3.3**width with counterweight extended***WW3*

overall width of the machine with the boom removed and the adjustable counterweight extended

NOTE The rotating upper structure is at 90°.

See Figure 3 a) and b).

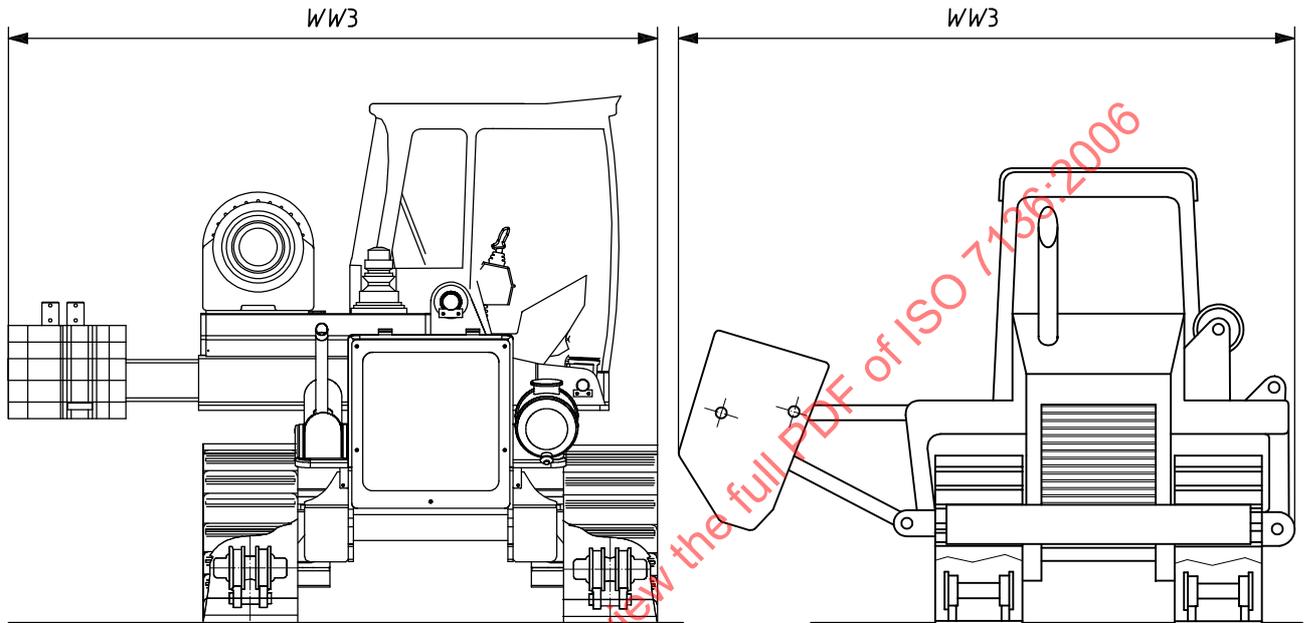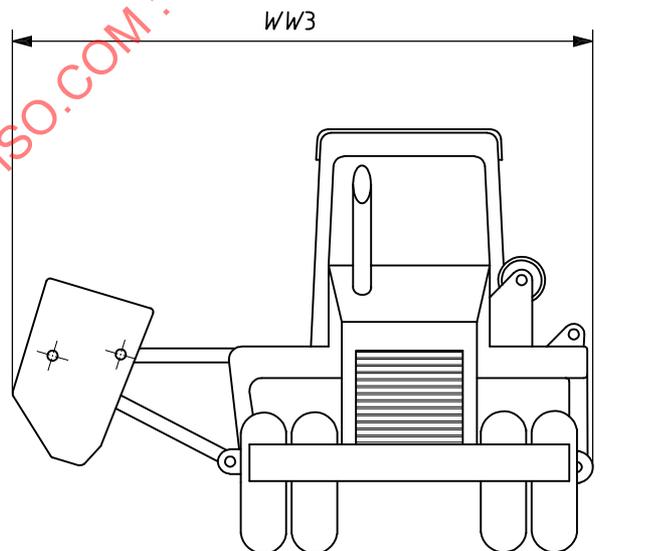a) Dimension *WW3* for crawler machineb) Dimension *WW3* for wheeled machine**Figure 3 — Dimension *WW3* for wheeled and crawler machines**

3.3.4
load overhang distance

WW4

(crawler machine) horizontal and perpendicular distance from the lift point line to the outer edge of the outer track link rail on the boom side of the machine

NOTE The rotating upper structure is positioned with the boom centreline perpendicular to the machine longitudinal axis.

See Figure 4.

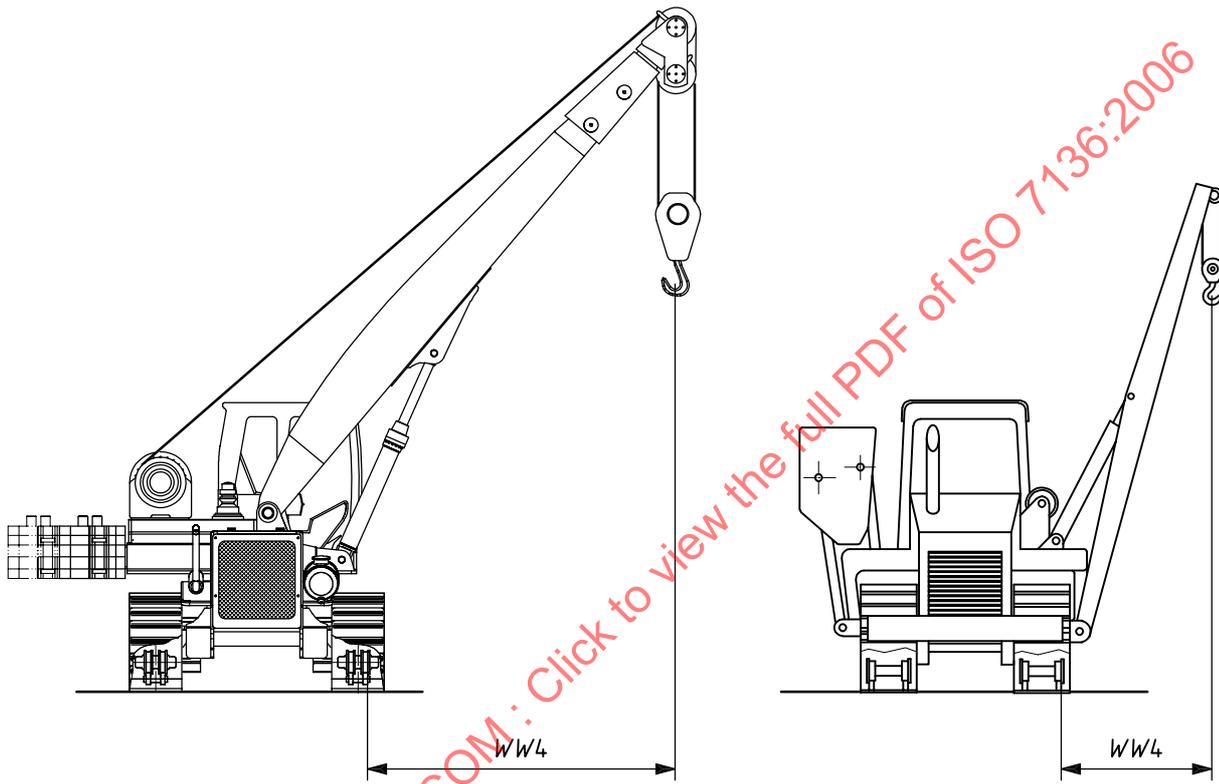


Figure 4 — Dimension *WW4* for crawler machine


3.3.5
load overhang distance

WW4

(wheeled machine) horizontal and perpendicular distance from the lift point line to a line connecting the centreline of the front and rear tires on the boom side of the machine

NOTE The rotating upper structure is positioned with the boom centreline perpendicular to the machine longitudinal axis.

See Figure 5.

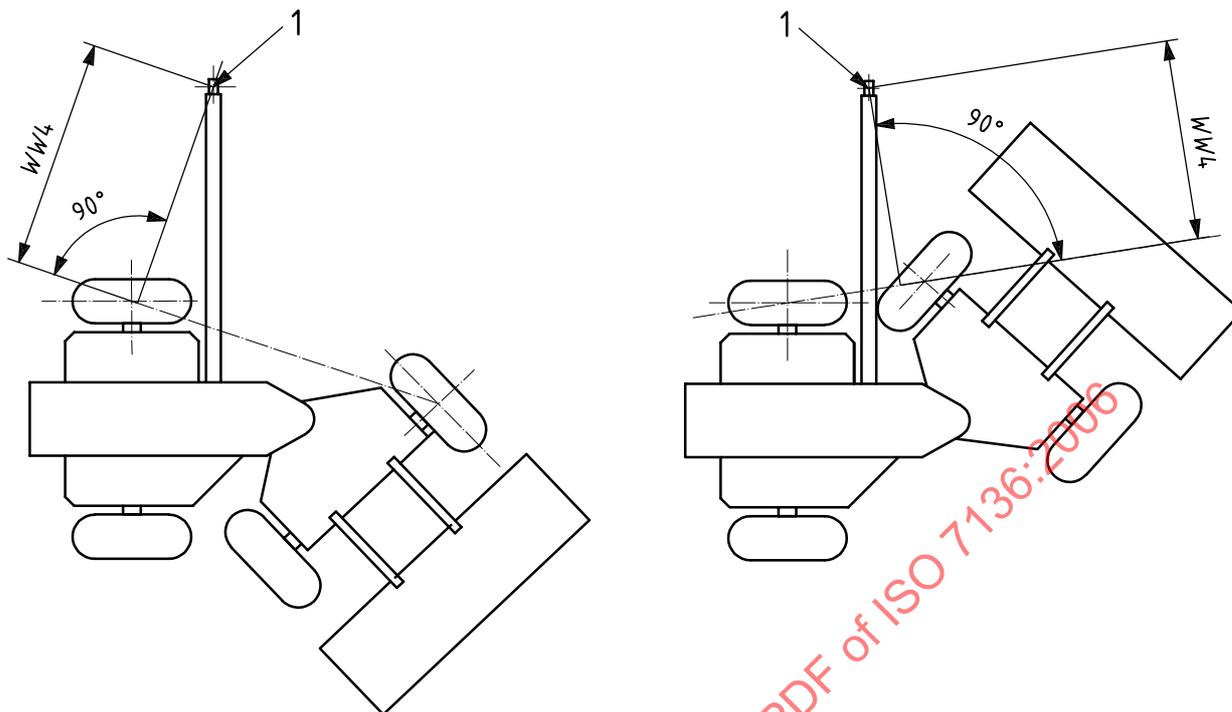

a) Articulated wheeled tractor steered away from boom

b) Articulated wheeled tractor steered toward boom

Key


1 lift point

Figure 5 — Dimension $WW4$ for wheeled machine

3.3.6 load overhang distance $WW4$

(machine with outriggers) horizontal and perpendicular distance from the lift point to a line connecting the centreline of the outrigger pads in their most favourable position

See Figure 6.

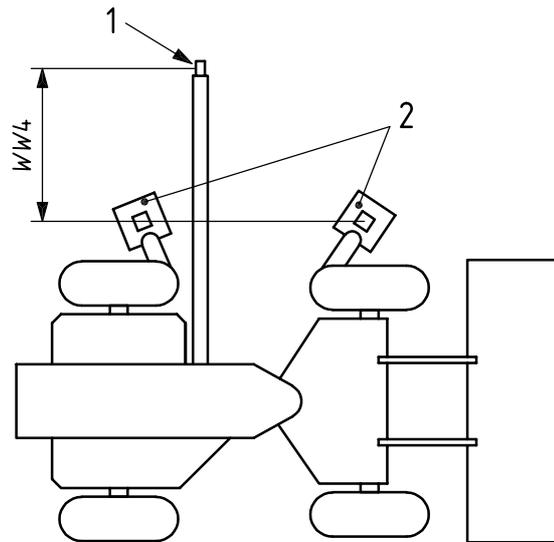

Key

- 1 lift point
- 2 outriggers

Figure 6 — Dimension $WW4$ for machine with outriggers steered straight

3.3.7

length of boom

LL1

straight-line distance between the centreline of the boom foot pivot and the centreline of the upper load block pivot

See Figure 7.

STANDARDSISO.COM : Click to view the full PDF of ISO 7136:2006

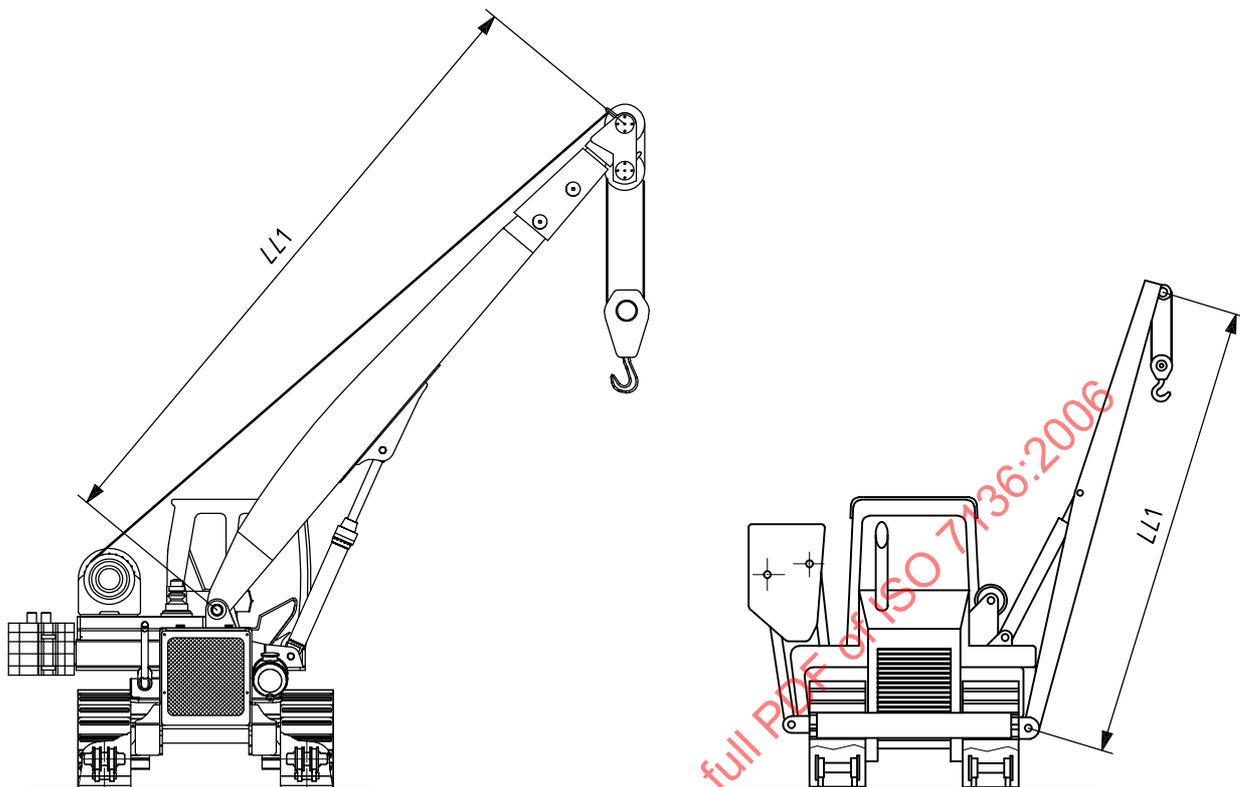


Figure 7 — Dimension $LL1$

3.3.8 shipping height

$H3$

⟨crawler machine⟩ height from the tip of the grouser to the highest point on the machine without the boom, counterweight, exhaust pipe, air cleaner inlet pipe or other easily removable components (if applicable)

See Figure 8.

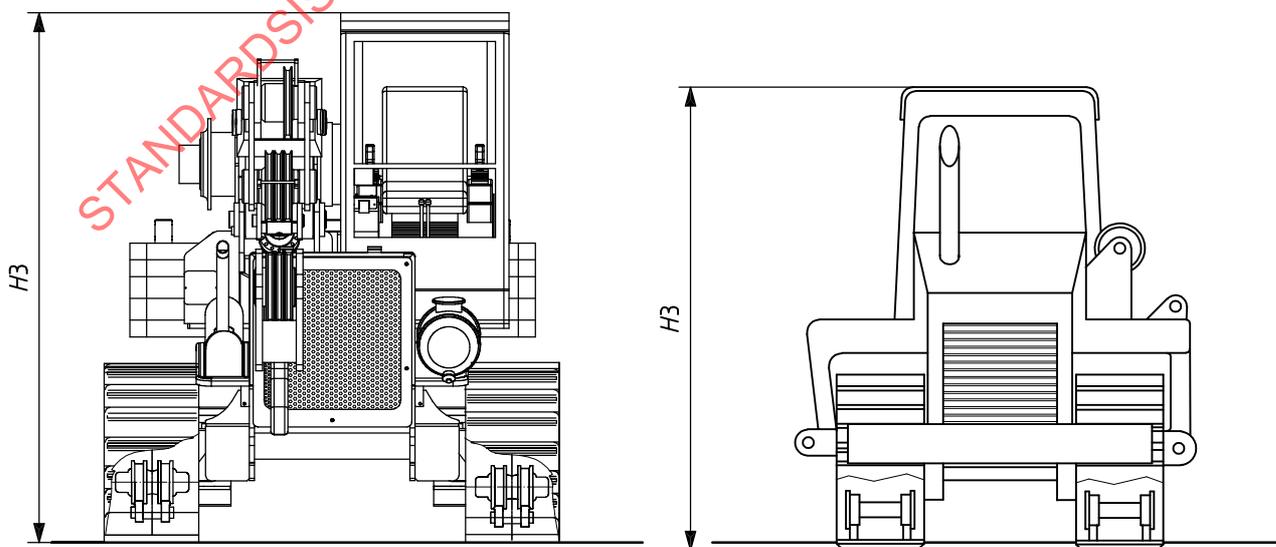


Figure 8 — Dimension $H3$ for crawler machine

3.3.9
shipping height

H3
(wheeled machine) height from the ground reference plane (GRP) to the highest point on the machine without the boom counterweight, exhaust pipe, air cleaner inlet pipe, or other easily removable components

See Figure 9.

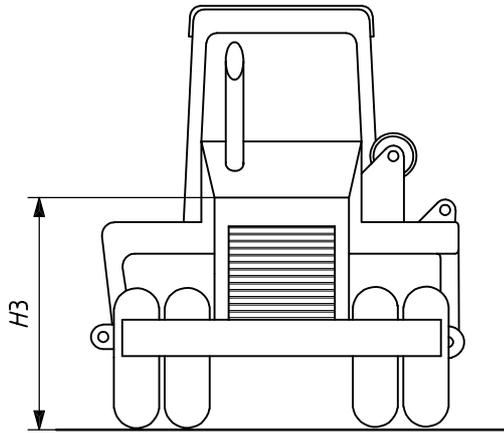


Figure 9 — Dimension *H3* for wheeled machine

3.3.10
grouser height

H5
distance between the face of the track shoe and the tip of the grouser

See Figure 10.

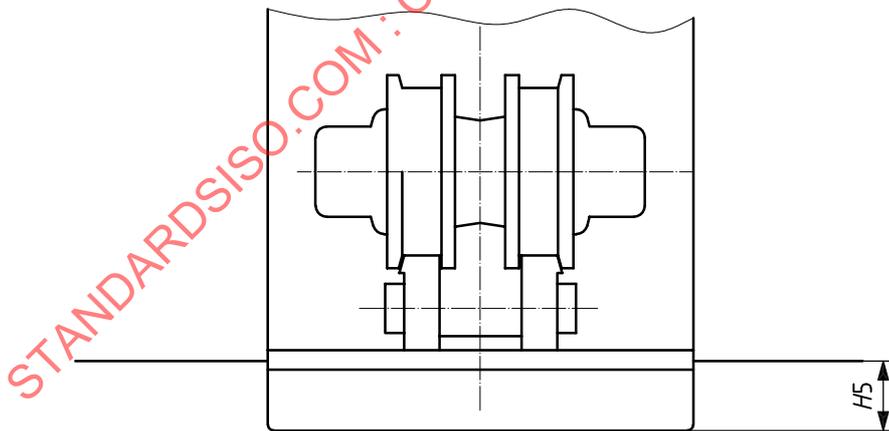
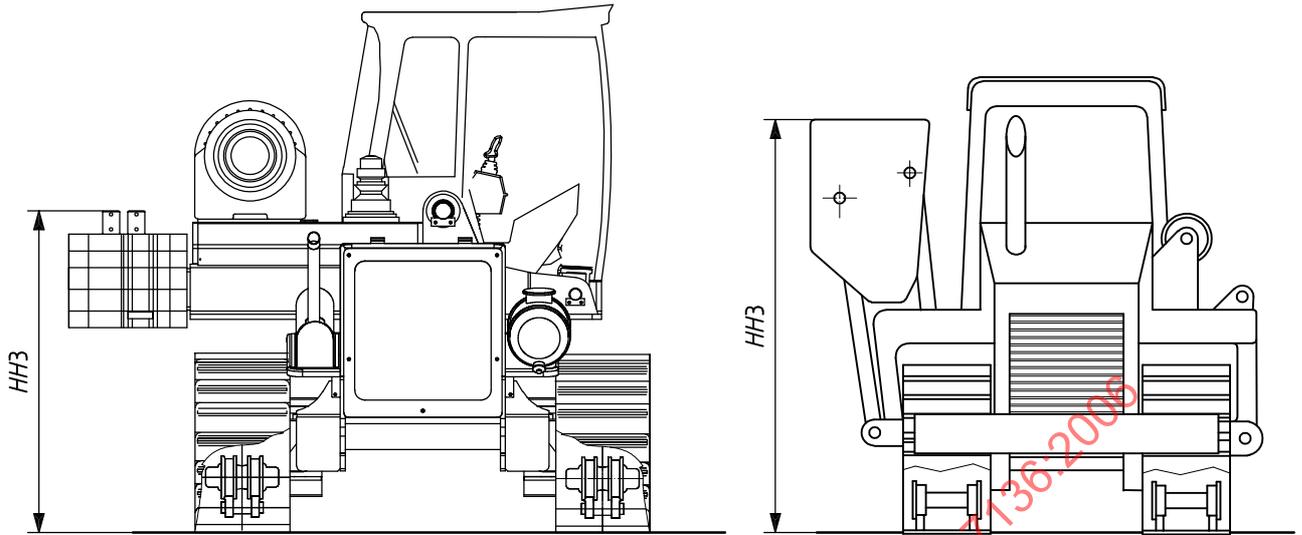


Figure 10 — Dimension *H5*

3.3.11
height to top of retracted counterweight

HH3
height between the ground reference plane (GRP) and the highest point on the counterweights when the adjustable counterweights are in the retracted position

See Figure 11.

Figure 11 — Dimension $HH3$


3.3.12

clearance under the extended counterweights

$HH4$

height between the ground reference plane (GRP) and the lowest point on the counterweights when the adjustable counterweights are in the extended position

See Figure 12.

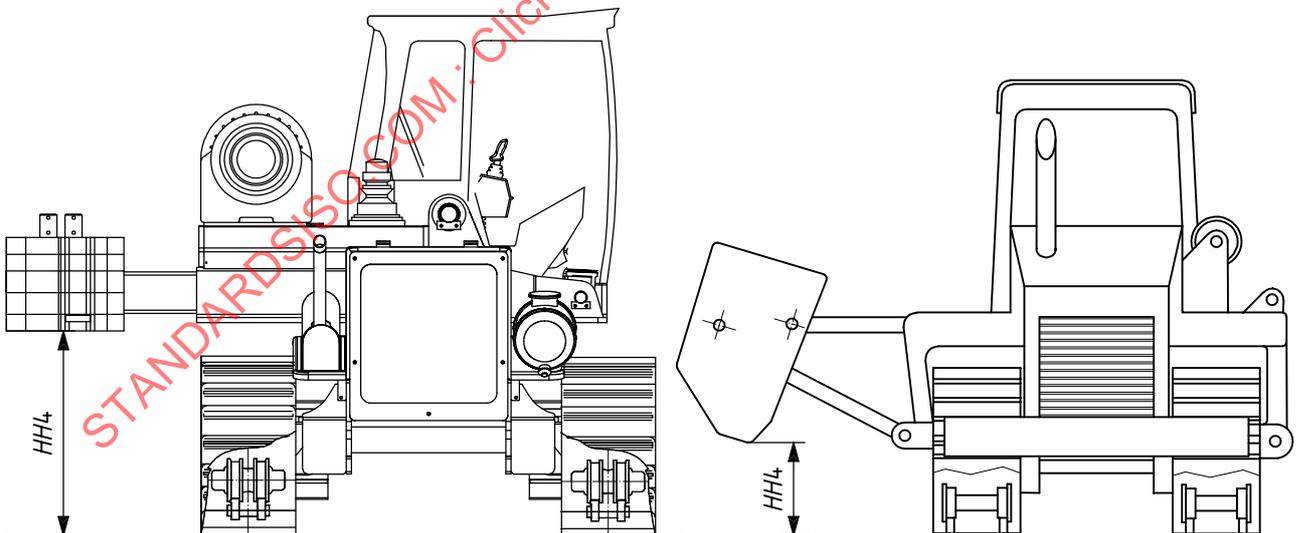Figure 12 — Dimension $HH4$

3.3.13

maximum hook height

HH5

height between the ground reference plane (GRP) and the bottom of the hook opening at maximum hook height

See Figure 13.


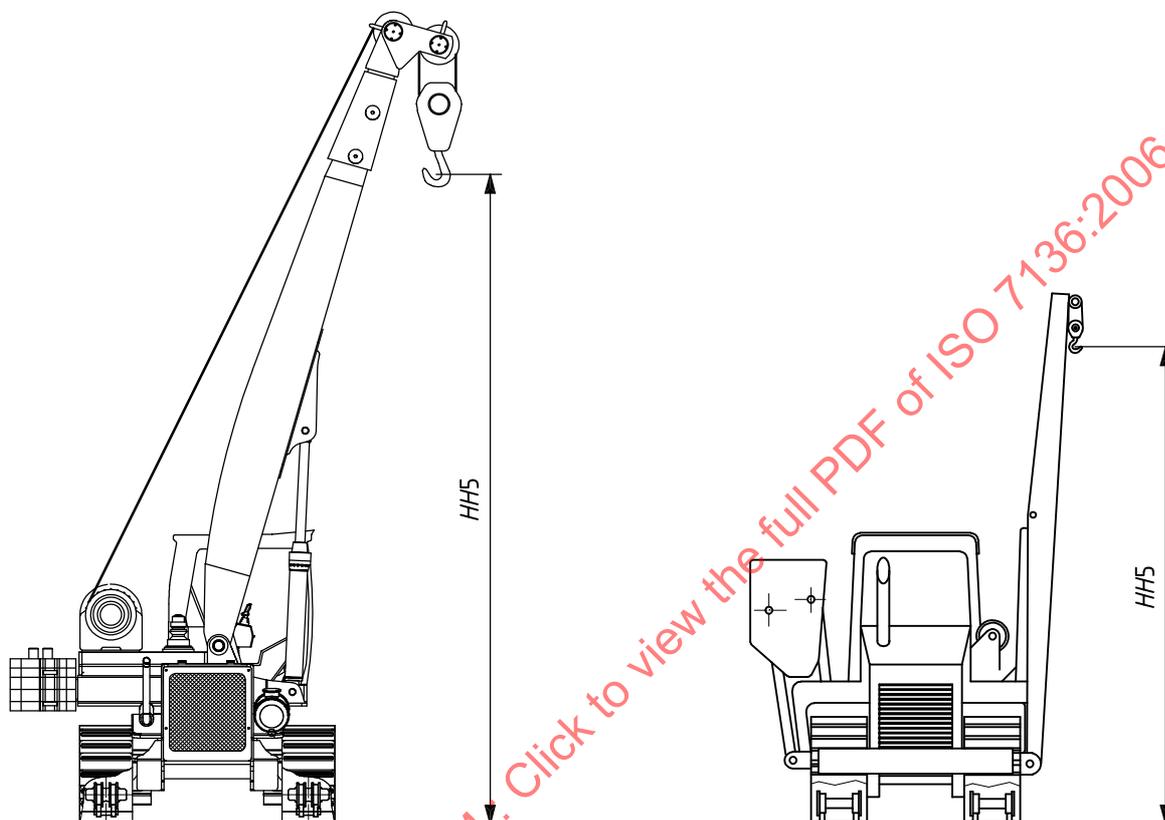


Figure 13 — Dimension *HH5*

4 Nomenclature

See Figure 14 for pipelayer component nomenclature.

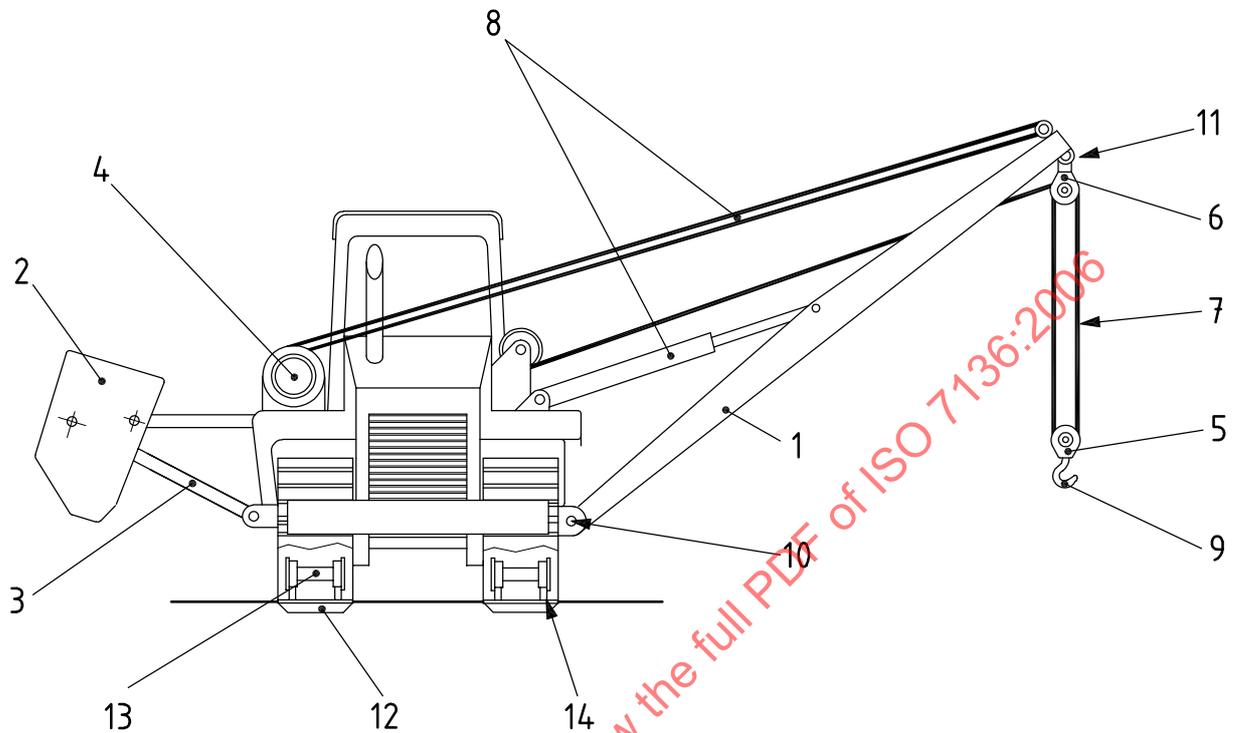

Key

- 1 boom
- 2 counterweight
- 3 counterweight support(s)
- 4 load hoist and, if applicable, boom hoist drums
- 5 load block, lower
- 6 load block, upper
- 7 load hoist, rope
- 8 boom hoist rope or boom cylinder
- 9 load hook
- 10 boom foot pivot
- 11 upper load block pivot
- 12 track shoe
- 13 lower track roller
- 14 track link rail outer edge

a) Pipelayer

Figure 14 — Pipelayer component nomenclature