



**International  
Standard**

**ISO 7435**

**Fasteners — Slotted set screws with  
dog point**

*Fixations — Vis sans tête fendues à têtton*

**Second edition  
2024-06**

STANDARDSISO.COM : Click to view the full PDF of ISO 7435:2024

STANDARDSISO.COM : Click to view the full PDF of ISO 7435:2024



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword.....	iv
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Dimensions.....</b>	<b>2</b>
<b>5 Requirements and reference International Standards.....</b>	<b>3</b>
<b>6 Marking and labelling.....</b>	<b>4</b>
6.1 Marking on product.....	4
6.2 Labelling on package.....	4
<b>7 Designation.....</b>	<b>5</b>
<b>Bibliography.....</b>	<b>6</b>

STANDARDSISO.COM : Click to view the full PDF of ISO 7435:2024

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 11, *Fasteners with metric external thread*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 185, *Fasteners*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 7435:1983), which has been technically revised.

The main changes are as follows:

- for short standard lengths, the lengths of the short dog points  $z$  have been added in [Table 1](#);
- the lengths for M1,6 ( $l = 3$  mm), M3 ( $l = 4$  mm) and M3,5 ( $l = 6$  mm) have been classified separately as short standard lengths with  $l_{nom}$  calculated in order to get at least 2,5 full pitches; the lengths for M10 ( $l = 16$  mm) and M12 ( $l = 20$  mm) have been classified as regular standard lengths with  $l_{nom}$  calculated in order to get at least 4 full pitches;
- for stainless steel screws, grades A2 and A4 with hardness classes 12H and 21H have been added;
- non-ferrous metal screws have been deleted (as a consequence of the withdrawal of ISO 8839);
- for steel fasteners, “plain” has been changed to “as processed”, and non-electrolytically applied zinc flake coating has been added in [Table 3](#);
- for stainless steel fasteners, “plain” has been changed to “Clean and bright”, and “Passivated” has been added in [Table 3](#);
- the requirement of surface integrity has been added for steel screws in [Table 3](#);
- specifications for marking and labelling have been added as [Clause 6](#).

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

# Fasteners — Slotted set screws with dog point

## 1 Scope

This document specifies the characteristics of slotted set screws with long dog point for regular standard lengths and with short dog point for short standard lengths, in steel and stainless steel, with metric coarse pitch threads M1,6 to M12 and with product grade A.

If in certain cases other specifications are requested, hardness classes and stainless steel grades can be selected from ISO 898-5 or ISO 3506-3, and dimensional options from ISO 888, ISO 965-1 or ISO 4753.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 724, *ISO general purpose metric screw threads — Basic dimensions*

ISO 888, *Fasteners — Bolts, screws and studs — Nominal lengths and thread lengths*

ISO 898-5, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 5: Set screws and similar threaded fasteners with specified hardness classes — Coarse thread and fine pitch thread*

ISO 965-1, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data*

ISO 1891-4, *Fasteners — Vocabulary — Part 4: Control, inspection, delivery, acceptance and quality*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-3, *Mechanical properties of corrosion-resistant stainless steel fasteners — Part 3: Set screws and similar fasteners not under tensile stress*

ISO 4042, *Fasteners — Electroplated coating systems*

ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-1, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements*

ISO 8991, *Designation system for fasteners*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*

ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coating systems*

## 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:


— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

## 4 Dimensions

Dimensions shall be in accordance with [Figure 1](#) and with [Tables 1](#) and [2](#).

Symbols and descriptions of dimensions are specified in ISO 225.

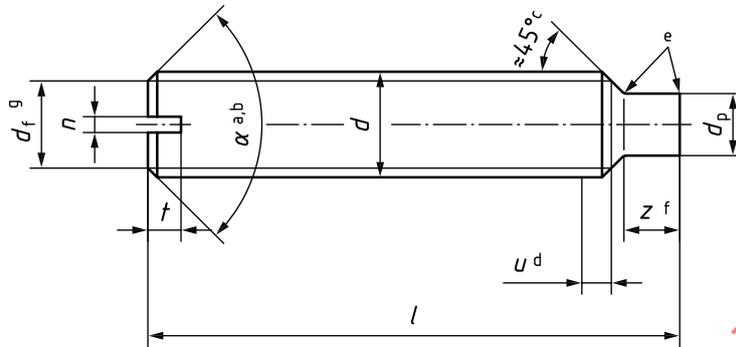

- a For regular standard lengths,  $\alpha_{ref}$  shall be 90° or 120° at the choice of the manufacturer.
- b For short standard lengths (see Footnote a in [Table 2](#)),  $\alpha_{ref}$  shall be 120°.
- c The 45° angle applies only to the portion of the point below the minor diameter of the thread.
- d Incomplete thread  $u \leq 2P$ .
- e Slight radius.
- f The short dog point shall apply for short standard lengths (see Footnote a in [Table 2](#)) and the long dog point shall apply for regular standard lengths, in accordance with [Table 1](#).
- g  $d_f$  is the diameter of the chamfer at the end on the slotted side.

**Figure 1 — Slotted set screw with dog point**

**Table 1 — Dimensions**

Dimensions in millimetres

Thread, $d$	M1,6	M2	M2,5	M3	(M3,5)	M4	M5	M6	M8	M10	M12
$P^a$	0,35	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	1,75
$d_f$	min. $\approx$ Minor thread diameter $d_3^b$										
$d_p$	max. 0,80	1,00	1,50	2,00	2,20	2,50	3,50	4,00	5,50	7,00	8,50
	min. 0,66	0,86	1,25	1,75	1,95	2,25	3,20	3,70	5,20	6,64	8,14
	nom. 0,25	0,25	0,4	0,4	0,5	0,6	0,8	1	1,2	1,6	2
$n$	max. 0,45	0,45	0,60	0,60	0,70	0,80	1,00	1,20	1,51	1,91	2,31
	min. 0,31	0,31	0,46	0,46	0,56	0,66	0,86	1,06	1,26	1,66	2,06
$t$	max. 0,74	0,84	0,95	1,05	1,21	1,42	1,63	2,00	2,50	3,00	3,60
	min. 0,56	0,64	0,72	0,80	0,96	1,12	1,28	1,60	2,00	2,40	2,80

NOTE The size shown in brackets is non-preferred.

- a  $P$  is the pitch of the thread.
- b The minor thread diameter  $d_3$  is specified in ISO 724.
- c For screws with regular standard lengths without Footnote a in [Table 2](#).
- d For screws with short standard lengths with Footnote a in [Table 2](#).

Table 1 (continued)

Thread, <i>d</i>			M1,6	M2	M2,5	M3	(M3,5)	M4	M5	M6	M8	M10	M12
z	long dog point <sup>c</sup>	max.	0,94	1,14	1,50	1,75	2,00	2,25	2,75	3,25	4,30	5,30	6,30
		min.	0,80	1,00	1,25	1,50	1,75	2,00	2,50	3,00	4,00	5,00	6,00
	short dog point <sup>d</sup>	max.	0,54	0,64	0,77	0,89	1,02	1,14	1,5	1,75	2,25	2,75	3,25
		min.	0,40	0,50	0,63	0,75	0,88	1,00	1,25	1,50	2,00	2,50	3,00

NOTE The size shown in brackets is non-preferred.

<sup>a</sup> *P* is the pitch of the thread.

<sup>b</sup> The minor thread diameter *d*<sub>3</sub> is specified in ISO 724.

<sup>c</sup> For screws with regular standard lengths without Footnote a in Table 2.

<sup>d</sup> For screws with short standard lengths with Footnote a in Table 2.

Table 2 — Lengths

Dimensions in millimetres

Thread, <i>d</i>			M1,6	M2	M2,5	M3	(M3,5)	M4	M5	M6	M8	M10	M12
<i>l</i>			Range of standard lengths between the stepped bold lines (white area)										
nom.	min.	max.											
2,5	2,3	2,7	a										
3	2,8	3,2	a	a									
4	3,76	4,24			a	a							
5	4,76	5,24				a	a						
6	5,76	6,24					a	a					
8	7,71	8,29						a	a				
10	9,71	10,29							a	a			
12	11,65	12,35								a	a		
(14)	13,65	14,35									a	a	
16	15,65	16,35										a	a
20	19,58	20,42											a
25	24,58	25,42											
30	29,58	30,42											
35	34,5	35,5											
40	39,5	40,5											
45	44,5	45,5											
50	49,5	50,5											
55	54,4	55,6											
60	59,4	60,6											

NOTE The size shown in brackets is non-preferred.

<sup>a</sup> For short standard lengths,  $\alpha_{ref}$  shall be 120° and short dog point shall apply.

## 5 Requirements and reference International Standards

The requirements specified in the International Standards referenced in Table 3 shall apply.

Table 3 — Requirements and reference International Standards

Material		Steel	Stainless steel
<b>General requirements</b>	International Standard	ISO 8992	
<b>Thread</b>	Tolerance class	6g <sup>a</sup>	
	International Standard	ISO 965-1	
<b>Mechanical properties</b>	Hardness class	14H, 22H	—
	Grade and hardness class	—	A1-12H, A2-12H, A2-21H, A4-12H, A4-21H
	International Standard	ISO 898-5	ISO 3506-3
<b>Tolerances</b>	Product grade	A	
	International Standard	ISO 4759-1	
<b>Surface condition</b>		As processed (no coating) Electroplated coatings as specified in ISO 4042 Non-electrolytically applied zinc flake coatings as specified in ISO 10683 Other finishes, coatings and/or additional requirements shall be agreed between the purchaser and the supplier	Clean and bright and /or Passivated <sup>b</sup>
<b>Surface integrity</b>		Limits for surface discontinuities as specified in ISO 6157-1	As agreed <sup>c</sup>
<b>Acceptability</b>		Acceptance inspection as specified in ISO 3269	

<sup>a</sup> Depending on the type of coating to be applied, another tolerance position of the thread may be specified for the uncoated fastener in accordance with the relevant coating standard.

<sup>b</sup> See e.g. ISO 16048.

<sup>c</sup> See e.g. ISO 6157-1.

## 6 Marking and labelling

### 6.1 Marking on product

Marking is not required for set screws, unless specifically agreed between the purchaser and the supplier at the time of the order (see ISO 898-5 or ISO 3506-3).

### 6.2 Labelling on package

Labelling on the package shall include at least:

- the reference to this document, i.e. ISO 7435;
- the thread size *d* and nominal length *l*;
- the hardness class for steel fasteners;
- the grade and the hardness class for stainless steel fasteners;
- the type of surface condition (finish and/or coating);
- the manufacturer's and/or distributor's identification and/or name;
- the manufacturing lot number as specified in ISO 1891-4;
- the quantity of pieces in the package.

## 7 Designation

The designation requirements as specified in ISO 8991 shall apply for all sizes, with:

- the hardness class for steel fasteners, as specified in ISO 898-5,
- the grade and the hardness class for stainless steel fasteners, as specified in ISO 3506-3.

When no specific surface condition (finish and/or coating) is specified in the designation, steel fasteners are delivered in the as processed condition, and stainless steel fasteners in the clean and bright condition.

EXAMPLE 1 A slotted set screw with long dog point, with thread size M5, nominal length  $l = 12$  mm, product grade A, in steel and hardness class 14H, as processed, is designated as follows:

**Set screw ISO 7435 – M5 × 12 – 14H**

EXAMPLE 2 A slotted set screw with short dog point, with thread size M5, nominal length  $l = 8$  mm, product grade A, in stainless steel of grade A2 and hardness class 12H, clean and bright, is designated as follows:

**Set screw ISO 7435 – M5 × 8 – A2-12H**

STANDARDSISO.COM : Click to view the full PDF of ISO 7435:2024