



**International
Standard**

ISO 7448

**Machinery for forestry — Machine-
fed woody biomass reduction
chippers, grinders, and shredders
— Vocabulary**

*Machines forestières — Broyeurs et déchiqueteuses de réduction
de la biomasse ligneuse alimentés par machine — Vocabulaire*

**First edition
2024-03**

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 General terms.....	1
3.2 Terms related to base machines.....	2
3.3 Terms related to cutting systems.....	2
3.4 Terms related to infeed.....	3
3.5 Terms related to discharge.....	4
3.6 Terms related to other components.....	5
3.7 Terms related to dimensional characteristics.....	5
3.8 Terms related to configurations.....	6
Annex A (informative) Dimensional characteristics and nomenclature of chippers	8
Annex B (informative) Dimensional characteristics and nomenclature of grinders and shredders	21
Bibliography	29
Index	30

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 15, *Machinery for forestry*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The figures in this document (see [Annex A](#) and [Annex B](#)) are intended to illustrate machine concepts for applying dimensional characteristics and for component identification purposes related to the machines defined in [3.2](#).

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 7448:2024

Machinery for forestry — Machine-fed woody biomass reduction chippers, grinders, and shredders — Vocabulary

1 Scope

This document identifies and defines terms used, illustrates configurations, and gives a nomenclature of components for machine-fed woody biomass reduction chippers, grinders, and shredders used in forestry. It aims to establish a uniform description of the various configurations of these types of forestry machines.

Machines covered by this document include:

- drum chippers;
- disc chippers;
- screw chippers;
- horizontal grinders;
- tub grinders;
- shredders.

Chippers, grinders, and shredders that are manually fed are not covered by this document.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 General terms

3.1.1 woody biomass

biomass originating from trees, bushes and shrubs together with their fruit, leaves and needles inherent to the biomass

Note 1 to entry: This definition includes forest, plantation and other virgin wood, wood processing industry by-products and residues, and used wood.

[SOURCE: ISO 16559:2022, 3.227]

3.2 Terms related to base machines

3.2.1

chipper

<machine-fed>

self-propelled, portable, or stationary forestry machine designed to chip whole trees or parts of trees where the material is mechanically loaded into the infeed components using a material loading device

Note 1 to entry: The material loading device can be another machine or a loading mechanism [for example, a *grapple loader* (3.6.2)] mounted on the chipper.

3.2.1.1

drum chipper

chipper (3.2.1) where the cutting elements are mounted on the periphery of cylindrical steel drum

3.2.1.2

disc chipper

chipper (3.2.1) where the cutting elements are mounted in slots on a large steel disc

3.2.1.3

screw chipper

chipper (3.2.1) where rotating conical-screw blades attached to a flywheel pull in the material and chip it simultaneously

3.2.2

grinder

self-propelled, towed, or stationary forestry machine designed to reduce trees, brush, or parts of trees by tearing, shredding, impacting, or shearing

[SOURCE: ISO 6814:2009, 2.3.1.10 modified to add "stationary forestry" and remove "to a uniform particle size"]

3.2.2.1

horizontal grinder

grinder (3.2.2) that presents and advances material with a horizontal feeding mechanism to the *grinding system* (3.3.2) and grinds the material to a reduced particle size

3.2.2.2

tub grinder

grinder (3.2.2) that presents and advances material with a vertical feeding mechanism to the *grinding system* (3.3.2) using a rotating tub and grinds the material to a reduced particle size

3.2.3

shredder

self-propelled, towed, or stationary forest machine that presents and advances material with either a vertical feeding mechanism or a horizontal feeding mechanism to the *shredding system* (3.3.3) and shreds the material to a reduced particle size

3.3 Terms related to cutting systems

3.3.1

chipping system

device used to chip and reduce whole or partial trees

3.3.2

grinding system

rotating components that reduce the fed material by impacting or shearing

3.3.3

shredding system

rotating components that reduce the fed material by shredding

3.3.4

cutting element

component incorporating single or multiple cutting surfaces

Note 1 to entry: The cutting element attachment hardware is not considered part of the cutting element.

Note 2 to entry: Examples of cutting elements include drums, discs, and screws.

[SOURCE: ISO 11839:2021, 3.1, modified — Note 1 to entry modified and Note 2 to entry added.]

3.3.5

grinding element

component incorporating single or multiple grinding surfaces

Note 1 to entry: The grinding element attachment hardware is not considered part of the grinding element.

[SOURCE: ISO 11839:2021, 3.1, modified — Note 1 to entry modified.]

3.3.6

shredding element

component incorporating single or multiple shredding surfaces

Note 1 to entry: The shredding element attachment hardware is not considered to be part of the shredding element.

3.3.7

anvil

sheer bar

counter-knife

element located close to the cutting system which restrains the feed material while it is cut, shredded, impacted, and reduced

3.3.8

screen

restricting element located close to the cutting system which retains the feed material while it is cut and reduced until it is reduced to a passing size

3.4 Terms related to infeed

3.4.1

infeed system

machine structure that accepts material from a loading machine or *grapple loader* (3.6.2) mechanism

EXAMPLE Feed rollers, conveyor(s), tub, hopper.

3.4.1.1

horizontal infeed

device that presents and advances material with a horizontal or near horizontal feeding action to the cutting system where gravity has a negligible effect

3.4.1.2

tub infeed

device that presents and advances material with a vertical and rotating feeding action to cutting system where gravity has a significant effect

3.4.1.3

hopper infeed

device that retains material and allows gravity to provide the principle feeding action to the cutting system

3.4.2

feed roller

component of a horizontal feeding mechanism using powered rotation on top of the feed material to assist feeding of the material

3.4.3

chipper infeed winch

mechanism which pulls, by means of a flexible element (rope) from a power-driven drum, whole trees or parts of trees to the infeed mechanism of a *chipper* (3.2.1)

3.4.4

infeed conveyor

portion of the *infeed system* (3.4.1) that continuously transports *woody biomass* (3.1.1) to the *feed roller* (3.4.2) using an endless belt, chain, or rollers

3.4.5

tub

rotating funnel-shaped receptacle, into which *woody biomass* (3.1.1) is loaded for processing

3.4.6

hopper

stationary receptacle, into which *woody biomass* (3.1.1) is loaded for processing or used for storage

Note 1 to entry: Hopper can be tipped for unloading.

3.4.7

hammermill

drum

rotor

device containing a vertical or horizontal rotating shaft or drum with hammer bars that impact material being fed into the *hopper infeed* (3.4.1.1) and is thereby shredded and expelled through *screens* (3.3.8)

3.5 Terms related to discharge

3.5.1

discharge system

system that transports reduced material away from the cutting system (3.3), by momentum, air flow or mechanical means

EXAMPLE a *discharge chute* (3.5.2), a *discharge conveyor* (3.5.3), a *discharge fan* (3.5.4).

3.5.2

discharge chute

portion of the *discharge system* (3.5.1) extending outward from the *discharge fan* (3.5.4) opening designed to control the ejection of processed material

3.5.3

discharge conveyor

portion of the *discharge system* (3.5.1) that continuously transports processed material along a gentle slope using an endless belt

3.5.4

discharge fan

portion of the *discharge system* (3.5.1) producing an airstream to the *discharge chute* (3.5.2) where processed material is discharged

3.5.5

discharge auger

device within the *discharge system* (3.5.1) for moving processed material to the *discharge chute* (3.5.2) or *discharge conveyor* (3.5.3)

3.6 Terms related to other components

3.6.1

operator's cab

enclosure on the machine where the operator is stationed to control machine functions

Note 1 to entry: An operator's cab can be repositioned (for example, tilted, elevated).

Note 2 to entry: Operator's cab can be the same as the driver's position.

3.6.2

grapple loader

knuckle-boom device with a grapple and supporting structure designed to grab, lift, swing and place trees or parts of trees

3.6.3

metal separator

device that separates metallic objects from the non-metallic material in the processed material stream

EXAMPLE Magnetics.

3.7 Terms related to dimensional characteristics

3.7.1

chipping system diameter

path described by the outermost point of the *cutting elements* (3.3.4) when rotating around an axis

3.7.2

grinding system diameter

path described by the outermost point of the *grinding elements* (3.3.5) when rotating around an axis

3.7.3

shredding system diameter

path described by the outermost point of the *shredding elements* (3.3.6) when rotating around an axis

3.7.4

infeed height

H_4

height from ground plane to leading edge of a *horizontal infeed* (3.4.1.1)

3.7.5

infeed opening height

H_3

height of the opening to the cutting system

3.7.6

infeed opening width

W_3

width of the opening to the cutting system

3.7.7

infeed opening length

L_3

length of the opening to the cutting system on a *tub grinder* (3.2.2.2)

3.7.8

tub size

diameter and depth of the *tub* (3.4.5)

3.7.9

operating height

H_1
distance from the ground to the highest extended machine element when in the operating configuration

3.7.10

operating length

L_1
linear distance between the forward-most extended machine element and the rearward-most extended machine element when in the operating configuration

3.7.11

operating width

W_1
linear distance between each side-most extended machine elements when in the operating configuration

3.7.12

transport height

H_2
distance from the ground to the highest machine element when in the transport configuration

3.7.13

transport length

L_2
linear distance between the forward-most machine element and the rearward-most machine element when in the transport configuration

3.7.14

transport width

W_2
linear distance between side-most retracted machine elements when in the transport configuration

3.8 Terms related to configurations

NOTE Chippers and grinders can be configured according to the type of mobility, power source or both.

3.8.1

mobility

method for moving the machine

3.8.1.1

towable configuration

machine configured with a frame and wheels that allow the machine to be moved by another vehicle

3.8.1.2

self-propelled configuration

machine configured to move under its own power

Note 1 to entry: These machines are typically lorry-mounted.

3.8.1.3

stationary configuration

machine configured as a structure and is not intended to be moved

3.8.2

power source

engine or electric motor which provides energy for linear or rotational movement

3.8.2.1

dedicated power source

power source (3.8.2) driving the cutting system or *mobility* (3.8.1) method

3.8.2.2

combined power source

power source (3.8.2) driving the cutting system and *mobility* (3.8.1) method

3.8.2.3

external power source

detachable *power source* (3.8.2) driving the cutting system

EXAMPLE Use of a power take-off (PTO) from another machine or vehicle.

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024


Annex A
(informative)

Dimensional characteristics and nomenclature of chippers

A.1 Dimensional characteristics of drum chippers

A.1.1 Towable drum chippers


See [Figures A.1 - A.5](#).

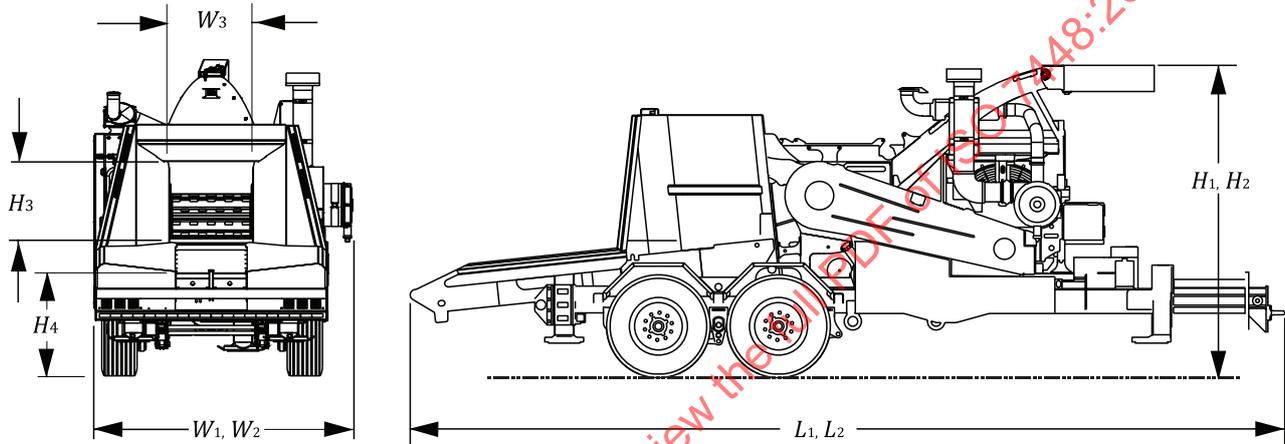

Key

- | | |
|---|---|
| H_1 operating height (3.7.9) | W_2 transport width (3.7.14) |
| L_1 operating length (3.7.10) | W_3 infeed opening width (3.7.6) |
| W_1 operating width (3.7.11) | H_3 infeed opening height (3.7.5) |
| H_2 transport height (3.7.12) | H_4 infeed height (3.7.4) |
| L_2 transport length (3.7.13) | |

Figure A.1 — Example of towable drum chipper with dedicated (engine) power source (shown in transport configuration)

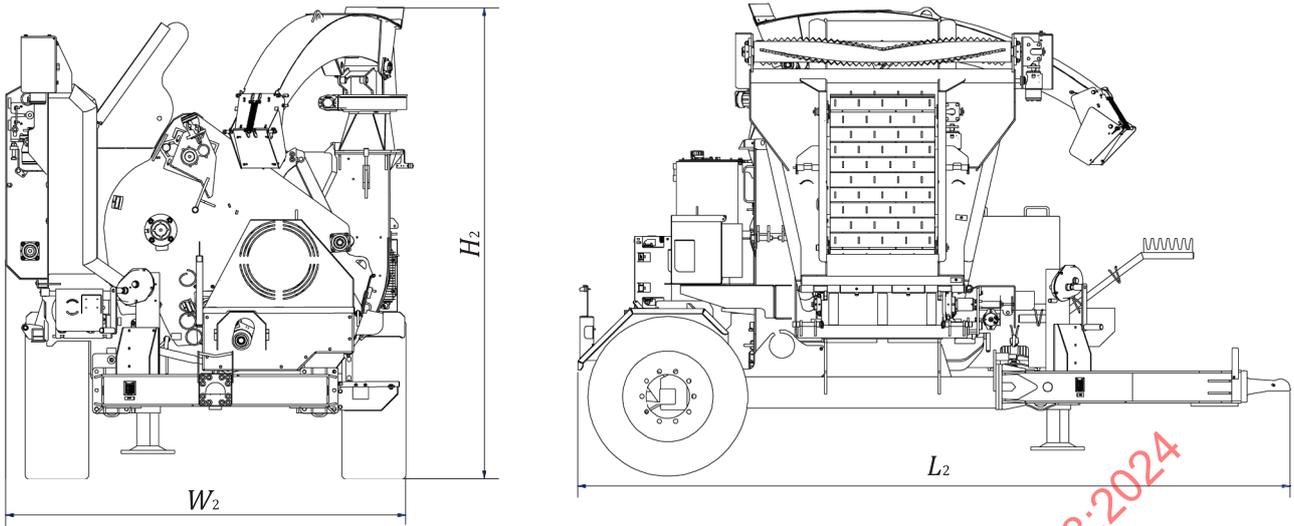


Key

H_2 transport height (3.7.12)

L_2 transport length (3.7.13)

W_2 transport width (3.7.14)

Figure A.2 — Example of towable drum chipper with external (PTO) power source (shown in transport configuration)

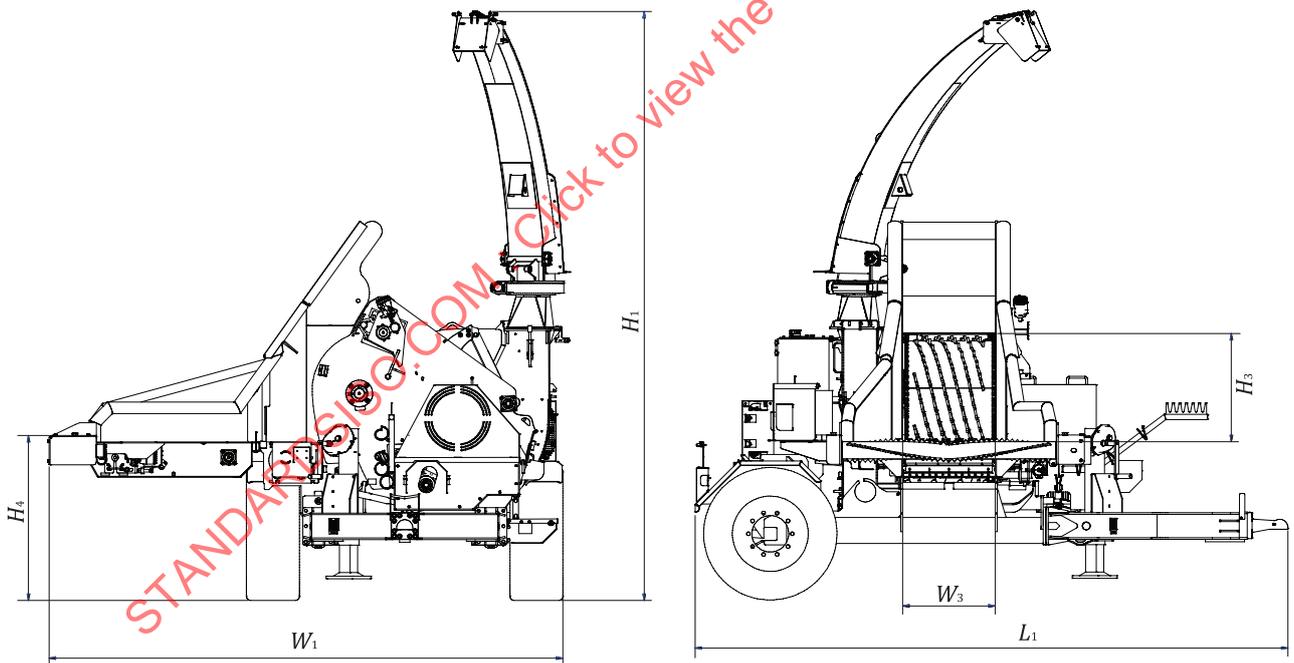

Key

H_1 operating height (3.7.9)

L_1 operating length (3.7.10)


W_1 operating width (3.7.11)

W_3 infeed opening width (3.7.6)

H_3 infeed opening height (3.7.5)

H_4 infeed height (3.7.4)

Figure A.3 — Example of towable drum chipper with external (PTO) power source (shown in operating configuration)

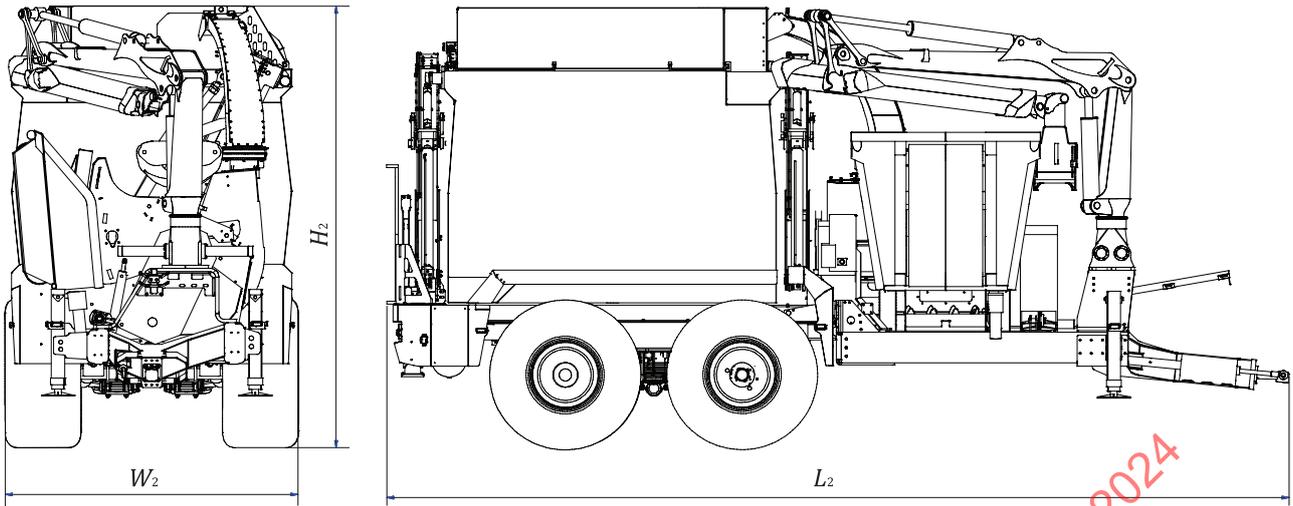


Key

H_2 transport height (3.7.12)

L_2 transport length (3.7.13)

W_2 transport width (3.7.14)

Figure A.4 — Example of towable drum chipper with dedicated (engine) power source and tipping box (shown in transport configuration)

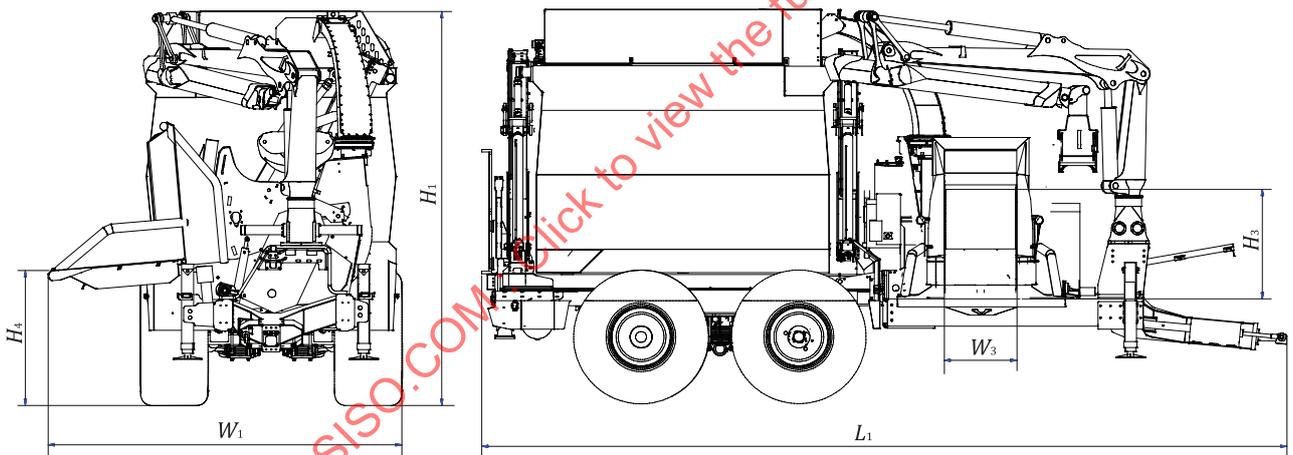

Key

H_1 operating height (3.7.9)

L_1 operating length (3.7.10)

W_1 operating width (3.7.11)

W_3 infeed opening width (3.7.6)


H_3 infeed opening height (3.7.5)

H_4 infeed height (3.7.4)

Figure A.5 — Example of towable drum chipper with dedicated (engine) power source and tipping box (shown in operating configuration)

A.1.2 Stationary drum chippers


See [Figures A.6](#) and [A.7](#).

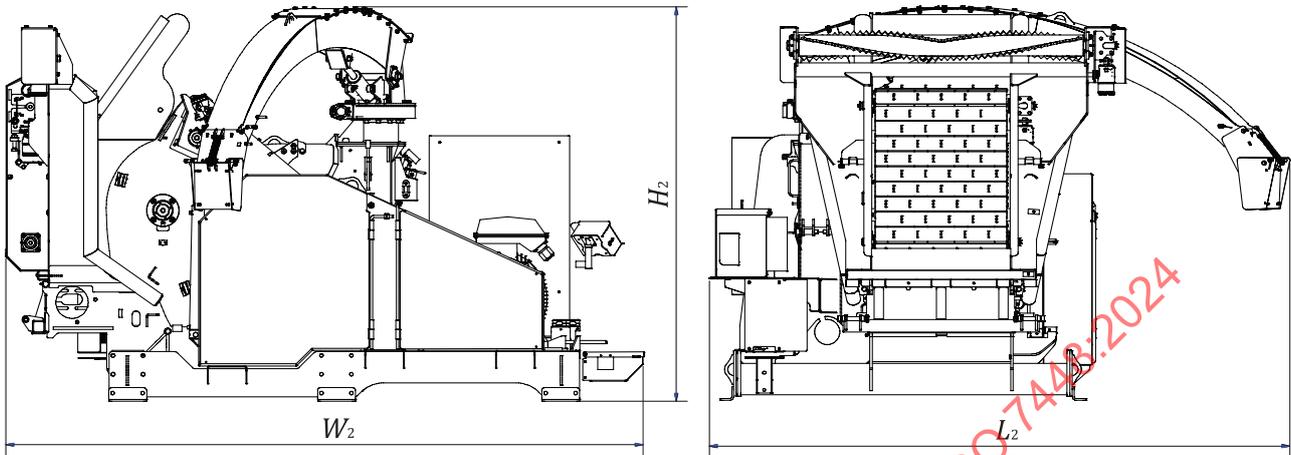

Key

- H_2 transport height ([3.7.12](#))
- L_2 transport length ([3.7.13](#))
- W_2 transport width ([3.7.14](#))

Figure A.6 — Example of stationary drum chipper with dedicated power source (shown in transport configuration)

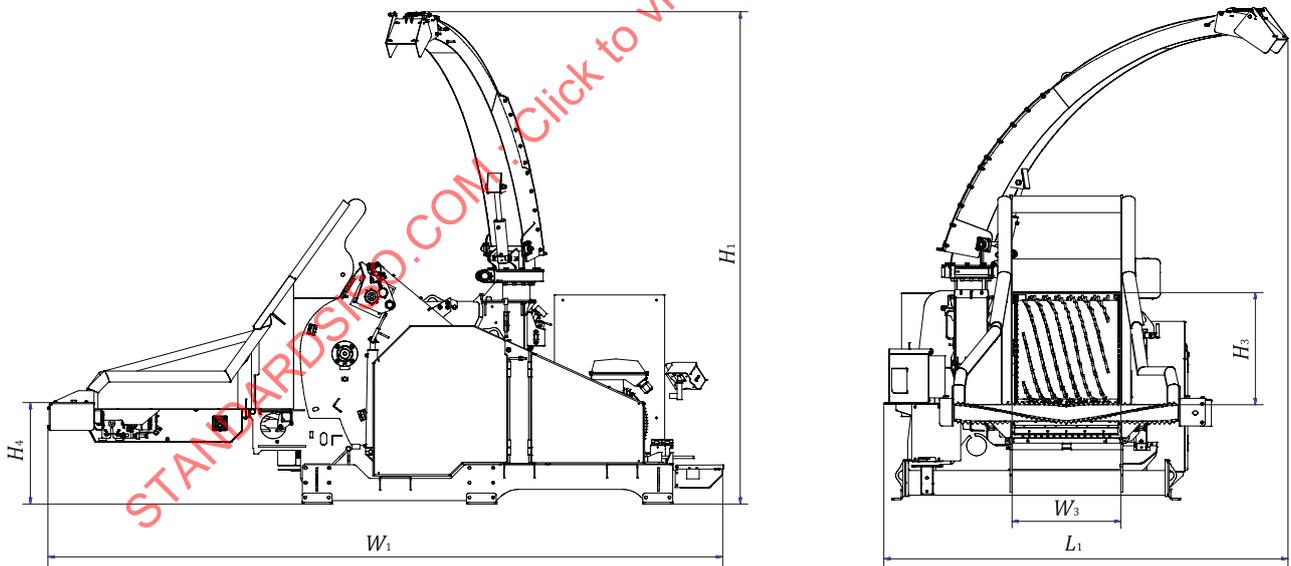


Key

- H_1 operating height ([3.7.9](#))
- L_1 operating length ([3.7.10](#))
- W_1 operating width ([3.7.11](#))
- W_3 infeed opening width ([3.7.6](#))
- H_3 infeed opening height ([3.7.5](#))
- H_4 infeed height ([3.7.4](#))

Figure A.7 — Example of stationary drum chipper with dedicated power source (shown in operating configuration)

A.1.3 Self-propelled drum chippers


See [Figures A.8](#) and [A.9](#).

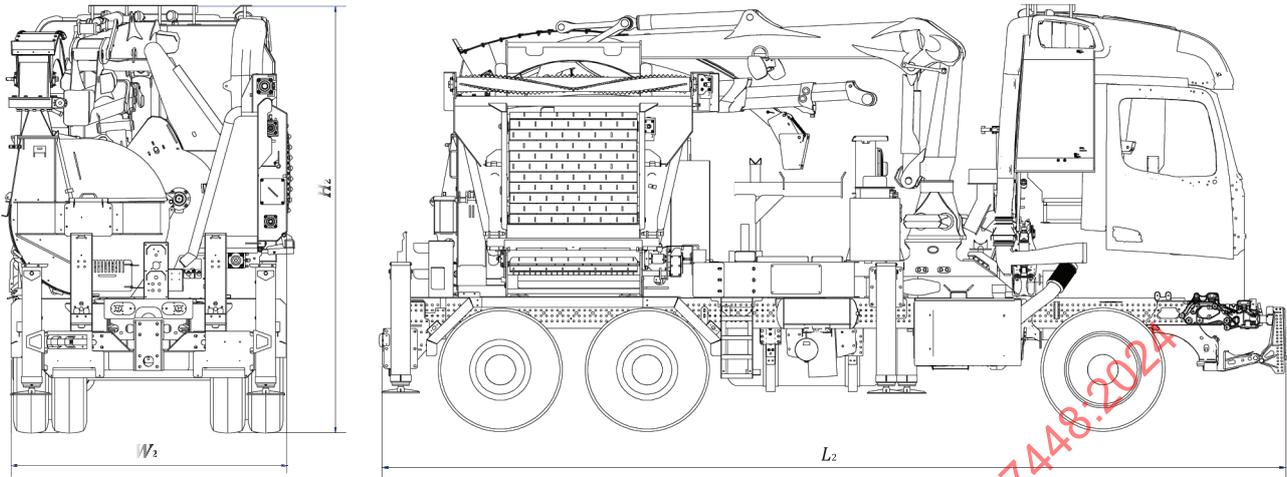

Key

- H_2 transport height ([3.7.12](#))
- L_2 transport length ([3.7.13](#))
- W_2 transport width ([3.7.14](#))

Figure A.8 — Example of self-propelled (lorry-mounted) drum chipper with combined (engine) power source and grapple loader (shown in transport configuration)

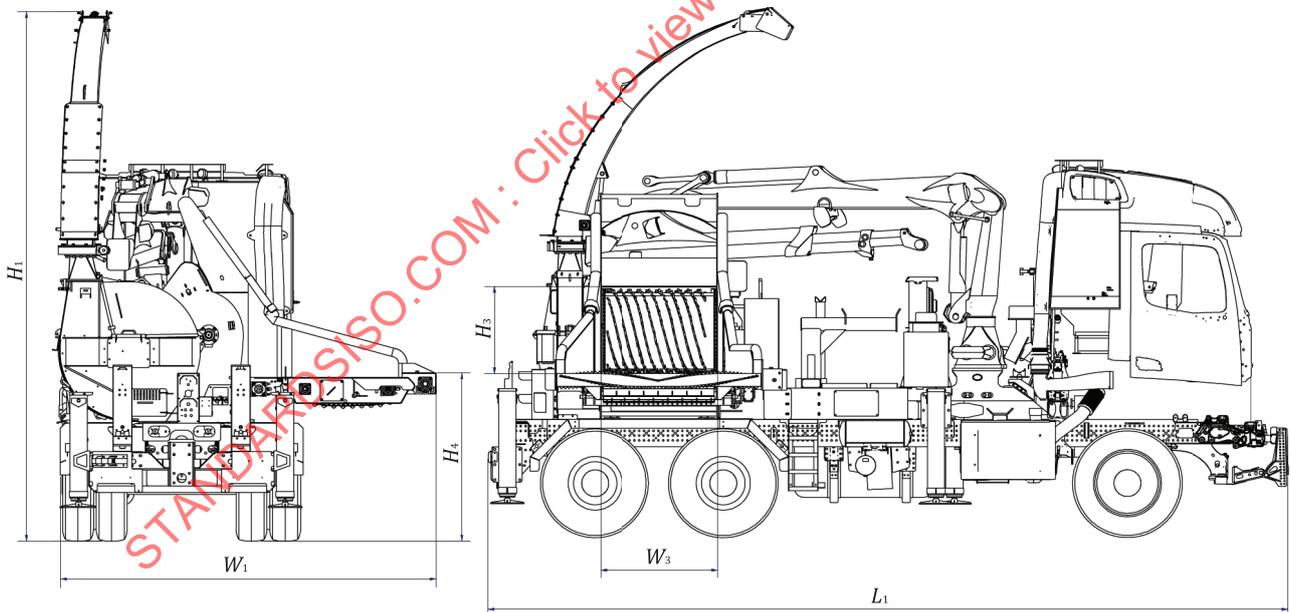


Key

- H_1 operating height ([3.7.9](#))
- L_1 operating length ([3.7.10](#))
- W_1 operating width ([3.7.11](#))
- W_3 infeed opening width ([3.7.6](#))
- H_3 infeed opening height ([3.7.5](#))
- H_4 infeed height ([3.7.4](#))

Figure A.9 — Example of self-propelled (lorry-mounted) drum chipper with combined (engine) power source and grapple loader (shown in operating configuration)

A.2 Dimensional characteristics of disc chippers

See [Figure A.10](#).

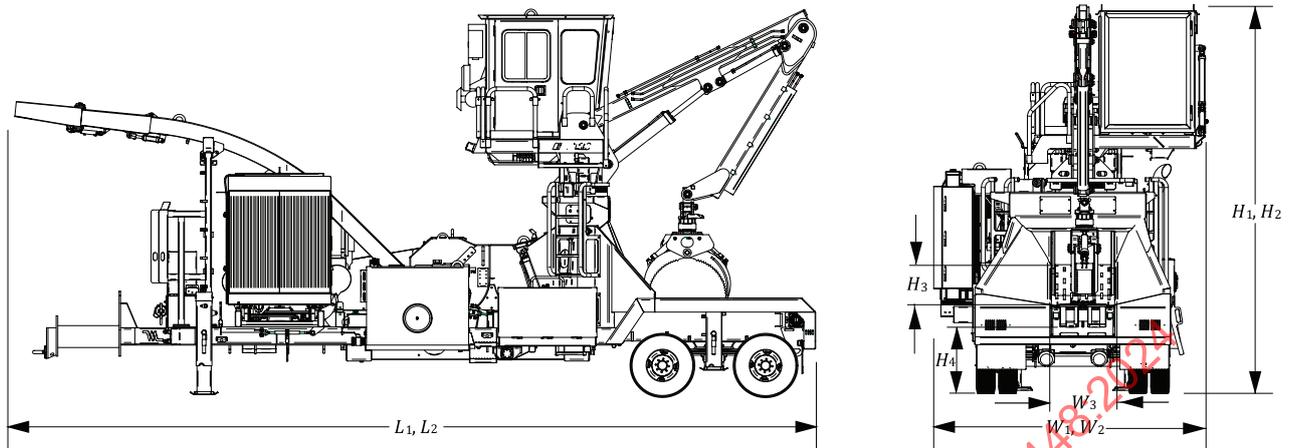

Key

H_1 operating height ([3.7.9](#))
 L_1 operating length ([3.7.10](#))
 W_1 operating width ([3.7.11](#))
 H_2 transport height ([3.7.12](#))


L_2 transport length ([3.7.13](#))
 W_2 transport width ([3.7.14](#))
 W_3 infeed opening width ([3.7.6](#))
 H_3 infeed opening height ([3.7.5](#))
 H_4 infeed height ([3.7.4](#))

Figure A.10 — Example of towable disc chipper with dedicated (engine) power source, operator's cab and grapple loader (shown in transport configuration)

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

A.3 Dimensional characteristics of screw chippers

See [Figure A.11](#).

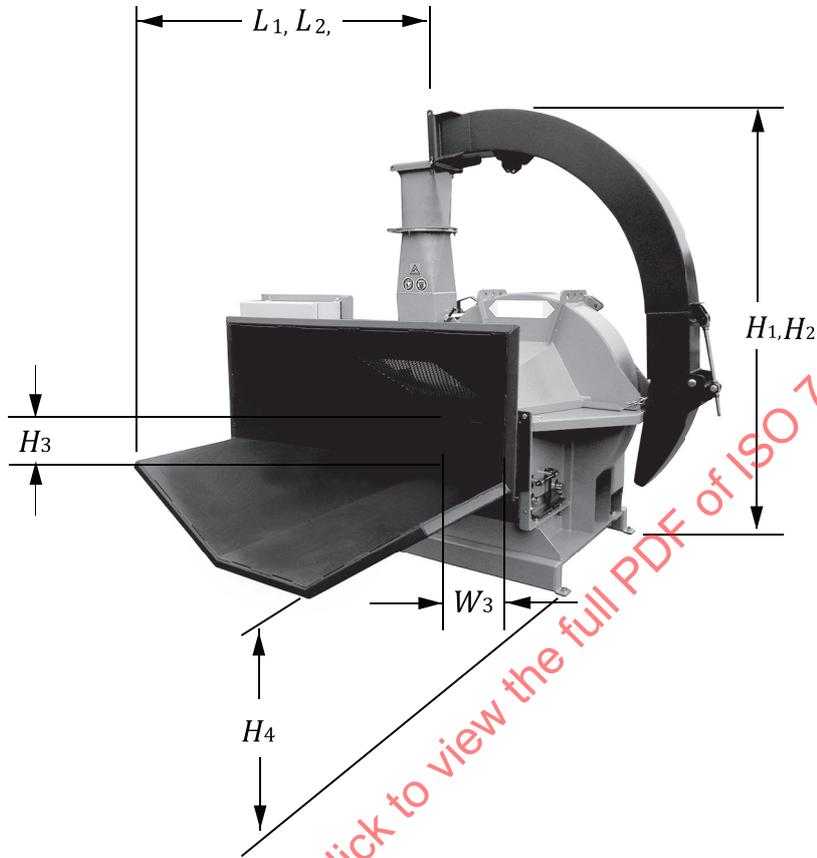

Key


- | | |
|--|---|
| H_1 operating height (3.7.9) | L_2 transport length (3.7.13) |
| L_1 operating length (3.7.10) | W_3 infeed opening width (3.7.6) |
| W_1 operating width (3.7.11) (not shown) | H_3 infeed opening height (3.7.5) |
| H_2 transport height (3.7.12) | H_4 infeed height (3.7.4) |

Figure A.11 — Example of stationary screw chipper with dedicated (electric motor) power source

A.4 Nomenclature of drum chippers

A.4.1 Towable drum chipper


See [Figures A.12](#) — [A.13](#).

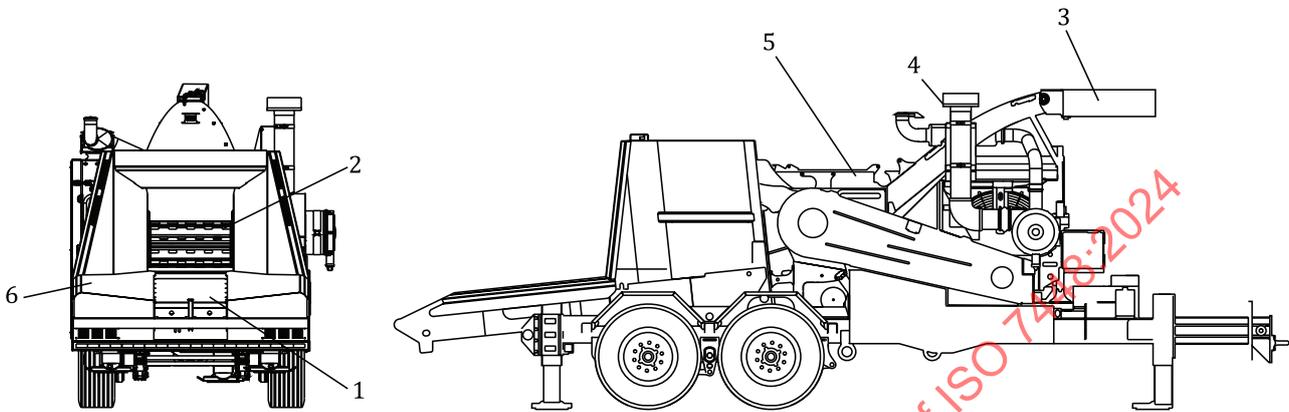

Key

- | | | | |
|---|---|---|--|
| 1 | infeed system (3.4.1) | 4 | dedicated power source (3.8.2.1) |
| 2 | chipping system (3.3.1) | 5 | discharge fan (3.5.4) |
| 3 | discharge chute (3.5.2) | 6 | hopper (3.4.6) |

Figure A.12 — Example of towable drum chipper with dedicated (engine) power source

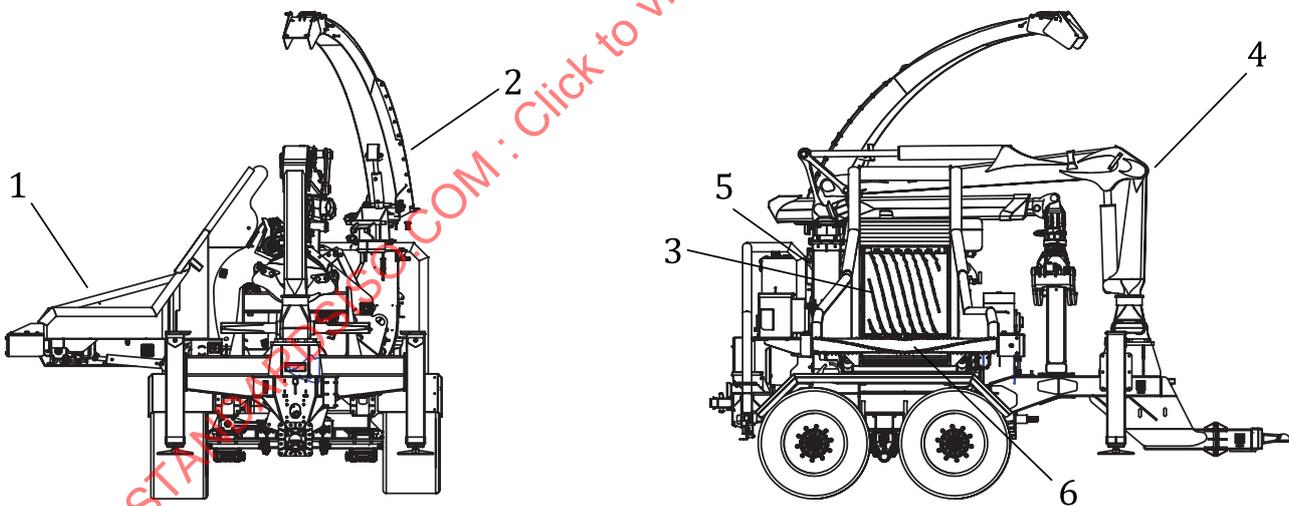


Key

- | | | | |
|---|---|---|--|
| 1 | hopper (3.4.6) | 4 | grapple loader (3.6.2) |
| 2 | discharge chute (3.5.2) | 5 | discharge fan (3.5.4) |
| 3 | chipping system (3.3.1) | 6 | infeed system (3.4.1) |

Figure A.13 — Example of towable drum chipper with external (PTO) power source and grapple loader

A.4.2 Stationary drum chipper

See [Figure A.14](#).

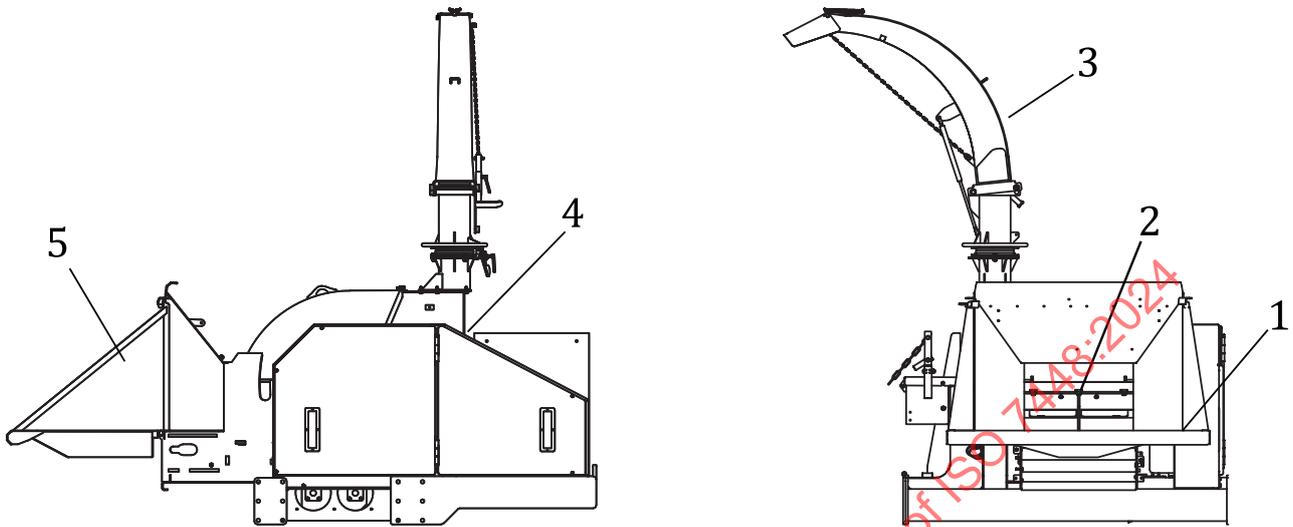

Key


- | | | | |
|---|---|---|---|
| 1 | infeed system (3.4.1) | 4 | discharge fan (3.5.4) |
| 2 | chipping system (3.3.1) | 5 | hopper (3.4.6) |
| 3 | discharge chute (3.5.2) | | |

Figure A.14 — Example of stationary drum chipper with dedicated (electric motor) power source

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

A.4.3 Self-propelled drum chipper

See [Figure A.15](#).

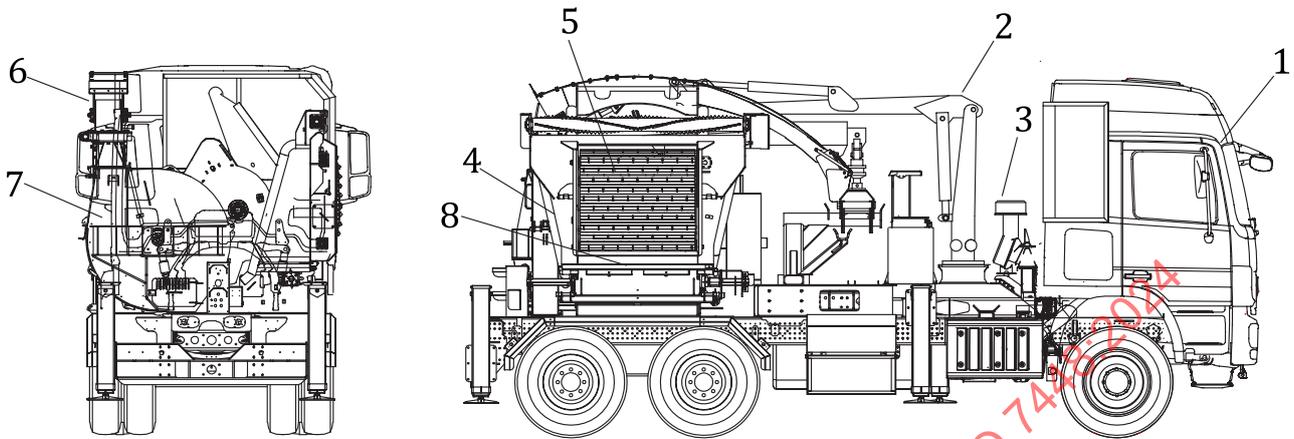

Key

- | | |
|---|---|
| 1 operator's cab ^a (3.6.1) | 5 chipping system (3.3.1) |
| 2 grapple loader (3.6.2) | 6 discharge chute (3.5.2) |
| 3 combined power source (3.8.2.2) | 7 discharge fan (3.5.4) |
| 4 hopper (3.4.6) | 8 infeed system (3.4.1) |


^a NOTE: Operator's cab can be the same as the driver's position.

Figure A.15 — Example of self-propelled (lorry-mounted) drum chipper with combined (engine) power source and grapple loader

STANDARDSISO.COM : Click to view the full PDF of ISO 7448:2024

A.5 Nomenclature of disc chippers

See [Figure A.16](#).

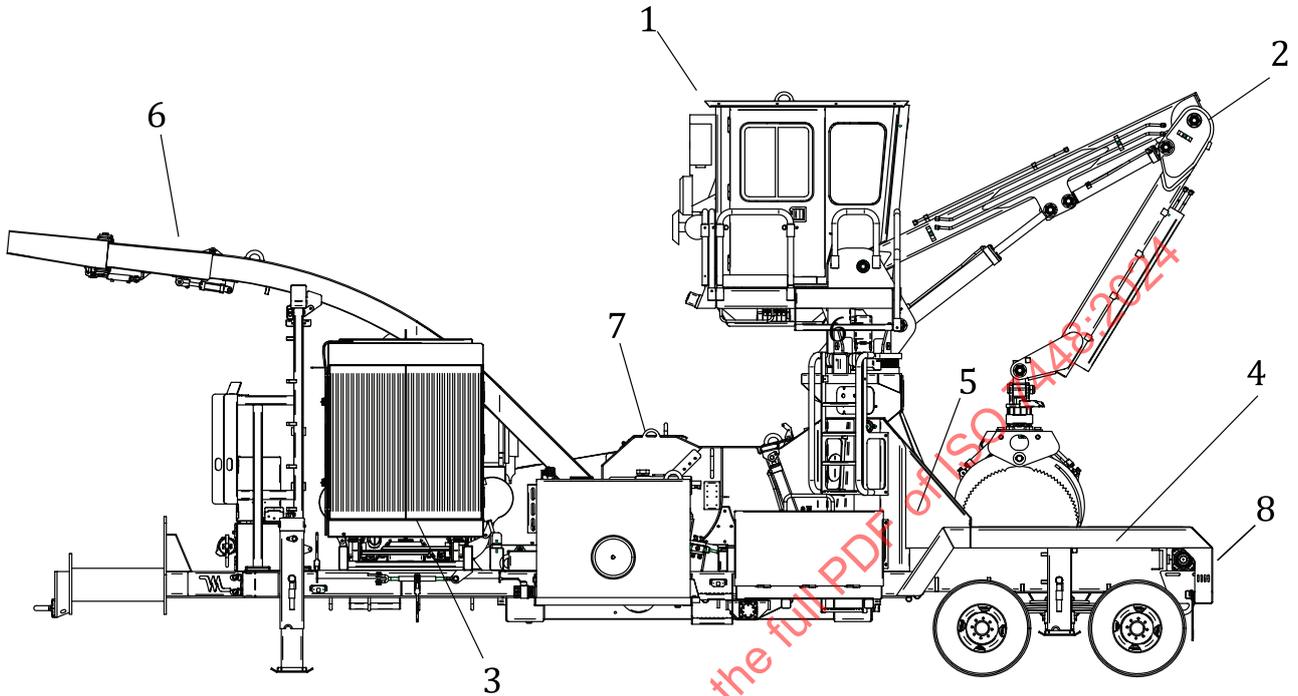


Key

- | | | | |
|---|--|---|---|
| 1 | operator's cab (3.6.1) | 5 | chipping system (3.3.1) |
| 2 | grapple loader (3.6.2) | 6 | discharge chute (3.5.2) |
| 3 | dedicated power source (3.8.2.1) | 7 | discharge fan (3.5.4) |
| 4 | hopper (3.4.6) | 8 | infeed system (3.4.1) |

Figure A.16 — Example of towable disc chipper with dedicated (engine) power source, operator's cab and grapple loader

A.6 Nomenclature of screw chippers

See [Figure A.17](#).

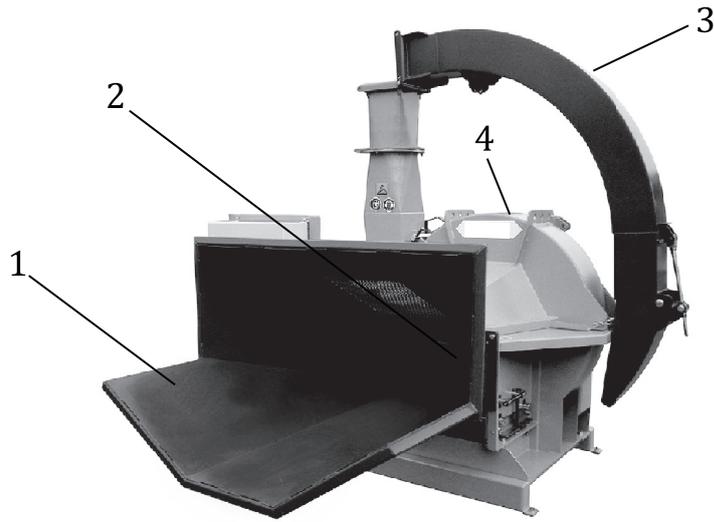


Key

- | | | | |
|---|-------------------------|---|-------------------------|
| 1 | hopper (3.4.6) | 3 | discharge chute (3.5.2) |
| 2 | chipping system (3.3.1) | 4 | discharge fan (3.5.4) |

Figure A.17 — Example of stationary screw chopper with dedicated (electric motor) power source

A.7 Cutting system component nomenclature of drum chippers

See [Figure A.18](#).

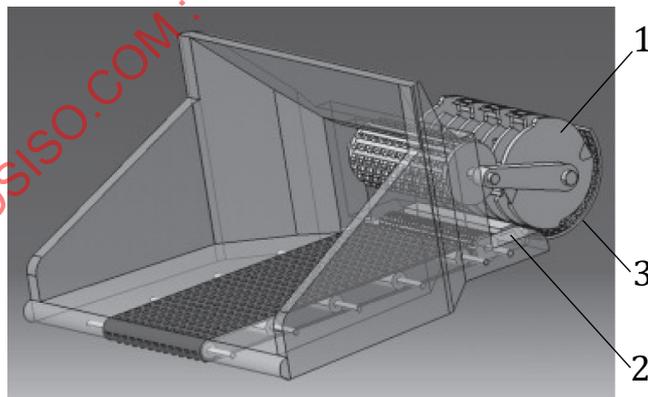


Key

- | | |
|---|--------------------------------|
| 1 | cutting element (3.3.4) (drum) |
| 2 | anvil (3.3.7) |
| 3 | screen (3.3.8) |

Figure A.18 — Example cutting system components of drum chopper

A.8 Cutting system component nomenclature of disc chippers

See [Figure A.19](#).

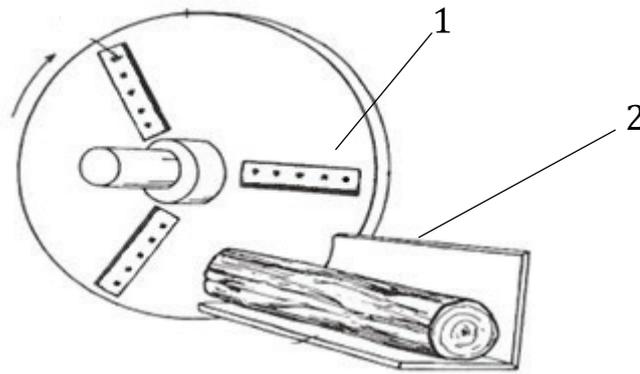


Key

- 1 cutting element ([3.3.4](#)) (disc)
- 2 infeed system ([3.4.1](#))

Figure A.19 — Example cutting system components of disc chipper

A.9 Cutting system component nomenclature of screw chippers

See [Figure A.20](#).

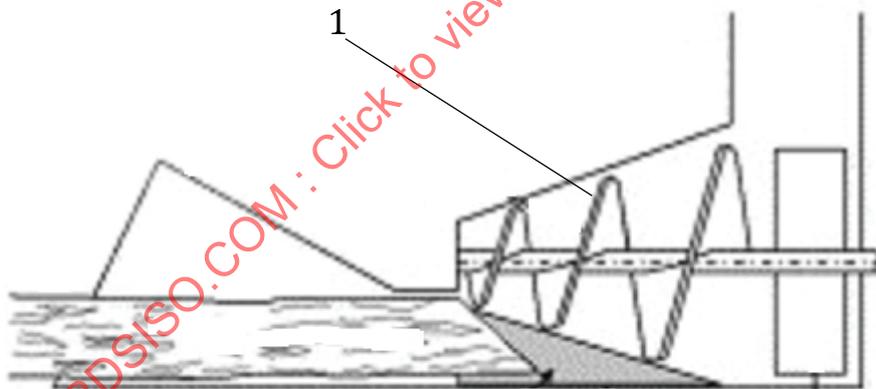

Key

- 1 cutting element ([3.3.4](#)) (screw)


Figure A.20 — Example cutting system components of screw chipper

Annex B
(informative)

Dimensional characteristics and nomenclature of grinders and shredders

B.1 Dimensional characteristics of horizontal grinders


See [Figures B.1](#) and [B.2](#).

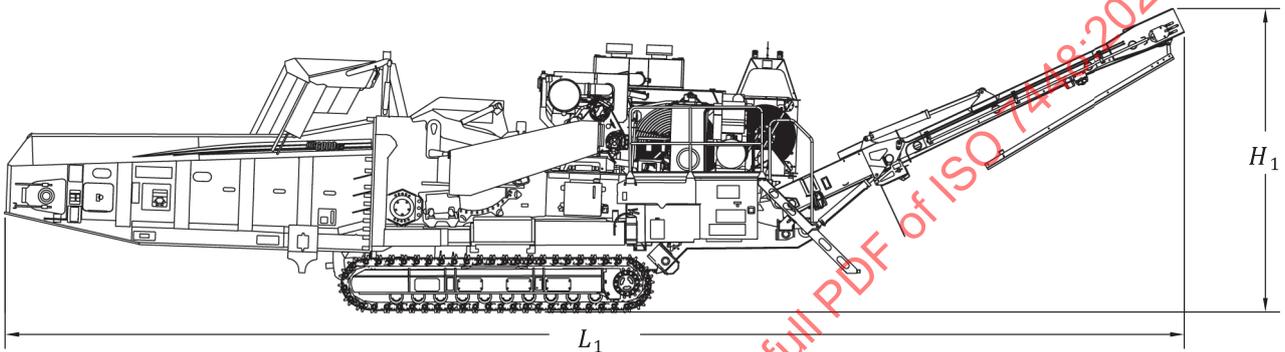

Key

- H_1 operating height ([3.7.9](#))
- L_1 operating length ([3.7.10](#))
- W_1 operating width ([3.7.11](#)) (not shown)

Figure B.1 — Example self-propelled horizontal grinder with dedicated (engine) power source (shown in operating configuration)

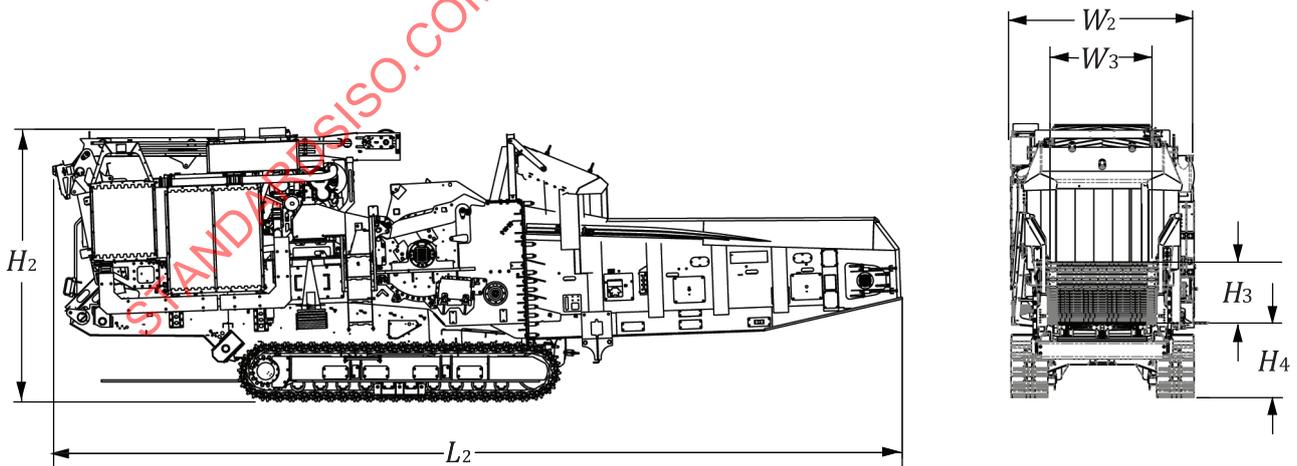


Key

- | | |
|---|--|
| H_2 transport height (3.7.12) | W_3 infeed opening width (3.7.6) |
| L_2 transport length (3.7.13) | H_3 Infeed opening height |
| W_2 transport width (3.7.14) | H_4 infeed height (3.7.4) |

Figure B.2 — Example self-propelled horizontal grinder with dedicated (engine) power source (shown in transport configuration)

B.2 Dimensional characteristics of tub grinders

See [Figure B.3](#).

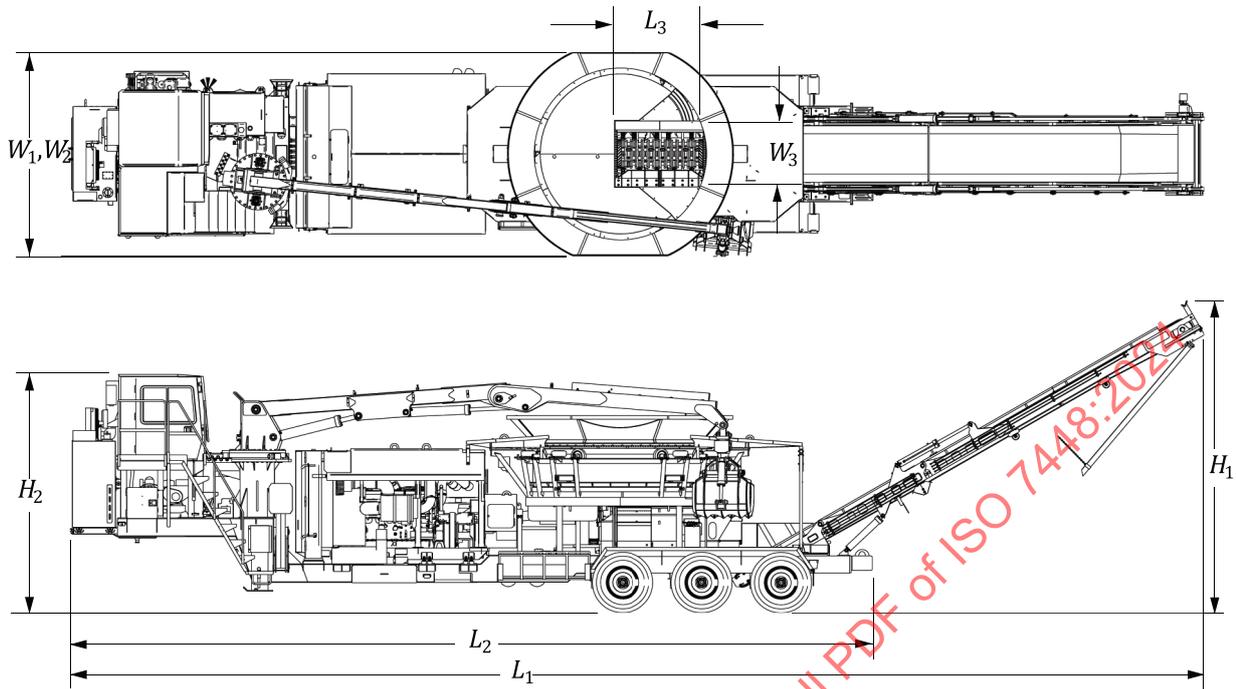


Key

- | | |
|---|--|
| H_1 operating height (3.7.9) | H_2 transport height (3.7.12) |
| L_1 operating length (3.7.10) | L_2 transport length (3.7.13) |
| W_1 operating width (3.7.11) | W_2 transport width (3.7.14) |
| L_3 infeed opening length (3.7.7) | W_3 infeed opening width (3.7.6) |

Figure B.3 — Example towable tub grinder with dedicated (engine) power source

B.3 Dimensional characteristics of shredders

See [Figure B.4](#).

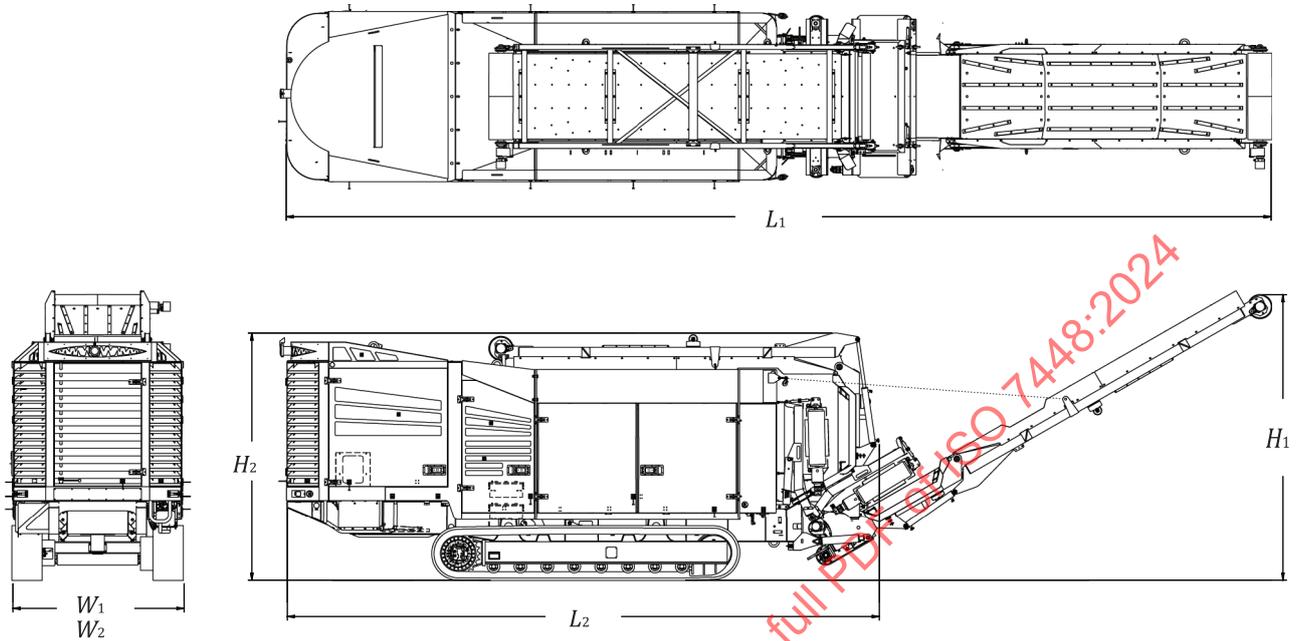

Key

H_1 operating height ([3.7.9](#))

H_2 transport height ([3.7.12](#))

L_1 operating length ([3.7.10](#))

L_2 transport length ([3.7.13](#))


W_1 operating width ([3.7.11](#))

W_2 transport width ([3.7.14](#))

Figure B.4 — Example self-propelled shredder with dedicated (engine) power source

B.4 Nomenclature of horizontal grinders

See [Figure B.5](#).

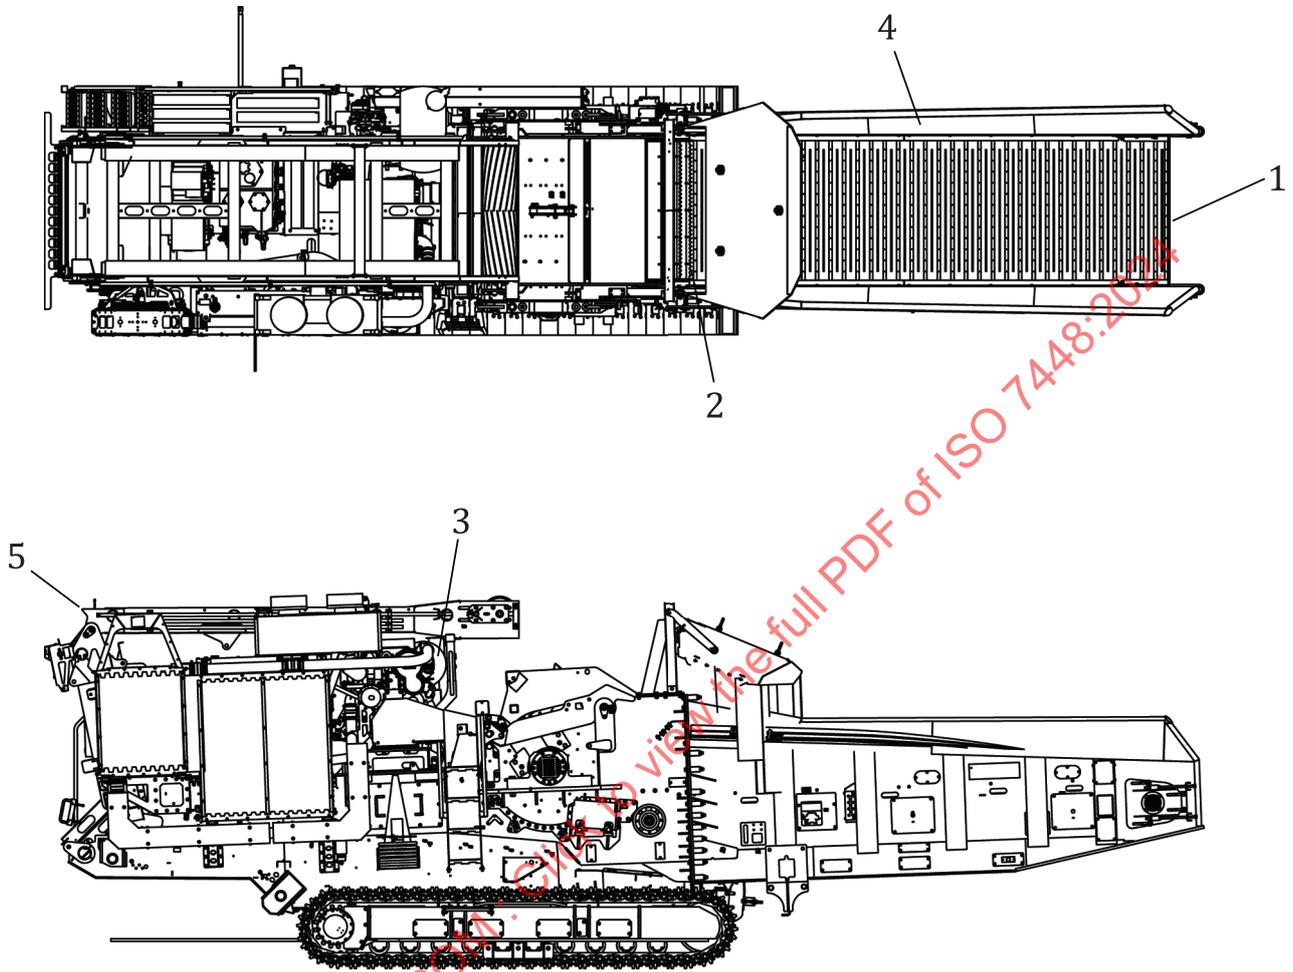

Key

- | | | | |
|---|--|---|--|
| 1 | infeed system (3.4.1) | 4 | hopper (3.4.6) |
| 2 | grinding system (3.3.2) | 5 | discharge conveyor (3.5.1) |
| 3 | dedicated power source (3.8.2.1) | | |

Figure B.5 — Example self-propelled horizontal grinder with dedicated (engine) power source