

INTERNATIONAL STANDARD

ISO
7650

First edition
1987-08-01



INTERNATIONAL ORGANIZATION FOR STANDARDIZATION
ORGANISATION INTERNATIONALE DE NORMALISATION
МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ

Commercial vehicles and buses — Mounting dimensions for starter motors of types 1, 2, 3 and 4

Véhicules utilitaires et autobus — Dimensions de montage des démarreurs de types 1, 2, 3 et 4

STANDARDSISO.COM : Click to view the full PDF of ISO 7650:1987

Reference number
ISO 7650:1987 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 7650 was prepared by Technical Committee ISO/TC 22, *Road vehicles*.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

STANDARDSISO.COM : Click to view the full PDF of ISO 7650:1987

Commercial vehicles and buses — Mounting dimensions for starter motors of types 1, 2, 3 and 4

1 Scope and field of application

This International Standard lays down the mounting dimensions for interchangeability of starter motors mounted on internal combustion engines in commercial vehicles and buses.

It applies to starter motors, types 1, 2, 3 and 4, sizes "A" and "B"; it may be used for other engine applications where no specific standards exist.

2 Reference

ISO 8123, *Road vehicles — Starter pinions of diametral pitches.*¹⁾


1) At present at the stage of draft.

3 Dimensions and tolerances

3.1 General dimensions

3.1.1 Starter motors with nose support bearing

3.1.1.1 Starter motor sizes "A" and "B", type 1

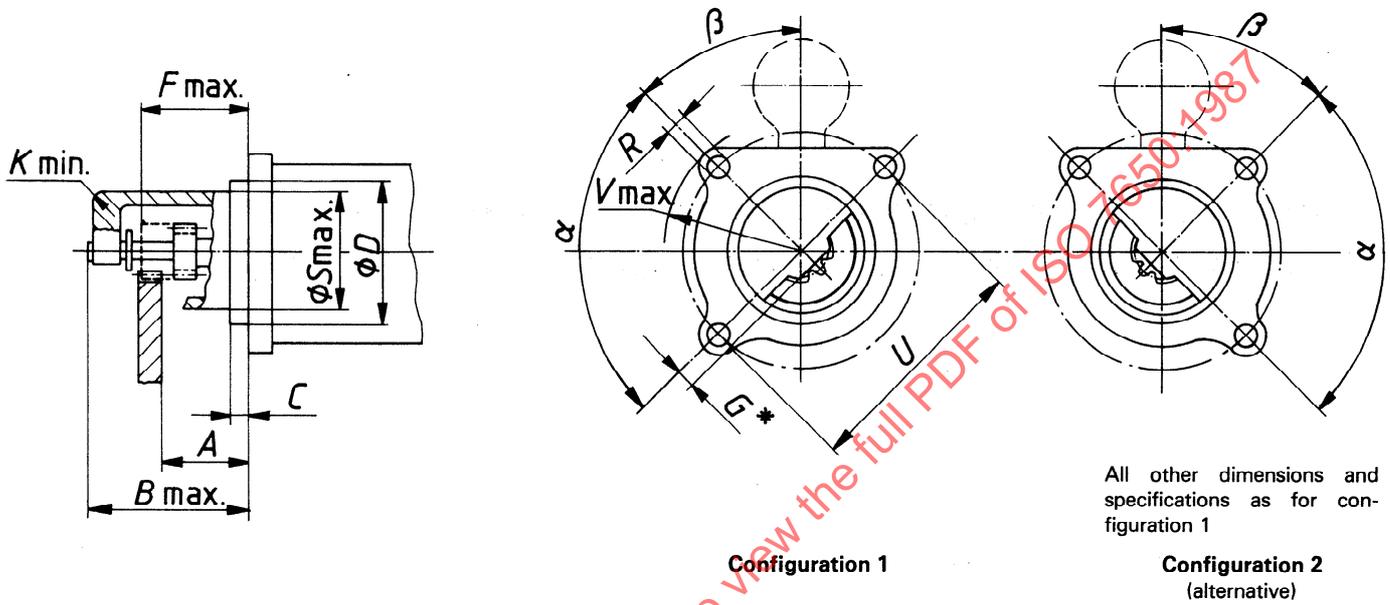

* Dimension G shall not exceed the root radius of pinion teeth (see ISO 8123).

Figure 1 — Starter motor with nose support bearing, type 1

Table 1


Dimensions in millimetres

Dimension	A	B	C	D ¹⁾	F	K	R	S	U	V	α	β ²⁾
Size	±1	max.			max.	min.	H13	max.	±0,15	max.	±30'	±2°
A	51	98	5 to 9	89	68	6	11	D - 0,7	127	80	90°	45°
B	24	72	5 to 9	89	39	6	11	D - 0,7	127	80	90°	45°

1) Tolerance classes: see 3.2.

2) The value of angle β specified in the table is the preferred value. Other values shall be agreed between engine and starter motor manufacturers.

3.1.1.2 Starter motor sizes "A" and "B", type 2

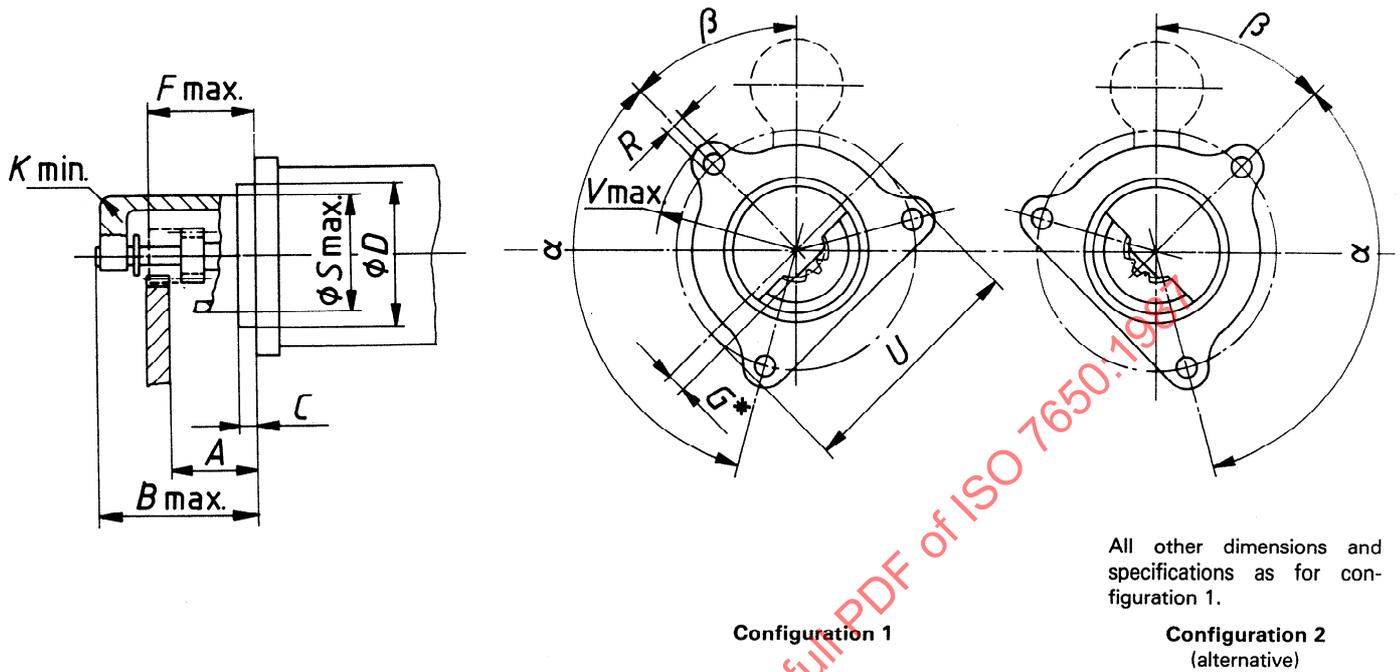

* Dimension G shall not exceed the root radius of pinion teeth (see ISO 8123).

Figure 2 — Starter motor with nose support bearing, type 2

Table 2

Dimensions in millimetres

Dimension	A	B	C	D ¹⁾	F	K	R	S	U	V	α	β ²⁾
Size	±1	max.			max.	min.	H13	max.	±0,15	max.	±30'	±2°
A	51	105	5 to 9	92	75	6	13,5 17	D - 0,7	146	90	120°	45°
B	24	78	5 to 9	92	48	6	13,5 17	D - 0,7	146	90	120°	45°

1) Tolerance classes: see 3.2.

2) The value of angle β specified in the table is the preferred value. Other values shall be agreed between engine and starter motor manufacturers.

3.1.2 Starter motors without nose support bearing

3.1.2.1 Starter motor sizes "A" and "B", type 3

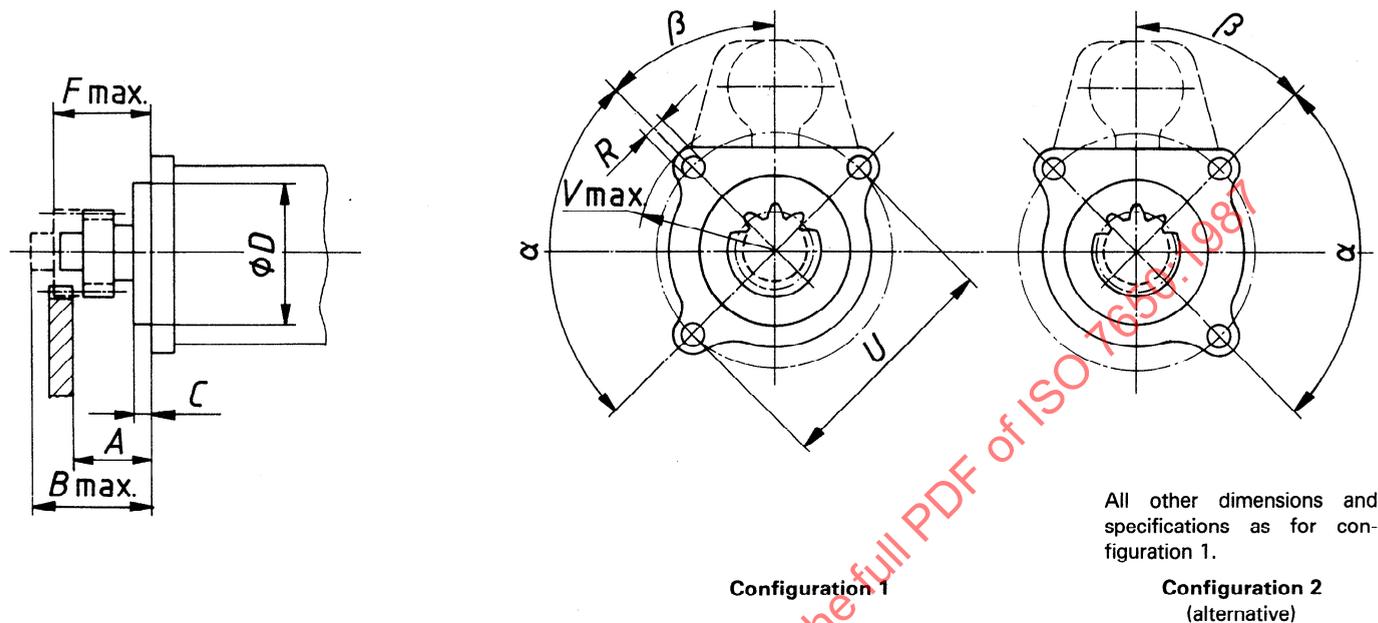


Figure 3 — Starter motor without nose support bearing, type 3

Table 3

Dimensions in millimetres

Dimension	A	B	C	D ¹⁾	F	R	U	V	α	β ²⁾
Size	± 1	max.			max.	H13	$\pm 0,15$	max.	$\pm 30'$	$\pm 2^\circ$
A	51	88	5 to 9	89	75	11	127	80	90°	45°
B	24	72	5 to 9	89	48	11	127	80	90°	45°

1) Tolerance classes: see 3.2.

2) The value of angle β specified in the table is the preferred value. Other values shall be agreed between engine and starter motor manufacturers.