

# INTERNATIONAL STANDARD

**ISO**  
**8526-2**

First edition  
1990-08-15

---

---

## **Modular units for machine tools — Workholding pallets —**

### **Part 2:** Workholding pallets of nominal size greater than 800 mm

*Éléments standards pour machines-outils — Palettes —*

*Partie 2: Palettes porte-pièce de dimension nominale supérieure à 800 mm*



Reference number  
ISO 8526-2 : 1990 (E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8526-2 was prepared by Technical Committee ISO/TC 39, *Machine tools*.

ISO 8526 consists of the following parts, under the general title *Modular units for machine tools — Workholding pallets*:

- *Part 1: Workholding pallets up to 800 mm nominal size*
- *Part 2: Workholding pallets of nominal size greater than 800 mm*

Annex A forms an integral part of this part of ISO 8526. Annex B is for information only.

© ISO 1990

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

## Introduction

This part of ISO 8526 has been drawn up to facilitate interchangeability of workholding pallets, including those from different manufacturers. It deals with square pallets and rectangular pallets of length-to-width ratio of 1,25 and of nominal size greater than 800 mm.

If pallets with tighter tolerances than specified in this part of ISO 8526 are required, they shall be subject to agreement between the manufacturer and the user.

This part of ISO 8526 does not specify the positioning accuracy of the pallets.

STANDARDSISO.COM : Click to view the full PDF of ISO 8526-2:1990

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 8526-2:1990

# Modular units for machine tools — Workholding pallets — Part 2: Workholding pallets of nominal size greater than 800 mm

## 1 Scope

This part of ISO 8526 specifies the dimensions of workholding pallets for use with machine tools and in manufacturing systems.

It applies to the following nominal sizes of pallet:

1 000 mm, 1 250 mm, 1 600 mm and 2 000 mm

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 8526. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 8526 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 286-2 : 1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts.*

ISO 299 : 1987, *Machine tool tables — T-slots and corresponding bolts.*

ISO 1101 : 1983, *Technical drawings — Geometrical tolerancing — Tolerancing of form, orientation, location and run-out — Generalities, definitions, symbols, indications on drawings.*

ISO 2768-1 : 1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications.*

## 3 Terminology

### 3.1 Nominal size

The nominal size is given by dimension  $a_1$  [see figure 3a)].

### 3.2 General

The terms used for the purposes of this part of ISO 8526 are listed in table 1 and illustrated in figure 1.

Table 1 — Terminology

Reference number	Designation
1	Top surface of pallet
2	Centre hole
3	Location surface
4	Clamping surface
5	Transportation slide surface
6	Location hole
7	Edge locator (when fitted)
8	Alignment hole (when provided)
9	Fixing holes for latch mechanism
10	Resting surface

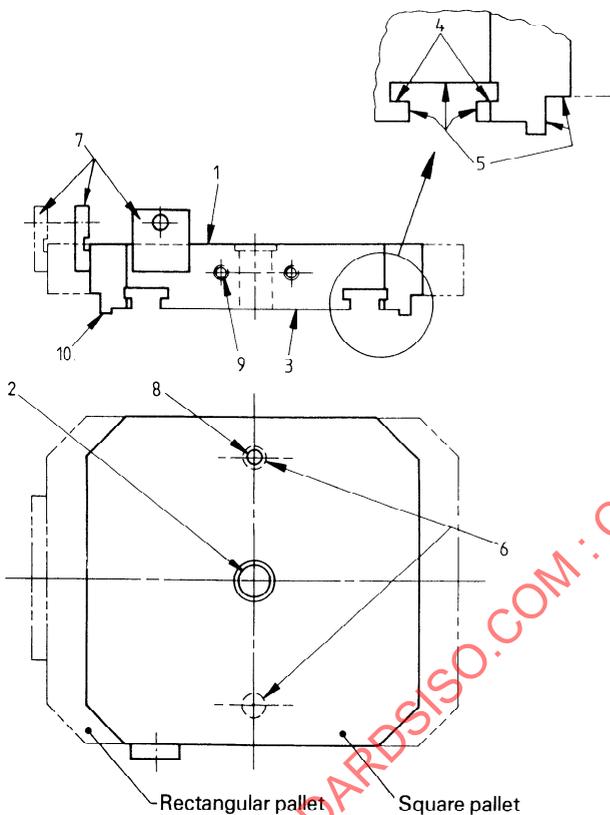


Figure 1 — Workholding pallet

## 4 Dimensions

Dimensions of pallets are given in table 2.

## 5 Top surface

### 5.1 Corners

Corners shall be removed from pallets (see dimension *c* in table 2).

### 5.2 T-slots and threaded holes

Either T-slots or threaded holes may be provided in the top surface. Pitches of threaded holes and T-slots and T-slot dimensions shall comply with ISO 299. Dimensions and pitches of T-slots and threaded holes are given in table 2.

#### NOTES

- 1 The top surface may be left plain, if desired, for special applications.
- 2 Radial slots may be used for special applications. Their dimensions are given in annex A, figures A.1 and A.2.

### 5.3 Types of top surface

The different types of top surface are as follows:

- type 1: surface with threaded holes [see figure 2a)];
- type 2: surface with T-slots [see figure 2b)];
- type 3: surface with T-slots and cross-tenons [see figure 2c)];
- type 4: plain surface (see figure 5);
- type 5: surface with radial T-slots (see figure A.1);
- type 6: surface with twin radial T-slots (see figure A.2).

### 5.4 Centre hole

A centre hole shall be provided and may be used as a reference hole for work positioning on the pallet and/or as a reference hole for pallet manufacturing (see figure 1).

The depth of the counterbore,  $d_4$ , if present, shall always be greater than the depth of the central tenon slot of the pallet.

### 5.5 Alignment hole

An alignment hole,  $d_6$ , may be provided for use in positioning the workpiece or fixture on the pallet and/or as a reference hole for pallet manufacturing purposes (see figure 1).

NOTE — It is necessary to provide means of preventing ingress of swarf and coolant to the bottom surface.

## 6 Location of workpiece

Workpieces or fixtures shall be located on the top surface by one of the following methods:

- a) by means of edge locators (see figure 4 and table 3);

NOTE — For type 2 and type 3 top surfaces, the mounting holes for the edge locators are at the discretion of the manufacturer. The positions of the fixing holes for the fixture should be the same as those shown in figure 4.

- b) by means of a centre hole and an associated alignment hole (where the top surface of the pallet has threaded holes) [see figure 2a)];

- c) by means of a centre hole and a reference slot (where the top surface of the pallet has T-slots) [see figure 2b)];

d) by means of two perpendicular tenon (crossed-tenon) slots [see figure 2c)];

e) by means of two or three straight-through location holes,  $d_6$  [see figures 3a) and 3b)].

#### NOTES

1 It is necessary to provide means of preventing ingress of swarf and coolant to the bottom surface.

2 The straight-through feature is optional.

## 7 Bottom surface

### 7.1 Location of pallet on the receiver (on the machine tool)

Location of the pallet on the receiver shall be by means of one of the following methods (see figure 3):

a) by two cylindrical holes on the pallet [see figure 3a)] and two cylindrical pins on the receiver;

b) by two or three tapered holes on the pallet [see figure 3b)] and two or three tapered pins on the receiver.

### 7.2 Shape and dimensions

The shape and dimensions of the bottom surface are given in figure 3a) and table 2.

## 8 Designation of pallets

The designation of a pallet is given by

- the number of this part of ISO 8526;
- its nominal size and length,  $a_1 \times a_1$  or  $a_1 \times a_2$ ;
- its top surface type (see 5.3);
- the pitch of its T-slots or threaded holes;
- the method of workpiece location [see clause 6, a) to e)];
- the method of locating the pallet on the receiver [see 7.1, a) and b)].

#### EXAMPLE

Designation of a square pallet, of nominal size and length 1 000 × 1 000, with top surface type 2, with 100 mm pitch of T-slots, with workpiece location by means of centre hole and reference slot c), and pallet location on the receiver by means of cylindrical holes a):

**ISO 8526-2 - 1 000 × 1 000-2-100-c-a**

#### EXAMPLE


Designation of a rectangular pallet, of nominal size and length 1 000 × 1 250, with top surface type 2, with 100 mm pitch of T-slots, with workpiece location by means of centre hole and reference slot c), and pallet location on the receiver by means of tapered holes b):

**ISO 8526-2 - 1 000 × 1 250-2-100-c-b**

STANDARDSISO.COM : Click to view the full PDF of ISO 8526-2:1990



Dimensions and tolerances of location and orientation in millimetres

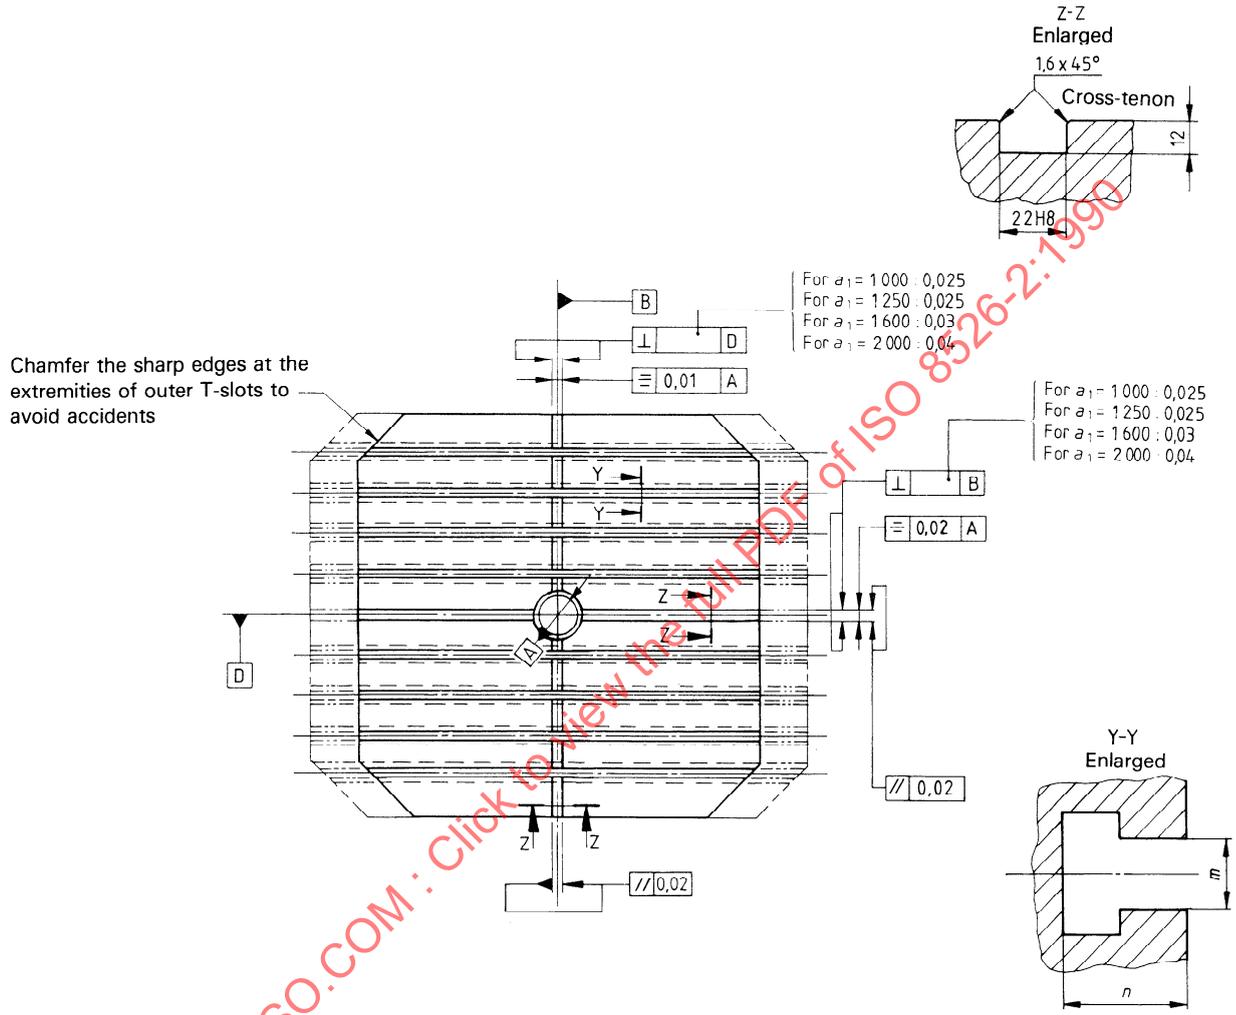


c) top surface, type 3 — with T-slots and cross-tenons

NOTE — For the tolerancing of location and orientation, see ISO 1101.

Figure 2 — Types of top surface


Dimensions and tolerances of form, orientation and location in millimetres

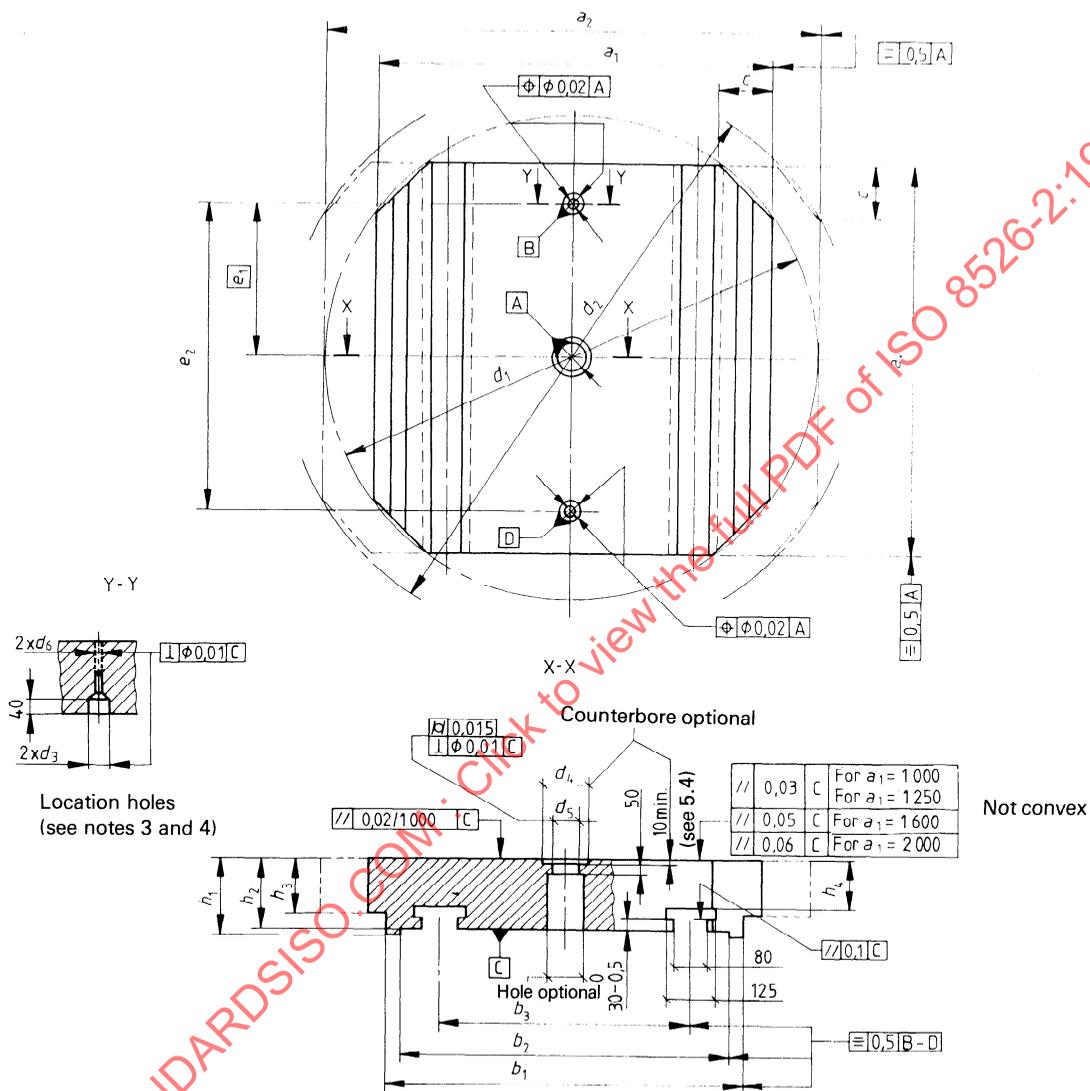

NOTE — For tapered location holes, see figure 3b).

a) Workholding pallets with cylindrical location holes

Dimensions in millimetres

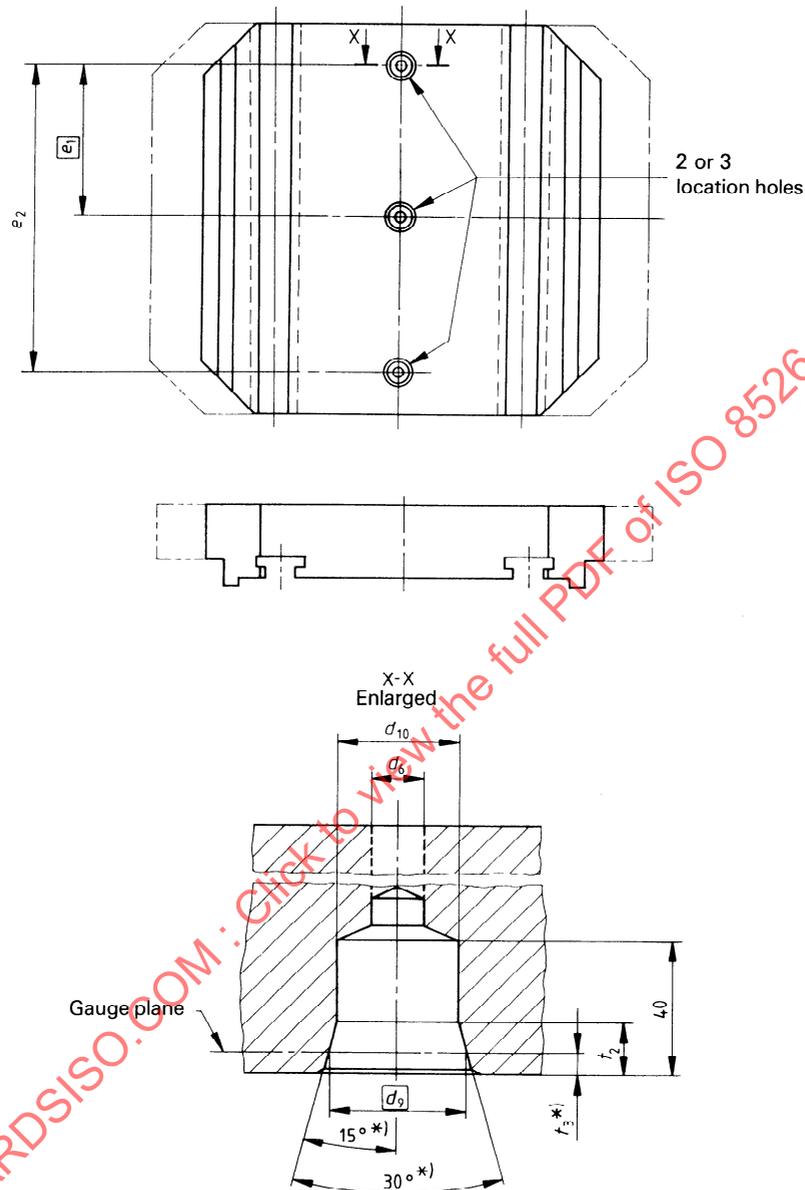

\*) The tolerances on  $t_3$ ,  $15^\circ$  and  $30^\circ$  are as specified by the manufacturer.

**b) Workholding pallets with tapered location holes**

**NOTES**

- 1 The type of location required should be stated when ordering pallets.
- 2 For the tolerancing of form, orientation and location, see ISO 1101.
- 3 Bushes of minimum depth equal to  $1\frac{1}{4}$  times their diameter may be inserted at either end of  $d_6$ , if preferred.
- 4 Where  $d_6$  is straight through, the centre portion of the bore of  $d_6$  may be relieved to a maximum length of  $(h_2 - 40) - 2,5 \times d_6$ , if desired.

**Figure 3 — Principal dimensions of workholding pallets**

Table 2 — Dimensions of workholding pallets<sup>1)</sup> (see figures 2 and 3)

Dimensions in millimetres

Dimension	Nominal size and length							
	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$
	1 000 × 1 000	1 000 × 1 250	1 250 × 1 250	1 250 × 1 600	1 600 × 1 600	1 600 × 2 000	2 000 × 2 000	2 000 × 2 500
$b_1 \begin{smallmatrix} 0 \\ -0,5 \end{smallmatrix}$	900		1 110		1 400		1 700	
$b_2 \begin{smallmatrix} +1 \\ 0 \end{smallmatrix}$	840		1 030		1 300		1 580	
$b_3 \pm 0,5$	630		800		1 000		1 250	
$c^{2)}$	125		125 <sup>3)</sup>		200		250	
$d_1 \begin{smallmatrix} 0 \\ -5 \end{smallmatrix}$	1 250		1 600		2 000		2 500	
$d_2 \begin{smallmatrix} 0 \\ -5 \end{smallmatrix}$	1 458		1 886		2 332		2 916	
$d_3$ H7 <sup>4)</sup>	50		80		80		80	
$d_4$ (optional)	110		110		110		110	
$d_5$ H7 <sup>4), 5)</sup>	100		100		100		100	
$d_6$ H7 <sup>4), 6)</sup>	25		25		25		25	
$d_7^{7)}$	M20		M20		M24		M24	
$d_8^{7)}$	22		22		26		26	
$d_9$	55		55		55		55	
$d_{10}$	50		80		80		80	
$e_1$	400		500		675		875	
$e_2 \pm 0,01$	800		1 000		1 350		1 750	
$h_1 \pm 0,5$	200		230		260		290	
$h_2$	190 ± 0,02		220 ± 0,03		250 ± 0,04		280 ± 0,04	
$h_3 \pm 0,5$	140		170		200		230	
$h_4 \begin{smallmatrix} 0 \\ -0,5 \end{smallmatrix}$	125		155		185		215	
$l_1 \pm 0,025$	400		500		675		875	
$l_2^{8)}$	AP	100	100		200		200	
	GP	100	125		160		200	
$l_3^{8)}$	AP	100	100		200		200	
	GP	100	125		160		200	

Table 2 — Dimensions of workholding pallets<sup>1)</sup> (see figures 2 and 3) (concluded)

Dimensions in millimetres

Dimension	Nominal size and length							
	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$	$a_1 \times a_1$	$a_1 \times a_2$
	1 000 × 1 000	1 000 × 1 250	1 250 × 1 250	1 250 × 1 600	1 600 × 1 600	1 600 × 2 000	2 000 × 2 000	2 000 × 2 500
$m^{9)}$	22		22		28		28	
$n \begin{smallmatrix} +1 \\ 0 \end{smallmatrix}$	38		38		48		48	
$t_1 \begin{smallmatrix} +1 \\ 0 \end{smallmatrix}$	35		35		40		40	
$t_2$	12		12		12		12	
$t_3$	2,67		2,67		2,67		2,67	

- 1) For working limits on untoleranced dimensions, see the medium series of ISO 2768-1.
- 2) Chamfer  $\times 45^\circ$  or radius at choice of the manufacturer.
- 3) Temporary.
- 4) See ISO 286-2.
- 5) The centre hole may have a bush in the reference bore.
- 6) When  $d_6$  is used as an alignment hole on the top surface and does not go straight through, the depth is at the manufacturer's discretion. When  $d_6$  is used purely as a clearance hole, it need not be toleranced.
- 7) The recess dimensions,  $d_8 \times 0,5$ , associated with the tapped holes in the top surface are primarily for thread protection. Headed plugs may be inserted in exposed holes to prevent the ingress of swarf, in which case the recess dimensions may be modified to accommodate the heads of the plugs. The use of plain plugs does not necessitate a change in these dimensions.  
The dimensions of plugs have not been standardized. Therefore such dimensions are left to agreement between purchaser and manufacturer.
- 8) AP and GP dimensions are alternative values, where AP is the arithmetic progression and GP is the geometric progression. (See annex B.)
- 9) The tolerance on  $m$  is H8 for tenon slots and H12 for fixing slots.

STANDARDSISO.COM : Click to view the full PDF of ISO 8526-2:1990

Dimensions in millimetres

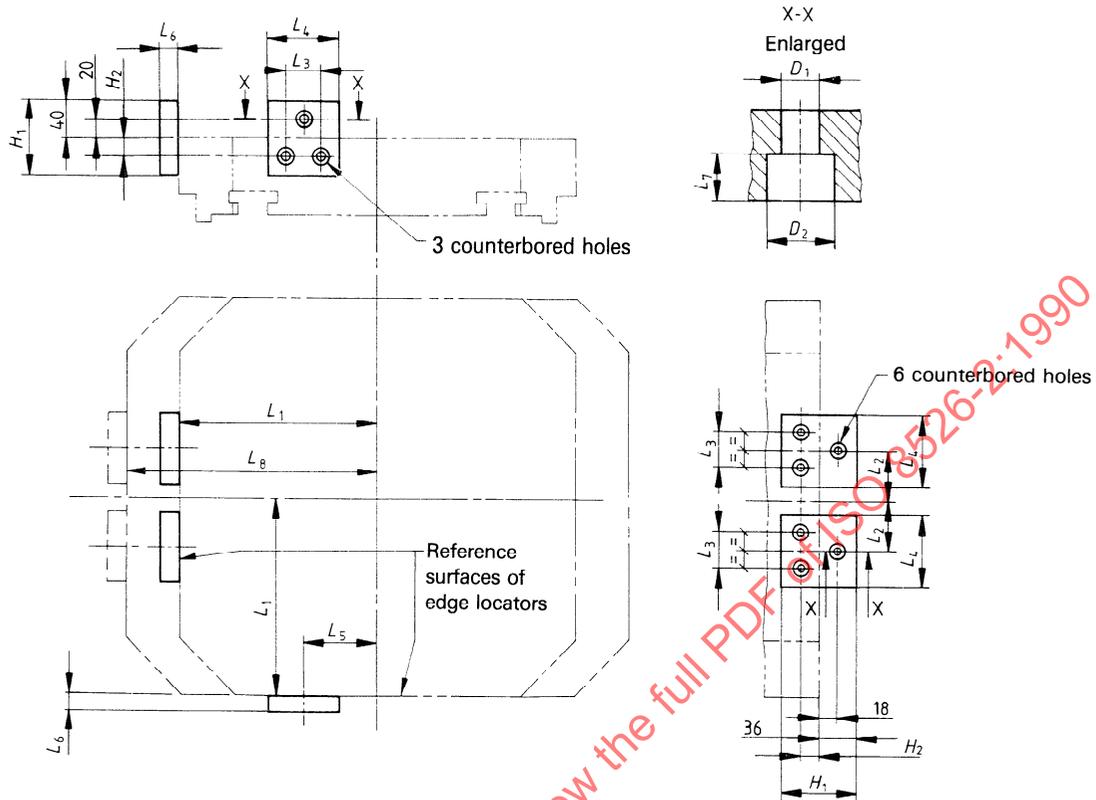
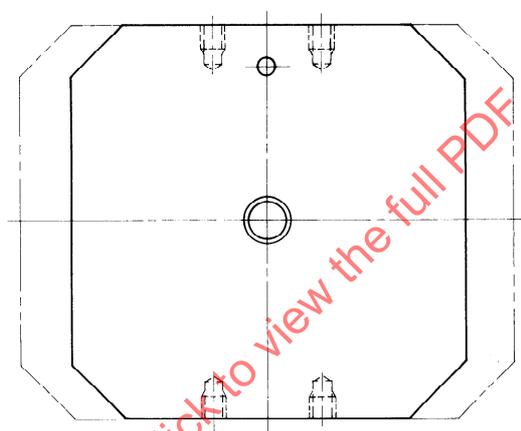
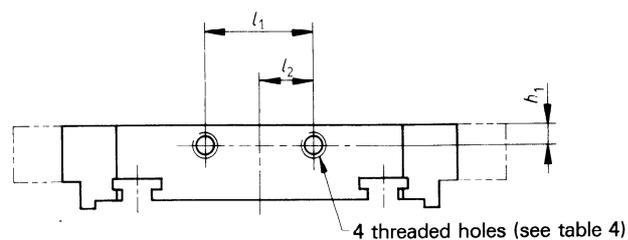


Figure 4 — Details of edge locators (when fitted)

Table 3 — Dimensions of edge locators (when fitted)

Dimensions in millimetres

Nominal size of pallet $a_1$	$L_1$ $\pm 0,01$	$L_2$	$L_3$	$L_4$	$L_5$	$L_6$	$L_7$	$L_8$ $\pm 0,01$	$H_1$	$H_2$	$D_1$	$D_2$	Fixing screw in pallet
1 000	500	200	50	98	250	38	21	625	100	30	22	33	M20
1 250	625	250	50	98	315	38	21	800	100	30	22	33	M20
1 600	800	315	55	108	400	45	25	1 000	120	35	26	36	M24
2 000	1 000	400	55	108	500	45	25	1 250	120	35	26	36	M24



**Figure 5** — Fixing holes for latch mechanism  
(the pallet illustrated is of type 4 with plain top surface)

**Table 4** — Dimensions of fixing holes  
for latch mechanism

Dimensions in millimetres

Nominal size of pallet $a_1$	$h_1$	$l_1$	$l_2$	Thread size
1 000	60	100	50	M20
1 250				
1 600	90	150	75	M24
2 000				

## Annex A (normative)

### Top surfaces with radial T-slots — Types 5 and 6

(See 5.2, note 2)

#### A.1 Top surface, type 5 — with radial T-slots

Dimensions in millimetres

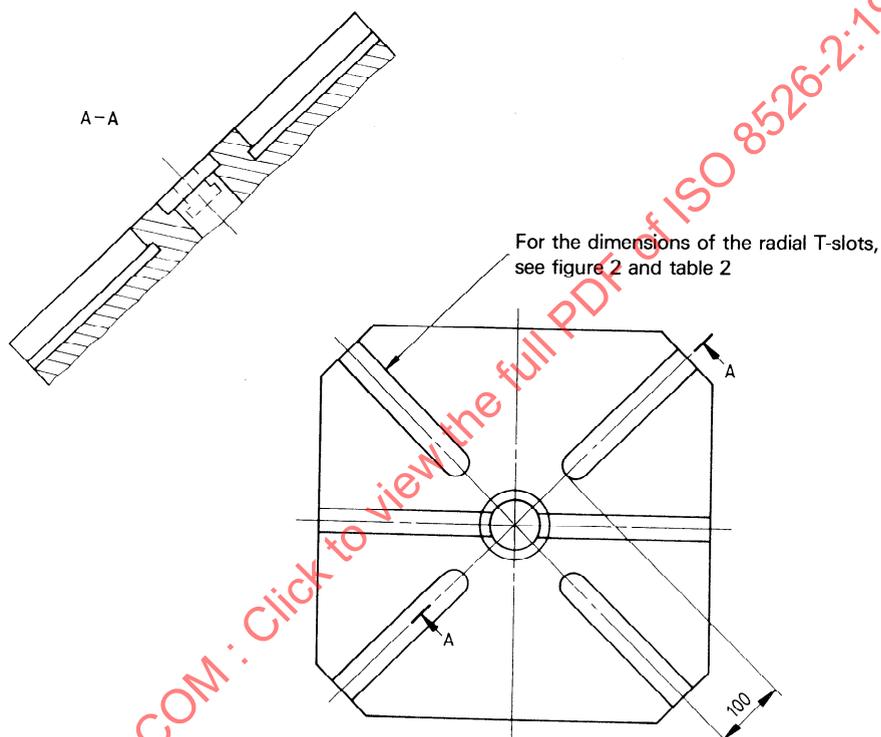


Figure A.1 — Top surface, type 5 — with radial T-slots