
**Ophthalmic optics — Spectacle frames —
Measuring system and terminology**

*Optique ophtalmique — Montures de lunettes — Système de mesure et
terminologie*

STANDARDSISO.COM : Click to view the full PDF of ISO 8624:2011



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 8624:2011



COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8624 was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 7, *Ophthalmic optics and instruments*.

This third edition cancels and replaces the second edition (ISO 8624:2002), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 8624:2011

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 8624:2017

Ophthalmic optics — Spectacle frames — Measuring system and terminology

1 Scope

This International Standard specifies a measuring system for spectacle frames and related terminology. It is applicable to fronts which are intended to be symmetrical.

2 Terms, definitions and symbols

For the purposes of this document, the following terms, definitions and symbols apply. For complementary terms and definitions, see Annex A.

2.1

boxed centre

C

intersection of the **horizontal centreline** (A.1) and **vertical centreline** (A.2) of the rectangular box which circumscribes the **lens shape** (A.10)

See Figure 1.

2.2

horizontal boxed lens size

horizontal lens size

a

distance between the vertical sides of the rectangular box which circumscribes the **lens shape** (A.10)

See Figure 1.

NOTE For spectacle frames having a significant **face form angle** (A.13), the horizontal boxed lens size shall be measured in the “plane” of the individual lens shape.

2.3

vertical boxed lens size

vertical lens size

b

distance between the horizontal sides of the rectangular box which circumscribes the **lens shape** (A.10)

See Figure 1.

2.4

boxed centre distance

distance between centres

c

distance between the **boxed centres** (2.1)

See Figure 1.

NOTE For spectacle frames having a significant **face form angle** (A.13), the boxed centre distance shall be measured between the **boxed centres** (2.1) marked on the back surfaces of lenses of appropriate base curve fitted to the frame. See Figure 4.

2.5
distance between lenses

d
horizontal distance between the nasal vertical sides of the rectangular boxes which circumscribe the right and left **lens shapes** (A.10)

See Figure 1.

NOTE Former users of the obsolete datum system should note that this is the datum measurement "minimum between lenses".

2.6
overall length of side

l
length from the intersection of the dowel screw's axis with the median plane of the joint to the end of the side and parallel to the centreline of it, the drop having been straightened

See Figure 2.

NOTE For sides without a joint, the side should be held open at $(90 \frac{0}{-5})^\circ$ to the front or to that part of the side that is intended to be attached to the front, and the length measurement is from the end of the side to the front less 10 mm. See Figure 3.


3 Measuring system

The measuring system for spectacle frames shall be in accordance with Figures 1 to 4, as defined in Clause 2.

If codes are used in spectacle frame documentation, the symbols given for the terms defined in Clause 2 shall be employed.

The measuring system comprises several horizontal and vertical dimensions and reference points. The knowledge of these is necessary for the manufacturing, ordering and adjustment of spectacle frames as well as for the exact mounting of spectacle lenses into spectacle frames.


The measuring system is based on the boxed lens (boxing) system, which uses a rectangle tangential to the lens shape as the basis for the determination of the dimensions of the spectacle front. The upper tangent is common to both lens shapes and shall be regarded as horizontal, except in the case of spectacle frames having a significant face form angle, for which the line touching the uppermost edges of the right and left lens shapes shall be regarded as horizontal.

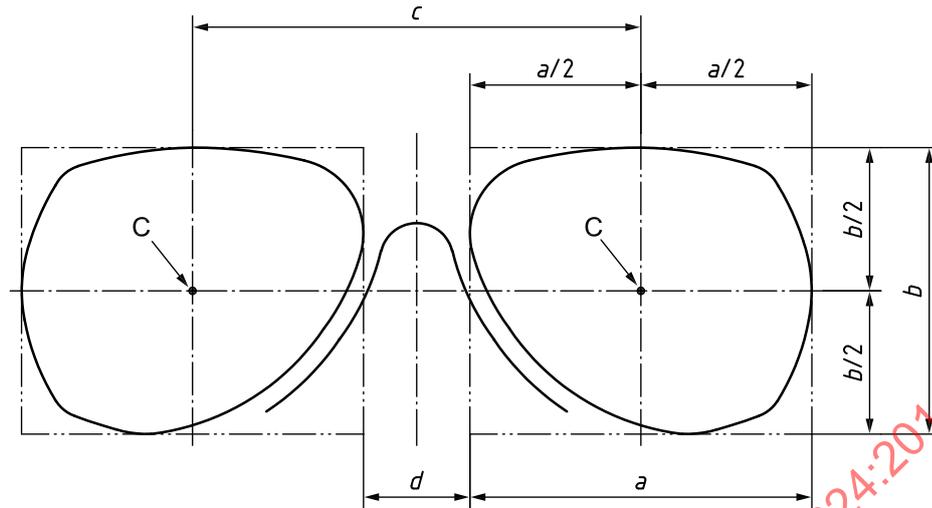

Key

- C boxed centre
- a horizontal lens size
- b vertical lens size
- c boxed centre distance
- d distance between lenses


Figure 1 — Measurements related to spectacle frames — Spectacle fronts

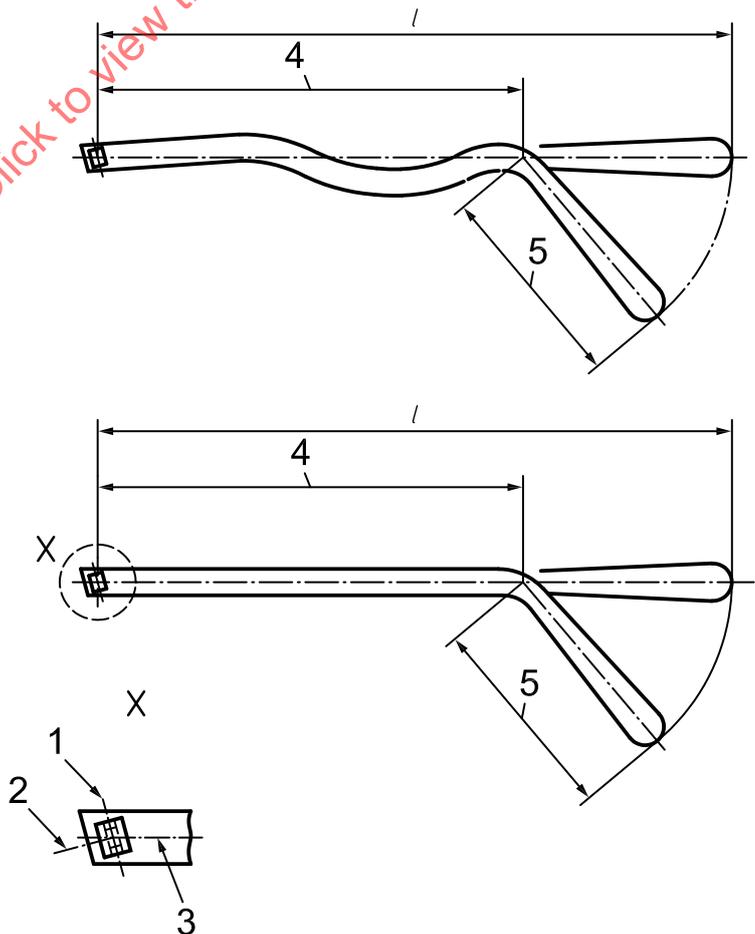

Key

- 1 axis of hinge or dowel screw axis
- 2 median plane of joint
- 3 centreline of side
- 4 length to bend (see Annex A)
- 5 length of drop (see Annex A)
- l overall length of side


Figure 2 — Measurements related to spectacle frames — Spectacle sides

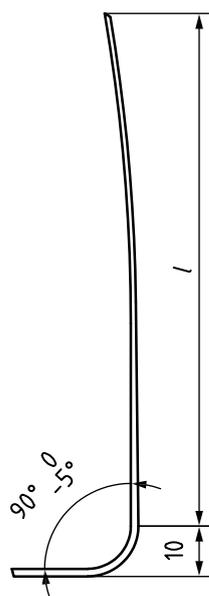

Key

l overall length of side

Figure 3 — Measurement of overall length of side for sides without a joint

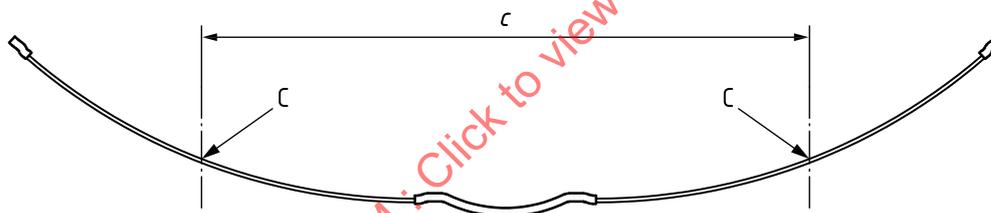

Key

C boxed centre

c boxed centre distance

Figure 4 — Measurement of boxed centre distance in frame having significant face form angle

Annex A (informative)

Complementary terms and definitions

Although the terms defined in this annex are not an integral part of the boxed lens system, they are frequently used in relation to lens shape or spectacle frames.

A.1

horizontal centreline

line located at an equal distance from the two horizontal tangents of the boxed lens (boxing) system

See Figures A.1 and A.2.

A.2

vertical centreline

line located at an equal distance from the vertical sides of the rectangular box which circumscribes the **lens shape** (A.10)

See Figure A.1.

A.3

vertical symmetry axis

line located at equal distance from the nasal vertical sides of the rectangular boxes which circumscribe the right and left spectacle **lens shapes** (A.10)

See Figure A.1.

A.4

bridge width line

reference line for bridge measurements, positioned 5 mm below the **horizontal centreline** (A.1)

See Figures A.1 and A.2.

A.5

bridge width

minimum distance between the rims measured along the **bridge width line** (A.4)

See Figures A.1 and A.2.

NOTE For spectacle frames with adjustable pads, bridge width applies to the rims, *not* the pads; for rimless spectacles, it applies to the minimum distance between the nasal edges of the spectacle lenses measured along the bridge width line.

A.6

bridge height

distance from the **bridge width line** (A.4) to the lower edge of the bridge, measured along the **vertical symmetry axis** (A.3)

See Figure A.1.

A.7

length to bend

length from the intersection of the dowel axis with the median plane of the joint to the intersection point of the axis of the tip and side, measured along the axis of the side

See Figure 2.

A.8
length of drop

length from the intersection point of the axes of the side and tip to the end of the side

See Figure 2.

A.9
effective diameter

diameter of the smallest circular uncut lens that can be glazed to the **lens shape** (A.10) with its geometrical centre positioned at the **boxed centre** (2.1)

See Figure A.3.

NOTE This includes an allowance for edging.

A.10
lens shape

outline of the lens periphery with the nasal side and the horizontal indicated

NOTE "Lens shape" refers to the shape of hypothetical spectacle lenses with:

- for a spectacle lens having a bevelled edge, the outermost edge of the spectacle lens, the lens having a bevel which includes a symmetrical angle of 120° and a bevel width greater than the width of the groove in the front;
- for a spectacle lens having a flat or grooved edge, the outermost edge of the spectacle lens.

A.11
plane of the spectacle front

plane containing the vertical centrelines of the right and left boxed lens shapes

NOTE This may be an approximation if the two centrelines are not parallel to each other.

A.12
plane of the lens shape

plane tangential to the front surface of a plano or demonstration or dummy lens at its **boxed centre** (2.1), when mounted in the frame

NOTE A demonstration lens or dummy lens is the plano lens mounted in the frame by the manufacturer for display purposes.

A.13
face form angle


angle between the plane of the spectacle front and the plane of the right lens shape, or of the left lens shape

See Figure A.4.

NOTE 1 The right or left face form angle is regarded as positive if the temporal side of the right or left lens plane is closer to the head than the **plane of the spectacle front** (A.11).

NOTE 2 The face form angles are often measured and specified as the average of the right (α_R) and left (α_L) angles, but the frame may be adjusted for a specific wearer so that they differ, and the angles should then be specified as α_R and α_L .

Dimensions in millimetres

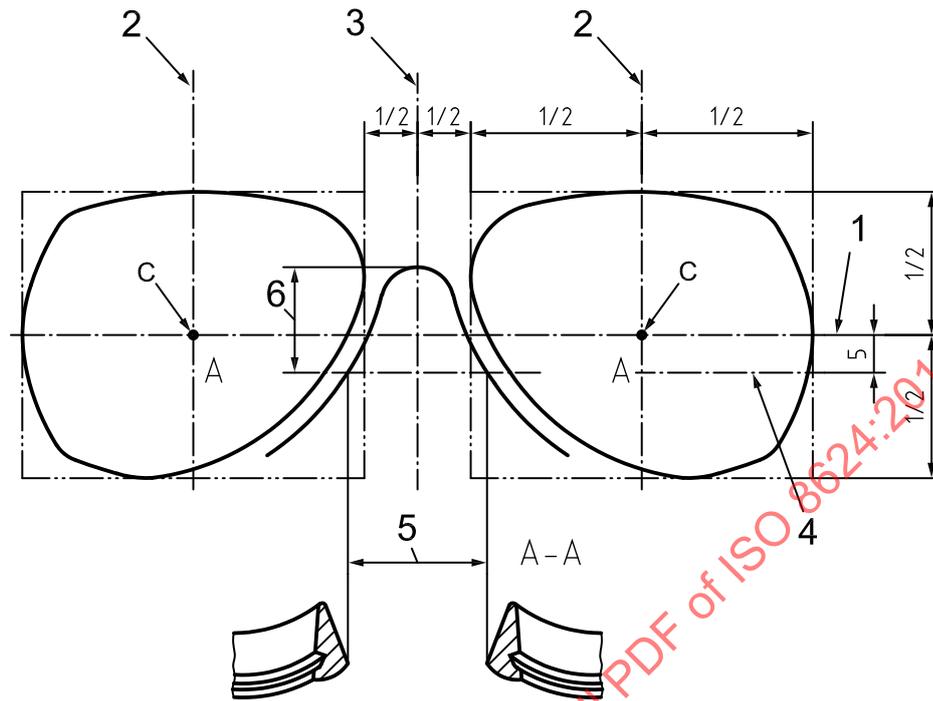


Key

- 1 horizontal centreline
- 2 vertical centreline
- 3 vertical symmetry axis
- 4 bridge width line
- 5 bridge width
- 6 bridge height
- C boxed centre

Figure A.1 — Complementary terms relating to fronts

Dimensions in millimetres

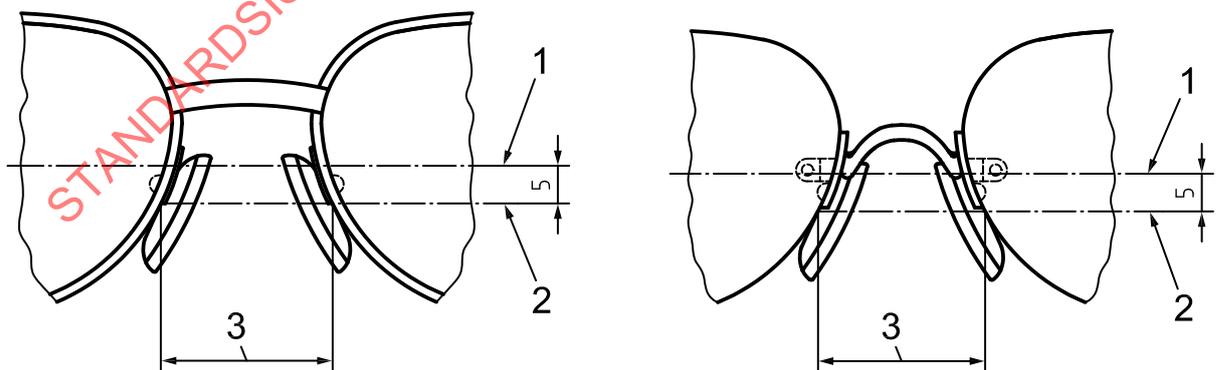

a) Spectacle frames with metal pad bridges

b) Rimless spectacle frames

Key

- 1 horizontal centreline
- 2 bridge width line
- 3 bridge width

Figure A.2 — Measurement of bridge width