

INTERNATIONAL
STANDARD

ISO
8675

Second edition
1999-08-15

**Hexagon thin nuts (chamfered) with metric
fine pitch thread — Product grades A and B**

*Écrous bas hexagonaux (chanfreinés) à filetage métrique à pas fin —
Grades A et B*

STANDARDSISO.COM : Click to view the full PDF of ISO 8675:1999



Reference number
ISO 8675:1999(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8675 was prepared by Technical Committee ISO/TC 2, *Fasteners*.

This second edition cancels and replaces the first edition (ISO 8675:1988) which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 8675:1999

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case postale 56 • CH-1211 Genève 20 • Switzerland
Internet iso@iso.ch

Printed in Switzerland

Introduction

This International Standard is part of the complete ISO product standard series on external hexagon drive fasteners. The series comprises:

- a) hexagon head bolts (ISO 4014 to ISO 4016 and ISO 8765);
- b) hexagon head screws (ISO 4017, ISO 4018 and ISO 8676);
- c) hexagon nuts (ISO 4032 to ISO 4036, ISO 8673 to ISO 8675);
- d) hexagon bolts with flange (ISO 4162 and ISO 15071);
- e) hexagon nuts with flange (ISO 4161 and ISO 10663);
- f) structural bolts and nuts (ISO 4775, ISO 7411 to ISO 7414 and ISO 7417).

STANDARDSISO.COM : Click to view the full PDF of ISO 8675:1999

Hexagon thin nuts (chamfered) with metric fine pitch thread — Product grades A and B

1 Scope

This International Standard specifies the characteristics of hexagon thin nuts (chamfered), with metric fine pitch thread, with nominal thread diameters d from 8 mm up to and including 64 mm, with product grade A for sizes d up to and including 16 mm and product grade B for sizes d over 16 mm.

If, in special cases, specifications other than those listed in this International Standard are required, they should be selected from existing International Standards, for example ISO 724, ISO 898-6, ISO 965-1, ISO 3506-2 and ISO 4759-1.

Coarse thread hexagon nuts according to ISO 4035 should be the first choice.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 225:1983, *Fasteners — Bolts, screws, studs and nuts — Symbols and designations of dimensions.*

ISO 724:1993, *ISO general-purpose metric screw threads — Basic dimensions.*

ISO 898-6:1994, *Mechanical properties of fasteners — Part 6: Nuts with specified proof load values — Fine pitch thread.*

ISO 965-1:1998, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data.*

ISO 3269:—¹⁾, *Fasteners — Acceptance inspection.*

ISO 3506-2:1997, *Mechanical properties of corrosion-resistant stainless-steel fasteners — Part 2: Nuts.*

ISO 4042:1999, *Fasteners — Electroplated coatings.*

ISO 4759-1:—²⁾, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C.*

ISO 6157-2:1995, *Fasteners — Surface discontinuities — Part 2: Nuts.*

ISO 8839:1986, *Mechanical properties of fasteners — Bolts, screws, studs and nuts made of non-ferrous metals.*

¹⁾ To be published. (Revision of ISO 3269:1988)

²⁾ To be published. (Revision of ISO 4759-1:1978)


ISO 8992:1986, *Fasteners — General requirements for bolts, screws, studs and nuts.*

ISO 10683:—³⁾, *Fasteners — Non-electrolytically applied zinc flake coatings.*

3 Dimensions

See Figure 1, Tables 1 and 2.

Symbols and descriptions of dimensions are defined in ISO 225.

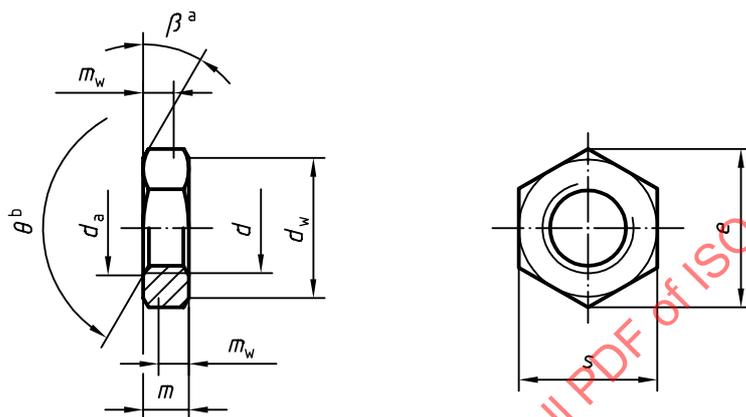

a $\beta = 15^\circ$ to 30°

b $\theta = 90^\circ$ to 120°

Figure 1

³⁾ To be published.

Table 1 — Preferred threads

Dimensions in millimetres

Thread ($d \times P$)		M8 × 1	M10 × 1	M12 × 1,5	M16 × 1,5	M20 × 1,5	M24 × 2	M30 × 2	M36 × 3	M42 × 3	M48 × 3	M56 × 4	M64 × 4
d_a	max.	8,75	10,8	13	17,3	21,6	25,9	32,4	38,9	45,4	51,8	60,5	69,1
	min.	8,00	10,0	12	16,0	20,0	24,0	30,0	36,0	42,0	48,0	56,0	64,0
d_w	min.	11,63	14,63	16,63	22,49	27,7	33,25	42,75	51,11	59,95	69,45	78,66	88,16
e	min.	14,38	17,77	20,03	26,75	32,95	39,55	50,85	60,79	71,3	82,6	93,56	104,86
m	max.	4,0	5,0	6,0	8,00	10,0	12,0	15,0	18,0	21,0	24,0	28,0	32,0
	min.	3,7	4,7	5,7	7,42	9,1	10,9	13,9	16,9	19,7	22,7	26,7	30,4
m_w	min.	2,96	3,76	4,56	5,94	7,28	8,72	11,12	13,52	15,76	18,16	21,36	24,32
s	nom. = max.	13,00	16,00	18,00	24,00	30,00	36	46	55,0	65,0	75,0	85,0	95,0
	min.	12,73	15,73	17,73	23,67	29,16	35	45	53,8	63,1	73,1	82,8	92,8

Table 2 — Non-preferred threads

Dimensions in millimetres

Thread ($d \times P$)		M10 × 1,25	M12 × 1,25	M14 × 1,5	M18 × 1,5	M20 × 2	M22 × 1,5	M27 × 2	M33 × 2	M39 × 3	M45 × 3	M52 × 4	M60 × 4
d_a	max.	10,8	13	15,1	19,5	21,6	23,7	29,1	35,6	42,1	48,6	56,2	64,8
	min.	10,0	12	14,0	18,0	20,0	22,0	27,0	33,0	39,0	45,0	52,0	60,0
d_w	min.	14,63	16,63	19,64	24,85	27,7	31,35	38	46,55	55,86	64,7	74,2	83,41
e	min.	17,77	20,03	23,36	29,56	32,95	37,29	45,2	55,37	66,44	76,95	88,25	99,21
m	max.	5,0	6,0	7,00	9,00	10,0	11,0	13,5	16,5	19,5	22,5	26,0	30,0
	min.	4,7	5,7	6,42	8,42	9,1	9,9	12,4	15,4	18,2	21,2	24,7	28,7
m_w	min.	3,76	4,56	5,14	6,74	7,28	7,92	9,92	12,32	14,56	16,96	19,76	22,96
s	nom. = max.	16,00	18,00	21,00	27,00	30,00	34	41	50	60,0	70,0	80,0	90,0
	min.	15,73	17,73	20,67	26,16	29,16	33	40	49	58,8	68,1	78,1	87,8

4 Specifications and reference standards

See Table 3.

Table 3 — Specification and reference standards

Material		Steel	Stainless steel	Non-ferrous metal
General requirements	International Standard	ISO 8992		
Thread	Tolerance	6H		
	International Standards	ISO 724, ISO 965-1		
Mechanical properties	Property class	$d \leq 39$ mm: 04, 05 $d > 39$ mm: as agreed	$d \leq 24$ mm: A2-035, A4-035 $24 \text{ mm} < d \leq 39$ mm: A2-025, A4-025 $d > 39$ mm: as agreed	Materials specified in ISO 8839
	International Standards	$d \leq 39$ mm: ISO 898-6 $d > 39$ mm: as agreed	$d \leq 39$ mm: ISO 3506-2 $d > 39$ mm: as agreed	
Tolerances	Product grade	$d \leq 16$ mm: A $d > 16$ mm: B		
	International Standard	ISO 4759-1		
Finish and/or coating		As processed Requirements for electroplating are covered in ISO 4042 Requirements for non-electrolytically applied zinc flake coatings are covered in ISO 10683 If different electroplating requirements are desired or if requirements are needed for other finishes, they should be negotiated between customer and supplier. Limits for surface discontinuities are covered in ISO 6157-2	Plain	Plain Requirements for electroplating are covered in ISO 4042
Acceptability		For acceptance procedure, see ISO 3269.		

5 Designation

EXAMPLE:

A hexagon thin nut (chamfered) with thread M16 × 1,5 and property class 05 is designated as follows:

Hexagon nut ISO 8675 - M16 × 1,5 - 05