
Tools for moulding — Flat ejector pins

Outillage de moulage — Éjecteurs lames

STANDARDSISO.COM : Click to view the full PDF of ISO 8693:2011



STANDARDSISO.COM : Click to view the full PDF of ISO 8693:2011



COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8693 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 8, *Tools for pressing and moulding*.

This third edition cancels and replaces the second edition (ISO 8693:1998), of which it constitutes a minor revision. In particular, the indication of surface textures has been updated in accordance with ISO 1302:2002.

STANDARDSISO.COM : Click to view the full PDF of ISO 8693:2011

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 8693:2017

Tools for moulding — Flat ejector pins

1 Scope

This International Standard specifies the dimensions and tolerances, in millimetres, of flat ejector pins which are used in compression and injection moulds and in die casting dies.

It also gives material guidelines and hardness requirements, and specifies the designation of flat ejector pins.


Ejector pins with cylindrical head are specified in ISO 6751; shouldered ejector pins are specified in ISO 8694.

2 Dimensions

The dimensions of flat ejector pins shall be in accordance with the indications of Figure 1 and Tables 1 and 2.

STANDARDSISO.COM : Click to view the full PDF of ISO 8693:2011

Surface roughness values in micrometres

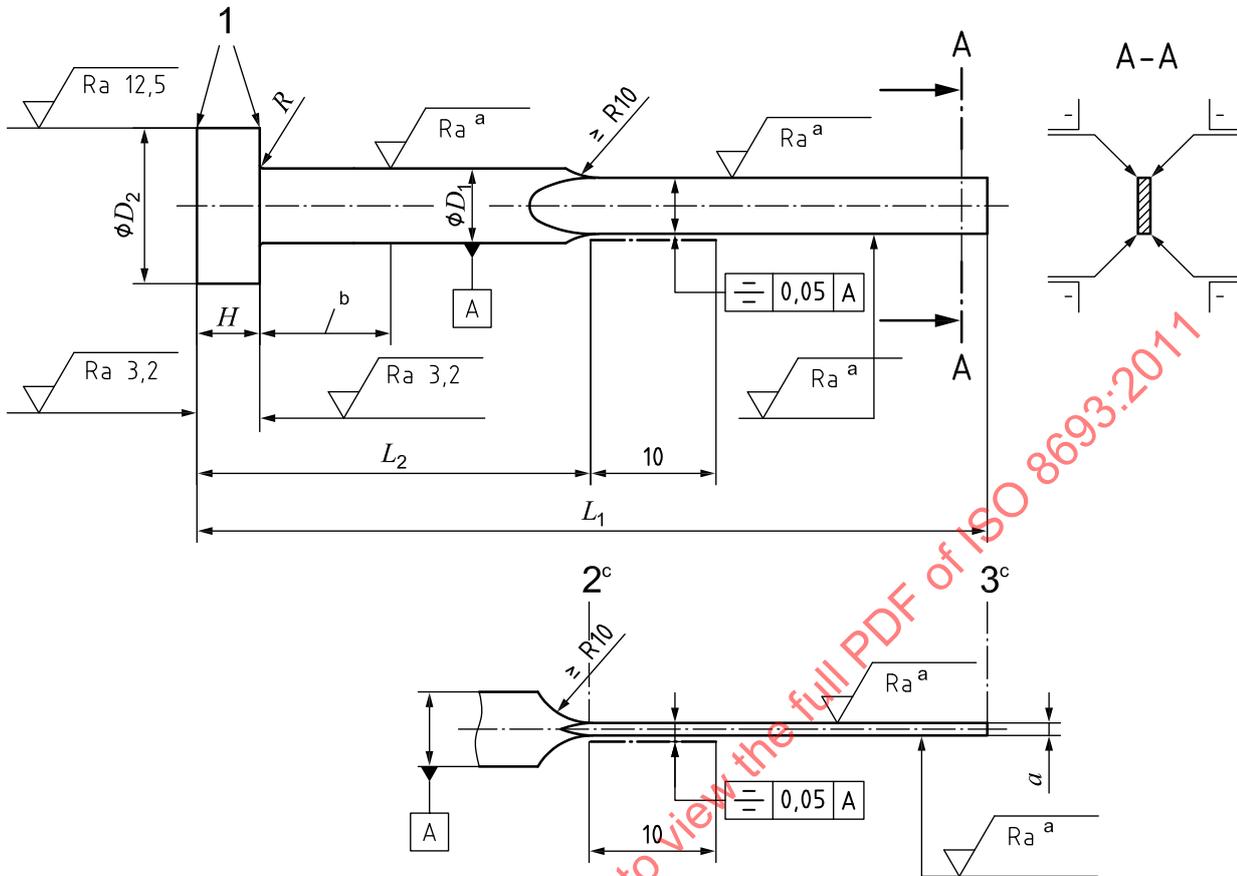

Key

- 1 edges without burrs
- 2 gauge plane 2
- 3 gauge plane 1
- a $Ra\ 0,8$ for hot worked steel. $Ra\ 0,4$ for alloyed cold worked steel.
- b It is permitted to provide the ejector pin with an alternative surface roughness or a small variation on the diameter, D_1 , for a certain length.
- c See note a to Tables 1 and 2.

Figure 1 — Flat ejector pins

Table 1 — Flat ejector pins of hot worked steel

Dimensions in millimetres

D_1 h11	D_2 0 -0,2	a^a 0 -0,015	b^a 0 -0,015	L_1 +2 0								H 0 -0,05	R +0,2 0	
				63	80	100	125	160	200	250	315			400
				L_2 -1 -2										
				32	40	50	63	80	100	125	160	200		
4	8	0,8	3,5	X	X	X	X						3	0,3
		1		X	X	X	X							
		4,2	3,8	X	X	X	X							
		4	1,2	3,5		X	X	X	X					
4,2	3,8			X	X	X	X							
5	10	1	4,5		X	X	X	X					5	0,5
		1,2				X	X	X						
6	12	1,5	5,5				X	X	X	X			7	0,8
		2					X	X	X					
8	14	1,5	7,5					X	X	X	X		7	0,8
		2						X	X	X				
10	16	1,5	9,5						X	X	X		7	0,8
		2						X	X	X	X			
12	18	2	11,5						X	X	X	X	7	0,8
		2,5						X	X	X	X			
16	22	2	15,5						X	X	X	X	7	0,8
		2,5						X	X	X	X			

^a These limit dimensions apply to 100 mm length. For lengths greater than 100 mm, the limit deviations shall be multiplied by $(L_1 - L_2) \times 10^{-2}$. The dimensional tolerance is at its maximum at gauge plane 2.

Table 2 — Flat ejector pins of alloyed cold worked steel

Dimensions in millimetres

D_1 h11	D_2 0 -0,2	a^a 0 -0,015	b^a 0 -0,015	L_1 +2 0								H 0 -0,05	R +0,2 0
				63	80	100	125	160	200	250	315		
				L_2 -1 -2									
				32	40	50	63	80	100	125	160		
4	8	0,8	3,5	X	X	X	X					3	0,3
		1		X	X	X	X						
4,2		3,8	X	X	X	X							
4		3,5		X	X	X	X						
4,2	3,8			X	X	X	X						
5	10	1	4,5		X	X	X	X				5	0,5
		1,2				X	X	X					
6	12	1,5	5,5			X	X	X	X			5	0,5
		2				X	X	X					
8	14	1,5	7,5				X	X	X	X		5	0,5
		2					X	X	X				
10	16	1,5	9,5						X	X	X	5	0,5
		2						X	X	X			
12	18	2	11,5						X	X	X	7	0,8
		2,5						X	X	X			

^a These limit dimensions apply to 100 mm length. For lengths greater than 100 mm, the limit deviations shall be multiplied by $(L_1 - L_2) \times 10^{-2}$. The dimensional tolerance is at its maximum at gauge plane 2.

3 Material and hardness

Flat ejector pins shall be made of hot worked steel or alloyed cold worked steel. The hardness of the shaft and head shall conform to the indication of Table 3.

Table 3 — Material and hardness

Material	Hardness ^a	
	Shaft	Head
Hot worked steel	Min. 1 400 MPa core strength min. 950 HV 0,3	(45 ± 5) HRC hot-forged
Alloyed cold worked steel	(60 ± 2) HRC	
^a The point at which hardness is measured is left to the manufacturer's discretion.		

4 Designation

Flat ejector pins according to this International Standard shall be designated by:

- a) "Flat ejector pin";
- b) reference to this International Standard, i.e. ISO 8693;
- c) the width, a , and thickness, b , in millimetres;
- d) the length, L_1 , in millimetres;
- e) the material.

EXAMPLE A flat ejector pin with width $a = 0,8$ mm, thickness $b = 3,5$ mm, length $L_1 = 63$ mm and made of hot worked steel is designated as follows:

Flat ejector pin ISO 8693 - 0,8 × 3,5 - 63 - Hot worked steel