

# INTERNATIONAL STANDARD

**ISO  
8705**

First edition  
1991-02-15

---

---

## **Mopeds — Measurement method for location of centre of gravity**

*Cyclomoteurs — Méthode de mesure de l'emplacement du centre de gravité*

STANDARDSISO.COM : Click to view the full PDF of ISO 8705:1991



Reference number  
ISO 8705 : 1991 (E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8705 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Sub-Committee SC 23, *Mopeds*.

Annex A forms an integral part of this International Standard.

STANDARDSISO.COM : Click to view the full PDF of ISO 8705:1991

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

## Introduction

The stability of a moped is a very important element of its active safety. The moped/rider combination and the environment in which this combination is used form a unique closed-loop system. However, the evaluation of the moped/rider combination stability is extremely complex because of interaction of the intrinsic moped stability, the influence of the position of the rider and his response to continuously changing conditions.

In the evaluation of moped stability, the determination of the kinetic characteristics of the moped/rider combination is to be considered an important part of the design parameters of the vehicle itself.

The test procedure described in this International Standard deals with one aspect of the kinetic characteristics: the determination of the centre of gravity of the moped and of the moped/rider combination.

STANDARDSISO.COM : Click to view the full PDF of ISO 8705:1991

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 8705:1997

# Mopeds — Measurement method for location of centre of gravity

## 1 Scope

This International Standard specifies a measuring method for determining the location of the centre of gravity of the moped and of the moped/rider combination.

Other measuring methods can be used if it is demonstrated that the results are equivalent.

The measurement results obtained by the method given in this International Standard alone (see annex A) cannot be used for an evaluation of the vehicle stability because they deal with only one aspect of this very complex phenomenon.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3779:1983, *Road vehicles — Vehicle identification number (VIN) — Content and structure*.

49 CFR Part 572, subpart B [*Code of Federal Regulations*, issued by the National Highway Traffic Safety Administration (NHTSA)].

## 3 Equipment

**3.1** The moped shall be placed on a platform that is as light as possible, while being sufficiently rigid.

**3.2** The moped shall be fixed on the platform in such a way that the sprung mass keeps the position obtained under the condition quoted in item 1.11 in annex A, when the moped or moped/rider combination is tilted to the position shown in figure 3.

**3.3** The rider shall be simulated by an anthropomorphic test dummy<sup>1)</sup>.

**3.4** The dummy shall be fixed on the moped by means of a rigid restraint jig.

**3.5** The accuracy of the weighing and measuring devices for determining the dimensions shall be recorded.

## 4 Definition of axis systems

**4.1** The moped axis system ( $x, y, z$ ) is a right-hand orthogonal axis system fixed in the moped such that when the moped is moving in a straight line on a level road, the  $x$ -axis is substantially horizontal, points forwards and is in the longitudinal plane of symmetry. The  $y$ -axis points to the rider's left side and the  $z$ -axis points upwards.

**4.2** The earth-fixed axis system ( $X, Y, Z$ ) is a right-hand orthogonal axis system fixed on the Earth. The  $X$ - and  $Y$ -axes are in a horizontal plane and the  $Z$ -axis points upwards.

## 5 Position of dummy

**5.1** The hands of the dummy shall be on the steering handlebar grips and the feet shall be on the footrests in such a way that the front part of the heel touches the footrest and the foot is at  $90^\circ \pm 5^\circ$  to the lower leg.

In the case of a moped with platform, the position of the feet shall be in accordance with the requirements of the manufacturer.

**5.2** The projection of the position of the dummy on the  $x$ - $z$  plane shall be defined by

- measuring the angle  $A$  between the  $x$ -axis and the line drawn from the knee pivot to the bottom of the heel;
- measuring the angle  $B$  between the  $x$ -axis and the line drawn from the shoulder pivot to the H-point.

## 6 Position of moped

The roll angle of the moped in relation to the platform shall be zero with a tolerance of  $\pm 0,5^\circ$ .

1) Test dummy as specified in 49 CFR Part 572, subpart B or equivalent.

## 7 Measuring procedure

### 7.1 Abbreviations and symbols

The following abbreviations and symbols are used in 7.2, 7.3 and 7.4:

- RMP: Rider/Moped/Platform combination;
- MP : Moped/Platform combination;
- P : Platform;
- RM : Rider/Moped combination;
- M : Moped;
- $m$  : Mass, in kilograms;
- $T$  : Period, in seconds;
- $i$  : RMP, MP, P, as appropriate;
- $j$  : RM, M, as appropriate;

NOTE — Further symbols are explained in the respective figures.

### 7.2 Location of centre of gravity along $x$ -axis

The location of the centre of gravity along the  $x$ -axis may be determined from the following equations (see figure 1):

$$l_i = \frac{L_{iF} P_{iF} + L_{iR} P_{iR}}{P_{iF} + P_{iR}}$$

$$l_j = \frac{m_{jP} l_{jP} - m_P l_P}{m_j}$$

$$a_j = l_j - l_F$$

where

$P_{iF}$  is the load indicated by the front weighing device of the  $i$  combination cited in 7.1;

$P_{iR}$  is the load indicated by the rear weighing device of the  $i$  combination cited in 7.1.

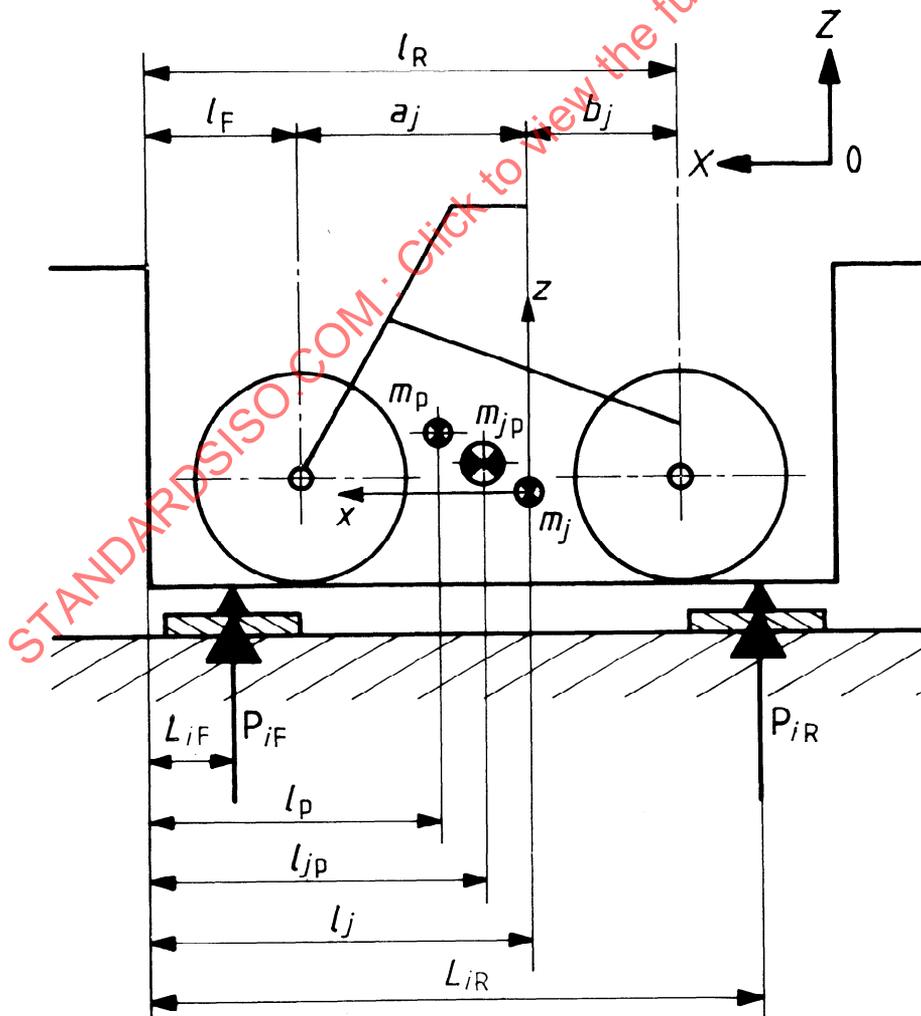


Figure 1 — Measurement procedure for location of centre of gravity along  $x$ -axis

**7.3 Location of centre of gravity along  $y$ -axis**

The location of the centre of gravity along the  $y$ -axis may be determined from the following equations (see figure 2):

$$l_i = \frac{L_{iL} P_{iL} + L_{iR} P_{iR}}{P_{iL} + P_{iR}}$$

$$l_j = \frac{m_{jP} l_{jP} - m_P l_P}{m_j}$$

$$D_j = l_j - l_o$$

where

$P_{iL}$  is the load indicated by the left side weighing device of the  $i$  combination cited in 7.1;

$P_{iR}$  is the load indicated by the right side weighing device of the  $i$  combination cited in 7.1;

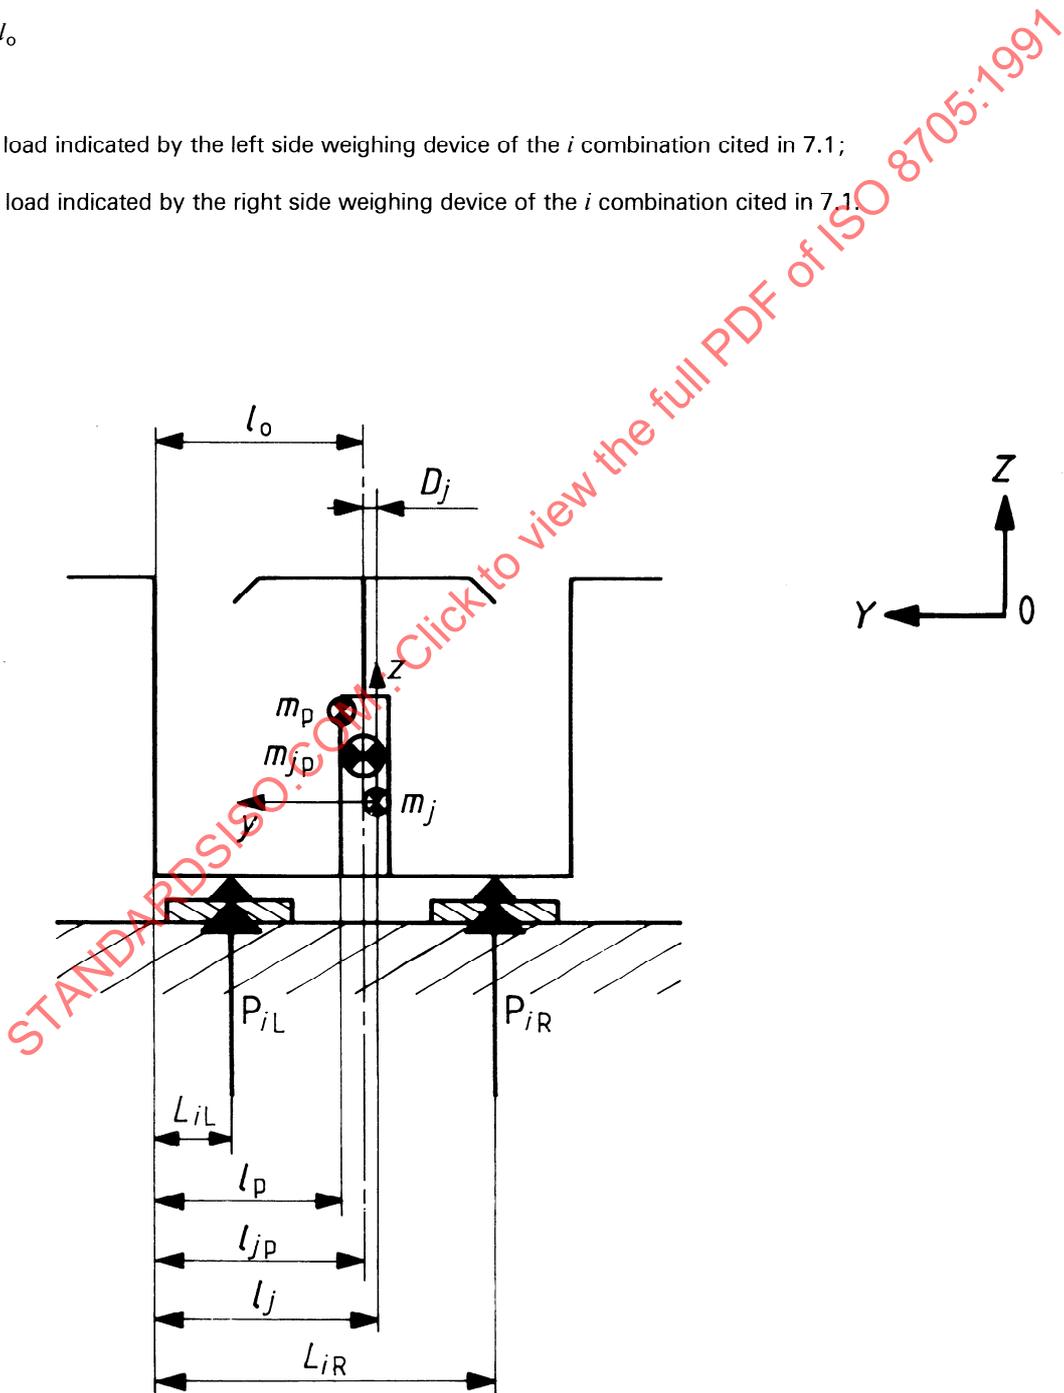


Figure 2 — Measurement procedure for location of centre of gravity along  $y$ -axis

7.4 Location of centre of gravity along z-axis

The location of the centre of gravity along the z-axis may be determined from the following equations (see figure 3):

$$d_i = c_i \tan \theta_o$$

$$c_i = \frac{m_k (a_o + b_o \tan \theta_k)}{m_i (\tan \theta_k - \tan \theta_o)}$$

$$c_j = \frac{m_{jP} c_{jP} - m_P c_P}{m_j}$$

$$h_{Gj} = h_o - c_j$$

where

$m_i$  is the mass of RMP, MP or P;

$m_k$  is the mass added to one side of the platform;

$\theta_o$  is the angle between the x-axis of RMP, MP or P and the horizontal plane under the condition  $m_i$  only;

$\theta_k$  is the angle between the x-axis of RMP, MP or P and the horizontal plane under the condition  $m_i + m_k$ .

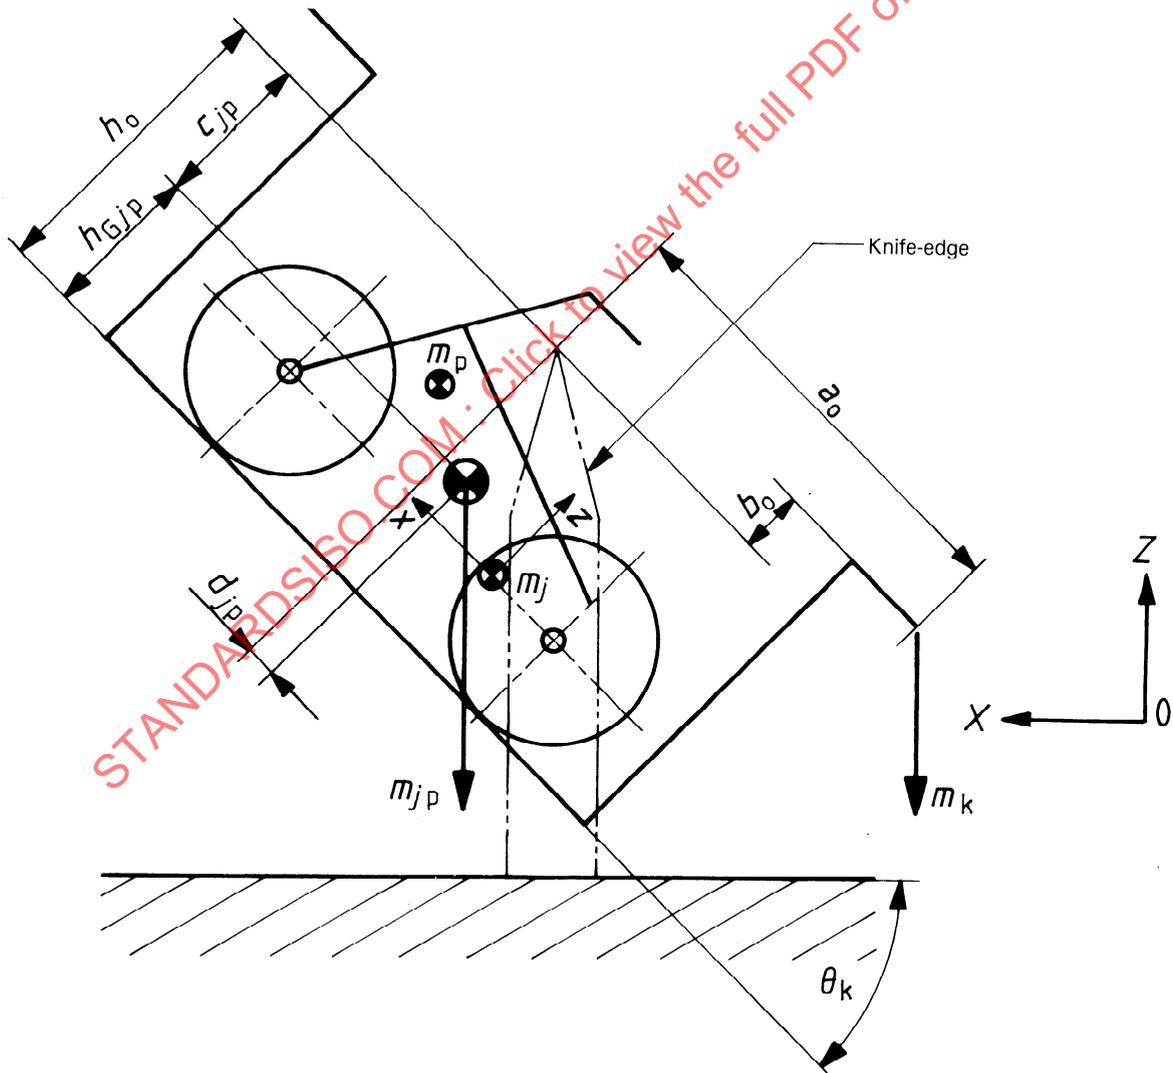


Figure 3 – Measurement procedure for location of centre of gravity along z-axis

8 Test results

Test results shall be presented as indicated in annex A.

## Annex A (normative)

### Format for measurement results

The format shown in this annex shall be used to record the measurement results of centres of gravity for mopeds, calculated in accordance with this International Standard.

Moped — Centre of gravity — Measurement results to ISO 8705	
<b>1 Vehicle identification</b>	
1.1	Make, model, type: .....
1.2	Year model: .....
1.3	Vehicle Descriptor Section (VDS) (see ISO 3779): .....
1.4	Tyre size: front: ..... /rear: .....
1.5	Tyre pressure: front: ..... kPa/rear: ..... kPa
1.6	Castor angle: ..... °
1.7	Wheel-base: ..... mm
1.8	Handlebar identification: .....
1.9	Description of handlebar position: .....
1.10	Seat identification: .....
1.11	Suspension setting (if adjustable): .....
<b>2 Test conditions</b>	
2.1	Vehicle with/without <sup>1)</sup> dummy
2.2	Dummy reference (if applicable): .....
2.3	Height from the centre of the steering head pipe to the ground: <sup>2)</sup> ..... mm
2.4	Height from the centre of the rear suspension upper fixation bolt to the ground: <sup>2)</sup> ..... mm
2.5	Angle <i>A</i> (see 5.2; if applicable): ..... °
2.6	Angle <i>B</i> (see 5.2; if applicable) : ..... °
<b>3 Test results</b>	
3.1 (See 7.2 and figure 1)	
	Location of centre of gravity along the <i>x</i> -axis of the rider/moped combination, $a_{RM}$ : ..... mm
	Location of centre of gravity along the <i>x</i> -axis of the moped, $a_M$ : ..... mm
3.2 (See 7.3 and figure 2)	
	Location of centre of gravity along the <i>y</i> -axis of the rider/moped combination, $D_{RM}$ : ..... mm
	Location of centre of gravity along the <i>y</i> -axis of the moped, $D_M$ : ..... mm
3.3 (See 7.4 and figure 3)	
	Location of centre of gravity along the <i>z</i> -axis of the rider/moped combination, $h_{GRM}$ : ..... mm
	Location of centre of gravity along the <i>z</i> -axis of the moped, $h_{GM}$ : ..... mm
1) Delete as applicable.	
2) If 2.3. and 2.4 cannot be measured, describe a reference point at the front and at the rear of the vehicle, and indicate the distance from these points to the ground.	