

INTERNATIONAL STANDARD

ISO
8945

First edition
1989-09-15

Equipment for working the soil — Rotary cultivator blades — Fixing dimensions

Matériel de travail du sol — Lames de cultivateurs rotatifs — Dimensions de fixation

STANDARDSISO.COM : Click to view the full PDF of ISO 8945:1989



Reference number
ISO 8945 : 1989 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 8945 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*.

STANDARDSISO.COM : Click to view the full PDF of ISO 8945:1989

Equipment for working the soil – Rotary cultivator blades – Fixing dimensions

1 Scope

This International Standard specifies the dimensions for four types of rotary cultivator blades.

It applies to agricultural rotary cultivator blades with two fixing holes.

2 Types and dimensions

The arrangement and dimensions of the fixing holes of rotary cultivator blades shall be as given in figure 1 and, according to the type of blade, dimensions and tolerances shall be as given in table 1 (types 1 to 4).

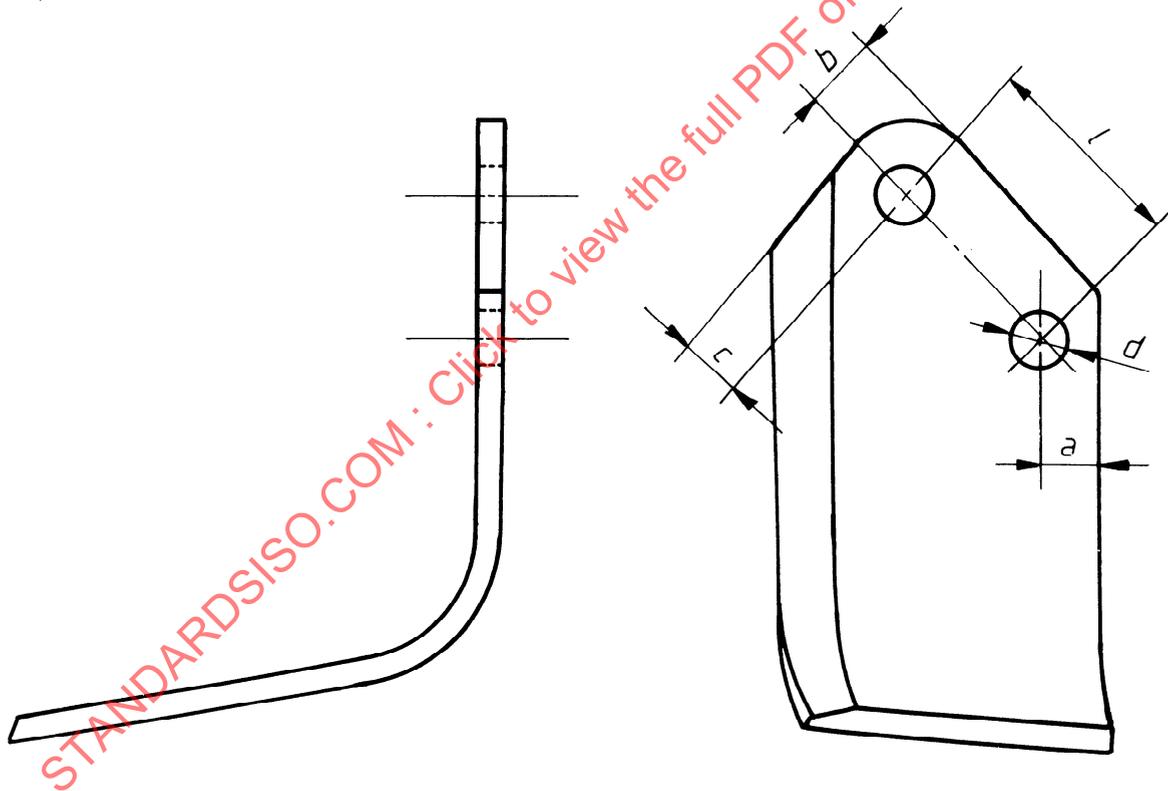


Figure 1

Table 1

Dimensions in millimetres

Rotary cultivator blade	Dimension						
	<i>d</i>	tol.	<i>l</i>	tol.	<i>a</i> max.	<i>b</i> max.	<i>c</i> max.
Type 1	13	H12	45	± 0,2	15	15	15
Type 2	17	H12	55	± 0,2	17	17	18
Type 3	17	+ 0,43 0	80	± 0,8	20	20	18
Type 4	17	H12	55	± 0,2	20	20	18