
**Ergonomics of human-system
interaction —**

**Part 210:
Human-centred design for
interactive systems**

Ergonomie de l'interaction homme-système —

*Partie 210: Conception centrée sur l'opérateur humain pour les
systèmes interactifs*

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-210:2019



STANDARDSISO.COM : Click to view the full PDF of ISO 9241-210:2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Rationale for adopting human-centred design	4
5 Principles of human-centred design	6
5.1 General.....	6
5.2 The design is based upon an explicit understanding of users, tasks and environments.....	6
5.3 Users are involved throughout design and development.....	6
5.4 The design is driven and refined by user-centred evaluation.....	7
5.5 The process is iterative.....	7
5.6 The design addresses the whole user experience.....	7
5.7 The design team includes multidisciplinary skills and perspectives.....	8
6 Planning human-centred design	9
6.1 General.....	9
6.2 Responsibility.....	9
6.3 Content of plan.....	9
6.4 Integration with project plan.....	10
6.5 Timing and resources.....	10
7 Human-centred design activities	10
7.1 General.....	10
7.2 Understanding and specifying the context of use.....	12
7.2.1 General.....	12
7.2.2 Context-of-use description.....	13
7.2.3 Sufficient detail to support design.....	13
7.2.4 Context of use specified for design.....	13
7.3 Specifying the user requirements.....	13
7.3.1 General.....	13
7.3.2 Identifying user and other stakeholder needs.....	14
7.3.3 Deriving user requirements.....	14
7.3.4 Resolving trade-offs between user requirements.....	14
7.3.5 Ensuring the quality of user requirements specifications.....	14
7.4 Producing design solutions.....	15
7.4.1 General.....	15
7.4.2 Designing user tasks, user-system interaction and user interface to meet user requirements, taking into consideration the whole user experience.....	15
7.4.3 Making design solutions more concrete.....	16
7.4.4 Altering the design solutions based on user-centred evaluation and feedback.....	17
7.4.5 Communicating the design solution to those responsible for implementation.....	17
7.5 Evaluating the design.....	17
7.5.1 General.....	17
7.5.2 Conducting user-centred evaluation.....	18
7.5.3 User-centred evaluation methods.....	18
7.5.4 User-based testing.....	18
7.5.5 Inspection-based evaluation.....	19
7.5.6 Long-term monitoring.....	19
8 Sustainability and human-centred design	20
9 Conformance	20
Annex A (informative) Overview of the ISO 9241 series	22

Annex B (informative) Sample procedure for assessing applicability and conformance	23
Bibliography	33

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-210:2019

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 4, *Ergonomics of human-system interaction*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

This second edition cancels and replaces the first edition (ISO 9241-210:2010), of which it constitutes a minor revision. The changes compared to the previous edition are as follows:

- [Figure 1](#) has been updated for clarity;
- additional information about accessibility has been added in [7.1](#);
- editorial changes have been made to align with the ISO/IEC Directives, Part 2.

A list of all parts in the ISO 9241 series can be found on the ISO website.

Introduction

Human-centred design is an approach to interactive systems development that aims to make systems usable and useful by focusing on the users, their needs and requirements, and by applying human factors/ergonomics, and usability knowledge and techniques. This approach enhances effectiveness and efficiency, improves human well-being, user satisfaction, accessibility and sustainability; and counteracts possible adverse effects of use on human health, safety and performance.

There is a substantial body of human factors/ergonomics and usability knowledge about how human-centred design can be organized and used effectively. This document aims to make this information available to help those responsible for managing hardware and software design and re-design processes to identify and plan effective and timely human-centred design activities.

The human-centred approach to design described in this document complements existing systems design approaches. It can be incorporated in approaches as diverse as object-oriented, waterfall and rapid application development.

The principles of human-centred design and the related activities have not changed substantially since ISO 13407 was produced and have been validated by ten years of application. This document reflects this by making requirements as well as recommendations.

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-210:2019

Ergonomics of human-system interaction —

Part 210:

Human-centred design for interactive systems

1 Scope

This document provides requirements and recommendations for human-centred design principles and activities throughout the life cycle of computer-based interactive systems. It is intended to be used by those managing design processes, and is concerned with ways in which both hardware and software components of interactive systems can enhance human-system interaction.

NOTE Computer-based interactive systems vary in scale and complexity. Examples include off-the-shelf (shrink-wrap) software products, custom office systems, process control systems, automated banking systems, Web sites and applications, and consumer products such as vending machines, mobile phones and digital television. Throughout this document, such systems are generally referred to as products, systems or services although, for simplicity, sometimes only one term is used.

This document provides an overview of human-centred design activities. It does not provide detailed coverage of the methods and techniques required for human-centred design, nor does it address health or safety aspects in detail. Although it addresses the planning and management of human-centred design, it does not address all aspects of project management.

The information in this document is intended for use by those responsible for planning and managing projects that design and develop interactive systems. It therefore addresses technical human factors and ergonomics issues only to the extent necessary to allow such individuals to understand their relevance and importance in the design process as a whole. It also provides a framework for human factors and usability professionals involved in human-centred design. Detailed human factors/ergonomics, usability and accessibility issues are dealt with more fully in a number of standards including other parts of ISO 9241 (see [Annex A](#)) and ISO 6385, which sets out the broad principles of ergonomics.

The requirements and recommendations in this document can benefit all parties involved in human-centred design and development. [Annex B](#) provides a checklist that can be used to support claims of conformance with this document.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

**3.1
accessibility**

extent to which products, systems, services, environments and facilities can be used by people from a population with the widest range of *user* (3.1) needs, characteristics and capabilities to achieve identified goals in identified *contexts of use* (3.10)

Note 1 to entry: Context of use includes direct use or use supported by assistive technologies.

[SOURCE: ISO 9241-112:2017, 3.15]

**3.2
context of use**

combination of users, goals and tasks, resources, and environment

Note 1 to entry: The “environment” in a context of use includes the technical, physical, social, cultural and organizational environments.

[SOURCE: ISO 9241-11:2018, 3.1.15]

**3.3
effectiveness**

accuracy and completeness with which users achieve specified goals

[SOURCE: ISO 9241-11:2018, 3.1.12]

**3.4
efficiency**

resources used in relation to the results achieved

Note 1 to entry: Typical resources include time, human effort, costs and materials.

[SOURCE: ISO 9241-11:2018, 3.1.13]

**3.5
ergonomics
human factors**

scientific discipline concerned with the understanding of interactions among human and other elements of a system, and the profession that applies theory, principles, data and methods to design in order to optimize human well-being and overall system performance

[SOURCE: ISO 6385:2016, 2.3]

**3.6
goal**

intended outcome

[SOURCE: ISO 9241-11:2018, 3.1.10]

**3.7
human-centred design**

approach to systems design and development that aims to make interactive systems more usable by focusing on the use of the system and applying human factors/ergonomics and usability knowledge and techniques

Note 1 to entry: The term “human-centred design” is used rather than “user-centred design” in order to emphasize that this document also addresses impacts on a number of stakeholders, not just those typically considered as users. However, in practice, these terms are often used synonymously.

Note 2 to entry: Usable systems can provide a number of benefits, including improved productivity, enhanced user well-being, avoidance of stress, increased accessibility and reduced risk of harm.

3.8**interactive system**

combination of hardware and/or software and/or services and/or people that users interact with in order to achieve specific goals

Note 1 to entry: This includes, where appropriate, packaging, user documentation, on-line and human help, support and training.

[SOURCE: ISO 9241-11: 2018, 3.1.5]

3.9**prototype**

(interactive system) representation of all or part of an interactive system, that, although limited in some way, can be used for analysis, design and evaluation

Note 1 to entry: A prototype may be as simple as a sketch or static mock-up or as complicated as a fully functioning interactive system with more or less complete functionality.

3.10**satisfaction**

extent to which the user's physical, cognitive and emotional responses that result from the use of a system, product or service meet the user's needs and expectations.

Note 1 to entry: Satisfaction includes the extent to which the user experience that results from actual use meets the user's needs and expectations.

Note 2 to entry: Anticipated use can influence satisfaction with actual use.

[SOURCE: ISO 9241-11:2018, 3.1.14]

3.11**stakeholder**

individual or organization having a right, share, claim or interest in a system or in its possession of characteristics that meet their needs and expectations

[SOURCE: ISO/IEC/IEEE 15288:2015 4.1.44, modified — The example and Note 1 to entry have been omitted.]

3.12**task**

set of activities undertaken in order to achieve a specific goal

Note 1 to entry: These activities can be physical, perceptual and/or cognitive.

Note 2 to entry: While goals are independent of the means used to achieve them, tasks describe particular means of achieving goals.

[SOURCE: ISO 9241-11:2018, 3.1.11]

3.13**usability**

extent to which a system, product or service can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use

Note 1 to entry: The "specified" users, goals and context of use refer to the particular combination of users, goals and context of use for which usability is being considered.

Note 2 to entry: The word "usability" is also used as a qualifier to refer to the design knowledge, competencies, activities and design attributes that contribute to usability, such as usability expertise, usability professional, usability engineering, usability method, usability evaluation, usability heuristic.

[SOURCE: ISO 9241-11:2018, 3.1.1]

3.14

user

person who interacts with a system, product or service

Note 1 to entry: Users of a system, product or service include people who operate the system, people who make use of the output of the system and people who support the system (including providing maintenance and training).

[SOURCE: ISO 9241-11:2018, 3.1.7]

3.15

user experience

user's perceptions and responses that result from the use and/or anticipated use of a system, product or service

Note 1 to entry: Users' perceptions and responses include the users' emotions, beliefs, preferences, perceptions, comfort, behaviours, and accomplishments that occur before, during and after use.

Note 2 to entry: User experience is a consequence of brand image, presentation, functionality, system performance, interactive behaviour, and assistive capabilities of a system, product or service. It also results from the user's internal and physical state resulting from prior experiences, attitudes, skills, abilities and personality; and from the context of use.

[SOURCE: ISO 9241-11:2018, 3.2.3]

3.16

user interface

all components of an interactive system (software or hardware) that provide information and controls for the user to accomplish specific tasks with the interactive system

[SOURCE: ISO 9241-110:2006]

3.17

validation

confirmation, through the provision of objective evidence, that the requirements for a specific intended use or application have been fulfilled

Note 1 to entry: Validation is the set of activities ensuring and gaining confidence that a system is able to accomplish its intended use, goals and objectives (i.e. meet stakeholder requirements) in the intended operational environment.

[SOURCE: ISO 9000:2015, 3.8.13, modified — Note 1 to entry has been replaced and Notes 2 and 3 to entry have been removed.]

3.18

verification

confirmation, through the provision of objective evidence, that specified requirements have been fulfilled

Note 1 to entry: Verification is a set of activities that compares a system or system element against the required characteristics. This can include, but is not limited to, specified requirements, design description and the system itself.

[SOURCE: ISO 9000:2015, 3.8.12, modified — Note 1 to entry has been replaced and Notes 2 and 3 to entry have been removed.]

4 Rationale for adopting human-centred design

Using a human-centred approach to design and development has substantial economic and social benefits for users, employers and suppliers. Highly usable systems and products tend to be more successful both technically and commercially. In some areas, such as consumer products, purchasers will pay a premium for well-designed products and systems. Support and help-desk costs are reduced

when users can understand and use products without additional assistance. In most countries, employers and suppliers have legal obligations to protect users from risks to their health, and safety and human-centred methods can reduce these risks (e.g. musculoskeletal risks). Systems designed using human-centred methods improve overall quality, for example, by:

- a) increasing the productivity of users and the operational efficiency of organizations;
- b) being easier to understand and use, thus reducing training and support costs;
- c) increasing usability (effectiveness, efficiency and satisfaction)
- d) increasing accessibility (for people from a population with the widest range of user needs, characteristics and capabilities);
- e) improving user experience;
- f) reducing discomfort and stress;
- g) providing a competitive advantage, for example by improving brand image;
- h) contributing towards sustainability objectives.

The human-centred approach can lead to increased human-centred quality (usability, accessibility, user experience, avoidance of harm from use) as defined in ISO 9241-220.

The complete benefits of human-centred design can be determined by taking into account the total life cycle costs of the product, system or service, including conception, design, implementation, support, use, maintenance and, finally, disposal. Taking a human-centred design approach contributes to other aspects of system design, for example, by improving the identification and definition of functional requirements. Taking a human-centred design approach also increases the likelihood of completing the project successfully, on time, and within budget. Using appropriate human-centred methods can reduce the risk of the product failing to meet stakeholder requirements or being rejected by its users.

Examples of outputs from human-centred design activities are illustrated in [Table 1](#).

Table 1 — Examples of outputs from human-centred design activities

Activities	Outputs from human-centred design	Examples of information contained in outputs
Understand and specify the context of use	Context of use description	<ul style="list-style-type: none"> — User group profiles — As-is scenarios — Personas
Specify the user requirements	User needs description User requirements specification	<ul style="list-style-type: none"> — Identified user needs — Derived user requirements — Required design guidance
Produce design solutions to meet these requirements	User-system interaction specification User interface specification Implemented user interface	<ul style="list-style-type: none"> — Scenarios of use — Low-fidelity prototypes — High-fidelity prototypes
Evaluate the designs against requirements	Evaluation results Conformance test results Long-term monitoring results	<ul style="list-style-type: none"> — Usability-test report — Field report — User survey report

NOTE More detailed information on each output can be found in ISO/IEC TR 25060.

5 Principles of human-centred design

5.1 General

This document provides a framework for human-centred design. It does not assume any particular design process, nor does it describe all the different activities necessary to ensure effective systems design. It is complementary to existing design methodologies and provides a human-centred perspective that can be integrated into different design and development processes in a way that is appropriate to the particular context. All the human-centred design activities identified in [Clause 7](#) are applicable (to a greater or lesser extent) at any stage in the development of a system.

Whatever the design process and allocation of responsibilities and roles adopted, a human-centred approach should follow the principles listed below (and described in [5.2](#) to [5.7](#)):

- a) the design is based upon an explicit understanding of users, tasks and environments (see [5.2](#));
- b) users are involved throughout design and development (see [5.3](#));
- c) the design is driven and refined by user-centred evaluation (see [5.4](#));
- d) the process is iterative (see [5.5](#));
- e) the design addresses the whole user experience (see [5.6](#));
- f) the design team includes multidisciplinary skills and perspectives (see [5.7](#)).

5.2 The design is based upon an explicit understanding of users, tasks and environments

Products, systems and services should be designed to take account of the people who will use them as well as other stakeholder groups, including those who can be affected (directly or indirectly) by their use. Therefore, all relevant user and stakeholder groups should be identified. Constructing systems based on an inappropriate or incomplete understanding of user needs is one of the major sources of systems failure.

The extent to which products are usable and accessible depends on the context, i.e. the specified users, having specified goals, performing specified tasks in a specified environment (see ISO 9241-11). For example, the kind of interface that provides good user experience for a young person downloading music on a phone may be completely inappropriate for accessing corporate data on a PDA (personal digital assistant). The characteristics of the users, tasks and environment are called the *context of use*. Guidance on how to gather relevant information is provided in [7.2](#). The context of use is a major source of information for establishing requirements (see [7.3](#)) and an essential input to the design process.

5.3 Users are involved throughout design and development

Involving users in design and development provides a valuable source of knowledge about the context of use, the tasks, and how users are likely to work with the future product, system or service. User involvement should be active, whether by participating in design, acting as a source of relevant data or evaluating solutions. The people who are involved should have capabilities, characteristics and experience that reflect the range of users for whom the system is being designed. The nature and frequency of this involvement can vary throughout design and development, depending on the type of project. The effectiveness of user involvement increases as the interaction between the developers and the users increases.

When custom-made systems are being developed, the intended users and the tasks performed can be directly linked to the development process. The organization procuring the system has the opportunity to have a direct influence on the design as it emerges, and those who are actually going to be working with the future system can take part in evaluating proposed solutions. Such involvement and participation can also increase user acceptance and commitment.

When generic or consumer products are being developed, the user population is dispersed and products can be targeted at groups of users with particular characteristics. It is still important that users or appropriate representatives be involved in development so that the user and task requirements relevant to the intended user group(s) can be identified for inclusion in the system specification to provide feedback through testing of the proposed design solutions.

5.4 The design is driven and refined by user-centred evaluation

Feedback from users is a critical source of information in human-centred design. Evaluating designs with users and improving them based on their feedback provides an effective means of minimizing the risk of a system not meeting user or organizational needs (including those requirements that are hidden or difficult to specify explicitly). Such evaluation allows preliminary design solutions to be tested against “real world” scenarios, with the results being fed back into progressively refined solutions. User-centred evaluation should also take place as part of the final acceptance of the product to confirm that requirements have been met. Feedback from users during operational use identifies long-term issues and provides input to future design.

NOTE The term “user-centred” is used here to emphasize that this evaluation is made from the user’s perspective.

5.5 The process is iterative

The most appropriate design for an interactive system cannot typically be achieved without iteration.

NOTE 1 In this context, iteration means repeating a sequence of steps until a desired outcome is achieved.

NOTE 2 In development methods that consist of mini-development cycles, human-centred activities can be iterated for individual parts of the system and again at a macro level across the whole product, system or service.

Iteration should be used to progressively eliminate uncertainty during the development of interactive systems. Iteration implies that descriptions, specifications and prototypes are revised and refined when new information is obtained in order to minimize the risk of the system under development failing to meet user requirements.

The complexity of human–computer interaction means that it is impossible to specify completely and accurately every detail of every aspect of the interaction at the beginning of development. Many of the needs and expectations of users and other stakeholders that will impact on the design of the interaction only emerge in the course of development, as the designers refine their understanding of the users and their tasks, and as users are better able to express their needs in response to potential solutions.

Iteration of proposed solutions incorporating feedback from a user perspective provides a means of mitigating risk.

EXAMPLE 1 Feedback from a user perspective is used to update the intended context of use, to revise the requirements and to refine proposed design solutions.

EXAMPLE 2 The requirements specification is refined iteratively by using scenarios, early mock-ups, and prototypes, to obtain feedback from users on whether these incorporate the user requirements correctly and completely.

The interaction between human-centred and other aspects of the design can also result in the need for iteration — for example to take account of the manufacturability of a product, the impact on the production environment or changes in the market-place.

5.6 The design addresses the whole user experience

User experience is a consequence of the presentation, functionality, system performance, interactive behaviour, and assistive capabilities of an interactive system, both hardware and software. It is also a consequence of the user’s prior experiences, attitudes, skills, habits and personality. There is a common misconception that usability refers solely to making products easy to use. However, the concept

of usability used in ISO 9241 is broader and, when interpreted from the perspective of the users' personal goals, can include the kind of perceptual and emotional aspects typically associated with user experience, as well as issues such as job satisfaction and the elimination of monotony.

Designing for the user's experience involves considering, where appropriate, organizational impacts, user documentation, on-line help, support and maintenance (including help desks and customer contact points), training, long-term use, and product packaging (including the "out-of-box experience"). The user's experience of previous or other systems and issues such as branding and advertising should also be considered. The need to consider these different factors and their interdependencies has implications for the project plan (see [Clause 6](#)).

Users' strengths, limitations, preferences and expectations should be taken into account when specifying which activities are carried out by the users and which functions are carried out by the technology.

NOTE 1 In safety-critical and mission-critical systems, it can be more important to ensure the effectiveness or efficiency of the system than to satisfy user preferences.

Design decisions related to this allocation of function determine the extent to which a given job, task, function or responsibility is to be automated or assigned to human performance. The decisions are based on many factors. These include the relative capabilities and limitations of humans versus technology in terms of reliability, speed, accuracy, strength, flexibility of response, financial cost, the importance of successful or timely accomplishment of tasks, safety, and user satisfaction (both short-term, e.g. as comfort and pleasure, and long-term, e.g. as health, well-being and job satisfaction). Basing such decisions solely on those functions the technology is capable of performing and then simply allocating the remaining system functions to users is likely to result in an ineffective design. Allocation of function is further described in [7.4.2.2](#).

Representative users should generally be involved in these decisions.

NOTE 2 "Representative" in this context means corresponding appropriately to the target end-user population.

The resulting human activities should form a set of tasks that is meaningful as a whole to the users. This is particularly important for custom-made organizational systems where system use supports major elements of the users' jobs. For further guidance, see ISO 9241-2 and the ISO 10075 series.

5.7 The design team includes multidisciplinary skills and perspectives

Human-centred design teams do not have to be large, but the team should be sufficiently diverse to collaborate over design and implementation trade-off decisions at appropriate times. The following skill areas and viewpoints can be needed in the design and development team:

- a) human factors and ergonomics, usability, accessibility, human-computer interaction, user research;
- b) users and other stakeholder groups (or those that can represent their perspectives);
- c) application domain expertise, subject matter expertise;
- d) marketing, branding, sales, technical support and maintenance, health and safety;
- e) user interface, visual and product design;
- f) technical writing, training, user support;
- g) user management, service management and corporate governance;
- h) business analysis, systems analysis;
- i) systems engineering, hardware and software engineering, programming, production/manufacturing and maintenance;
- j) human resources, sustainability and other stakeholders.

Projects benefit from additional creativity and ideas from the interaction and collaboration of team members who, collectively, have an extensive skill base. An additional benefit of a multidisciplinary and multi-perspective approach is that team members become more aware of the constraints and realities of the other disciplines; for example, technical experts can become more sensitized to user issues and users can become more aware of technical constraints.

6 Planning human-centred design

6.1 General

Human-centred design shall be planned and integrated into all phases of the product life cycle, i.e. conception, analysis, design, implementation, testing and maintenance.

6.2 Responsibility

Those responsible for planning the project shall consider the relative importance of human factors/ergonomics in the project by evaluating:

- a) how usability relates to the purpose and use of the product, system or service (e.g. size, number of users, relationship with other systems, safety or health issues, accessibility, specialist application, extreme environments);
- b) the levels of the various types of risk that can result from poor usability (e.g. financial, poor product differentiation, safety, required level of usability, acceptance);
- c) the nature of the development environment (e.g. size of project, time to market, range of technologies, internal or external project, type of contract).

NOTE 1 Underestimating the extent of user interaction is a common feature of projects that do not plan human-centred design appropriately, such as a system initially intended to be fully automated but that ends up requiring significant user interaction.

In general, the aim is to select the most appropriate techniques and procedures in order to identify and mitigate human-system risks.

NOTE 2 Descriptions of methods for implementing human-centred design activities can be found in ISO/TR 16982. Details of human-centred design processes that can be used to implement the guidance in this document can be found in ISO 9241-220. ISO 9241-220 uses the ISO standard format for process models and which also contains processes for ensuring human-centred design content in systems strategy and the introduction and operation of interactive systems. Details of the processes used by an enterprise in order to define and address the wider range of product and process issues raised by the human-centred approach can be found in ISO/TS 18152. Further guidance on a human-centred approach to systems where dependability is critical is given in IEC 62508.

6.3 Content of plan

The planning of human-centred design shall include:

- a) identifying appropriate methods and resources for the activities described in [Clause 7](#);
- b) defining procedures for integrating these activities and their outputs with other system development activities;
- c) identifying the individuals and the organization(s) responsible for the human-centred design activities and the range of skills and viewpoints they provide;
- d) developing effective procedures for establishing feedback and communication on human-centred design activities as they affect other design activities and “trade-offs”, and methods for documenting outputs from these activities;

- e) agreeing on appropriate milestones for human-centred activities that are integrated into the overall design and development process;
- f) agreeing on suitable timescales to allow iteration, use of feedback and possible design changes to be incorporated into the project schedule.

6.4 Integration with project plan

The plan for human-centred design shall form part of the overall project plan. To ensure that it is followed through on and implemented effectively, the plan for human-centred design should be subject to the same project disciplines (e.g. responsibilities, change control) as other key activities. The human-centred design aspects of the project plan should be reviewed and revised appropriately as requirements change throughout the life of the project.

6.5 Timing and resources

Project planning shall allocate time and resources to human-centred activities. This shall include time for iteration and the incorporation of user feedback, and for evaluating whether the design solution satisfies the user requirements.

Additional time should also be allocated to communication among design team participants and to reconciling potential conflicts and trade-offs that involve human-system issues. Extra communication and discussion to identify and resolve usability issues early in the project will afford significant savings at later stages when changes are, inevitably, more costly.

Human-centred design activities should start at the earliest stage of the project (e.g. as part of the process for formulating the initial concept of the product or system). Human-centred design continues throughout the life of the project.

7 Human-centred design activities

7.1 General

Once the need for developing a system, product or service has been identified, and the decision has been made to use human-centred development, four linked human-centred design activities shall take place during the design of any interactive system:

- a) understanding and specifying the context of use (see [7.2](#));
- b) specifying the user requirements (see [7.3](#));
- c) producing design solutions (see [7.4](#));
- d) evaluating the design (see [7.5](#)).

Each of the human-centred design activities can use existing information and produces new information that should be captured in an appropriate way for the chosen development approach.

These activities take account of the challenges listed below.

- There are often a number of different user groups and other stakeholders, whose needs have to be taken into account.
- The context of use can be highly diverse and can vary from user group to user group and between different tasks.
- At the beginning of a project, the requirements that can be captured are unlikely to be exhaustive.
- Some requirements only emerge once a proposed solution is available.

- User requirements can be diverse and potentially contradictory to each other and to those of other stakeholders.
- Initial design solutions rarely satisfy all the user needs.
- It is difficult to ensure that all parts of the system are considered in an integrated manner.

At a high level, project human-centred design activities correspond to the overall stages of design and development, from requirements through design to verification and validation. But on a more detailed level, these activities can be applied to obtain feedback on initial design concepts before requirements are finalized. Evaluating rough prototypes and mock-ups of potential designs will help obtain a deeper understanding of user needs, as well as providing initial feedback on the design concepts. These activities can also be applied during revisions to an interactive system and can be useful in evaluating systems in routine operation.

Human-centred design activities should be incorporated in the organization's design approach(es) for projects.

Human-centred design can start at any point (7.2 "Understanding and specifying the context of use" or 7.3 "Specifying the user requirements" or 7.4 "Producing design solutions" or 7.5 "Evaluating the design") depending on the project.

EXAMPLE 1 Where users and their tasks are well understood and documented, the project starts by specifying known user requirements.

EXAMPLE 2 Where users complain about an existing system, the project starts with a systematic evaluation of the system.

EXAMPLE 3 In a project to identify innovations in an already successful system, the project starts by extending the knowledge of the context of use.

EXAMPLE 4 Where the user base for a product is to be extended to include elderly people, the project starts with new design solutions based on design guidance for the relevant age groups.

Human-centred design activities can be incorporated in design approaches as diverse as object-oriented, waterfall, HFI (human factors integration), agile, rapid development, etc.

NOTE In agile development, context of use information and objectives for the outcomes of human-centred design are established at the beginning of a project. During each sprint all the human-centred design activities take place and are documented to the extent needed for communication within the project team.

[Figure 1](#) illustrates the interdependence of human-centred design activities.

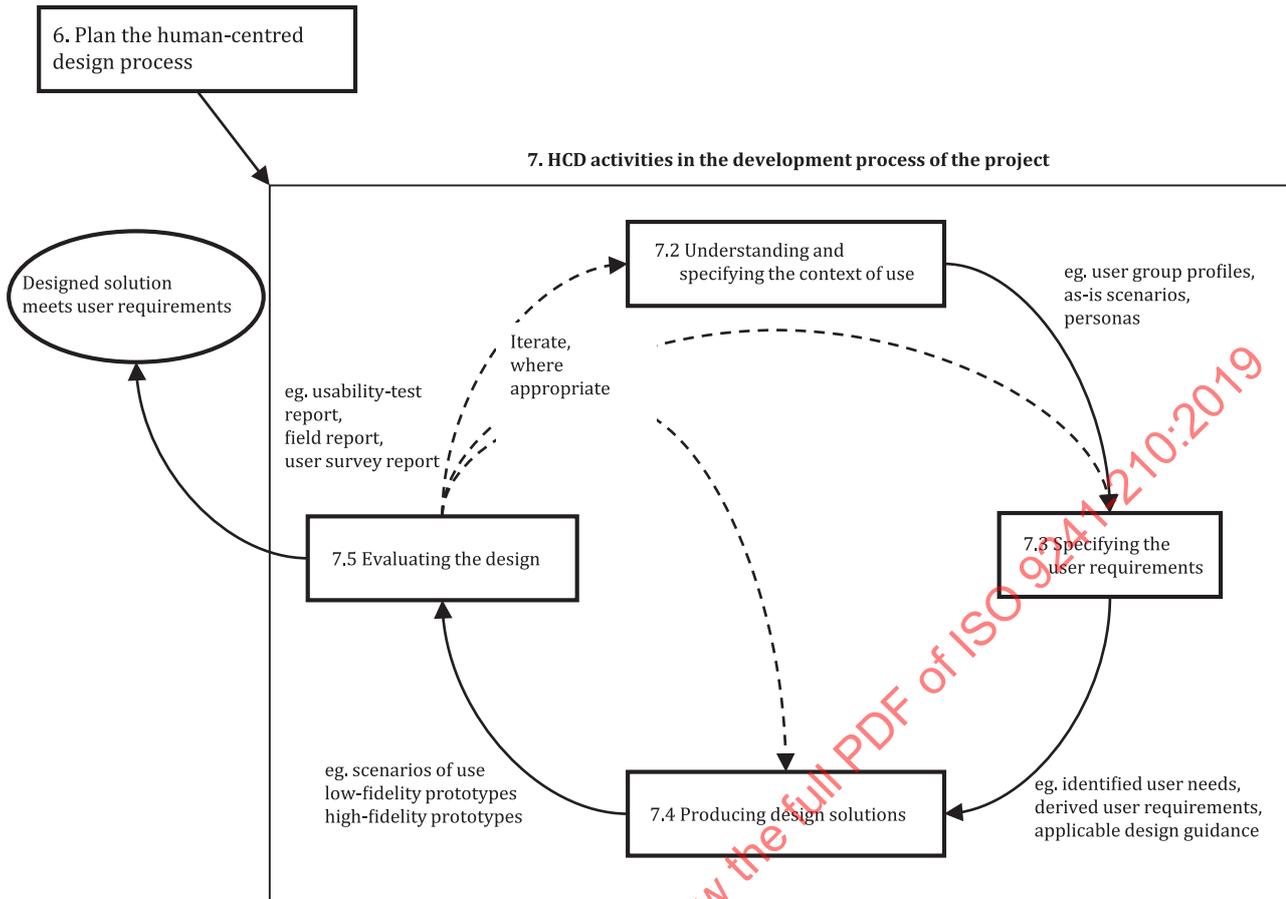


Figure 1 — Interdependence of human-centred design activities

7.2 Understanding and specifying the context of use

7.2.1 General

The characteristics of the users, tasks and organizational, technical and physical environment define the context in which the system is used. It is useful to gather and analyse information on the current context in order to understand, and then specify, the context that will apply to the future system. Analysis of existing or similar systems (including manual systems if appropriate) can, if still valid, provide information on a whole range of context issues, including deficiencies and baseline levels of performance and satisfaction. It can reveal needs, problems and constraints that can otherwise be overlooked but which need to be met by the future system. Also, some aspects of the current context will persist, even if the system is highly novel. If an existing system is to be upgraded or enhanced, some of this information will already be available. If there are extensive results from user feedback, help-desk reports and other data, these can provide a basis for prioritizing system modifications and changes.

NOTE 1 A context-of-use description can be a description of the current context of use or a description of the context intended for design.

NOTE 2 ISO/TR 16982 provides information on a variety of methods that can be used for collecting and communicating this information.

7.2.2 Context-of-use description

The context-of-use description shall include the following:

- a) **The users and other stakeholder groups:** there can be a range of different user groups as well as other stakeholder groups whose needs are important. Relevant groups shall be identified and their relationship with the proposed development described in terms of key goals and constraints.
- b) **The characteristics of the users or groups of users:** relevant characteristics of the users shall be identified. These can include knowledge, skill, experience, education, training, physical attributes, habits, preferences and capabilities. If necessary, the characteristics of different types of users should be defined, e.g. with different levels of experience or physical capability. In order to achieve accessibility, products, systems and services should be designed to be used by people with the widest range of capabilities in intended user populations. This is a legal requirement in many countries.

NOTE ISO/IEC 29138-1 identifies a range of user needs to be considered in order to provide accessibility for people with disabilities.

- c) **The goals and tasks of the users:** the goals of the users and the overall goals of the system shall be identified. The characteristics of tasks that can influence usability and accessibility shall be described, e.g. the way in which users typically carry out tasks, the frequency and duration of performance, interdependencies and activities to be carried out in parallel. If there are any potential adverse consequences for health and safety (e.g. excessive workload caused by inappropriate pacing in a call centre) or if there is a risk that the task can be completed incorrectly (e.g. making an incorrect purchase), these should also be identified. Tasks should not be described solely in terms of the functions or features provided by a product or system.
- d) **The environment(s) of the system:** the technical environment, including the hardware, software and materials, shall be identified. In addition, the relevant characteristics of the physical, social and cultural environments shall be described. The physical attributes include issues such as thermal conditions, lighting, spatial layout and furniture. The social and cultural aspects of the environment include factors such as work practices, organizational structure and attitudes.

7.2.3 Sufficient detail to support design

The context of use of the system should be described in sufficient detail to support the requirements, design and evaluation activities.

NOTE The context-of-use description is a working document that is first produced in outline terms and then reviewed, maintained, extended and updated during the design and development process. For example, at an early stage of development, it can only be possible to identify task goals rather than detailed task activities. It can also identify important design implications that emerge during the analysis.

7.2.4 Context of use specified for design

The context of use specified for design (i.e. the context in which the system will be used) should be stated in the user requirements specification to clearly identify the conditions under which the requirements apply. See ISO 9241-11 for more information about the context of use and a sample report, and ISO 20282-1 for more information about context of use for everyday products.

7.3 Specifying the user requirements

7.3.1 General

In most design projects, identifying user needs and specifying the functional and other requirements for the product or system is a major activity. For human-centred design, this activity shall be extended to create an explicit statement of user requirements in relation to the intended context of use and the business objectives of the system.

Depending on the scope of the system, the user requirements can include requirements for organizational changes and revised work styles and can suggest opportunities to combine products and services. If it is known that the proposed interactive system will affect organizational practice, the development process should involve organizational stakeholders, with the aim of optimizing both the organizational and technical systems.

7.3.2 Identifying user and other stakeholder needs

User and other stakeholder needs should be identified, taking account of the context of use. These should include that which users need to achieve (rather than how to achieve it) and any constraints imposed by the context of use.

7.3.3 Deriving user requirements

The specification of user requirements shall include:

- a) the intended context of use;
- b) requirements derived from user needs and the context of use — for example, there can be a requirement for a product to be used outdoors;
- c) requirements arising from relevant ergonomics and user interface knowledge, standards and guidelines (e.g. accessibility requirements are found in ISO 9241-20 and ISO 9241-171);
- d) usability requirements and objectives, including measurable usability performance and satisfaction criteria in specific contexts of use — for example, an objective can be that 90 % of the intended users can successfully divert an incoming call to voice mail, or for the aesthetic design of a Web page to achieve a given user satisfaction score;
- e) requirements derived from organizational requirements that directly affect the user — for example, a call centre system can require that customer calls be answered within a specific time frame.

User requirements provide the basis for the design and evaluation of interactive systems to meet the user needs.

User requirements are developed in conjunction with, and form part of, the overall requirements specification of an interactive system.

7.3.4 Resolving trade-offs between user requirements

Potential conflicts between user requirements, e.g. between accuracy and speed, should be resolved.

The rationales, factors and weighting of human system issues for use in trade-offs should be documented so that they can be understood in the future.

NOTE Making such trade-offs can require revisiting initial assumptions and the involvement of relevant stakeholders.

7.3.5 Ensuring the quality of user requirements specifications

The user requirements specification should be:

- a) stated in terms that permit subsequent testing;
- b) verified by the relevant stakeholders;
- c) internally consistent; and
- d) updated as necessary during the life of the project.

7.4 Producing design solutions

7.4.1 General

Design decisions have a major impact on the user experience. Human-centred design aims to achieve a good user experience by considering it throughout the design process (see 5.6).

Potential design solutions are produced by drawing on the description of the context of use, the results of any baseline evaluations, the established state of the art in the application domain, design and usability guidelines and standards, and the experience and knowledge of the multidisciplinary design team. Further user requirements can emerge as potential design solutions are detailed and evaluated.

Producing design solutions should include the following sub-activities:

- a) designing user tasks, user-system interaction and user interface to meet user requirements, taking into consideration the whole user experience;
- b) making the design solutions more concrete (for example making use of scenarios, simulations, prototypes or mock-ups);
- c) altering the design solutions in response to user-centred evaluation and feedback (see 7.5 for details on user evaluation);
- d) communicating the design solutions to those responsible for their implementation.

7.4.2 Designing user tasks, user-system interaction and user interface to meet user requirements, taking into consideration the whole user experience

7.4.2.1 Principles for design

Designing for the user experience is a process of innovation that takes account of user satisfaction (including emotional and aesthetic aspects), as well as effectiveness and efficiency. Design involves a variety of creative approaches to achieve a good user experience.

The following principles (taken from ISO 9241-110) should be taken into account when designing interactive systems:

- a) suitability for the task;
- b) self-descriptiveness;
- c) conformity with user expectations;
- d) suitability for learning;
- e) controllability;
- f) error tolerance;
- g) suitability for individualization.

NOTE 1 “Self-descriptiveness” means it is obvious to the users which dialogue they are in, where they are within the dialogue, which actions can be taken and how they can be performed.

NOTE 2 There are a number of further design principles given in other human-system interaction standards, which provide guidance to support this design activity. These are listed in the Bibliography.

7.4.2.2 Designing the tasks and interaction between user and system

Appropriate design of the user-system interaction relies on a clear understanding of the intended context of use, including the users' roles and tasks and their outputs. This understanding enables an

appropriate allocation of functions to be achieved, i.e. the division of system tasks into those performed by humans and those performed by technology.

When the system is being developed for use within a specific organization, e.g. a new branch banking system, this activity can also involve job and organizational design (ISO 9241-2 provides guidance on job and task design).

Designing the interaction involves deciding how users will accomplish tasks *with* the system rather than describing what the system looks like. For example, decisions at this point can include issues such as the choice of modality (e.g. auditory, visual and tactile) and the choice of media (e.g. text versus graphics, dialogue boxes versus wizards, mechanical versus electronic controls).

Designing the interaction should include:

- making high-level decisions (e.g. initial design concept, essential outcomes);
- identifying tasks and sub-tasks;
- allocating tasks and sub-tasks to the user and to other parts of the system;
- identifying the interaction objects required for the completion of the tasks;
- identifying and selecting appropriate dialogue techniques (see ISO 9241-112, ISO 9241-125, ISO 9241-129, ISO 9241-143, ISO 9241-154 and ISO 9241-161);
- designing the sequence and timing (dynamics) of the interaction;
- designing the information architecture of the user interface of an interactive system to allow efficient access to interaction objects.

NOTE The order in which these activities are undertaken depends on the type of interaction being designed and is itself an iterative activity.

7.4.2.3 Designing the user interface

For the detailed design of the user interface, there is a substantial body of ergonomics and user interface knowledge, standards and guidelines which should be used to inform the design of both hardware and software. These include standards within the ISO 9241 series on displays, input devices, dialogue principles, menus, presentation of information, user guidance, and other user interface and accessibility guidelines. Many organizations also have internal user interface style guides, product knowledge and knowledge on users and other aspects of the context of use, such as user expectations (see ISO 1503) and stereotypes. See [Annex A](#) for relevant standards in the ISO 9241 series.

7.4.3 Making design solutions more concrete

Using scenarios, simulations, models and mock-ups or other forms of prototype enables designers to communicate the proposed design to users and other stakeholders to obtain feedback.

The benefits include:

- a) making design proposals more explicit (this enables members of the design team to communicate with each other and with users early in the development process);
- b) allowing designers to explore several design concepts before they settle on one;
- c) making it possible to incorporate user feedback into the design early in the development process;
- d) making it possible to evaluate several iterations of a design and alternative designs;
- e) improving the quality and completeness of the functional design specification.

Simple prototypes are valuable at an early stage to explore alternative design solutions. While there can be substantial benefit in making the design solutions as realistic as possible, the level of detail and realism should be appropriate to the issues that need to be investigated. Investing too much time or money in producing a detailed working prototype can lead to a reluctance to change the design.

7.4.4 Altering the design solutions based on user-centred evaluation and feedback

Feedback from evaluation should be used to improve and refine the system (see [7.5](#) for details on user-centred evaluation).

NOTE 1 Feedback reveals strengths and weaknesses in the design solution and can provide new information about user needs and suggest areas where the design can be improved.

The costs and benefits of proposed changes should be evaluated and used to inform decisions about what will be modified.

NOTE 2 The effort of redesign depends on the nature of the issue; it can be small or can require substantial resources, and the decision to redesign is assessed against the criticality of the issue.

Changes proposed on the basis of early evaluation are likely to be the most cost-effective.

Project plans should allow sufficient time for making the changes as a result of such feedback.

7.4.5 Communicating the design solution to those responsible for implementation

There are a variety of ways of communicating the design solution to those teams and individuals responsible for implementation or manufacture. Effective means of communication can vary from providing appropriate documentation, to producing revised prototypes, to embedding experts in human-centred design in the design and development team.

Whatever the nature of the overall project, there should be some sustained channel of communication between those responsible for human-centred design and other members of the project team. When design solutions are communicated, they should be accompanied by an explanation and justification of the design decisions, especially where trade-offs are necessary.

The communication should take account of the constraints imposed by the project and the project team's knowledge and understanding about ergonomics and user interface design.

7.5 Evaluating the design

7.5.1 General

User-centred evaluation (evaluation based on users' perspective) is a required activity in human-centred design.

Even at the earliest stages in the project, design concepts should be evaluated to obtain a better understanding of user needs. Real-life use of a product, system or service is complex and, even though ergonomic design guidance can provide useful support to designers, user-centred evaluation is an essential element of human-centred design. However, evaluation by users (user-based testing, see [7.5.4](#)) is not always practical or cost-effective at every stage of the project. In such circumstances, design solutions should also be evaluated in other ways — for example, using task modelling and simulations. These methods are still centred on how users will experience the system, even though the users themselves might not participate directly. User-centred evaluation can be used to:

- a) collect new information about user needs;
- b) provide feedback on strengths and weaknesses of the design solution from the user's perspective (in order to improve the design);

- c) assess whether user requirements have been achieved (which can include assessing conformity to international, national, local, corporate or statutory standards); and
- d) establish baselines or make comparisons between designs.

7.5.2 Conducting user-centred evaluation

User-centred evaluation should involve:

- a) allocating resources both to obtain early feedback in order to improve the product and, at a later stage, to determine whether the requirements have been satisfied;
- b) planning the user-centred evaluation so that it fits the project schedule;
- c) carrying out sufficiently comprehensive testing to provide meaningful results for the system as a whole;
- d) analysing the results, prioritizing issues and proposing solutions;
- e) communicating the solutions appropriately so that they can be used effectively by the design team.

7.5.3 User-centred evaluation methods

There is a variety of user-centred evaluation methods that can be used to evaluate designs. Guidance on these and other usability methods, and on selecting the most appropriate method or set of methods, is provided in ISO/TR 16982.

NOTE Further information, recommendations and tests, checklists and other means of conformance to ergonomic criteria can be found in the standards listed in [Annex A](#) and the Bibliography.

To obtain valid results, the evaluation should be carried out by experienced evaluators, and should use appropriate methods.

User-centred evaluation is useful at all stages in the project from the early concept of the design to its long-term use, which can then provide input for future versions of the product, system or service (see [7.5.6](#)). In the early stages of development and design, changes are relatively inexpensive. The longer the process is allowed to progress, and the more fully the system is defined, the greater the cost of changes.

Resources for evaluation should be allocated both to obtain early feedback with which to improve the product and, at a later stage, to validate that the user requirements have been satisfied. The scope of the latter (summative) evaluation should depend on the risks associated with not meeting requirements.

Two widely used approaches to user-centred evaluation are:

- user-based testing; and
- inspection-based evaluation using usability and accessibility guidelines or requirements.

NOTE Compliance with some guidelines and standards for software can be tested automatically, which can be useful to identify basic problems. For example, some aspects of the accessibility of software can be evaluated using automated testing tools.

7.5.4 User-based testing

User-based testing can be undertaken at any stage in the design.

At a very early stage, users can be presented with models, scenarios or sketches of the design concepts and asked to evaluate them in relation to a real context. For example, a new check-out concept can be evaluated using a three-dimensional model, or simple drawings of screens can be used to evaluate a new mobile phone navigation design. Such early testing can provide valuable feedback on the acceptability of the proposed design. Detailed aspects of the design can often be quickly and inexpensively assessed —

for example, using paper versions of proposed dialogues. A mock-up of the interaction through simulated or actual tasks and in a suitable context is always necessary.

When prototypes are being tested, the users should carry out tasks using the prototype rather than just be shown demonstrations or a preview of the design. The information gathered is used to drive the design.

At a later stage in the development, user-based testing can be carried out to assess whether usability objectives, including measurable usability performance and satisfaction criteria, have been met in the intended context or contexts of use.

One form of user-based testing involves field validation, i.e. testing the designs or design concepts in real environments. For software products, such testing is often referred to as “beta” testing, where an early version of the software is made available for use, and users are made aware that the product is not final and is still being refined. Hardware products can be produced in small quantities for similar real-world testing. Fully developed products can also be evaluated in field settings to provide input for future developments.

Techniques that can be used to gather data from field validation include help-desk data, field reports, incident analysis, near-miss reports, log files, defect reports, real user feedback, performance data, satisfaction surveys, reports of health impacts, design improvements, user observation and requests for changes.

7.5.5 Inspection-based evaluation

Inspection-based evaluation can be valuable and cost-effective and can also complement user testing. It can be used to eliminate major issues before user testing and hence make user testing more cost-effective.

Inspection-based evaluation is ideally performed by usability experts who base their judgement on prior experience of problems encountered by users and their own knowledge of ergonomic guidelines and standards. The assessment of several experts can be combined to reduce individual bias. Inspection can involve the evaluator putting himself or herself into the role of the user working with the system, product or service. Inspection-based evaluation can be supported by checklists, lists of user requirements, general usability guidance, industry best practices, usability heuristics, guidelines or standards. However, the effectiveness of the inspection always depends on the skills, experience and knowledge of the evaluators.

Inspection-based evaluation is simpler and quicker to carry out than user testing and can, in principle, take account of a wider range of users and tasks than user-based evaluation (e.g. to assess if a product satisfies user requirements in contexts of use not selected for user testing). Inspection does not always find the same problems that would be found in user-based testing. Inspection tends to emphasize obvious problems and might not scale well for complex or novel interfaces. The greater the difference between the knowledge and experience of the inspectors and the real users, the less reliable are the results. When appropriate, inspection-based evaluation can be carried out in conjunction with application domain experts.

Relevant guidelines and standards are an important input for design (see [7.4.2](#)), and compliance can be assessed by inspection. Although it can be time-consuming and resource-intensive, it can be necessary to check compliance, for example, with Web accessibility guidelines.

7.5.6 Long-term monitoring

A human-centred design process should also include long-term monitoring of the use of the product, system or service. This involves collecting user input in different ways over a period of time.

Follow-up evaluation is often a formal part of system evaluation and is carried out within a specific time frame, e.g. six months to a year after the system is installed. Follow-up evaluation often tests performance of the system and also collects data to determine whether user needs and requirements have been met and are correctly stated.

There is an important difference between short-term evaluation and long-term monitoring. Some effects of working with an interactive product, system or service are not recognizable until it has been used for a period of time. Similarly, there can be effects that result from external factors such as unforeseen changes in legislation. Such issues do not need to be addressed immediately, though the information obtained can still be used for the future modification or development of the product, system or service.

Long-term performance data and reports about any health effects can provide valuable information. Criteria and measurements should be sensitive enough to identify system failure, or system problems, as early as possible.

NOTE Identifying unsafe behaviour is clearly preferable to registering accidents, and identifying mental or physiological overload is preferable to registering medical disorders.

8 Sustainability and human-centred design

In modern society, a key issue is to encourage socially responsible designs that take into consideration sustainability. In terms of standardization, this involves integrating and balancing out the economic, social and environmental considerations.

NOTE ISO has made a commitment to develop “standards for a sustainable world”. The 1987 United Nations' Brundtland Commission report, *Our Common Future*, defined sustainable development as “meeting the needs of the present without compromising the ability of future generations to meet their own needs”.

Human-centred design directly supports the first two pillars of sustainability:

- a) economic — matching a design to users' needs and abilities enhances its utilization, quality and efficiency, thus providing cost-effective solutions and reducing the likelihood that systems products and services will be wasteful or rejected by their users;
- b) social — taking a human-centred approach results in systems, products and services that are better for the health, well-being and engagement of their users, including users with disabilities.

Human-centred design also supports the environmental component through promoting a whole-life-cycle approach to design. It explicitly encourages all those involved in design to consider the longer-term implications of their system for their users and therefore for the environment. An approach that leads to usable products is more likely to be maintained and continually applied.

9 Conformance

Conformance with this document is achieved by:

- a) satisfying all the requirements;
- b) identifying applicable recommendations;
- c) explaining why particular recommendations are not applicable;
- d) stating whether or not the applicable recommendations have been followed.

If a product or system is claimed to have met the requirements and if the applicable recommendations are considered to have been followed, the procedure used to determine how they have been met/followed should be specified. The detail to which the procedure is specified is a matter of negotiation between the involved parties.

[Annex B](#) provides a means both for recording the applicability of the recommendations and reporting that the requirements and applicable recommendations have been met and/or followed.

Users of this document can either utilize the procedure and forms provided in [Annex B](#) or develop another procedure tailored to their particular needs.

NOTE ISO 9241-220 provides an assessment model for demonstrating capability in human-centred design within a project or an organization.

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-210:2019

Annex A (informative)

Overview of the ISO 9241 series

[Table A.1](#) presents an overview of the structure of the ISO 9241 series.

The structure reflects the numbering of the original ISO 9241 standard; for example, displays were originally ISO 9241-3 and are now the ISO 9241-300 series. In each section, the “hundred” is an introduction to the section; for example, ISO/TR 9241-100 gives an introduction to the software-ergonomics parts.

Table A.1 — Structure of ISO 9241 — Ergonomics of human–system interaction

Part	Title
1	Introduction
2	Guidance on task requirements
11	Usability: Definitions and concepts
20	Accessibility guidelines for information/communication technology (ICT) equipment and services
21–99	To be assigned
100	Software ergonomics
200	Human–system interaction processes
300	Displays and display-related hardware
400	Physical input devices — Ergonomics principles
500	Workplace ergonomics
600	Environment ergonomics
700	Special application domains
800	To be assigned
900	Tactile and haptic interactions

Annex B (informative)

Sample procedure for assessing applicability and conformance

B.1 General

This annex provides an example of a checklist (see [Table B.1](#)) that can be used to determine whether the requirements in this document have been met and the applicable recommendations followed.

This checklist contains all requirements and recommendations from this document, presented in sequence, but cannot be used in isolation from the full content of this part of this document.

It should be noted that the procedure described is itself provided as guidance and is not an exhaustive process to be used as a substitute for the standard itself.

Use of the checklist provides a basis for:

- determining which of the recommendations are applicable;
- determining whether requirements have been met and whether applicable recommendations have been followed; and
- providing a list in support of a claim of conformance showing that all requirements have been met, and a systematic listing of all the applicable recommendations that have been followed.

Several of the requirements and recommendations in this document have more than one component. These are presented in lists. Satisfaction of the requirement or recommendation depends on consideration of each component rather than the requirement or recommendation itself. Each item of these lists is therefore presented in a separate row in the checklist and the row containing the requirement is marked with a grey fill. The completed checklist can be used in support of statements relating to conformance of a project with this document. It provides a list of all of the requirements and recommendations for which conformance has been achieved.

B.2 How to use the checklist

Clause and subclause numbers are presented in the first column of the table, with the corresponding title or requirements/recommendations in the second column. The third column is used to indicate whether the requirement or recommendation in each clause or subclause is applicable or not applicable. All requirements already have Y (for “yes”) inserted in column 3. All the other clauses or subclauses need to be checked in relation to the project context and Y or N (for “no”) entered in column 3 as appropriate.

For each recommendation, information on applicable circumstances is given in the relevant clause or subclause of this document. If the recommendation is not applicable, this should be indicated in column 3 in the “Applicability” section of the table, and a brief explanation should be provided in column 4 “Reason not applicable”.

Checking whether a requirement or recommendation has been satisfied involves reviewing all those items which are shown to be applicable in column 3 and determining whether the project being evaluated conforms to these requirements and recommendations (where applicable). The exact method for making this determination can vary.

The “Conformance” section of the checklist provides space in columns 5 and 6 to indicate the decision as to whether each applicable requirement or recommendation has been satisfied (Y) or not satisfied

(N). Any clause or subclause that is not satisfied should be accompanied by a brief note in column 7 explaining the reasons why this is the case. Column 7 can also be used to record information about the method used.

B.3 Copying the checklist

Users of this document may freely reproduce the table contained in this annex for use in demonstrating conformance with this document.

Editable versions of the checklist are available at <https://standards.iso.org/iso/9241/210/ed-2/en>.

Table B.1 — Checklist for assessing applicability and conformity with this document

Clause/ subclause	Requirement or recommendation	Applicability		Conformance		
		Yes/ No	Reason not applicable	Yes	No	Comments
5	Principles of human-centred design					
5.1	Whatever the design process and allocation of responsibilities and roles adopted, a human-centred approach should follow the principles listed [in 5.1].					
5.2	Products, systems and services should be designed to take account of the people who will use them as well as other stakeholder groups including those who can be affected (directly or indirectly) by their use.					
5.2	All relevant user and stakeholder groups should be identified. [see also 7.2.2 a)]					
5.3	User involvement should be active.					
5.3	The users who are involved should have capabilities, characteristics and experience that reflect the range of users for whom the system is being designed. [see also 7.2.2 b)]					
5.4	User-centred evaluation should take place as part of the final acceptance of the product to confirm that requirements have been met.					
5.5	Iteration should be used to progressively eliminate uncertainty during the development of interactive systems.					

Table B.1 (continued)

Clause/ subclause	Requirement or recommendation	Applicability		Conformance		
		Yes/ No	Reason not applicable	Yes	No	Comments
5.6	The user's experience of previous or other systems and issues such as branding and advertising should also be considered.					
5.6	Users' strengths, limitations, preferences and expectations should be taken into account when specifying which activities are carried out by the users and which functions are carried out by the technology.					
5.6	Representative users should generally be involved in decisions related to the allocation of function.					
5.6	The human activities resulting from the allocation of function should form a set of tasks that is meaningful as a whole to the user.					
5.7	Human-centred design teams do not have to be large but the team should be sufficiently diverse to collaborate over design and implementation trade-off decisions at appropriate times.					
6	Planning human-centred design					
6.1	Human-centred design shall be planned and integrated into all phases of the product life cycle.	Y				
6.2	Those responsible for planning the project shall consider the relative importance of human factors/ergonomics in the project by evaluating:					
6.2 a)	how usability relates to the purpose and use of the product, system or service	Y				
6.2 b)	the levels of the various types of risk that can result from poor usability	Y				
6.2 c)	the nature of the development environment	Y				

Table B.1 (continued)

Clause/ subclause	Requirement or recommendation	Applicability		Conformance		
		Yes/ No	Reason not applicable	Yes	No	Comments
6.3	The planning of human-centred design shall include:					
6.3 a)	identifying appropriate methods and resources for the activities described in Clause 6	Y				
6.3 b)	defining procedures for integrating these activities and their outputs with other system development activities	Y				
6.3 c)	identifying the individuals and the organization(s) responsible for the human-centred design activities and the range of skills and viewpoints they provide	Y				
6.3 d)	developing effective procedures for establishing feedback and communication on human-centred design activities as they affect other design activities and “trade-offs”, and methods for documenting outputs from these activities	Y				
6.3 e)	agreeing on appropriate milestones for human-centred activities that are integrated into the overall design and development process	Y				
6.3 f)	agreeing on suitable timescales to allow iteration, use of feedback and possible design changes to be incorporated into the project schedule	Y				
6.4	The plan for human-centred design shall form part of the overall system development project plan.	Y				
6.4	To ensure that it is followed through and implemented effectively, the plan for human-centred design should be subject to the same project disciplines (e.g. responsibilities, change control) as other key activities.					
6.4	The human-centred design aspects of the project plan should be reviewed and revised appropriately as requirements change throughout the life of the project.					
6.5	Project planning shall allocate time and resources to the human-centred activities.	Y				
6.5	[The plan] shall include time for iteration and the incorporation of user feedback, and for evaluating whether the design solution satisfies the user requirements.	Y				