
**Ergonomics of human-system
interaction —**

Part 303:
**Requirements for electronic visual
displays**

Ergonomie de l'interaction homme-système —

*Partie 303: Exigences relatives aux écrans de visualisation
électroniques*

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-303:2008



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-303:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Guiding principles	2
5 Ergonomic requirements and recommendations	2
5.1 Viewing conditions	2
5.2 Luminance	4
5.3 Special physical environments	5
5.4 Visual artefacts	6
5.5 Legibility and readability	10
5.6 Legibility of information coding	13
5.7 Legibility of graphics	14
5.8 Fidelity	16
6 Conformance	19
Annex A (informative) Overview of the ISO 9241 series	20
Annex B (informative) Attractivity, or subject visual quality	24
Annex C (informative) Usability aspects of installation	25
Annex D (normative) Basic concepts of visual perception for contrast and luminance of electronic displays	27
Annex E (informative) Virtual display — Performance objectives	35
Annex F (informative) Electronic visual display accessibility — Selected bibliography	42
Bibliography	44

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 9241-303 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 4, *Ergonomics of human-system interaction*.

This first edition of ISO 9241-303, together with ISO 9241-302 and ISO 9241-305, cancels and replaces ISO 9241-8:1998. Together with ISO 9241-302, ISO 9241-305 and ISO 9241-307, it cancels and replaces ISO 9241-7:1998 and ISO 13406-2:2001, and partially replaces ISO 9241-3:1992. The following has been technically revised:

- terms and definitions related to electronic visual displays have been transferred to, and collected in, ISO 9241-302;
- while the areas previously covered in ISO 9241 and by ISO 13406 remain essentially unchanged, test methods and requirements have been updated to account for advances in science and technology;
- all generic ergonomic requirements have been incorporated into ISO 9241-303;
- the application of those requirements to different display technologies, application areas and environmental conditions — including test methods and pass/fail criteria — is specified in ISO 9241-307.

ISO 9241 consists of the following parts, under the general title *Ergonomic requirements for office work with visual display terminals (VDTs)*:

- *Part 1: General introduction*
- *Part 2: Guidance on task requirements*
- *Part 4: Keyboard requirements*
- *Part 5: Workstation layout and postural requirements*
- *Part 6: Guidance on the work environment*
- *Part 9: Requirements for non-keyboard input devices*
- *Part 11: Guidance on usability*

- Part 12: Presentation of information
- Part 13: User guidance
- Part 14: Menu dialogues
- Part 15: Command dialogues
- Part 16: Direct manipulation dialogues
- Part 17: Form filling dialogues

ISO 9241 also consists of the following parts, under the general title *Ergonomics of human-system interaction*:

- Part 20: Accessibility guidelines for information/communication technology (ICT) equipment and services
- Part 110: Dialogue principles
- Part 151: Guidance on World Wide Web user interfaces
- Part 171: Guidance on software accessibility
- Part 300: Introduction to electronic visual display requirements
- Part 302: Terminology for electronic visual displays
- Part 303: Requirements for electronic visual displays
- Part 304: User performance test methods for electronic visual displays
- Part 305: Optical laboratory test methods for electronic visual displays
- Part 306: Field assessment methods for electronic visual displays
- Part 307: Analysis and compliance test methods for electronic visual displays
- Part 308: Surface-conduction electron-emitter displays (SED) [Technical Report]
- Part 309: Organic light-emitting diode (OLED) displays [Technical Report]
- Part 400: Principles and requirements for physical input devices
- Part 410: Design criteria for physical input devices
- Part 920: Guidance on tactile and haptic interactions

For the other parts under preparation, see Annex A.

Introduction

This part of ISO 9241 addresses a large range of technologies, tasks and environments.

ISO 9241 was originally developed as a seventeen-part International Standard on the ergonomics requirements for office work with visual display terminals. As part of the standards review process, a major restructuring of ISO 9241 was agreed to broaden its scope, to incorporate other relevant standards and to make it more usable. The general title of the revised ISO 9241, “Ergonomics of human-system interaction”, reflects these changes and aligns the standard with the overall title and scope of Technical Committee ISO/TC 159, Subcommittee SC 4. The revised multipart standard is structured as series of standards numbered in the “hundreds”: the 100 series deals with software interfaces, the 200 series with human-centred design, the 300 series with visual displays, the 400 series with physical input devices, and so on.

See Annex A for an overview of the entire ISO 9241 series.

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-303:2008

Ergonomics of human-system interaction —

Part 303: Requirements for electronic visual displays

1 Scope

This part of ISO 9241 establishes image-quality requirements, as well as providing guidelines, for electronic visual displays. These are given in the form of generic — independent of technology, task and environment — performance specifications and recommendations that will ensure effective and comfortable viewing conditions for users with normal or adjusted-to-normal eyesight.

This part of ISO 9241 does not address issues of accessibility for people with disabilities. However, it does take into account aspects of the eyesight of older people and could be of value to people dealing with issues of visual impairment in certain cases: the specification of essential characteristics for normal viewing can be used to gauge the severity of different visual abnormalities so that appropriate solutions can be identified.

NOTE In addition to the Bibliography, Annex F gives a selected bibliography of documents addressing the needs of people with disabilities, including people with poor, deteriorating or no eyesight.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9241-302, *Ergonomics of human-system interaction — Part 302: Terminology for electronic visual displays*

ISO 9241-307, *Ergonomics of human-system interaction — Part 307: Analysis and compliance test methods for electronic visual displays*

3 Terms and definitions

For the purpose of this document, the terms and definitions given in ISO 9241-302 apply.

4 Guiding principles

For a satisfying human–display interaction, a number of different requirements have to be met at the same time in an appropriate balance. For the purposes of this part of ISO 9241, these requirements have been grouped into the following eight major areas:

- viewing conditions;
- luminance;
- special physical environments;
- visual artefacts;
- legibility and readability;
- legibility of information coding;
- legibility of graphics;
- fidelity.

NOTE For the attractiveness of the image on the visual display, see Annex B.

5 Ergonomic requirements and recommendations

5.1 Viewing conditions

5.1.1 General

Many tasks require that the information presented on an electronic visual display be acted upon. Viewing the display such that this information can be taken up quickly, without error and with little effort, is thus highly important. A number of viewing conditions that are necessary, though not sufficient of themselves, can be specified for achieving fast, error-free and near-effortless viewing. These pertain to the design viewing distance and direction and to the needed gaze and head tilt angles of the viewer.


It is known that viewing distance and line-of-sight angle (gaze angle) need to be compatible with the user's vergence and accommodation capability and his or her capability to focus on short distances.

5.1.2 Design viewing distance

The design viewing distance is dependent on the task and on the electronic visual display and shall not be less than 300 mm, being the typical minimum comfortable viewing distance, or *near point*, for normal (emmetropic) eyes of adults. There is a physiologically determined relationship between the near point and the age of the user, shown in Figure 1, and between the near point and the luminance level; however, there is a large variance in this relation.

Shorter viewing distances, of between 200 mm and 300 mm, can be observed in children and (very) young adults, enabling them to see details (e.g. parts of characters) smaller than those that they could see at greater distances, provided that aspects such as display luminance, contrast and the sharpness are high enough. However, most adults as well as older people position their displays at a larger viewing distance, typically 300 mm and more.

For larger visual displays, such as those used in office tasks, the preferred viewing distance is longer — typically 400 mm to 750 mm. At this distance, the accommodative strain to the eyes is less than at shorter viewing distances; moreover, there is larger freedom of movement at larger viewing distances. For presentation tasks or projection, the preferred viewing distance is still larger (typically 2 m to 10 m).

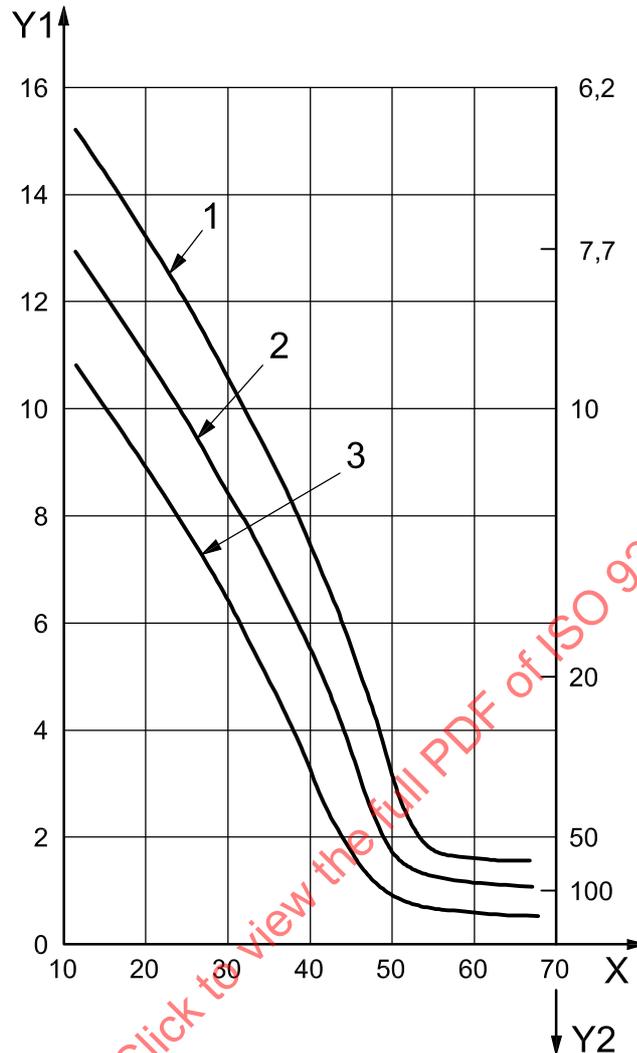**Key**

- X age, in years
- Y1 accommodation span, dioptres
- Y2 near point of accommodation, centimetres
- 1 maximum
- 2 mean
- 3 minimum

Figure 1 — Accommodation span and near point in relation to age of user

5.1.3 Design viewing direction

For normal use in which the user moves his or her head, a display shall be legible from any angle of inclination up to at least 40° from the normal to the surface of the display, measured in any plane.

Depending on the task, other limit values are possible. For example, for tasks requiring privacy, such as display use in crowded environments, the display should be only legible to a maximum angle of inclination between 15° and 20°.

EXAMPLE People in wheelchairs wishing to withdraw cash from an automatic teller machine in privacy are obliged to read the ATM display from a fairly low viewpoint. Their requirements can be met by a display that is only legible to a maximum angle of inclination between 15° and 20° in the horizontal plane, but downwards to a larger angle, of at least 40°, in the vertical plane.

NOTE Some display technologies exhibit anisotropic optical properties, which means that the luminance, contrast and colour vary with viewing direction.

5.1.4 Gaze and head tilt angles

For a typical working environment with an approximately vertical position of the upper body, the work place and the visual display should permit the user to view the screen with a gaze angle from 0° to 40° and a head-tilt angle of from 0° to 25°.

NOTE These angle values can require the tilt of the display to be adjustable, so that perpendicular view can be obtained. In addition, the height (above floor level) of the display might have to be adjustable.

5.1.5 Displays for virtual images

The ergonomics of displays for virtual images are considered in Annex E, covering the ergonomics characteristics of binocular non-see-through displays and gives recommended values.

5.2 Luminance

5.2.1 General

In order for information symbols on a visual display screen to be visible, sufficient contrast with their background is necessary. Both symbols and screen background therefore need to be of a certain, different luminance and/or colour.

In most cases, there is a luminous environment to the screen that contributes to its luminance and colour; therefore, the contrast on the screen is changed by the luminous environment (for reflective displays such as paper, contrast on the display screen is even caused by the luminous environment). Since the environment's luminosity generally cannot be controlled by the user, it is necessary to provide means of adjusting display luminance to obtain a proper luminance balance over a range of work environments.

5.2.2 Illuminance

The supplier shall specify the design screen illuminance, E_S .

NOTE If the application uses colours, their chromaticity coordinates, u', v' , may change as a result of the colour of the design screen illumination.

5.2.3 Display luminance

In the ambient illumination for which the display is designed, the display luminance shall exceed the minimum value for obtaining a sufficient recognizability of the displayed information over the design viewing range and the intended lifetime of the visual display unit. Under night-time conditions, it should not be so high as to annihilate dark adaptation of the user's eyes.

Annex D presents a treatise on basic concepts of contrast and luminance in visual perception. Equation (D.11) defines the minimum value of bright parts of a display taking into account the luminances of the dark parts and of diffuse and specular reflections on the display surface.

EXAMPLE For an office application having 500 lx illuminance (horizontally) of white paper with a reflectance of 80 % and positive display polarity, it is often recommended that the display luminance be in the range of 100 cd/m² to 150 cd/m².

5.2.4 Luminance balance and glare

The area average luminance of task areas that are frequently viewed in sequence while using the display (paper document, screen, etc.) should be between 0,1 L and 10 L , where L is the average luminance of the whole screen in the application used on the display in the design viewing direction. For a stationary visual field, a higher ratio of space average luminances between the task area and its surrounds (for instance, room walls), up to 1:10, has no adverse effect.

The design of the visual display screen and surrounding area of the product housing shall not contribute to disturbing glare by the environmental lighting. This holds especially for prolonged viewing in work environments.

NOTE 1 Glare is defined by CIE (845-02-52; glare) as: "condition of vision in which there is discomfort or a reduction in the ability to see details or objects, caused by an unsuitable distribution or range of luminance, or too extreme contrasts" (Reference [22]). Disturbing glare thus is a condition of vision in which there is a disturbing degree of visual discomfort or/and a noticeable reduction in the ability to see details or objects.

NOTE 2 Matt surfaces typically do not produce glare, whereas gloss surfaces can, depending on design aspects such as shape, colour, size and environmental lighting conditions. There are, however, cases where gloss is advantageous. For printed paper and some mobile displays, such as reflective colour displays, gloss is necessary for obtaining high colour fidelity, whereas the occurrence of disturbing glare can be avoided by changing the orientation of the paper or mobile display with respect to the environmental light source.

NOTE 3 For prolonged viewing in work environments, the aim is to harmonize the visual display screen and surrounding area of the product housing with their environment and its lighting according to ISO/IEC 8995-1 and ISO 9241-6.

5.2.5 Luminance adjustment

For emissive displays, the luminance of the background and/or the contrast between the characters and their background shall be easily adjustable by the user. The emissive display shall be easily adjustable to ambient conditions over the range of luminances that can occur in the particular work environment.

5.3 Special physical environments

5.3.1 General

The following guidelines should be taken into consideration in the design of a display wherever it is expected that the display will be subjected to one or more of the environmental conditions described in 5.3.2 to 5.3.4.

5.3.2 Vibration

Vibration of the display with respect to the head and therefore the eyes (or *vice versa*) is an annoying effect that can even reduce visual performance, because

- vibration hampers eye movement control during reading by making it more difficult to determine the target of saccades, and causing image movement during a fixation pause, in which the centre of the visual field needs to be recognized,
- the contrast of small details is reduced because the zones along a border will have the average luminance of both sides of the border, and
- the rapid alternation of light and dark in an area of the visual field can create flicker effects.

The severity of these effects depends on the frequency and amplitude of the vibration. Frequencies above 0,5 Hz of the display are disturbing when their amplitude is more than a threshold value. Also, frequencies of the head above 6 Hz are disturbing when the amplitude is more than a threshold value. Such frequencies and amplitudes should therefore be avoided — for example, by embedding the display in appropriate damping material.

5.3.3 Wind and rain

Strong winds can cause vibrations of objects such as visual displays that are sufficiently exposed.

Rain drops falling on a display screen will distort the displayed image, to the point where text becomes illegible.

Visual displays that may be used outdoors should therefore be mechanically shielded from such weather effects.

5.3.4 Excessive temperatures

When operation of display devices is required in environments where temperatures are approaching 0 °C or + 40 °C, users should take equipment and personal precautions to ensure that they are able to complete their tasks satisfactorily and safely. Excessive temperatures will adversely affect the performance of most display devices, as well as the associated electronic circuitry and therefore affect user performance on the task. Consult the manufacturer's product specifications to find out the recommended operating range of temperatures for the device. If the environmental conditions are close to or beyond the recommended limits, the display device and the associated electronic circuitry may have to be heated or cooled to a temperature level within the manufacturer's specified range in order to ensure proper operation of the device(s).

5.4 Visual artefacts

5.4.1 General

Ideally, an electronic visual display will show only intended, high-quality information, in the form of text, graphics or images. However, display technology is usually not ideal, and reflected images of the outside world as well as unintended images due to visual perception phenomena cause *visual artefacts*, i.e. information competing with the intended information for the viewer's attention.

5.4.2 Luminance non-uniformity

For an intended uniform display luminance, the luminance non-uniformity, either step-wise or smooth, in ambient illumination shall not exceed the threshold for reduced visual performance, with a maximum of 1,7:1.

5.4.3 Colour non-uniformity

Any non-uniformity of the colour shall not create competing information content when evaluated at three locations on the screen. The maximum chromaticity difference shall be in accordance with Table 1.

Table 1 — Maximum chromaticity difference

$\frac{D_{\text{active}}}{D_{\text{design view}}}$	Chromaticity difference $\Delta(u',v')$	
	Applications using colour per default colour set	Any primary colour ^a
< 0,75	0,02	0,02
\geq 0,75	0,03	0,03

D_{active} diagonal of active area of screen
 $D_{\text{design view}}$ design viewing distance
^a The primary colours are the unmixed colours, usually red, green and blue.

Colour uniformity refers to how well the colour remains constant over the surface of the screen. Conversely, non-uniformity of colour characterizes the manner in which the colour changes over the surface of the screen. The non-uniformity of colours is best specified by the maximum colour difference (using some colour difference metric) between any two points on the screen. Several colour different metrics and coordinates are in use today, including CIELAB, CIELUV and CIE 1931 (x, y).

For the purposes of this part of ISO 9241, the metric, u',v' colour difference, is used.

5.4.4 Contrast uniformity

Contrast uniformity can be important if proper recognition or presentation of information depends critically on proper scene or pattern rendering. It is expressed as a percentage: contrast uniformity = $100 \%(C_{\min}/C_{\max})$, where C_{\min} and C_{\max} are the minimum and maximum contrast, respectively, of the sampled contrast set on the screen (see ISO 9241-305). The contrast uniformity should be as high as possible and, in general, be commensurate to the user's task.

NOTE There are three different forms of contrast non-uniformity:

- variation in area average luminance contrast from the centre of a display to the edge of any portion thereof;
- variation of the peak contrast of character elements (dots or strokes) at different locations of the screen;
- variation of the peak contrast of character elements (dots or strokes) within a character.

The threshold for visual detection of contrast non-uniformity is higher than the threshold for measurable difference in task performance. Both thresholds are dependent on the following factors:

- target size;
- contrast sensitivity of the user;
- task;
- luminance of the target, background and surrounds.

There are other ways of expressing contrast uniformity that may be found to be useful, for example, the ratio of the "intended contrast", such as that between text characters and their background, to the contrast that is due to the contrast non-uniformity.

One way to ascertain the impact of contrast non-uniformity is to use a user performance test method (see ISO 9241-304). Test persons representing a sample from the intended user population most likely to suffer performance reduction should be used. In the test, the contrast uniformity shall be intentionally varied over the screen.

5.4.5 Geometric distortions

For different rows or columns of text, the difference of length shall not exceed 1 % of the length of that column or row.

The horizontal displacement of a symbol position relative to the symbol positions directly above and below shall not vary by more than 5 % of the character width. The vertical displacement of a symbol position, relative to the symbol positions to the right and left of it, shall not vary by more than 5 % of the character height.

5.4.6 Screen and faceplate defects

The electronic display should be free of screen and faceplate defects.

Regularly addressed displays should be free of pixel faults¹⁾. If not, the supplier shall specify the number of defective pixels and/or subpixels.

Depending on the task of the user, screen and faceplate defects or pixel faults can be disturbing, resulting in reduced performance in reading speed and reading errors or to reduced appreciation of an image and visual discomfort. Or they can present wrong information in images and their information content, leading to misinterpretation of the displayed content. Aesthetic and attractiveness aspects can affect the user's acceptance regarding the displayed content in case of faults as well.

1) As defined in ISO 9241-302, "pixel fault" includes both defective pixels and *subpixels*.

Therefore, screen and faceplate defects or pixel faults have to be examined from the point of view of their relevance to

- a) ergonomics performance, and
- b) acceptance by the users, given their tasks.

If a regularly addressed display meets the ergonomics performance criteria for pixel faults, these faults will not reduce reading speed, increase number of reading errors or cause visual discomfort symptoms such as red, sore, itchy or watering eyes, headaches or aches and pains associated with poor posture.

If an electronic display meets the acceptance criteria for pixel faults in a specified fault class, these pixel faults will probably not cause misinterpretations or insufficient acceptance by the users, related to the intended tasks.

NOTE If an electronic display has pixel faults, their number is not the only important factor, but rather, this number in relation to the size of both pixels and display. Also of importance is the material being displayed, task of the user, position on the display screen of the defective pixel and/or subpixel, etc. The exact ergonomic performance requirement level is not defined in this part of ISO 9241. Therefore, a display in any of the fault classes (0, I, II, III, IV) can meet the ergonomics performance and visual discomfort requirement level, depending on the context of use. Research is continuing to elucidate these issues and will be taken into account in future amendments of this part of ISO 9241.

5.4.7 Temporal instability (flicker)

The entire image area shall be free of flicker to at least 90 % of the user population.

Flicker is the perception of unintended temporal variations in luminance on the display, in a frequency range of a few hertz up to the critical flicker frequency. These unintended temporal variations can affect the comfort and performance of the user. The critical flicker frequency (CFF) is an upper frequency above which flicker is no longer perceived by the user. The perception of flicker increases with increasing luminance and increasing screen size.

NOTE 1 The eye is more sensitive to flicker in the lateral visual field than in the central visual field.

NOTE 2 The critical frequency decreases with age (*between individuals* factor) and with fatigue (*within individuals* factor) and with duration of exposure.

5.4.8 Spatial instability (jitter)

The image shall be free of jitter in the intended display environment.

This can be accomplished by ensuring that the peak-to-peak variation in the geometric location of image elements does not exceed 0,000 1 mm per millimetre of design viewing distance for the frequency range of 0,5 Hz to 30 Hz.

5.4.9 Moiré effects


Moiré is a regular image superimposed on the intended image. Because the image is a structured pattern, it is often detected easily by users.

Moiré patterns are natural interference phenomena. They can appear as ripples, waves and intensity variations that are superimposed on the screen image.

For colour displays, moiré patterns, which resemble a periodic noise field overlying the screen image area, should not have more than 6 JND (just noticeable differences) (see ISO 9241-302) of modulation at their fundamental spatial frequency.

Moiré patterns with spatial frequency and modulation falling above the curve in Figure 2 are predicted to exceed 6 JND and therefore be clearly visible.

To minimize (decrease) the detection of moiré patterns by users, the fundamental spatial frequency and modulation of a colour display should be below the curve shown in Figure 2.

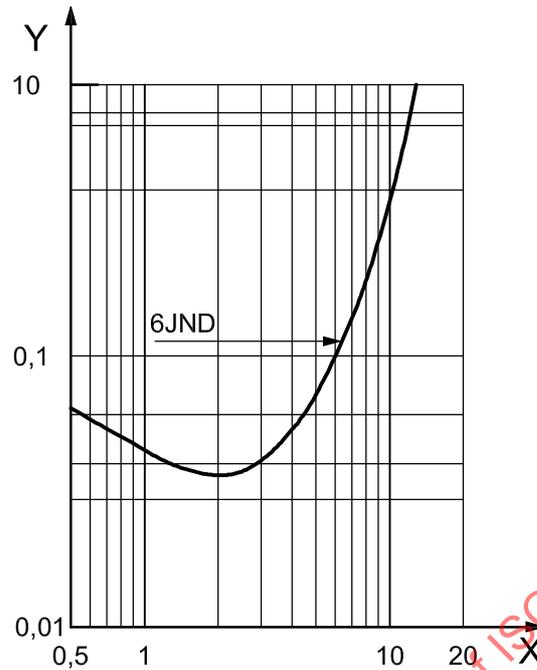**Key**

X spatial frequency, cycles per degree
 Y contrast

JND just noticeable difference

Figure 2 — Thresholds for visibility of moiré patterns
 [From HFES 100.^[1] (reprinted with permission)]

5.4.10 Other instabilities

Electronic visual displays can exhibit unintended spatial and temporal luminance variations such as “swim” or “crosstalk”. In addition to the requirements specified in 5.4.6, 5.4.7 and 5.4.8, those for proper ergonomics design criteria should be used to minimize other unintended spatial or temporal artefacts that exceed the threshold for visual detection.

It is important to first analyse the context of use to verify whether or not the threshold for detection is exceeded. There are many artefacts that are visible through, for example, a magnifying glass, but not at the actual viewing distance.

EXAMPLE Technically speaking, a display can exhibit jitter that is spatially so small that it cannot be detected with the naked eye at normal viewing distance. From an ergonomics point of view, the display is jitter-free when used at that viewing distance. This jitter, however, will still have an effect on contrast of thin lines. So the conclusion will be that the display has, from an ergonomics point of view, reduced contrast in thin lines, technically caused by jitter. It will depend on the degree of contrast reduction whether or not corrective action, i.e. reduce or eliminate the jitter, is necessary.

5.4.11 Unwanted reflections

Disturbing and/or unwanted reflections that reduce contrast shall be avoided. If necessary, the screen shall have antiglare and/or antireflection treatment. Unavoidable reflections shall be as small as possible.

Specular reflections of ambient light sources (luminaires, lamps, windows, etc.) on a display screen are unwanted reflections. They reduce the contrast and thus the legibility of displayed information. Often, they are the cause of glare, leading to discomfort or inability to recognize the information for the user. Depending on the kind of visual display terminal, reflections can be one of the following types or combinations thereof:

- a) Lambertian (reflected luminance constant for all directions) — paper for photocopiers is a good example of a Lambertian reflector;

- b) specular (mirror-like) — a distinct image of the source of illumination is visible;
- c) haze (peaked about the specular direction, but images are more or less blurred due to light scattering) — small light sources reflected by a hazy object are perceived as a non-distinct fuzzy circle of light around the specular direction.

Lambertian reflections reduce the contrast of the displayed information by lightening the dark state. Specular reflections, however, are often experienced as uncomfortable, due to the repeated focusing (accommodation) of the eye between the information displayed on the screen and the image of the light source. This continued re-focusing is the reason why many people rate a Lambertian reflection as less disturbing than a reflected distinct image of the same luminance. Distinct images of light sources can be experienced as so bright that the displayed information cannot be perceived and interpreted (i.e. causing disability glare).

NOTE 1 Displays with a transparent protection or CRT (cathode ray tube) and plasma displays can be well characterized by a superposition of Lambertian and specular reflectance components. The same characterization that omits the haze component leads to substantial errors in the evaluation of displays having a non-vanishing haze component.

NOTE 2 Typical LCD (liquid crystal display) monitor screens, for example, comprise only haze components with varying width of the intensity distribution of reflected light; in this case, specular and Lambertian components can be neglected.

NOTE 3 Many users find the type of reflection that produces a distinct image more objectionable than a diffused reflection of the same luminance.

5.4.12 Unintended depths effects

Spectrally extreme colours that produce unintended depth effects (chromostereopsis) shall not be presented for images intended to be continuously viewed or read.

5.5 Legibility and readability

5.5.1 General

For electronic visual displays, the presentation of legible characters and symbols for readable text is one of the most important issues. The characteristics and requirements are described in 5.5.2 to 5.5.11.

Older people experience a number of complex age effects on their eyesight, not all of which are presently known in detail, that in particular influence the recommendations for luminance contrast (5.5.2), image polarity (5.5.3) and character height (5.5.4). The consequences of these effects may be summarized as follows: for older people, avoid low contrast and low background luminances, and small character sizes.

5.5.2 Luminance contrast

In the ambient illumination for which the display is designed, the minimum luminance contrast of character details within or between characters that is relevant for legibility shall comply with the values derived from Figure D.3.

As an example, for applications with a display luminance of 20 cd/m², and taking any reflections in the display screen into account, the minimum contrast values shall be $C_m = 0,5$ (contrast modulation), or $C_r = 3:1$ (contrast ratio).

For a good visual performance and comfortable reading, especially over extended periods of time, the modulation depth or luminance contrast should preferably be higher than 0,5 or 3:1, respectively. This is particularly important for older users, especially above 80 years of age.

Annex D is a treatise on basic concepts of contrast and luminance in visual perception, leading to Equation (D.8).

5.5.3 Image polarity

Either dark characters on a brighter background (positive image polarity), or bright characters on a darker background (negative image polarity) are acceptable. If a display provides positive and negative polarities, it shall meet all the requirements of this part of ISO 9241 for each image polarity.

NOTE For most tasks, positive image polarity is preferable. Its advantages are

- reduction of bright to dark eye adaptation,
- less eye strain,
- improvement of legibility, owing to better recognition of characters at the same contrast,
- less detection of unavoidable reflections,
- better legibility for most older people, and
- in most cases, screen luminance in balance with walls of a normally lit room.

However, many people with low vision prefer negative image polarity.

5.5.4 Character height

The minimum Latin character height shall be 16' of arc; it is required that the system have the capability of providing a character height from 20' to 22' of arc. Japanese characters shall have a minimum character height of 20' of arc. Character heights subtending from 20' to 22' of arc for Latin characters and from 25' to 35' of arc for Japanese characters are recommended for most tasks.

The ultimate limiting factor for legibility is the human visual system: only characters that have been imaged sharply, with sufficient height, on the retina can be read well. Which height is "sufficient" will depend on the quality of the display and of the text displayed thereon, the age of the reader and the reading task. For an ideal visual display such as is approached by printed paper, the minimum character height is 10' to 12' of arc. Present electronic displays at best only approximate the ideal display. Limiting factors are pixel density or resolution, contrast and character font and matrix, as well as viewing distance.

For applications where legibility is incidental to the task, smaller characters may be used (for instance, for footnotes, superscripts and subscripts). For Latin characters, the character height should exceed 10' of arc unless loss of legibility is acceptable (e.g. when showing page layout appearance).

For applications designed for a special group of users, generally young ones, a character height of 11' of arc with a viewing distance of 250 mm (see 5.1.1) makes it possible to fit a chunk of legible information such as a timetable on the screen of hand-held devices. Such users then can read and combine this information, provided: firstly, that the pixel density of the display is at least 200 pixels per inch, secondly, that the contrast between characters and background is 3:1 or higher (depending on the technology), and thirdly, that the width-to-height character matrix is at least 7×9 . However, the application should allow the characters to be displayed at a larger height for users with a lower visual acuity than those of the special group mentioned — albeit at the cost of fitting a smaller chunk of legible information on one screen.

The character height of lowercase characters without ascender and descender should be approximately 70 % of the character height (uppercase character without ascender). In instances where readability is important, the upper limit on character height should be 30' of arc.

Older users need reading glasses for short viewing distances because they have lost some, and eventually all, of their accommodative power. For a viewing distance of 25 cm, this need can begin at approximately 35 years. However, the negative effect on recognition of characters not being imaged sharply on the retina can be compensated to a certain extent by increased contrast. Furthermore, contrast sensitivity and, therefore, character recognition increases with increasing background luminance. However, especially in situations such as outdoors, when people do not have their reading glasses immediately available, the use of letters that are not too small, i.e. larger than 16' of arc, is recommended for displays such as public phones, cell phones or personal digital assistants (PDA).

NOTE 1 Small, or very small electronic displays such as are used in PDA or cell phones, with correspondingly small characters, typically are read at distances close to the near point, where the eyes' lenses are maximally accommodated (characters with a height of 1,4 mm subtend 16' of arc at a viewing distance of 300 mm). Maintaining such a strong accommodation over a considerable time can be strenuous; it is unnecessary if larger characters that can be read at a larger viewing distance are used. However, with smaller characters, more information can be presented on one screen, without scrolling, thus making it easier for the user to survey, for instance, (part of) a timetable and quickly grasp its meaning.

NOTE 2 For character sets other than Latin or Japanese, such as Cyrillic, Chinese, Arabic or Korean, as defined in ISO/IEC 10646 [2], appropriate character heights need to be specified.

5.5.5 Text size constancy

If text size constancy is important for the task, then the height and width of a specific character of a specific character font shall not vary by more than $\pm 5\%$ of the character height of that character set, regardless of where it is presented on the display surface.

EXAMPLE The difference in size between the 10 point and 11 point font sizes might be rendered as 11 pixels and 12 pixels. In a proofreading task, the user is required to find letters typed by error in 11 point size in the middle of a 10 point text. The difference between 12 pixels and 11 pixels is 9%. If the text size constancy is not clearly better than 9%, the task will be difficult or impossible to perform. In digital displays which are driven by analogue signals, and where the resolution of the input signal is different from the resolution of the digital display, the font size is rendered with ± 1 pixel accuracy due to the analogue-digital conversion.

5.5.6 Character stroke width

For Latin-origin characters, the stroke width shall be within the range of 10% to 17% of character height.

NOTE Values below this range can give the character a very thin vertical appearance ("spider-legs").

5.5.7 Character width-to-height ratio

For considerations such as line length and proportional spacing, the width-to-height ratio shall be within the range 0,5:1 to 1:1. For optimum legibility and readability, a width-to-height ratio of 0,7:1 to 0,9:1 is recommended.

5.5.8 Character format

The following applies to Latin characters.

- A 7×9 (width-to-height) character matrix shall be the minimum used for tasks that require continuous reading for context, or where individual alphabetic character legibility is important for the task, such as proofreading. A 5×7 (width to height) character matrix shall be the minimum used for numeric and upper-case-only presentations.
- The character matrix shall be increased upward by at least two pixels if diacritics are used. If lower case is used the character matrix shall be increased downward by at least two pixels, to accommodate the descenders of the lower case letters.
- For higher-density character matrices, the number of pixels used for diacritics should follow conventional designs for printed text. A 4×5 (width to height) character matrix shall be the minimum used for subscripts and superscripts, and for numerators and denominators of fractions displayed in a single character position. The 4×5 matrix may also be used for alphanumeric information not related to the operator's task, such as copyright information.

For Japanese characters, a minimum matrix of 11×11 elements is recommended, while a matrix of 15×15 elements is preferred.

5.5.9 Between-character spacing

For character fonts without serifs, the between-character spacing shall be a minimum of one stroke width or one pixel. If characters have serifs, the between-character spacing shall be a minimum of one pixel between the serifs of adjacent characters. For other text presentations, horizontal spacing should be within the range of 25 % to a maximum of 60 % of character width.

5.5.10 Between-word spacing

The minimum number of pixels between words shall be the number of pixels in the width of an unaccented upper-case letter H. The number of pixels in the width of the letter N shall be used for proportionally spaced fonts.

5.5.11 Between-line spacing

For tasks that require continuous reading of text, a minimum of one pixel or one horizontal stroke width shall be used for spacing between lines of text. This area should not contain parts of characters, diacritics or underscores.

5.6 Legibility of information coding

5.6.1 General

A particular meaning can be attached to the information displayed on the screen by coding it such that it can be distinguished from the rest of the displayed information. Luminance, colour, symbol shape and blink rate can all be used for this coding.

5.6.2 Luminance coding

Areas coded by luminance only shall differ in display luminance with respect to each other by a ratio of at least 1,5:1. Luminance coding includes intended ambient illumination conditions and design viewing angles.

NOTE Previously, in ISO 9241, the term *absolute luminance coding* was used. All previous requirements related to *absolute luminance coding* are now covered by this subclause.

5.6.3 Blink coding

Where blink coding is used solely to attract attention, a single blink frequency of from 1 Hz to 3 Hz, with a duty cycle of 50 %, is recommended. Where readability is required during blinking, a blink rate of 0,33 Hz to 1 Hz, with a duty cycle of 70 %, is recommended. It should be possible to switch off the blinking of the cursor.

NOTE The maximum of 3 Hz is derived from the need to protect people with photosensitive epilepsy.

5.6.4 Colour coding

Because of the conspicuity of colour differences, colour coding is a powerful means of attaching a specific meaning to the targeted information. Colours used for coding should be easy to discriminate. Each colour used for information coding should only represent one meaning of information, for example, the colour red reserved for all messages indicating a dangerous status or situation. The colour code should be used consistently in the whole system; otherwise it loses its value through confusion. Colour should not be the only means of coding, and should at least be used with care, because 8 % to 10 % of the male population is colour anomalous, i.e. does not perceive colour correctly. Some form of redundancy in coding should be used.

5.6.5 Geometrical coding

Geometrical coding is a particular type of graphical coding. The distinction of different classes of information in a graph can be facilitated by the use of different geometrical shapes, such as triangles or circles. These shapes should be easy to distinguish, which means that their number should be limited.

NOTE For more information on coding, see ISO 9241-12 [3].

5.7 Legibility of graphics

5.7.1 General

Information can be carried by graphical symbols. They may be simple geometrical configurations such as circles and squares or more complex ones, generally called icons. Graphs, i.e. configurations of straight or curvilinear lines, also carry information. This can be acquired by the user only if these graphical symbols and graphs have a sufficient legibility in terms of their size, contrast and colour.

5.7.2 Monochrome and multicolour object size

Icons should be designed so that they are easily discerned, discriminated and comprehended.

Icons should enable the user to relate the graphic of the icon to the function of the icon.

To accomplish this, critical details such as symbols or text within the icon should have a minimum height of 20' of arc. Heights subtending 25' to 35' of arc are preferred.

For graphical objects and other small objects where legibility is the primary concern, refer to 5.5.2.

For isolated images where accurate colour identification is required, the image shall subtend 30' of arc; 45' of arc is preferred.

5.7.3 Contrast for object legibility

Where accurate identification of an isolated, multicolour image (e.g. a single character or a symbol) is required, the same conditions for screen luminance and contrast as those specified in 5.5.2 shall apply.

5.7.4 Colour considerations for graphics

Where accurate colour identification of strings of characters or symbols is required, their minimum size shall be at least 20' of arc at the design viewing distance. Where accurate colour identification of an isolated image such as a character or symbol is required, the image should be at least 30' of arc at the design viewing distance, preferably 45' of arc.

a) Small images

In the case of a dark background, the use of spectrally extreme blue ($v' < 0,2$) should be avoided for images subtending less than 2°.

b) Isolated images

Where accurate colour identification of an isolated image such as a character or symbol is required, the image should subtend at least 30' of arc at the design viewing distance, preferably 45' of arc.

c) Default colour set

When an application requires the user to discriminate or identify colours, it shall offer a default set of colours. The default colour set should be based on an operating system and include at least

- the primary colours of red, blue and green,
- non-primary colours as combinations of primary colour pairs, red-blue, red-green and blue-green, and
- black and white.

For accurate identification, the default colour set should consist of no more than 11 colours. If the colours can be altered by the user, the default set of colours shall be retrievable and restorable.

d) Colour difference

Colour pairs that are to be discriminated shall have colour difference values of $\Delta E_{uv}^* > 20$.

NOTE 1 If viewers are to accurately discriminate colours, even ΔE_{uv}^* significantly larger than 20' of arc does not necessarily guarantee satisfactory perceptual performance because of the effects of adjacency and size on colour appearance.

NOTE 2 The metrics of lightness difference, ΔL^* , red-green difference, $\Delta u'$, and yellow-blue difference, $\Delta v'$, predict perception differently for different conditions. For example, for colour images widely separated, ΔL^* overestimates colour difference perception. For small images, $\Delta v'$ overestimates colour-difference perception by a factor of 5 to 1 compared with $\Delta u'$.

NOTE 3 Small images composed of colours from the blue-green region of the visible spectrum are very difficult to identify and discriminate because of small-field tritanopia. It is thus best to assign blue to large images (greater than 20' of arc) and avoid spectrally extreme blue for small images (less than 20' of arc).

e) Negative polarity

For text, alphanumerics and symbols used in reading tasks that are presented in negative polarity:

- blue ($v' < 0,2$) on a dark background shall not be used;
- red ($u' > 0,4$) on a dark background should be avoided and shall not be used on a spectrally extreme blue ($v' < 0,2$) background.

f) Positive polarity

For text, alphanumerics and symbols used in reading tasks that are presented in positive polarity:

- spectrally extreme blue ($v' < 0,2$) shall not be used on a spectrally extreme red ($u' > 0,4$) background;
- spectrally extreme red ($u' > 0,4$) shall not be used on a spectrally extreme blue ($v' < 0,2$) background.

g) Depth effects

Spectrally extreme colours that produce depth effects shall not be presented for images intended to be continuously viewed or read.

h) Colour misconvergence

On multicolour shadowmask CRT and projected images for some projector technologies, colour misconvergence causes the appearance of colour fringes or double images along the edges of an image, and may reduce user performance. The level of misconvergence at any location on such CRT or projection screens shall not degrade visual performance during task execution.

5.7.5 Background and surrounding image effects

In order to better discriminate and identify colours, systems and applications should use an achromatic background behind chromatic foreground image colours, or achromatic foreground image colours on chromatic backgrounds.

5.7.6 Number of colours

5.7.6.1 Simultaneous colour presentation

The number of colours simultaneously presented on a display should be based on the performance requirements of the task. In general, the number of colours simultaneously presented should be minimized. For accurate identification, the default colour set(s) (including the achromatic white, grey and black) should consist of no more than 11 colours for each set; more colours will lead to discrimination problems between some of the pairs of colours.

EXAMPLE 1 Red, orange, yellow, yellow-green, green, green-blue (cyan), blue, blue-red (purple or magenta), black, white and grey.

EXAMPLE 2 Red, pink, orange, yellow, brown, green, blue, purple, black, white and grey.

5.7.6.2 Visual search for colour images

When a rapid visual search based on colour discrimination is required, no more than six colours should be used.

5.7.6.3 Conspicuity of colours

Users can be easily distracted from the information they want by conspicuous colours appearing nearby.

5.7.6.4 Colour interpretation from memory

If the meaning of each colour in a set of colours is to be recalled from memory, no more than six colours should be used. For software applications that require the meaning of each colour of a set of more than six colours to be recalled, the associated meaning of each colour shall be made accessible.

5.8 Fidelity

5.8.1 General

Fidelity is an attribute that is important when static or moving images from the real world have to be reproduced electronically. The greater the correspondence between these electronic images and their real-world examples, the higher the fidelity of the imaging process. However, it is not certain that images with the highest fidelity will be those preferred by the viewers.

5.8.2 Colour gamut and reference white

5.8.2.1 Colour gamut

Accurate colour rendering is required whenever objects or scenes taken from reality are visualized on an electronic visual display (electronic photography, television, video, etc.). Inadequate colour rendering can cause misinterpretation or missing recognition of the objects or scenes that are visualized (colour of human skin may indicate sickness, etc.). In order to assure a minimum performance with respect to colour rendering (task dependent), the electronic visual display shall be able to reproduce colours that form a minimum triangular area in a specified chromaticity space [e.g. u' and v' chromaticity coordinates CIELUV (1976) of the primary colours R, G and B]. The applicable minimum values are given in ISO 9241-307.

5.8.2.2 Reference white

In order to arouse “proper” colour sensations, i.e. those corresponding to the expectation of a user watching a reproduction of reality, it is desirable to have images of non-selective surfaces such as paper or white clothes always perceived as “white” — regardless of the illumination at the scene which is reproduced. This can be accomplished by (1) establishing a *reference white* on the visual display, and (2) adjusting the camera registering the scene and the communication channel between camera and receiving display in such a way that non-selective surfaces are reproduced in reference white^[4]. For the FCC colour primaries²⁾, the chromaticity of CIE Illuminant, $C (u' = 0, 201; v' = 0,461)$ should be used as reference white for the display.

5.8.3 Gamma and grey scale

The gamma for each of the three primary colours shall be in the range of $2,0 \pm 0,2$.

As to the grey scale of a multichrome visual display capable of reproducing images from the real world, no special requirements in addition to those for faithfully reproducing colour are necessary, since the human eye is much more tolerant to luminance deviations than to chromaticity deviations for a particular visual scene. It should be realized that the gamma curve of an LCD depends on the viewing direction, which means that the colour and luminance distribution of an image can change substantially when the viewing direction changes.

5.8.4 Rendering of moving images

To render moving images properly, a display needs temporal fidelity. This temporal fidelity is influenced by four main parameters:

- rise time;
- hold time (time between end of rise time and beginning of fall time);
- fall time;
- sampling frequency.

The rise and fall time shall be short enough for the luminance signal to switch from one desired level to another, from frame to frame. Otherwise, this signal will not be able to change fast enough for fast-moving images. In the worst case, the motion will become undetectable (i.e. as on slow LCD screens without any compensation for this slowness).

The rise and fall times shall be short enough for proper rendering of the fastest moving image that will be shown on the screen. Otherwise, the edges and details of moving images will be blurred.

The hold time shall be the same or shorter than that required for the fastest moving image that will be shown on the screen. Otherwise, the edge and details of moving images will be blurred.

NOTE 1 If the hold time is too short compared to the sampling frequency, the user will perceive flicker.

The sampling frequency (refresh rate) shall be high enough to show all details of fast moving images. If the sampling frequency is too low, quick movements will not be visible. If the sampling frequency is very low, the movement will become jerky.

Apart from these four parameters, the signal-to-noise ratio of the signal shall be high enough so that fast movements are not lost in noise.


2) US Federal Communications Commission standard.

NOTE 2 The following steps might be taken to ensure the integrity of moving images:

- a) analyse the intended moving image content and identify how high a sampling frequency will be needed in order not to lose intended movement details;
- b) choose a display with a refresh rate that matches the sampling frequency;
- c) select the rise and fall times to be short enough not to blur moving images;
- d) select the hold time to be short enough not to blur moving images;
- e) verify that the combination of refresh rate and hold time does not create flicker.

Test the system to find out whether or not video signal processing is needed to compensate for any remaining artefact or system deficiency.

Figure 3 illustrates the effects of several rise, hold and fall times and a particular sampling frequency on the image of a moving object.

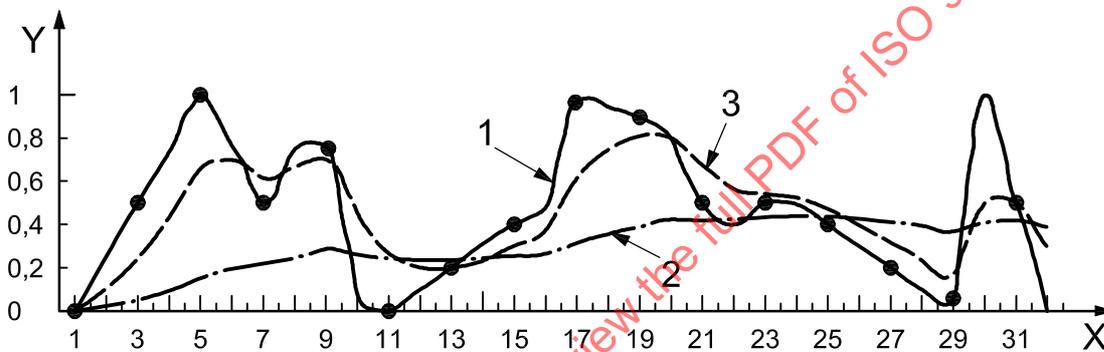

Key

X time (arbitrary unit)
 Y intensity (arbitrary unit)

- 1 real image
- 2 STN-LCD (super twisted nematic-liquid crystal display) type display
- 3 TFT-LCD (thin film transistor-liquid crystal display) type display/CRT (cathode ray tube) display

Both the STN-LCD and TFT-LCD displays have not only a too-slow rise time and fall time, but also a too-long hold time for the moving image to be able to be shown properly. The user will perceive blur. The CRT is fast enough and has a short enough hold time to show the movements without blur. The sampling frequency, however, is not fast enough to avoid flicker and to sample the movement correctly (see time = 22 and time = 31).

Figure 3 — Luminance-time graph of image moving with speed over small section of screen

5.8.5 Image formation time (IFT)

The IFT shall be short enough for the type of information shown. The time required for an image to form on an electronic visual display depends on the technical type of display. This image formation time can be too long for the application. For example, rendering realistic motion effects requires a short IFT. However, for displays that keep displaying each part of the image over a large part of the frame period, the duration of the frame period is a limiting factor. If the IFT or frame period duration is too long, while the display produces the image during a large part of the frame period, then blurred or jerky images will result, and contrast could be reduced.

For many flat panel display types, the time needed to switch from one luminance level to another — determinant for the IFT — depends on the values of these levels in a complex way. It also depends on the temperature of the display. The dependence is specific to the display type. As yet, not enough data are available to predict when the transition between two grey levels will be slowest, i.e. when the “worst case” in terms of IFT occurs. Switching from “black” to “white” could take less time than switching from, for instance, “dark grey” to “light grey”. ISO 9241-307 gives an indication of the imaging consequences of a particular IFT.

5.8.6 Spatial resolution

Resolution of the display should enable a satisfying reproduction of the original image; that is the case with the normal horizontal and vertical resolution of TV imagery. Moreover, there should not be geometric distortions that reduce geometric imaging fidelity.

5.8.7 Raster modulation or fill factor

For displays having a raster modulation or fill factor of less than 30 pixels per degree at the design viewing distance, the luminance modulation in the direction perpendicular to adjacent pixel lines shall not exceed $C_m = 0,4$ for monochrome displays or $C_m = 0,7$ for multi-colour displays, when all pixels are in their high state.

For better legibility, C_m should not exceed 0,2 for either type of display.

5.8.8 Pixel density

For direct-view displays, the manufacturer shall specify the pixel density.

Pixel density is an important factor for properly rendering information.

6 Conformance

The procedures for determining conformance with this part of ISO 9241 shall be in accordance with ISO 9241-307.

Annex A (informative)

Overview of the ISO 9241 series

This annex presents an overview of ISO 9241: its structure, subject areas and the current status of both published and projected parts, at the time of publication of this part of ISO 9241. For the latest information on the series, see: <http://isotc.iso.org/livelink/livelink?func=ll&objId=651393&objAction=browse&sort=name>.

Part no.	Subject/title	Current status
1	General introduction	International Standard (intended to be replaced by ISO/TR 9241-1 and ISO 9241-130)
2	Guidance on task requirements	International Standard
3	Visual display requirements	Replaced by the ISO 9241 "300" subseries
4	Keyboard requirements	International Standard (intended to be replaced by the ISO 9241 "400" subseries)
5	Workstation layout and postural requirements	International Standard (intended to be replaced by ISO 9241-500)
6	Guidance on the work environment	International Standard (intended to be replaced by ISO 9241-600)
7	Requirements for display with reflections	Replaced by the ISO 9241 "300" subseries
8	Requirements for displayed colours	Replaced by the ISO 9241 "300" subseries
9	Requirements for non-keyboard input devices	International Standard (intended to be replaced by the ISO 9241 "400" subseries)
11	Guidance on usability	International Standard
12	Presentation of information	International Standard (intended to be replaced by ISO 9241-111 and ISO 9241-141)
13	User guidance	International Standard (intended to be replaced by ISO 9241-124)
14	Menu dialogues	International Standard (intended to be replaced by ISO 9241-131)
15	Command dialogues	International Standard (intended to be replaced by ISO 9241-132)
16	Direct-manipulation dialogues	International Standard (intended to be replaced by ISO 9241-133)
17	Form filling dialogues	International Standard (intended to be replaced by ISO 9241-134)
20	Accessibility guidelines for information/communication technology (ICT) equipment and services	International Standard

Part no.	Subject/title	Current status
Introduction		
100	Introduction to software ergonomics	Planned
General principles and framework		
110	Dialogue principles	International Standard
111	Presentation principles	Planned to partially revise and replace ISO 9241-12
112	Multimedia principles	Planned to revise and replace ISO 14915-1
113	GUI and control principles	Planned
Presentation and support to users		
121	Presentation of information	Planned
122	Media selection and combination	Planned to revise and replace ISO 14915-3
123	Navigation	Planned to partially revise and replace ISO 14915-2
124	User guidance	Planned to revise and replace ISO 9241-13
129	Individualization	Planned
Dialogue techniques		
130	Selection and combination of dialogue techniques	Planned to incorporate and replace ISO 9241-1:1997/Amd 1:2001
131	Menu dialogues	Planned to replace ISO 9241-14
132	Command dialogues	Planned to replace ISO 9241-15
133	Direct-manipulation dialogues	Planned to replace ISO 9241-16
134	Form-based dialogues	Planned to replace ISO 9241-17
135	Natural language dialogues	Planned
Interface control components		
141	Controlling groups of information (including windows)	Planned to partially replace 9241-12
142	Lists	Planned
143	Media controls	Planned to partially revise and replace ISO 14915-2
Domain-specific guidance		
151	Guidance on World Wide Web user interfaces	International Standard
152	Interpersonal communication	Planned
153	Virtual reality	Planned
Accessibility		
171	Guidance on software accessibility	International Standard

Part no.	Subject/title	Current status
Human-centred design		
200	Introduction to human-centred design standards	Planned
210	Human-centred design of interactive systems	Planned to revise and replace ISO 13407
Process reference models		
220	Human-centred lifecycle processes	Planned to revise and replace ISO/PAS 18152
Methods		
230	Human-centred design methods	Planned to revise and replace ISO/TR 16982
Ergonomic requirements and measurement techniques for electronic visual displays		
300	Introduction to electronic visual display requirements	International Standard
302	Terminology for electronic visual displays	International Standard
303	Requirements for electronic visual displays	International Standard
304	User performance test methods for electronic visual displays	International Standard
305	Optical laboratory test methods for electronic visual displays	International Standard
306	Field assessment methods for electronic visual displays	International Standard
307	Analysis and compliance test methods for electronic visual displays	International Standard
308	Surface conduction electron-emitter displays (SED)	Technical Report
309	Organic light-emitting diode (OLED) displays	Technical Report
Physical input devices		
400	Principles and requirements for physical input devices	International Standard
410	Design criteria for physical input devices	International Standard
411	Laboratory test and evaluation methods for the design of physical input devices	Planned
420	Selection procedures for physical input devices	Under preparation
421	Workplace test and evaluation methods for the use of physical input devices	Planned
Workstation		
500	Workstation layout and postural requirements	Planned to revise and replace ISO 9241-5
Work environment		
600	Guidance on the work environment	Planned to revise and replace ISO 9241-6

Part no.	Subject/title	Current status
Application domains		
710	Introduction to ergonomic design of control centres	Planned
711	Principles for the design of control centres	Planned to revise and replace ISO 11064-1
712	Principles for the arrangement of control suites	Planned to revise and replace ISO 11064-2
713	Control room layout	Planned to revise and replace ISO 11064-3
714	Layout and dimensions of control centre workstations	Planned to revise and replace ISO 11064-4
715	Control centre displays and controls	Planned to revise and replace ISO 11064-5
716	Control room environmental requirements	Planned to revise and replace ISO 11064-6
717	Principles for the evaluation of control centres	Planned to revise and replace ISO 11064-7
Tactile and haptic interactions		
900	Introduction to tactile and haptic interactions	Planned
910	Framework for tactile and haptic interactions	Under preparation
920	Guidance on tactile and haptic interactions	Under preparation
930	Haptic and tactile interactions in multimodal environments	Planned
940	Evaluation of tactile and haptic interactions	Planned
971	Haptic and tactile interfaces to publicly available devices	Planned

Annex B (informative)

Attractivity, or subject visual quality

The attractivity of the image on a visual display is an important factor and there is no doubt that it influences well-being, fatigue and work performance.

In the case of a character font design, attractivity is a psychological factor that is a measure for acceptance by the user.

A unanimously agreed definition of *attractivity* has yet to be established. Nevertheless, the following contributing factors are considered to influence it (although the psychological correlation has not yet been shown).

Font styles

- character, word, line separations
- serifs
- bold, italic style
- under/overcut
- size

User factors

- education
- age
- reading environment

Non-scientific reading performance studies and opinion polls for printed text using different fonts have been carried out with a significant number of persons. The results definitely show a differentiation in attractivity ratings. For example, it is well known by book printers that certain fonts such as *Gatineau* are preferred by many people. It is not known, however, whether these experiences can be transposed to the characteristics of visual displays — be they CRT, LCD or other, new, technologies.

For the above reasons, neither a precise definition, measurement methods nor reference levels can be given. It can be recommended, however, that the factor of attractivity be considered by the manufacturer wishing to improve his design. In the absence of a scientifically proven methodology, it could also be helpful to question as many people as possible on their opinion and subjective rating of a presentation of various character sets, including the set intended to be used, applying the proven rules for performing opinion surveys.

Annex C (informative)

Usability aspects of installation

C.1 Usability aspects

Usability is an important consideration in the design of products because it is concerned with the extent to which the users of products can work effectively, efficiently and with satisfaction. To determine the level of usability achieved, the performance and satisfaction of users working with a product should be measured. Key factors that should be addressed when assessing the usability of a product are the task to be performed, the context of use and the qualification of the user. An adequate usability test should be able to reveal discrepancies between the intended use (as defined by a designer) and actual use (as performed by a real user).

The installation and set-up of a product, such as a computer workstation, is one of the initial experiences that a user has with a product and that can influence initial user satisfaction.

For this reason, this annex provides an outline of one possible usability test for installation and the setting up of a product, such as a computer workstation.

C.2 Installation and set-up

As defined in this example, the task to be performed and the context of use is the installation of a product. Installation could comprise the following stages:

- unpacking;
- finding/identifying the installation procedure or manual;
- removal of protective means such as screws, shock absorbers and wrapping materials;
- coordination of hardware installation components including cables, plugs, bezels and screws;
- sequence and connection aids (e.g. colour coding of matching parts) to assemble installation components;
- installation of software components such as drivers, utilities and applications;
- registration;
- several start/restart sequences of the system.

The effectiveness and the efficiency of installation depends on the abilities, experience and training of the person in charge of the task. For this reason, the manufacturer should determine the type of installation: whether it is a user setup or an expert setup, or a plug-and-play versus a customized setup.

To determine the level of usability, a representative usability test in a suitable environment should be conducted. This environment can be simulated in a usability test lab.

The following measures have been shown to provide meaningful information:

- a) time from unpacking to completion of installation;
- b) time of identified individual sub-steps;
- c) number of misinterpretations;
- d) failures (fatal — i.e. abnormal stop — circumventable problems or minor):
 - 1) minor (temporarily impedes progress),
 - 2) major (substantially impedes progress),
 - 3) fatal (further progress is not possible);
- e) number of questions to trained reference person;
- f) number and quality of user feedback and recommendations for improvement;
- g) relation of needed guidance compared to self-explaining steps.

C.3 Operation of product

In order to specify or measure usability of use, one needs to identify the goals and to decompose effectiveness, efficiency and satisfaction and the components of the context of use into subcomponents with measurable and verifiable attributes. Many situations may require the evaluation of the usability of the product-under-test within the complete system. This includes any hardware or software component that is relevant and representative of the actual work environment. The components and the relationships between them are illustrated in Figure C.1.

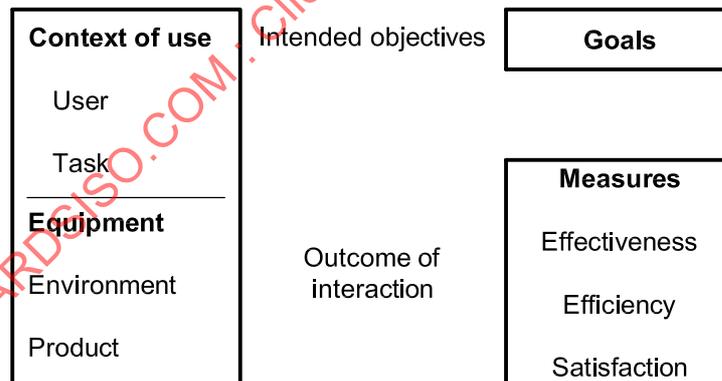


Figure C.1 — Usability framework

Annex D (normative)

Basic concepts of visual perception for contrast and luminance of electronic displays

D.1 Contrast and luminance for electronic displays

This annex attempts to elucidate the phenomena behind the formation of images with a certain luminance and contrast on an electronic display, thus dealing with basic concepts of luminance and contrast in visual perception.

D.2 Symbols and abbreviated terms

For the purposes of this annex, the following symbols and abbreviated terms apply.


CR	contrast ratio
E	illuminance
g	uniformity of illumination
L_L	display luminance of low state
L_A	luminance of light source
L_r	reflected luminance
L_H	display luminance of high state
r	(subscript) reflected value
$S_A(\lambda)$	spectral distribution of light source
$S(\lambda)$	spectral distribution
T	correlated colour temperature
u', v'	CIE 1976 UCS values
X_r, Y_r, Z_r	tristimulus values of colour stimulus
ψ	character height
γ	gamma value (electro-optical transfer function)

D.3 Illumination conditions

The typical use of a display is illustrated in Figure D.1. Elements of vision are symbolically drawn:

- different illumination conditions (natural, artificial sources) and their attributes;
- surrounding, which affects the adaptation of the eye;

- the display with its attributes;
- the eye with its attributes.

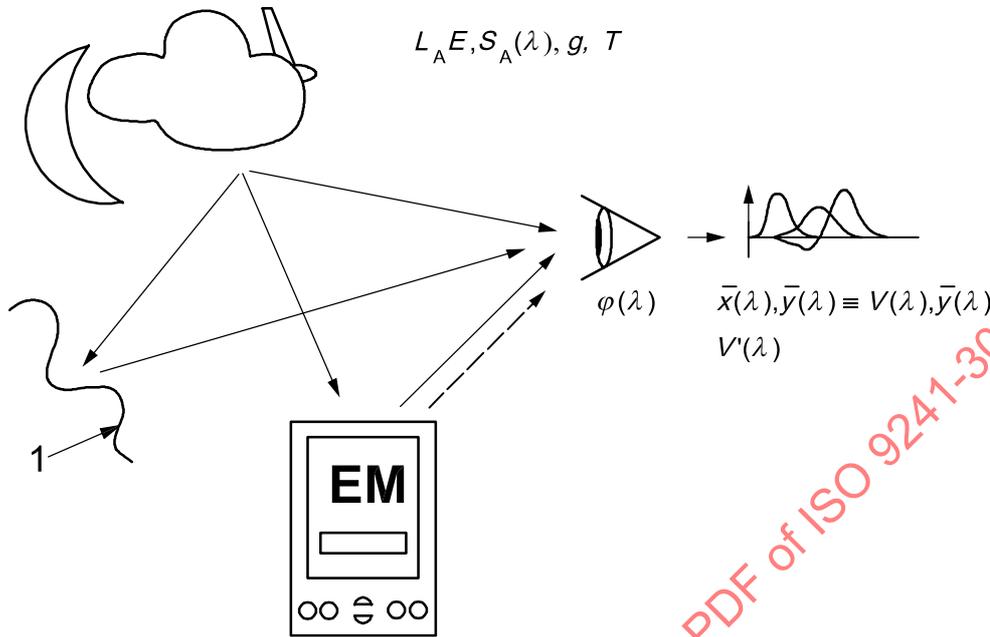

Key

1 physical surroundings

Useful information: $S(\lambda)$, L_H , L_L , CR , u', v', Ψ, γ , etc.

Disturbing information: $X_r, Y_r, Z_r, (L_r)$, etc.

NOTE See D.2 for symbol meanings.

Figure D.1 — Use of displays

Useful information is given by the display to the user based on

- luminance, L_H, L_L ,
- contrast, $CR = L_H/L_L$, and
- colour contrast, ΔE .

Due to reflection, the different illumination conditions result in disturbing information. The following are consequences of the disturbing information.

Reduction of contrast:

$$CR = \frac{L_H + L_r}{L_L + L_r} \tag{D.1}$$

Desaturation and change of hue:


$$\begin{aligned} \Sigma X &= X + X_r \\ \Sigma Y &= Y + Y_r \\ \Sigma Z &= Z + Z_r \end{aligned} \tag{D.2}$$

Useful information is recognizable if the following conditions are met:

- minimum luminance;
- minimum contrast;
- minimum size;
- adaptation of the eye to current luminance of field of vision;
- sufficient time of presentation of the object;
- reduction of unintended information, for example from reflections, so that the useful information can be perceived and is minimally influenced.

D.4 Luminance contrast

A comparison of the different contrast requirements of ISO 9241-3 [4] and ISO 13406-2 [5] is shown in Figure D.2.

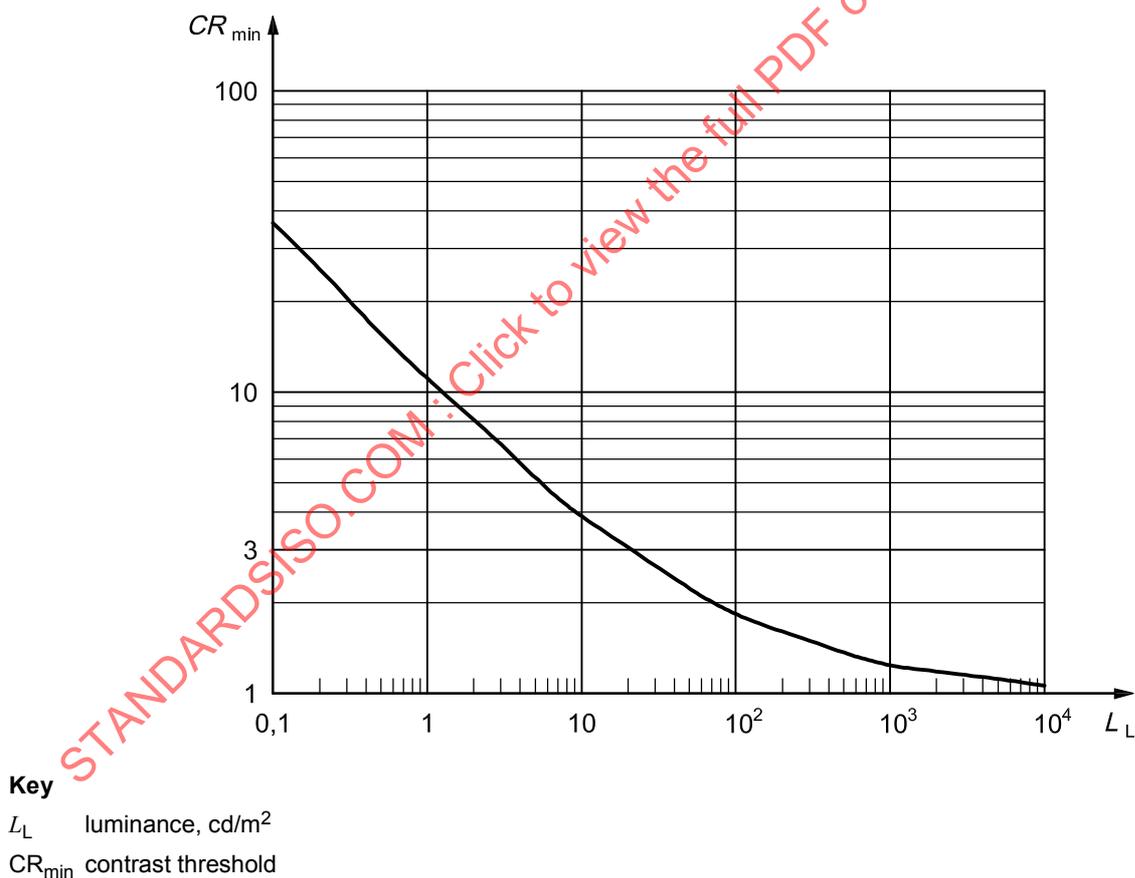

Minimum contrast according to ISO 9241-3: $CR = 3:1$

Minimum contrast according to ISO 13406-2: $CR = 1 + 10 \times L_L^{-0,55}$

Figure D.2 — Minimum contrast of displays (according to ISO 9241-3/ISO 13406-2)

Comparison and discussion

Both curves in Figure D.2 cross at $L_L^* \approx 18,7 \text{ cd/m}^2$.

Below L_L^* , the requirement of ISO 9241-3 is too low when compared with ISO 13406-2.

Above L_L^* , the requirement of ISO 9241-3 is too high when compared with ISO 13406-2.

The contrast according to ISO 13406-2 strives to 1 with increasing L_L . This is unacceptable.

As an alternative to the differing contrast requirements of ISO 9241-3 and ISO 13406-2, for the purposes of this part of ISO 9241, another contrast requirement is specified.

Based on historical research, Kokoschka [15] carried out a mathematical evaluation of the visual contrast threshold, \bar{C} , giving a mathematical expression of \bar{C} as a function of luminance, L_L , and angular extent, α , of the visual target:

$$\begin{aligned} \bar{C} &= \frac{L_H - L_L}{L_L} = f(L_L, \alpha) \\ \bar{C} &= \bar{C}_{\min} \times f_1 \times f_2 \\ \bar{C} &= 0,002\,75 \times f_1 \times f_2 \end{aligned} \tag{D.3}$$

with

$$\begin{aligned} f_1 &= 1 + \left(\frac{L_L}{0,158} \right)^{-0,484} \\ f_2 &= 1 + \left(\frac{\alpha_0}{\alpha} \right)^2 \\ \alpha_0 &= 7,5 + 133 \times \left[1 - \frac{1}{1 + \left(\frac{L_L}{0,000\,75} \right)^{-0,383}} \right] \end{aligned} \tag{D.4}$$

This expression is converted to express the contrast ratio, CR:

$$CR = \frac{L_H}{L_L} = 1 + \bar{C} \tag{D.5}$$


Depending on the size of the visual target, the visual contrast threshold, \bar{C} , shall be adjusted by a constant, k . Using an object size of $\alpha = 1'$ will lead to a constant k of:

$$\begin{aligned} CR &= \frac{L_H}{L_L} = 3 = 1 + k \times \bar{C}, \quad (L_L^* \approx 18,7 \text{ cd/m}^2; \quad \alpha = 1') \\ k &\approx 6,3 \end{aligned} \tag{D.6}$$

In general:

$$CR = \frac{L_H}{L_L} = 1 + 6,3 \times \bar{C}(L_L; \alpha = 1') \tag{D.7}$$

The result is shown by the dotted line in Figure D.3.

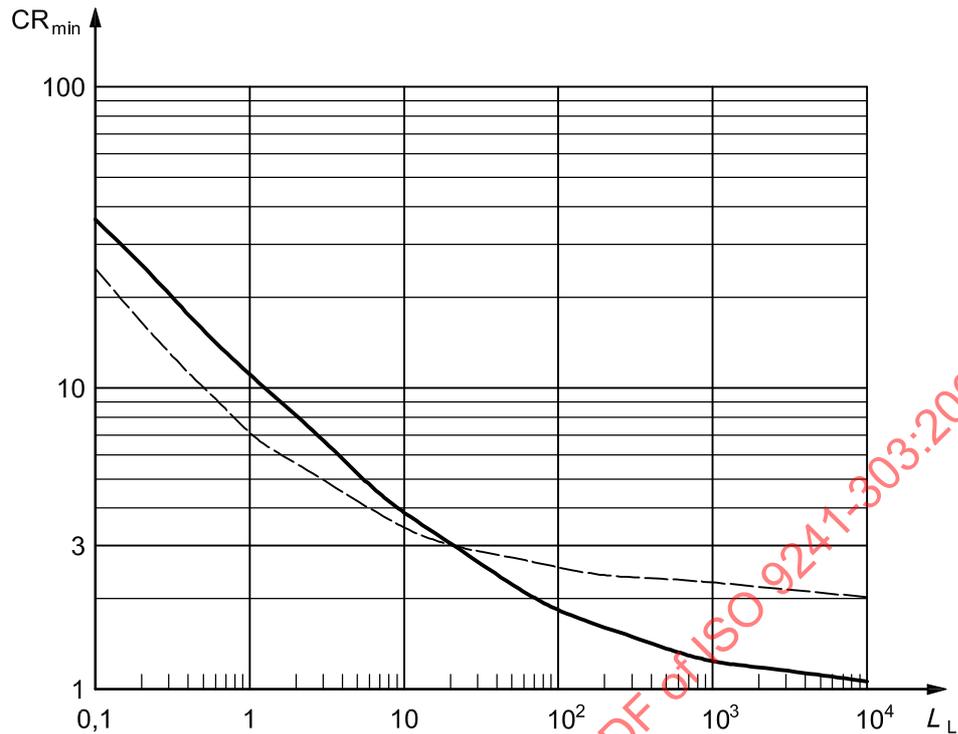**Key**

L_L luminance, cd/m^2

CR_{\min} contrast threshold

Figure D.3 — Required minimum contrast of displays

The (adjusted) visual contrast threshold for an object size of 1' is proposed as the minimum contrast requirement for electronic displays.

Therefore, the required contrast shall be:

$$\text{CR}_{\min} = 2,2 \times (1 + 2,2 \times L_L^{-0,65}) = 2,2 + 4,84 \times L_L^{-0,65} \quad (\text{D.8})$$

Basic data for the above-mentioned contrast requirement were derived by experiments on young users. The required luminance contrast, CR, differs with the age of the users. For this reason, the introduction of a contrast multiplier, k_{age} , was suggested by Blackwell [16]:

$$\text{CR}_{\min, \text{age}} = k_{\text{age}} \times \text{CR}_{\min} \quad (\text{D.9})$$

See Table D.1.

Table D.1 — Blackwell's age contrast multiplier

Age of user years	Contrast multiplier k_{age}
20	1,00
25	1,00
30	1,02
35	1,07
40	1,17
45	1,34
50	1,58
55	1,90
60	2,28
65	2,66

However, the combination of the data from Blackwell and Kokoschka needs to be regarded with caution. At the present time, Equation (D.8) represents the appropriate requirement (see also CIE 145 [17]).

D.5 Display luminance

In addition to L_H , L_L , the luminance, L_r , reflected from the display or screen surface shall be considered in illuminated environments; L_r considers luminance components, L_D and L_S :

— diffuse reflected luminance, $L_D = q \times E = R'_D \times E$;

— specular reflected luminance, $L_S = R'_S \times L_A$.

In general, the minimum contrast will be:

$$CR_{min} = \frac{L_H + L_D + L_S}{L_L + L_D + L_S} = 2,2 + 4,84 \times (L_L + L_D + L_S)^{-0,65} \tag{D.10}$$

Solving Equation (D.10) to L_H , the minimum display luminance, $L_{H,min}$, is derived:

$$L_{H,min} = \left[2,2 + 4,84 \times (L_L + L_D + L_S)^{-0,65} \right] \times (L_L + L_D + L_S) - L_D - L_S \tag{D.11}$$

Therefore, $L_{H,min}$ is a function of L_L :

$$L_D = q \times E = R'_D \times E \tag{D.12}$$

$$L_S = R'_S \times L_A \tag{D.13}$$

This is illustrated in the following two examples:

Example 1

Typical CRT monitor as used in offices, where:

$$L_L = 0,5 \text{ cd/m}^2$$

$$q = \frac{\rho}{\pi} \approx 2,5 \%$$

$$R_{S,EXT} \approx 3\%$$

$$L_A = 0 \text{ cd/m}^2$$

See Table D.2.

Table D.2 — Results of Equation (D.11) for Example 1

E lx	$L_{H,min}$ cd/m ²
1	≈ 5
10	≈ 6
100	≈ 11
1 000	≈ 46
100 00	≈ 334
100 000	≈ 3 075

Example 2

Typical laptop with TFT-LCD, where:

$$L_L = 0,5 \text{ cd/m}^2$$

$$q = \frac{\rho}{\pi} \approx 0 \%$$

$$R_{S,EXT} \approx 2 \%$$

$$L_A \text{ see Table D.3.}$$

Table D.3 — Results of Equation (D.11) for Example 2

L_A cd/m ²	$L_{H,min}$ cd/m ²
1	≈ 5
10	≈ 6
100	≈ 10
1 000	≈ 39
100 00	≈ 272
100 000	≈ 2 470

Lower limit for $L_{H,min}$

$L_{H,min}$ shall exceed 3 cd/m². This minimum luminance is required in order to perceive colour images [18].

In the case of low illuminance, $L_{H,min}$ is also a function of the display size.

EXAMPLE In cinemas, $L_{H,min}$ should be about 50 cd/m².

Upper limit for L_H

Glare (disability glare or discomfort glare) shall not be produced by the display.

NOTE Glare depends on the state of the adaptation of the human eye.

STANDARDSISO.COM : Click to view the full PDF of ISO 9241-303:2008

Annex E (informative)

Virtual display — Performance objectives

E.1 General

Use comfort is one of the key issues when head-worn or hand-held virtual displays are considered. The purpose of this annex is to provide a minimum set of ergonomical performance objectives for helping achieve a comfortable user experience with a virtual display. These are limited to non-see-through binocular or biocular displays.

E.2 Eye relief

Eye relief is the distance from the last physical surface of the virtual display optics to the exit pupil where the pupil of the eye is placed. Eye relief is constrained by two factors: the eye must be near enough to the lens that the whole display is visible, but far enough away from the display so that spectacles can be worn. To accommodate spectacles, the eye relief should be at least 25 mm [5], [6], [7].

E.3 Convergence demand

The vergence angle, α , is the angle between the visual axes of the left and right eye. See Figure E.1. It is expressed as:

$$\alpha = 2 \tan^{-1}(i/2D)$$

where

- D is the distance from the nodal point of eye along the midsagittal plane to the fixated point, F , in space;
- i is the interpupillary distance.

When the two displays of a binocular virtual display are in front of the eyes, the user has to converge the eyes in order to perceive the images and fuse them into a single percept. The convergence position of the eyes that is required for binocular fusion is the *convergence demand* of the binocular virtual display system.

The system should not cause a convergence demand that is in the divergent direction from the parallel visual axes, i.e. in the direction of the temples from optical infinity [5], [8].

The convergence demand should be between 0° to 10°, preferably between 2° to 10° [5], [6].