
**Textile machinery and accessories —
Cylindrical sliver cans —**

**Part 2:
Spring bottoms**

*Matériel pour l'industrie textile — Pots cylindriques pour rubans —
Partie 2: Fonds à ressort*

STANDARDSISO.COM : Click to view the full PDF of ISO 93-2:2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 93-2:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 93-2 was prepared by Technical Committee ISO/TC 72, *Textile machinery and accessories*, Subcommittee SC 1, *Spinning preparatory, spinning, twisting and winding machinery and accessories*.

This third edition cancels and replaces the second edition (ISO 93-2:1999), which has been technically revised.

ISO 93 consists of the following parts, under the general title *Textile machinery and accessories — Cylindrical sliver cans*:

- *Part 1: Main dimensions*
- *Part 2: Spring bottoms*

Textile machinery and accessories — Cylindrical sliver cans —

Part 2: Spring bottoms

1 Scope

This part of ISO 93 specifies the principal features of spring bottoms — with and without pre-tension — for cylindrical sliver cans, as specified in ISO 93-1, used in the textile industry.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 93-1, *Textile machinery and accessories — Cylindrical sliver cans — Part 1: Main dimensions*

3 Symbols

d	inside diameter of sliver can
d_4	outside diameter of spring plate
h	overall height
h_2	distance from top rim of can to surface of spring plate
h_3	depth of spring plate
F_n	force of spring
F_v	force of spring in top working position
L_0	length of unloaded spring
L_v	length of spring in top working position (i.e. when constrained)

4 Principal features

4.1 Spring bottoms for cylindrical cans without castors

See Figures 1 and 2, and Table 1.

For type A (see Figure 1), force of spring F_n and tolerances of parallelism of the spring plate shall be agreed between the producer, machine manufacturer and customer.

For type B (see Figure 2), force of spring F_n and force of spring in top working position F_v , as well as tolerances of parallelism of the spring plate, shall be agreed between the producer, machine manufacturer and customer.

The distance from the top rim of can to surface of spring plate h_2 shall be

- for type A, between ≥ 5 mm and ≤ 70 mm, and
- for type B, equal to 20 mm.

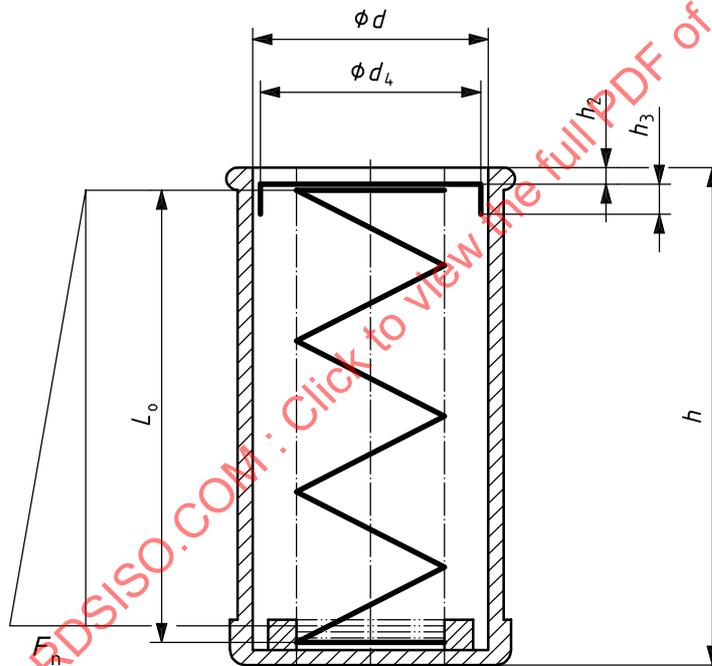


Figure 1 — Spring bottom without pre-tension — Type A

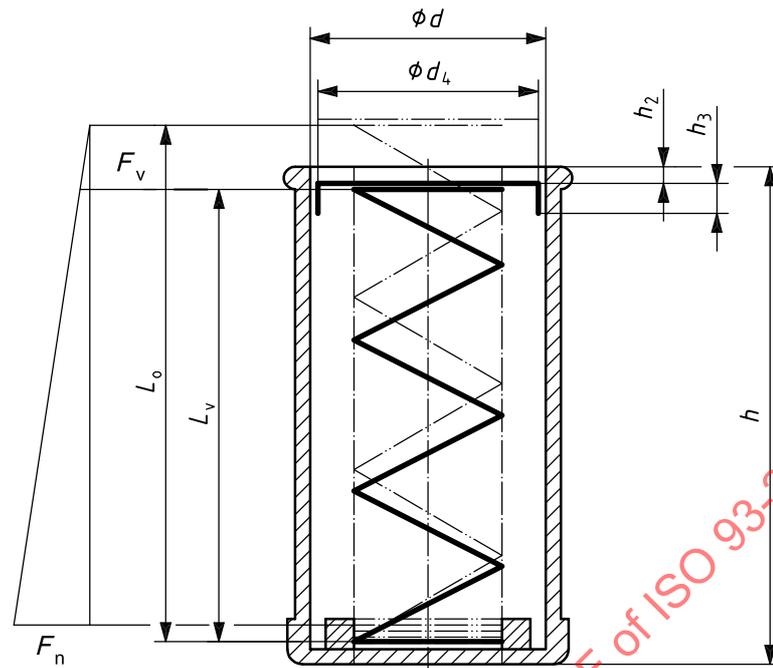


Figure 2 — Spring bottom with pre-tension — Type B

STANDARDSISO.COM : Click to view the full PDF of ISO 93-2:2006

Table 1 — Principal features of spring bottoms — Types A and B

Dimensions in millimetres

Size of can ^a		Characteristics of spring		Spring plate	
d ± 3	h	Type A $L_0 \pm 30$	Type B $L_0 \pm 30$	d_4	h_3
300	900	840	940	285	50
350				335	50
400				385	50
450				435	50
500				485	55
600				585	60
700				682	70
300	1 000	940	1 040	285	50
350				335	50
400				385	50
450				435	50
500				485	55
600				585	60
700				682	70
400	1 100	1 040	1 140	385	50
450				435	50
500				485	55
600				585	60
700				682	70
450	1 200 ^c	1 140	1 240	435	50
500				485	55
600				585	60
700 ^b				682	70

^a According to ISO 93-1.

^b Inside diameters d greater than 700 mm shall be in increments of 100 mm.

^c Heights h greater than 1 200 mm shall be in increments of 100 mm.

4.2 Spring bottoms for cylindrical cans with castors

See Figures 3 and 4, and Table 2.

For type C (see Figure 3), force of spring F_n and tolerances of parallelism of the spring plate shall be agreed between the producer, machine manufacturer and customer.

For type D (see Figure 4), force of spring F_n and force of spring in top working position F_v , as well as tolerances of parallelism of the spring plate, shall be agreed between the producer, machine manufacturer and customer.

The distance from the top rim of can to surface of spring plate h_2 shall be

- for type C, between ≥ 5 mm and ≤ 70 mm, and
- for type D, equal to 20 mm.

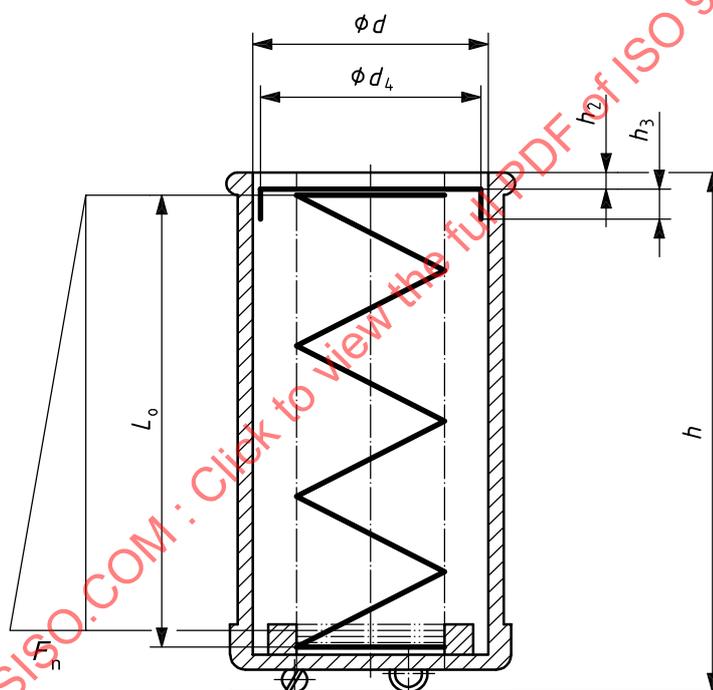


Figure 3 — Spring bottom without pre-tension — Type C

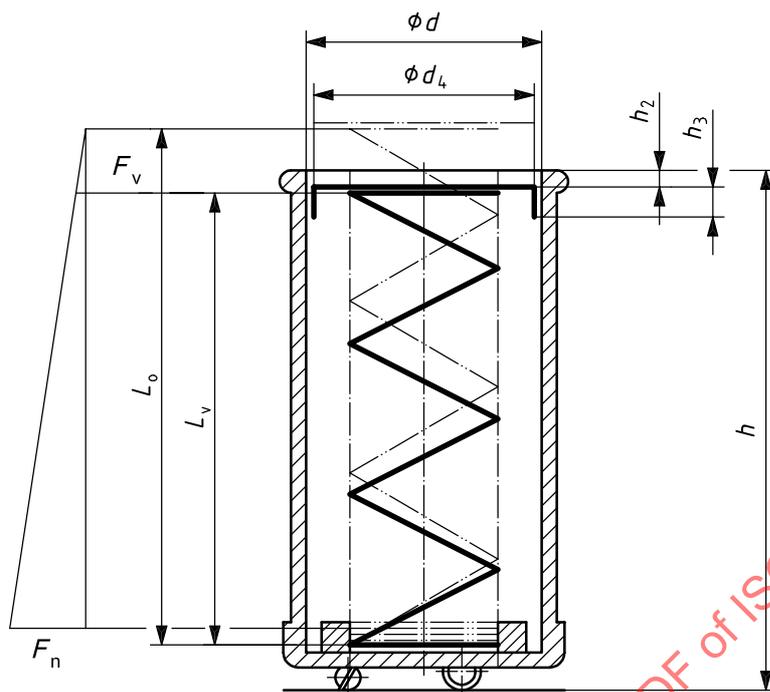


Figure 4 — Spring bottom with pre-tension — Type D

STANDARDSISO.COM : Click to view the full PDF of ISO 93-2:2006

Table 2 — Principal features of spring bottoms — Types C and D

Dimensions in millimetres

Size of can ^a		Characteristics of spring		Spring plate	
d ± 3	h	Type C $L_0 \pm 30$	Type D $L_0 \pm 30$	d_4	h_3
400	900	770	870	385	50
600				585	60
400	1 000	870	970	385	50
450				435	50
500				485	55
600				585	60
700				682	70
800				780	85
900				880	100
450	1 100	970	1 070	435	50
500				485	55
600				585	60
700				682	70
800				780	85
900				880	100
1000				980	100
450	1 200 ^c	1 070	1 170	435	50
500				485	55
600				585	60
700				682	70
800				780	85
900				880	100
1 000 ^b				980	100

^a According to ISO 93-1.

^b Inside diameters d greater than 1 000 mm shall be in increments of 200 mm.

^c Heights h greater than 1 200 mm shall be in increments of 100 mm.