

INTERNATIONAL STANDARD

ISO
9960-1

First edition
1992-07-15

Draughting instruments with or without graduation —

Part 1: Draughting scale rules

*Instruments de dessin avec ou sans graduation —
Partie 1: Règles graduées de dessinateurs*



Reference number
ISO 9960-1:1992(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 9960-1 was prepared by Technical Committee ISO/TC 10, *Technical drawings, product definition and related documentation*, Sub-Committee SC 9, *Media and equipment for drawing and related documentation*.

ISO 9960 consists of the following parts, under the general title *Draughting instruments with or without graduation*:

- Part 1: *Draughting scale rules*
- Part 2: *Protractors*
- Part 3: *Set squares*

Annex A of this part of ISO 9960 is for information only.

Draughting instruments with or without graduation —

Part 1: Draughting scale rules

1 Scope

This part of ISO 9960 specifies the main requirements and the accuracy of draughting scale rules, and their graduations in SI units (International System of Units).

Two types of draughting scale rule are covered, those for hand use and those for manually operated draughting machines, both for professional use only. Scale rules for use in schools are not included.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 9960. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 9960 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 554:1976, *Standard atmospheres for conditioning and/or testing — Specifications*.

ISO 3098-1:1974, *Technical drawings — Lettering — Part 1: Currently used characters*.

ISO 9962-3:—¹⁾, *Manually operated draughting machines — Part 3: Dimensions of scale rule chuck plates*.

1) To be published.

2) Term defined in ISO 10209-1^[5].

3 Definitions

For the purposes of this part of ISO 9960, the following definitions apply.

3.1 graduation: Division lines and figuring. The graduation may be engraved in black.

3.2 major divisions: Lines along the edge of a scale rule defining the major units.

3.3 figuring: Numbering and lettering on a scale rule identifying the values of the major divisions.

3.4 division lines: Lines along the edge of a scale rule, including both the major divisions and the lines subdividing the major divisions.

3.5 (draughting) scale rule: Parallel-sided draughting instrument on which graduations are applied.

Draughting scale rules are used to draw straight lines and/or to measure distances on drawings which can be either full scale, reduced or enlarged with respect to the object to be shown.

3.6 scale: Ratio of the linear dimension of an element of an object as represented in the original drawing²⁾ to the real linear dimension of the same element of the object itself.

NOTE 1 The scale of a print may be different from that of the original drawing (see ISO 5455^[1]).

3.7 nominal length (of the scale rule): Graduated length of the scale rule.

3.8 inspection scale rule: Scale rule used only for testing purposes.

4 Characteristics

4.1 Cross-sections

The general shape of the scale rule cross-section may be as follows:

a) flat, see figure 1;




Figure 1

b) four bevel, see figure 2;




Figure 2

c) oval, see figure 3;



Figure 3

d) semi-oval, see figure 4;



Figure 4

e) two bevel, see figure 5;



Figure 5

f) one bevel, see figure 6;




Figure 6

g) opposite bevel, see figure 7;




Figure 7

h) triangular, see figure 8;




Figure 8

4.2 Nominal lengths

The nominal lengths are as follows:

150 mm; 200 mm; 250 mm; 300 mm; 350 mm;
400 mm; 450 mm; 500 mm; 600 mm; 800 mm;
1 000 mm.

The nominal length of inspection scale rules shall be 300 mm or 500 mm.

4.3 Lengths of division lines

The lengths of the division lines are as follows:

1,8 mm; 2,5 mm; 3,5 mm; 5 mm; 7 mm; 10 mm.

The length of lines for each level of subdivision shall be constant throughout the scale rule.

4.4 Tolerance on length of division lines

The tolerances on the length of the division lines are as follows:

- lengths of 1,8 mm and 2,5 mm: $\pm 0,3$ mm
- lengths of 3,5 mm and 5 mm: $\pm 0,5$ mm
- lengths of 7 mm and 10 mm: ± 1 mm

4.5 Width of division lines

The mean width of division lines shall range from a minimum of 0,08 mm to a maximum of 0,13 mm for adjacent division lines where the distance between division lines is not more than 0,5 mm, and from a minimum of 0,09 mm to a maximum of 0,18 mm for adjacent division lines where the distance between division lines is more than 0,5 mm. The width of each division line shall not differ by more than 10 % from the mean width. In each scale rule, the same mean width of division lines shall be used, regardless of their length.

4.6 Distance between division lines

The distance between division lines shall be measured between their centres. The space between adjacent division lines shall not be less than four times the mean width of those division lines.

4.7 Smallest subdivision

The smallest subdivision shall be not less than 0,4 mm.

4.8 Graduation intervals

The major divisions and the lines subdividing the major divisions shall be indicated by using three different lengths of division line (see table 1).

4.9 Beginning of graduation

The first division line shall be at a distance of 10 mm or $5n$ millimetres, with $n = 2, 3, \dots$, from the nearest end of the scale rule (see figure 9).

Dimensions in millimetres

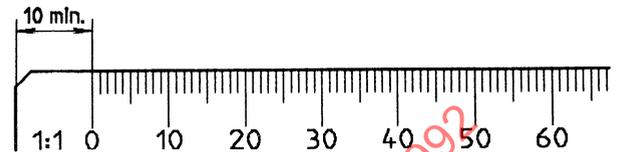


Figure 9

4.10 Characters

Vertical characters of type A, in accordance with ISO 3098-1, shall be used.

4.11 Height of digits

The height of digits shall be 1,8 mm or, in accordance with ISO 3098-1, 2,5 mm or 3,5 mm.

4.12 Arrangement of digits

Each digit shall be centred on the corresponding major division.

4.13 Scales for scale rule graduations

The graduations for scales in accordance with ISO 5455[1] are given in table 1.



4.14 Indication of scale

The indication of the scale shall be placed on the left of the zero-point, as shown on figure 9, for example 1:1.

4.15 Overall length

The overall length shall be 20 mm to 30 mm longer than the nominal length, to allow for the necessary indication of the scale.

Table 1 — Graduations for scale rules

Scales (see ISO 5455 ⁽¹⁾)	Graduation and measurement unit
1:1	
1:10	0 100 mm 200 300 2 900 3 000 mm
1:100	0 1 m 2 3 29 30 m
1:1 000	0 10 m 20 30 290 300 m
1:10 000	0 100 m 200 300 2 900 3 000 m
10:1	0 1 mm 2 3 29 30 mm
1:2	
1:20	0 0,5 1 m 6 m
1:200	0 5 10 m 60 m
1:2 000	0 50 100 m 600 m
5:1	0 5 10 mm 60 mm
1:5	
1:50	0 1 m 14 15 m
1:500	0 10 m 140 150 m
1:5 000	0 100 m 1 400 1 500 m
2:1	0 10 mm 140 150 mm

5 Dimensions and geometrical tolerances

5.1 Cross-section dimensions

Cross-section dimensions of scale rules are left to the manufacturer's choice.

The shapes and dimensions of working edges shall be as shown in figure 10 or 11, and given in table 2.

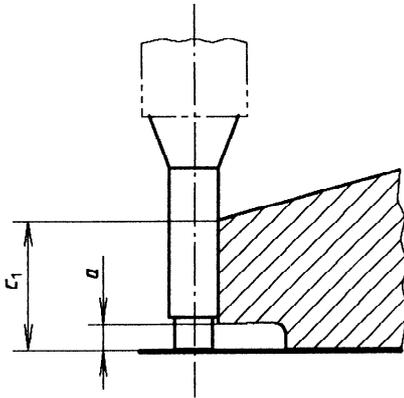


Figure 10

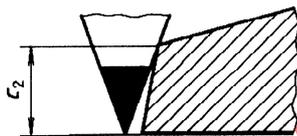


Figure 11

Table 2 — Working edge dimensions of scale rules for various draughting instruments (see figures 10 and 11)

Dimensions in millimetres

Symbol of draughting instrument	Description of draughting instrument	ink recess <i>a</i>	Height of working edge	
			<i>c</i> ₁	<i>c</i> ₂
	Tubular technical pen with stepped tube tip (see ISO 9175-1[2])	0,4 to 0,6	1 to 1,5	—
	Tubular technical pen with tube tip not stepped	—	—	—
	Fine lead mechanical pencil, tubular guided	0,4 to 0,6	1 to 1,5	0,5 to 1
	Fine lead mechanical pencil, lead guided	—	—	
	Wood-cased pencil, clutch pencil	—	—	
	Felt-tip/fibre-tip pen, tubular guided	0,4 to 0,6	1 to 1,5	—
	Felt-tip/fibre-tip pen, fibre-tip guided	—	—	—
	Ball-point pen	0,4 to 0,6	1 to 1,5	0,5 to 1

STANDARDSISO.COM : Click to view the full PDF of ISO 9960-1:1992

5.2 Geometrical tolerances

See table 3.

Table 3 — Geometrical tolerances

Dimensions in millimetres

Characteristics	Geometrical tolerances	
	Grade 00	Grade 0
Accuracy of division	- 0,06/100	- 0,1/100
Straightness tolerance of the working edge of		
— draughting scale rules	0,05/100	0,1/100
— inspection scale rules	0,02/100	—
Flatness tolerance of the underside of the scale rule ¹⁾	0,15/100	0,25/100
Parallelism tolerance between the two working edges	0,06/100	0,1/100
1) Certain applications will require a flatness tolerance of 0,1/100 for grade 00 and 0,15/100 for grade 0.		

6 Specific requirements for manually operated draughting machine scale rules

6.1 Cross-sections

The general shape of the scale rule cross-section is left to the manufacturer's choice. However, cross-sections in accordance with figures 4 and 5 are recommended.

6.2 Thickness

The thickness of manually operated draughting machine scale rules shall be 5 mm ^{+0,2}/_{-0,5} mm or 4 mm ^{+0,2}/_{-0,5} mm (see ISO 9962-3).

6.3 Width

The widths of manually operated draughting machine scale rules are given in table 4 with respect to the nominal lengths.

Table 4 — Widths of manually operated draughting machine scale rules

Dimensions in millimetres

Nominal length	Width		
	Large size, L	Medium size, M	Small size, S
200	—	—	40 ⁺¹ / ₋₄
250	50 ± 2	45 ± 2	40 ⁺¹ / ₋₄
300	50 ± 2	45 ± 2	40 ⁺¹ / ₋₄
350	50 ± 2	45 ± 2	40 ⁺¹ / ₋₄
400	50 ± 2	45 ± 2	40 ⁺¹ / ₋₄
450	50 ± 2	45 ± 2	—
500	50 ± 2	45 ± 2	—
600	50 ± 2	—	—

6.4 Mass

When different scale rules are used on manually operated draughting machines (see ISO 9962-1[3] and ISO 9962-2[4]) in a vertical position, consideration should be given to the mass requirements to ensure reliable attachment of the scale rules to the draughting machine (see ISO 9962-3).

6.5 Geometrical tolerances

The geometrical tolerances of manually operated draughting machine scale rules shall be those specified for grade 00 in table 3. Concavity is not permitted (see figure 12).

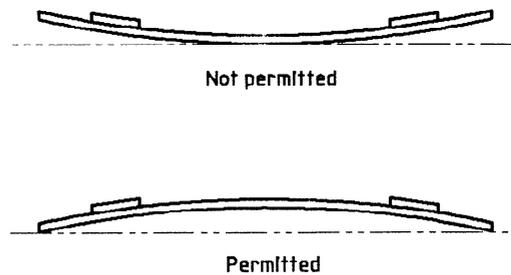


Figure 12

7 Appearance

7.1 Materials

Scale rules shall be made from materials suitable for the purpose of such instruments. The dimensional variations should be less than 1 % for temperature changes between 10 °C and 30 °C and relative humidity changes between 25 % and 100 %.

7.2 Surfaces

The surface in contact with the drawing media (i.e. the underside) shall be smooth and shall not damage the surface of the drawing media nor the drawing itself.

7.3 Edges

The edges shall be smooth enough to ensure precise lines. They shall not damage the lines drawn.

7.4 Division lines, digits and lettering

Division lines, digits and lettering shall be applied indelibly in black and be uniformly clear and distinct. There shall be no missing division lines, digits or lettering, or any errors. Scale rules made of transparent materials should be marked on the underside.

8 Inspection

The tests shall be carried out under standard test atmosphere 23/50 specified in ISO 554.

8.1 Width of division lines

The width of division lines shall be measured with a micrometer microscope.

8.2 Distance between division lines

The distance between division lines shall be measured with a micrometer microscope.

8.3 Thickness of manually operated draughting machine scale rules

The thickness of manually operated draughting machine scale rule shall be measured with a micrometer.

8.4 Flatness of underside of scale rule

8.4.1 The deviation from flatness of the underside of the scale rule shall be measured with a surface plate and feeler gauge.

8.4.2 For manually operated draughting machine scale rules, the surface plate shall be in a position 75° from the horizontal (see figure 13).

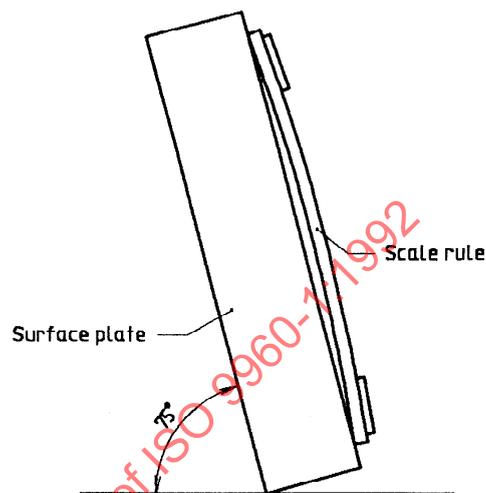


Figure 13

8.4.3 Place the scale rule with the underside on a surface plate as shown in figure 13 and measure the clearance between the surface plate and the scale rule underside with a feeler gauge.

8.5 Straightness of working edge

8.5.1 The straightness of the working edge shall be measured with a surface plate and feeler gauge (see figure 14).

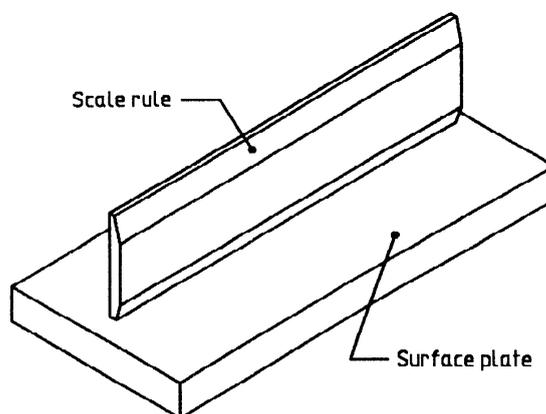


Figure 14