

---

---

**Information technology — Generic coding  
of moving pictures and associated audio  
information —**

**Part 1:  
Systems**

**AMENDMENT 3: Transport of HEVC video  
over MPEG-2 systems**

*Technologies de l'information — Codage générique des images  
animées et du son associé —*

*Partie 1:  
Systèmes*

*AMENDEMENT 3: Transport de vidéo HEVC sur les systèmes MPEG-2*



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 3 to ISO/IEC 13818-1:2013 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*, in collaboration with ITU-T. The identical text is published as Rec. ITU-T H.222.0 (2012)/Amd.3 (01/2014).

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 13818-1:2013/Amd 3:2014

INTERNATIONAL STANDARD  
RECOMMENDATION ITU-TInformation technology – Generic coding of moving pictures  
and associated audio information: Systems

## Amendment 3

## Transport of HEVC video over MPEG-2 systems

## 1) Clause 1.2.2

Add the following references:

- Recommendation ITU-T H.265 (2013), *High efficiency video coding*.  
ISO/IEC 23008-2:2013, *Information technology – High efficiency coding and media delivery in heterogeneous environments – Part 2: High efficiency video coding*.

## 2) Clauses 2.1.95 to 2.1.109

Add the following definitions after clause 2.1.94:

**2.1.95 HEVC video stream:** A byte stream as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2 Annex B.

**2.1.96 HEVC access unit:** An access unit as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2 with the constraints specified in 2.17.1.

**2.1.97 HEVC 24-hour picture (system):** An *HEVC access unit* with a presentation time that is more than 24 hours in the future. For the purpose of this definition, *HEVC access unit*  $n$  has a presentation time that is more than 24 hours in the future if the difference between the initial arrival time  $t_{ai}(n)$  and the DPB output time  $t_{o,dpb}(n)$  is more than 24 hours.

**2.1.98 HEVC slice:** An *HEVC independent slice segment* and zero or more subsequent *HEVC dependent slice segments* preceding the next *HEVC independent slice segment* (if any) within the same *HEVC access unit*.

**2.1.99 HEVC slice segment:** A *byte\_stream\_nal\_unit* with *nal\_unit\_type* in the range of 0 to 9 and 16 to 23, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.100 HEVC dependent slice segment:** An *HEVC slice segment* with the syntax element *dependent\_slice\_segment\_flag* in the slice header set to a value equal to 1, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.101 HEVC independent slice segment:** An *HEVC slice segment* with the syntax element *dependent\_slice\_segment\_flag* in the slice header set to a value 0 or inferred to be equal to 0, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.102 HEVC tile of slices:** One or more consecutive *HEVC slices* which form the coded representation of a tile, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.103 HEVC still picture (system):** An HEVC still picture consists of an *HEVC access unit* containing an IDR picture preceded by VPS, SPS and PPS NAL units, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2, that carry sufficient information to correctly decode this IDR picture. Preceding an HEVC still picture, there shall be another HEVC still picture or an end of sequence NAL unit terminating a preceding coded video sequence, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.104 HEVC video sequence (system):** A coded video sequence as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.105 HEVC video sub-bitstream:** A subset of the NAL units of an HEVC video stream in their original order.

**2.1.106 HEVC temporal video sub-bitstream:** An *HEVC video sub-bitstream* that contains all VCL NAL units and associated non-VCL NAL units of the temporal sub-layer, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2, associated with TemporalId equal to 0 and which may additionally contain all VCL NAL units and associated non-VCL NAL units of all temporal sub-layers associated with a contiguous range of TemporalId from 1 to a value equal to or smaller than `sps_max_sub_layers_minus1` included in the active sequence parameter set, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2.

**2.1.107 HEVC temporal video subset:** An *HEVC video sub-bitstream* that contains all VCL NAL units and the associated non-VCL NAL units of one or more temporal sub-layers, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2, with each temporal sub-layer not being present in the corresponding *HEVC temporal video sub-bitstream* and TemporalId associated with each temporal sub-layer forming a contiguous range of values.

NOTE – According to the constraints for the transport of HEVC specified in 2.17.1, each temporal sub-layer of an *HEVC video stream* is present either in the *HEVC temporal video sub-bitstream* or in exactly one *HEVC temporal video subset* which is carried in a set of elementary streams that are associated by hierarchy descriptors. This prevents the multiple inclusion of the same temporal sub-layer and allows aggregation of the *HEVC temporal video sub-bitstream* with associated *HEVC temporal video subsets* according to the hierarchy descriptors, as specified in 2.17.3.

**2.1.108 HEVC highest temporal sub-layer representation:** The sub-layer representation of the temporal sub-layer with the highest value of TemporalId, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2, in the associated *HEVC temporal video sub-bitstream* or *HEVC temporal video subset*.

**2.1.109 HEVC complete temporal representation:** A sub-layer representation as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2 that contains all temporal sub-layers up to the temporal sub-layer with TemporalId equal to `sps_max_sub_layers_minus1+1` as included in the active sequence parameter set, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2.

### 3) Clause 2.4.2.6

Replace the following two paragraphs:

Replace:

The delay of any data through the system target decoder buffers shall be less than or equal to one second except for still picture video data and ISO/IEC 14496 streams. Specifically:  $td_n(j) - t(i) \leq 1$  second for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .

with:

The delay of any data through the system target decoder buffers shall be less than or equal to one second except for still picture video data, ISO/IEC 14496 and ISO/IEC 23008-2 streams. Specifically:  $td_n(j) - t(i) \leq 1$  second for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .

Replace:

For ISO/IEC 14496 streams, the delay is constrained by  $td_n(j) - t(i) \leq 10$  seconds for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .

with:

For ISO/IEC 14496 and ISO/IEC 23008-2 streams, the delay is constrained by  $td_n(j) - t(i) \leq 10$  seconds for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .

### 4) Clause 2.4.2.11

Add the following new clause immediately after clause 2.4.2.10:

#### 2.4.2.11 T-STD extensions for carriage of HEVC

T-STD extensions and T-STD parameters for the decoding of HEVC video streams are defined in 2.17.2 and 2.17.3. Program stream support including P-STD extensions and P-STD parameters are not specified for HEVC video streams.

**5) Clause 2.4.3.5**

In the paragraph specifying the *discontinuity\_indicator*, add at the end of the bulleted list introduced by "For the purpose of this clause, an elementary stream access point is defined as follows":

- HEVC video streams or HEVC temporal video sub-bitstreams – The first byte of an HEVC access unit. The VPS, SPS and PPS parameter sets, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2, referenced in this and all subsequent HEVC access units in the HEVC video sequence shall be provided after this access point in the byte stream and prior to their activation.

In the paragraph specifying the *elementary\_stream\_priority\_indicator*, add:

In the case of HEVC video streams or HEVC temporal video sub-bitstreams or HEVC temporal video subsets, this field may be set to '1' only if the payload contains one or more bytes from a slice with *slice\_type* set to 2. A value of '0' indicates that the payload has the same priority as all other packets which do not have this bit set to '1'.

**6) Clause 2.4.3.7**

In Table 2-22, replace the following line:

1110 xxxx	Rec. ITU-T H.262   ISO/IEC 13818-2, ISO/IEC 11172-2, ISO/IEC 14496-2 or Rec. ITU-T H.264   ISO/IEC 14496-10 video stream number xxxx
-----------	--

with:

1110 xxxx	Rec. ITU-T H.262   ISO/IEC 13818-2, ISO/IEC 11172-2, ISO/IEC 14496-2, Rec. ITU-T H.264   ISO/IEC 14496-10 or Rec. ITU-T H.265   ISO/IEC 23008-2 video stream number xxxx
-----------	--

At the end of the clause specifying the *PTS* (presentation time stamp), add:

For HEVC video streams, HEVC temporal video sub-bitstreams and HEVC temporal video subsets, if a PTS is present in the PES packet header, it shall refer to the first HEVC access unit that commences in this PES packet. To achieve consistency between the STD model and the HRD model defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2, for each HEVC access unit the PTS value in the STD shall, within the accuracy of their respective clocks, indicate the same instant in time as the nominal DPB output time in the HRD, as defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2.

At the end of the clause specifying the *DTS* (decoding time stamp), add:

For HEVC video streams, HEVC temporal video sub-bitstreams and HEVC temporal video subsets, if a DTS is present in the PES packet header, it shall refer to the first HEVC access unit that commences in this PES packet. To achieve consistency between the STD model and the HRD model defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2, for each HEVC access unit the DTS value in the STD shall, within the accuracy of their respective clocks, indicate the same instant in time as the nominal CPB removal time in the HRD, as defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2.

**7) Clause 2.4.4.9**

In Table 2-34, *Stream type assignments*, replace the following line:

0x24-0x7E	Rec. ITU-T H.222.0   ISO/IEC 13818-1 Reserved
-----------	---

with:

0x24	HEVC video stream or an HEVC temporal video sub-bitstream
0x25	HEVC temporal video subset of an HEVC video stream conforming to one or more profiles defined in Annex A of Rec. ITU-T H.265   ISO/IEC 23008-2
0x26-0x7E	Rec. ITU-T H.222.0   ISO/IEC 13818-1 Reserved

## 8) Clause 2.6.1

Replace Table 2-45 with:

Table 2-45 – Program and program element descriptors

descriptor_tag	TS	PS	Identification
0	n/a	n/a	Reserved
1	n/a	X	Forbidden
2	X	X	video_stream_descriptor
3	X	X	audio_stream_descriptor
4	X	X	hierarchy_descriptor
5	X	X	registration_descriptor
6	X	X	data_stream_alignment_descriptor
7	X	X	target_background_grid_descriptor
8	X	X	video_window_descriptor
9	X	X	CA_descriptor
10	X	X	ISO_639_language_descriptor
11	X	X	system_clock_descriptor
12	X	X	multiplex_buffer_utilization_descriptor
13	X	X	copyright_descriptor
14	X		maximum_bitrate_descriptor
15	X	X	private_data_indicator_descriptor
16	X	X	smoothing_buffer_descriptor
17	X		STD_descriptor
18	X	X	IBP_descriptor
19-26	X		Defined in ISO/IEC 13818-6
27	X	X	MPEG-4_video_descriptor
28	X	X	MPEG-4_audio_descriptor
29	X	X	IOD_descriptor
30	X		SL_descriptor
31	X	X	FMC_descriptor
32	X	X	external_ES_ID_descriptor
33	X	X	MuxCode_descriptor
34	X	X	FmxBufferSize_descriptor
35	X		multiplexBuffer_descriptor
36	X	X	content_labeling_descriptor
37	X	X	metadata_pointer_descriptor
38	X	X	metadata_descriptor
39	X	X	metadata_STD_descriptor
40	X	X	AVC video descriptor
41	X	X	IPMP_descriptor (defined in ISO/IEC 13818-11, MPEG-2 IPMP)
42	X	X	AVC timing and HRD descriptor
43	X	X	MPEG-2_AAC_audio_descriptor
44	X	X	FlexMuxTiming_descriptor
45	X	X	MPEG-4_text_descriptor
46	X	X	MPEG-4_audio_extension_descriptor
47	X	X	Auxiliary_video_stream_descriptor
48	X	X	SVC extension descriptor
49	X	X	MVC extension descriptor
50	X	n/a	J2K video descriptor
51	X	X	MVC operation point descriptor

**Table 2-45 – Program and program element descriptors**

descriptor_tag	TS	PS	Identification
52	X	X	MPEG2_stereoscopic_video_format_descriptor
53	X	X	Stereoscopic_program_info_descriptor
54	X	X	Stereoscopic_video_info_descriptor
55	X	n/a	Transport_profile_descriptor
56	X	n/a	HEVC video descriptor
57-62	n/a	n/a	Rec. ITU-T H.222.0   ISO/IEC 13818-1 Reserved
63	X	X	Extension_descriptor
64-255	n/a	n/a	User Private

**9) Clause 2.6.7**

In Table 2-50, replace the description for value 15 as shown below:

**Table 2-50 – Hierarchy\_type field values**

Value	Description
15	Base layer or MVC base view sub-bitstream or AVC video sub-bitstream of MVC or HEVC temporal video sub-bitstream.

**10) Clause 2.6.11**

Add the following immediately after Table 2-54:

Table 2-54bis describes the alignment type for HEVC when the data\_alignment\_indicator in the PES packet header has a value of '1'.

**Table 2-54bis – HEVC video stream alignment values**

Alignment type	Description
00	Reserved
01	HEVC access unit
02	HEVC slice
03	HEVC access unit or slice
04	HEVC tile of slices
05	HEVC access unit or tile of slices
06	HEVC slice or tile of slices
07	HEVC access unit or slice or tile of slices
08	HEVC slice segment
09	HEVC slice segment or access unit
10	HEVC slice segment or slice
11	HEVC slice segment or access unit or slice
12	HEVC slice segment or tile of slices
13	HEVC slice segment or access unit or tile of slices
14	HEVC slice segment or slice or tile of slices
15	HEVC slice segment or access unit or slice or tile of slices
16-255	Reserved

11) **Clause 2.6.90**

Replace Table 2-103bis with:

**Table 2-103bis – Extension descriptor**

Syntax	No. of bits	Mnemonic
<pre> Extension_descriptor () {     descriptor_tag     descriptor_length     extension_descriptor_tag     if ( extension_descriptor_tag == 0x02) {         ObjectDescriptorUpdate()     }     else if ( extension_descriptor_tag == 0x03) {         HEVC_timing_and_HRD_descriptor()     }     else {         for ( i=0; i&lt;N; i++) {             reserved         }     } }                     </pre>	<p>8</p> <p>8</p> <p>8</p> <p>8</p>	<p>uimsbf</p> <p>uimsbf</p> <p>uimsbf</p> <p>bslbf</p>

12) **Clause 2.6.91**

Add the following immediately before Table 2-103ter:

**HEVC\_timing\_and\_HRD\_descriptor()** – This structure is defined in clauses 2.6.95 and 2.6.96.

Replace Table 2-103ter with:

**Table 2-103ter – Extension descriptor tag values**

Extension_descriptor_tag	TS	PS	Identification
0	n/a	n/a	Reserved
1	n/a	X	Forbidden
2	X	X	ODUpdate_descriptor
3	X	n/a	HEVC_timing_and_HRD_descriptor()
3-255	n/a	n/a	Rec. ITU-T H.222.0   ISO/IEC 13818-1 Reserved

13) **Clauses 2.6.95 to 2.6.98**

Add the following new clauses immediately after clause 2.6.94:

**2.6.95 HEVC video descriptor**

For an HEVC video stream, the HEVC video descriptor provides basic information for identifying coding parameters, such as profile and level parameters of that HEVC video stream. For an HEVC temporal video sub-bitstream or an HEVC temporal video subset, the HEVC video descriptor provides information such as the associated HEVC highest temporal sub-layer representation contained in the elementary stream to which it applies.

Table 2-103sexiens – HEVC video descriptor

Syntax	No. Of bits	Mnemonic
HEVC_descriptor() {		
<b>descriptor_tag</b>	8	uimsbf
<b>descriptor_length</b>	8	uimsbf
<b>profile_space</b>	2	uimsbf
<b>tier_flag</b>	1	bslbf
<b>profile_idc</b>	5	uimsbf
<b>profile_compatibility_indication</b>	32	bslbf
<b>progressive_source_flag</b>	1	bslbf
<b>interlaced_source_flag</b>	1	bslbf
<b>non_packed_constraint_flag</b>	1	bslbf
<b>frame_only_constraint_flag</b>	1	bslbf
<b>reserved_zero_44bits</b>	44	bslbf
<b>level_idc</b>	8	uimsbf
<b>temporal_layer_subset_flag</b>	1	bslbf
<b>HEVC_still_present_flag</b>	1	bslbf
<b>HEVC_24hr_picture_present_flag</b>	5	bslbf
<b>reserved</b>		
if (temporal_layer_subset_flag == '1') {		
<b>reserved</b>	5	bslbf
<b>temporal_id_min</b>	3	uimsbf
<b>reserved</b>	5	bslbf
<b>temporal_id_max</b>	3	uimsbf
}		
}		

#### 2.6.96 Semantic definition of fields in HEVC video descriptor

**profile\_space, tier\_flag, profile\_idc, profile\_compatibility\_indication, progressive\_source\_flag, interlaced\_source\_flag, non\_packed\_constraint\_flag, frame\_only\_constraint\_flag, reserved\_zero\_44bits, level\_idc** – When the HEVC video descriptor applies to an HEVC video stream or to an HEVC complete temporal representation, these fields shall be coded according to the semantics defined in Rec. ITU-T H.265 | ISO/IEC 23008-2 for *general\_profile\_space*, *general\_tier\_flag*, *general\_profile\_idc*, *general\_profile\_compatibility\_flag[i]*, *general\_progressive\_source\_flag*, *general\_interlaced\_source\_flag*, *general\_non\_packed\_constraint\_flag*, *general\_frame\_only\_constraint\_flag*, *general\_reserved\_zero\_44bits*, *general\_level\_idc*, respectively, for the corresponding HEVC video stream or HEVC complete temporal representation, and the entire HEVC video stream or HEVC complete temporal representation to which the HEVC video descriptor is associated shall conform to the information signalled by these fields.

When the HEVC video descriptor applies to an HEVC temporal video sub-bitstream or HEVC temporal video subset of which the corresponding HEVC highest temporal sub-layer representation is not an HEVC complete temporal representation, these fields shall be coded according to the semantics defined in Rec. ITU-T H.265 | ISO/IEC 23008-2 for *sub\_layer\_profile\_space*, *sub\_layer\_tier\_flag*, *sub\_layer\_profile\_idc*, *sub\_layer\_profile\_compatibility\_flag[i]*, *sub\_layer\_progressive\_source\_flag*, *sub\_layer\_interlaced\_source\_flag*, *sub\_layer\_non\_packed\_constraint\_flag*, *sub\_layer\_frame\_only\_constraint\_flag*, *sub\_layer\_reserved\_zero\_44bits*, *sub\_layer\_level\_idc*, respectively, for the corresponding HEVC highest temporal sub-layer representation, and the entire HEVC highest temporal sub-layer representation to which the HEVC video descriptor is associated shall conform to the information signalled by these fields.

NOTE 1 – In one or more sequences in the HEVC video stream the level may be lower than the level signalled in the HEVC video descriptor, while also a profile may occur that is a subset of the profile signalled in the HEVC video descriptor. However, in the entire HEVC video stream, only subsets of the entire bitstream syntax shall be used that are included in the profile signalled in the HEVC video descriptor, if present. If the sequence parameter sets in an HEVC video stream signal different profiles, and no additional constraints are signalled, then the stream may need examination to determine which profile, if any, the entire stream conforms to. If an HEVC video descriptor is to be associated with an HEVC video stream that does not conform to a single profile, then the HEVC video stream should be partitioned into two or more sub-streams, so that HEVC video descriptors can signal a single profile for each such sub-stream.

**temporal\_layer\_subset\_flag** – This 1-bit flag, when set to '1', indicates that the syntax elements describing a subset of temporal layers are included in this descriptor. This field shall be set to 1 for HEVC temporal video subsets and for HEVC temporal video sub-bitstreams. When set to '0', the syntax elements *temporal\_id\_min* and *temporal\_id\_max* are not included in this descriptor.

**HEVC\_still\_present\_flag** – This 1-bit field, when set to '1', indicates that the HEVC video stream or the HEVC highest temporal sub-layer representation may include HEVC still pictures. When set to '0', then the associated HEVC video stream shall not contain HEVC still pictures.

NOTE 2 – According to Rec. ITU-T H.265 | ISO/IEC 23008-2, IDR pictures are always associated with a TemporalId value equal to 0. Consequently, if the HEVC video descriptor applies to an HEVC temporal video subset, HEVC still pictures can only be present in the associated HEVC temporal video sub-bitstream.

**HEVC\_24\_hour\_picture\_present\_flag** – This 1-bit flag, when set to '1', indicates that the associated HEVC video stream or the HEVC highest temporal sub-layer representation may contain HEVC 24-hour pictures. For the definition of an HEVC 24-hour picture, see clause 2.1.97. If this flag is set to '0', the associated HEVC video stream shall not contain any HEVC 24-hour pictures.

**temporal\_id\_min** – This 3-bit field indicates the minimum value of the *TemporalId*, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2, of all HEVC access units in the associated elementary stream.

**temporal\_id\_max** – This 3-bit field indicates the maximum value of the *TemporalId*, as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2, of all HEVC access units in the associated elementary stream.

**2.6.97 HEVC timing and HRD descriptor**

For an HEVC video stream, an HEVC temporal video sub-bitstream or an HEVC temporal video subset, the HEVC timing and HRD descriptor provides timing and HRD parameters, as defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2, for the associated HEVC video stream or the HEVC highest temporal sub-layer representation thereof, respectively.

**Table 2-103septiens – HEVC timing and HRD descriptor**

Syntax	No. Of bits	Mnemonic
HEVC_timing_and_HRD_descriptor() {		
<b>hrd_management_valid_flag</b>	1	bslbf
<b>reserved</b>	6	bslbf
<b>picture_and_timing_info_present_flag</b>	1	bslbf
if (picture_and_timing_info_present_flag == '1') {		
<b>90kHz_flag</b>	1	bslbf
<b>reserved</b>	7	bslbf
if (90kHz_flag == '0') {		
N	32	uimsbf
K	32	uimsbf
}		
<b>num_units_in_tick</b>	32	uimsbf
}		
}		

**2.6.98 Semantic definition of fields in HEVC timing and HRD descriptor**

**hrd\_management\_valid\_flag** – This 1-bit flag is only defined for use in transport streams. When the HEVC timing and HRD descriptor is associated with an HEVC video stream or with an HEVC highest temporal sub-layer representation carried in a transport stream, then the following apply.

If the *hrd\_management\_valid\_flag* is set to '1', then Buffering Period SEI and Picture Timing SEI messages, as defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2, shall be present in the associated HEVC video stream or HEVC highest temporal sub-layer representation. These buffering period SEI messages shall carry coded *nal\_initial\_cpb\_removal\_delay* and *nal\_initial\_cpb\_removal\_delay\_offset* values and may additionally carry *nal\_initial\_alt\_removal\_delay* and *nal\_initial\_alt\_cpb\_removal\_delay\_offset* values for the NAL HRD. If the *hrd\_management\_valid\_flag* is set to '1', then the transfer of each byte from MB<sub>n</sub> to EB<sub>n</sub> in the T-STD as defined in 2.17.2 or the transfer from MB<sub>n,k</sub> to EB<sub>n</sub> in the T-STD as defined in 2.17.3 shall be according to the delivery schedule for that byte into the CPB in the NAL HRD, as determined from the coded *nal\_initial\_cpb\_removal\_delay* and *nal\_initial\_cpb\_removal\_delay\_offset* or from the coded *nal\_initial\_alt\_cpb\_removal\_delay* and *nal\_initial\_alt\_cpb\_removal\_delay\_offset* values for *SchedSelIdx* equal to *cpb\_cnt\_minus1*, as specified in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2. When the *hrd\_management\_valid\_flag* is set to '0', the leak method shall be used for the transfer from MB<sub>n</sub> to EB<sub>n</sub> in the T-STD as defined in 2.17.2 or the transfer from MB<sub>n,k</sub> to EB<sub>n</sub> in the T-STD as defined in 2.17.3.

**picture\_and\_timing\_info\_present\_flag** – This 1-bit flag when set to '1' indicates that the *90kHz\_flag* and parameters for accurate mapping to a 90-kHz system clock are included in this descriptor.

**90kHz\_flag** – This 1-bit flag when set to '1' indicates that the frequency of the HEVC time base is 90 kHz.

**N, K** – For an HEVC video stream or HEVC highest temporal sub-layer representation, the frequency of the HEVC time base is defined by the syntax element *vui\_time\_scale* in the VUI parameters, as defined in Annex E of Rec. ITU-T H.265 | ISO/IEC 23008-2. The relationship between the HEVC *time\_scale* and the STC shall be defined by the parameters N and K in this descriptor as follows.

$$time\_scale = (N \times system\_clock\_frequency) / K$$

If the *90kHz\_flag* is set to '1', then N equals 1 and K equals 300. If the *90kHz\_flag* is set to '0', then the values of N and K are provided by the coded values of the N and K fields.

NOTE – This allows mapping of time expressed in units of *time\_scale* to 90 kHz units, as needed for the calculation of PTS and DTS timestamps, for example in decoders for HEVC access units for which no PTS or DTS is encoded in the PES header.

**num\_units\_in\_tick** – This 32-bit field is coded exactly in the same way as the *vui\_num\_units\_in\_tick* field in VUI parameters in Annex E of Rec. ITU-T H.265 | ISO/IEC 23008-2. The information provided by this field shall apply to the entire HEVC video stream or HEVC highest temporal sub-layer representation to which the HEVC timing and HRD descriptor is associated.

## 14) Clause 2.17

Add the following new clause after clause 2.16:

### 2.17 Carriage of HEVC

#### 2.17.1 Constraints for the transport of HEVC

For HEVC video streams, HEVC temporal video sub-bitstreams or HEVC temporal video subsets, the following constraints additionally apply:

- Each HEVC access unit shall contain an access unit delimiter NAL unit.  
NOTE 1 – HEVC requires that an access unit delimiter NAL unit, if present, is the first NAL unit within an HEVC access unit. Access unit delimiter NAL units simplify the ability to detect the boundary between HEVC access units.
- An HEVC video stream or HEVC temporal video sub-bitstream shall be an element of an ITU-T H.222.0 | ISO/IEC 13818-1 program and the *stream\_type* for this elementary stream shall be equal to 0x24.
- The video parameter sets, sequence parameter sets and picture parameter sets, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2, that are necessary for decoding an HEVC video stream or HEVC temporal video sub-bitstream shall be present within the elementary stream carrying that HEVC video stream or HEVC temporal video sub-bitstream.
- For each HEVC temporal video subset that is an element of the same Rec. ITU-T H.222.0 | ISO/IEC 13818-1 program, the *stream\_type* for this elementary stream shall be equal to 0x25.
- When a Rec. ITU-T H.222.0 | ISO/IEC 13818-1 program includes more than one HEVC temporal video subset, or more than one HEVC temporal video sub-bitstream and at least one HEVC temporal video subset, a hierarchy descriptor as defined in 2.6.7 shall be present for all associated elementary streams with *stream\_type* equal to 0x24 or 0x25. The hierarchy descriptors shall be used to indicate the dependencies of all HEVC temporal video sub-bitstreams and all HEVC temporal video subsets.
- In each elementary stream with *stream\_type* equal to 0x24 with a hierarchy descriptor, the *hierarchy\_type* in the hierarchy descriptor shall be equal to 15.
- In each elementary stream with *stream\_type* equal to 0x25 with a hierarchy descriptor, the *hierarchy\_type* in the hierarchy descriptor shall be equal to 3.
- The video parameter sets, sequence parameter sets and picture parameter sets, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2, that are necessary for decoding the HEVC highest temporal sub-layer representation of an HEVC temporal video subset shall be present within the elementary stream carrying the HEVC temporal video sub-bitstream associated by a hierarchy descriptor.
- The aggregation of the HEVC temporal video sub-bitstream with associated HEVC temporal video subsets according to the hierarchy descriptors, as specified in 2.17.3, shall result in a valid HEVC video stream.

NOTE 2 – The resulting HEVC video stream contains a set of temporal sub-layers, as specified in Rec. ITU-T H.265 | ISO/IEC 23008-2, with TemporalId values forming a contiguous range of integer numbers.

**Carriage in PES packets**

ITU-T H.265 | ISO/IEC 23008-2 video is carried in PES packets as *PES\_packet\_data\_bytes*, using one of the 16 *stream\_id* values assigned to video, while signalling the ITU-T H.265 | ISO/IEC 23008-2 video stream by means of the assigned stream-type value in the PMT (see Table 2-34). The highest level that may occur in an HEVC video stream, as well as a profile and tier that the entire stream conforms to should be signalled using the HEVC video descriptor. If an HEVC video descriptor is associated with an HEVC video stream, an HEVC temporal video sub-bitstream, an HEVC temporal video subset, then this descriptor shall be conveyed in the descriptor loop for the respective elementary stream entry in the program map table. This Recommendation | International Standard does not specify the presentation of ITU-T H.265 | ISO/IEC 23008-2 streams in the context of a program.

For PES packetization, no specific data alignment constraints apply. For synchronization and STD management, PTSs and, when appropriate, DTSs are encoded in the header of the PES packet that carries the ITU-T H.265 | ISO/IEC 23008-2 video elementary stream data. For PTS and DTS encoding, the constraints and semantics apply as defined in 2.4.3.7 and 2.7.

**DPB buffer management**

Carriage of an HEVC video stream, an HEVC temporal video sub-stream or an HEVC temporal video subset over an ITU-T H.222.0 | ISO/IEC 13818-1 stream does not impact the size of the buffer DPB. For decoding an HEVC video stream, an HEVC temporal video sub-bitstream or an HEVC temporal video subset and its associated HEVC temporal video subsets in the STD, the size of a DPB is as defined in Rec. ITU-T H.265 | ISO/IEC 23008-2. The DPB shall be managed as specified in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2 (clauses C.3 and C.5). A decoded HEVC access unit enters the DPB instantaneously upon decoding the HEVC access unit, hence at the CPB removal time of the HEVC access unit. A decoded HEVC access unit is presented at the DPB output time. If the HEVC video stream, HEVC temporal video sub-bitstream or HEVC temporal video subset provides insufficient information to determine the CPB removal time and the DPB output time of HEVC access units, then these time instants shall be determined in the STD model from PTS and DTS timestamps as follows:


- 1) The CPB removal time of HEVC access unit  $n$  is the instant in time indicated by  $DTS(n)$  where  $DTS(n)$  is the DTS value of HEVC access unit  $n$ .
- 2) The DPB output time of HEVC access unit  $n$  is the instant in time indicated by  $PTS(n)$  where  $PTS(n)$  is the PTS value of HEVC access unit  $n$ .

NOTE 3 – HEVC video sequences in which the *low\_delay\_hrd\_flag* in the syntax structure *hrd\_parameters()* is set to 1 carry sufficient information to determine the DPB output time and the CPB removal time of each HEVC access unit. Hence for HEVC access units for which STD underflow may occur, the CPB removal time and the DPB output time are defined by HRD parameters, and not by DTS and PTS timestamps.

NOTE 4 – An HEVC video stream may carry information to determine compliance of the HEVC video stream to the HRD, as specified in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2. The presence of this information can be signalled in a transport stream using the HEVC timing and HRD descriptor with the *hrd\_management\_valid\_flag* set to '1'. Irrespective of the presence of this information, compliance of an HEVC video stream to the T-STD ensures that HRD buffer management requirements for the CPB are met when each byte in the HEVC video stream is delivered to and removed from the CPB in the HRD at exactly the same instant in time at which the byte is delivered to and removed from  $EB_n$  in the T-STD.

**2.17.2 T-STD Extensions for single layer HEVC**

When there is an HEVC video stream or HEVC temporal video sub-bitstream in an ITU-T H.222.0 | ISO/IEC 13818-1 program and there is no HEVC temporal video subset associated with this elementary stream of stream\_type 0x24 in the same ITU-T H.222.0 | ISO/IEC 13818-1 program, the T-STD model as described in 2.4.2 is extended as illustrated in Figure 2-18 and as specified below.

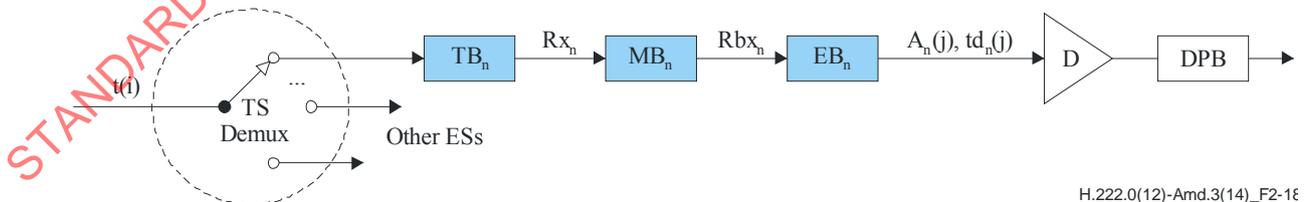

**Figure 2-18 – T-STD model extensions for single layer HEVC**

**TB<sub>n</sub>, MB<sub>n</sub>, EB<sub>n</sub> buffer management**

The following additional notations are used to describe the T-STD extensions and are illustrated in Figure 2-18 above.

t(i) indicates the time in seconds at which the i-th byte of the transport stream enters the system target decoder

TB<sub>n</sub> is the transport buffer for elementary stream n

TBS is the size of the transport buffer TB<sub>n</sub>, measured in bytes

MB<sub>n</sub> is the multiplexing buffer for elementary stream n

MBS<sub>n</sub> is the size of the multiplexing buffer MB<sub>n</sub>, measured in bytes

EB<sub>n</sub> is the elementary stream buffer for the HEVC video stream

j is an index to the HEVC access unit of the HEVC video stream

A<sub>n</sub>(j) is the j-th access unit of the HEVC video bitstream

td<sub>n</sub>(j) is the decoding time of A<sub>n</sub>(j), measured in seconds, in the system target decoder

Rx<sub>n</sub> is the transfer rate from the transport buffer TB<sub>n</sub> to the multiplex buffer MB<sub>n</sub> as specified below.

Rbx<sub>n</sub> is the transfer rate from the multiplex buffer MB<sub>n</sub> to the elementary stream buffer EB<sub>n</sub> as specified below.

The following apply:

- There is exactly one transport buffer TB<sub>n</sub> for the received HEVC video stream or HEVC temporal video sub-bitstream where the size TBS is fixed to 512 bytes.
- There is exactly one multiplexing buffer MB<sub>n</sub> for the HEVC video stream or HEVC temporal video sub-bitstream, where the size MBS<sub>n</sub> of the multiplexing buffer MB is constrained as follows:

$$MBS_n = BS_{mux} + BS_{oh} + CpbBrNalFactor \times MaxCPB[tier, level] - cpb\_size$$

where BS<sub>oh</sub>, packet overhead buffering, is defined as:

$$BS_{oh} = (1/750) \text{ seconds} \times \max\{ CpbBrNalFactor \times MaxBR[tier, level], 2\,000\,000 \text{ bit/s} \}$$

and BS<sub>mux</sub>, additional multiplex buffering, is defined as:

$$BS_{mux} = 0.004 \text{ seconds} \times \max\{ CpbBrNalFactor \times MaxBR[tier, level], 2\,000\,000 \text{ bit/s} \}$$

MaxCPB[tier, level] and MaxBR[tier, level] are taken from Annex A of Rec. ITU-T H.265 | ISO/IEC 23008-2 for the tier and level of the HEVC video stream or HEVC temporal video sub-bitstream. cpb\_size is taken from the HRD parameters, as specified in Annex E of Rec. ITU-T H.265 | ISO/IEC 23008-2, included in the HEVC video stream or HEVC temporal video sub-bitstream.

- There is exactly one elementary stream buffer EB<sub>n</sub> for all the elementary streams in the set of received elementary streams associated by hierarchy descriptors, with a total size EBS<sub>n</sub>

$$EBS_n = cpb\_size \text{ (measured in bytes)}$$

where cpb\_size is taken from the HRD parameters, as specified in Annex E of Rec. ITU-T H.265 | ISO/IEC 23008-2, included in the HEVC video stream or the HEVC temporal video sub-bitstream.

- Transfer from TB<sub>n</sub> to MB<sub>n</sub> is applied as follows:

When there is no data in TB<sub>n</sub> then Rx<sub>n</sub> is equal to zero. Otherwise:

$$Rx_n = bit\_rate$$

where bit\_rate is CpbBrNalFactor/CpbBrVlcFactor x BitRate[ SchedSelIdx ] of data flow into the CPB for the byte stream format and BitRate[ SchedSelIdx ] is as defined in Annex E of Rec. ITU-T H.265 | ISO/IEC 23008-2 when NAL hrd\_parameters() is present in the VUI parameters of the HEVC video stream.

NOTE – Annex E also specifies default values for BitRate[ SchedSelIdx ] based on profile, tier and level when NAL HRD parameters are not present in the VUI .

- Transfer from MB<sub>n</sub> to EB<sub>n</sub> is applied as follows:

If the HEVC\_timing\_and\_HRD\_descriptor is present with the hrd\_management\_valid\_flag set to '1' for the elementary stream, then the transfer of data from MB<sub>n</sub> to EB<sub>n</sub> shall follow the HRD defined scheme for data arrival in the CPB of the elementary stream as defined in Annex C of Rec. ITU-T H.265 | ISO/IEC 23008-2.

Otherwise, the leak method shall be used to transfer data from  $MB_n$  to  $EB_n$  as follows:

$$Rbx_n = CpbBrNalFactor \times MaxBR[tier, level]$$

where  $MaxBR[tier, level]$  is taken from Annex A of Rec. ITU-T H.265 | ISO/IEC 23008-2 for the tier and level of the HEVC video stream or HEVC temporal video sub-bitstream.

If there is PES packet payload data in  $MB_n$ , and buffer  $EB_n$  is not full, the PES packet payload is transferred from  $MB_n$  to  $EB_n$  at a rate equal to  $Rbx_n$ . If  $EB_n$  is full, data are not removed from  $MB_n$ . When a byte of data is transferred from  $MB_n$  to  $EB_n$ , all PES packet header bytes that are in  $MB_n$  and precede that byte are instantaneously removed and discarded. When there is no PES packet payload data present in  $MB_n$ , no data is removed from  $MB_n$ . All data that enters  $MB_n$  leaves it. All PES packet payload data bytes enter  $EB_n$  instantaneously upon leaving  $MB_n$ .

**STD delay**

The STD delay of any ITU-T H.265 | ISO/IEC 23008-2 data other than HEVC still picture data through the system target decoders buffers  $TB_n$ ,  $MB_n$ , and  $EB_n$  shall be constrained by  $td_n(j) - t(i) \leq 10$  seconds for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .

The delay of any HEVC still picture data through the system target decoders  $TB_n$ ,  $MB_n$ , and  $EB_n$  shall be constrained by  $td_n(j) - t(i) \leq 60$  seconds for all  $j$ , and all bytes  $i$  in access unit  $A_n(j)$ .


**Buffer management conditions**

Transport streams shall be constructed so that the following conditions for buffer management are satisfied:

- Each  $TB_n$  shall not overflow and shall be empty at least once every second.
- Each  $MB_n$ ,  $EB_n$  and DPB shall not overflow.
- $EB_n$  shall not underflow, except when VUI parameters are present for the HEVC video sequence with the *low\_delay\_hrd\_flag* set to '1'. Underflow of  $EB_n$  occurs for HEVC access unit  $A_n(j)$  when one or more bytes of  $A_n(j)$  are not present in  $EB_n$  at the decoding time  $td_n(j)$ .

**2.17.3 T-STD extensions for layered transport of HEVC temporal video subsets**

When there is an HEVC video sub-bitstream and at least one associated elementary stream of type 0x25 in an ITU-T H.222.0 | ISO/IEC 13818-1 program, the T-STD model as described in 2.4.2 is extended as illustrated in Figure 2-19 and as specified below.

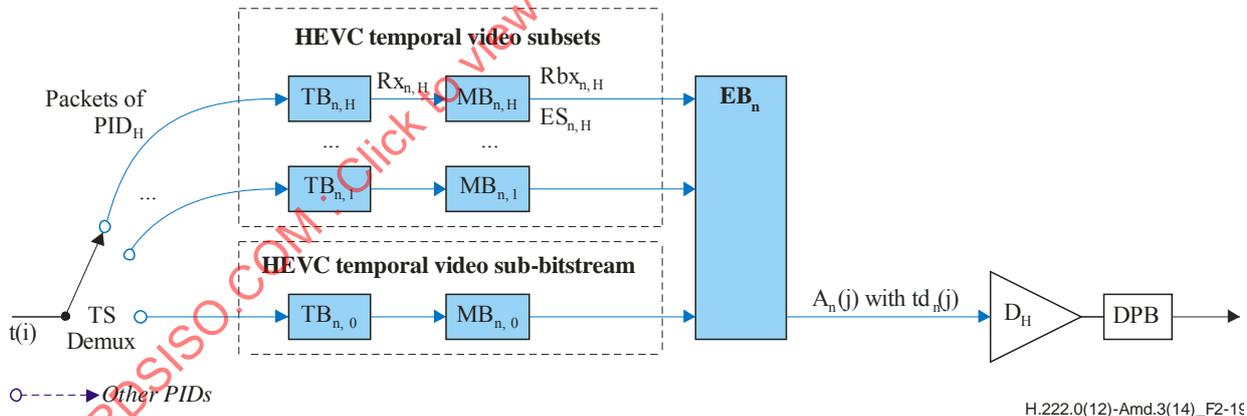

**Figure 2-19 – T-STD model extensions for layered transport of HEVC temporal video subsets**

The following additional notations are used to describe the T-STD extensions and are illustrated in Figure 2-19 above.

- $t(i)$  indicates the time in seconds at which the  $i$ -th byte of the transport stream enters the system target decoder.
- $H$  is the number of received HEVC temporal video subsets, associated by hierarchy descriptors with the same HEVC temporal video sub-bitstream.
- $k$  is an index identifying the  $H+1$  received elementary streams which contain exactly one HEVC temporal video sub-bitstream and  $H$  HEVC temporal video subsets associated by hierarchy descriptors. The index value  $k$  equal to 0 identifies the elementary stream which contains the HEVC temporal video sub-bitstream and index values  $k$  ranging from 1 up to  $H$  identify the associated HEVC temporal video subsets.