

**INTERNATIONAL
STANDARD**

**ISO/IEC
14776-412**

First edition
2006-10

**Information technology –
Small computer system interface (SCSI) –
Part 412:
Architecture model-2 (SAM-2)**

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006



Reference number
ISO/IEC 14776-412:2006(E)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-4:2006

INTERNATIONAL STANDARD

ISO/IEC 14776-412

First edition
2006-10

Information technology – Small computer system interface (SCSI) – Part 412: Architecture model-2 (SAM-2)

Copyright © 2006 ISO/IEC, Geneva — All rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



PRICE CODE

X

For price, see current catalogue

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-4:2006

Contents

| | Page |
|---|------|
| 1 General..... | 11 |
| 1.1 Scope | 11 |
| 1.2 Precedence requirements | 11 |
| 2 Normative reference | 12 |
| 3 Definitions, symbols, abbreviations, and conventions | 13 |
| 3.1 Definitions..... | 13 |
| 3.2 Acronyms..... | 23 |
| 3.3 Keywords..... | 23 |
| 3.4 Editorial conventions | 24 |
| 3.5 Numeric conventions | 25 |
| 3.6 Notation conventions | 25 |
| 3.6.1 Hierarchy diagram conventions..... | 25 |
| 3.6.2 Notation for procedures and functions..... | 26 |
| 3.6.3 Notation for state diagrams | 27 |
| 4 SCSI Architecture Model..... | 28 |
| 4.1 Introduction..... | 28 |
| 4.2 The SCSI distributed service model | 29 |
| 4.3 The SCSI client-server model..... | 30 |
| 4.4 The SCSI structural model | 31 |
| 4.5 SCSI domain | 33 |
| 4.6 The service delivery subsystem | 33 |
| 4.6.1 The service delivery subsystem object..... | 33 |
| 4.6.2 Synchronizing client and server states | 34 |
| 4.6.3 Request/Response ordering..... | 34 |
| 4.7 SCSI devices | 35 |
| 4.7.1 SCSI initiator device | 35 |
| 4.7.2 SCSI target device..... | 35 |
| 4.7.3 SCSI target/initiator device | 37 |
| 4.7.4 SCSI port identifier | 37 |
| 4.7.5 SCSI task router | 37 |
| 4.7.6 SCSI device name | 38 |
| 4.7.7 SCSI port name | 38 |
| 4.8 Logical units..... | 39 |
| 4.9 Logical unit numbers | 40 |
| 4.9.1 Logical unit numbers overview | 40 |
| 4.9.2 LUN 0 address..... | 40 |
| 4.9.3 Single level logical unit number structure | 40 |
| 4.9.4 Eight byte logical unit number structure | 42 |
| 4.9.5 Logical unit addressing method..... | 44 |
| 4.9.6 Peripheral device addressing method | 44 |
| 4.9.7 Flat space addressing method | 45 |
| 4.9.8 Extended logical unit addressing..... | 45 |
| 4.9.9 Well known logical unit addressing..... | 47 |
| 4.10 Tasks | 48 |
| 4.10.1 The task object | 48 |
| 4.10.2 Task tags | 48 |
| 4.11 The nexus object | 49 |
| 4.12 SCSI ports | 50 |
| 4.12.1 SCSI port configurations..... | 50 |
| 4.12.2 SCSI devices with multiple ports | 50 |
| 4.12.3 Multiple port target SCSI device structure | 51 |
| 4.12.4 Multiple port initiator SCSI device structure..... | 52 |
| 4.12.5 Multiple port target/initiator SCSI device structure | 53 |

| | |
|---|-----------|
| 4.12.6 SCSI initiator device view of a multiple port SCSI target device | 53 |
| 4.12.7 SCSI target device view of a multiple port SCSI initiator device | 55 |
| 4.13 Model for dependent logical units..... | 56 |
| 4.14 The SCSI model for distributed communications | 58 |
| 5 SCSI Command Model | 61 |
| 5.1 The Execute Command remote procedure | 61 |
| 5.2 Command descriptor block (CDB)..... | 62 |
| 5.2.1 CDB format..... | 62 |
| 5.2.2 OPERATION CODE byte..... | 63 |
| 5.2.3 CONTROL byte..... | 64 |
| 5.3 Status | 65 |
| 5.3.1 Status codes..... | 65 |
| 5.3.2 Status precedence..... | 66 |
| 5.4 SCSI transport protocol services in support of Execute Command..... | 67 |
| 5.4.1 Overview..... | 67 |
| 5.4.2 Execute Command request/confirmation SCSI transport protocol services..... | 67 |
| 5.4.3 Data transfer SCSI transport protocol services | 69 |
| 5.4.3.1 Introduction..... | 69 |
| 5.4.3.2 Data-In delivery service | 70 |
| 5.4.3.3 Data-Out delivery service | 70 |
| 5.5 Task and command lifetimes..... | 71 |
| 5.6 Task management function lifetime..... | 72 |
| 5.7 Aborting tasks..... | 72 |
| 5.7.1 Mechanisms that cause tasks to be aborted | 72 |
| 5.7.2 When a SCSI initiator port aborts its own tasks | 72 |
| 5.7.3 When a SCSI initiator port aborts tasks from other SCSI initiator ports | 73 |
| 5.8 Command processing examples | 73 |
| 5.8.1 Unlinked command example | 73 |
| 5.8.2 Linked command example..... | 74 |
| 5.9 Command processing considerations and exception conditions..... | 75 |
| 5.9.1 Contingent allegiance (CA) and auto contingent allegiance (ACA)..... | 75 |
| 5.9.1.1 Overview..... | 75 |
| 5.9.1.2 Establishing a CA or ACA..... | 75 |
| 5.9.1.3 Handling tasks when neither CA or ACA is in effect..... | 77 |
| 5.9.1.4 Handling new tasks from the faulted initiator port when CA or ACA is in effect | 77 |
| 5.9.1.5 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect | 78 |
| 5.9.1.5.1 Commands permitted from non-faulted initiator ports during CA or ACA..... | 78 |
| 5.9.1.5.2 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect | 79 |
| 5.9.1.6 Clearing a CA condition..... | 81 |
| 5.9.1.7 Clearing an ACA condition | 81 |
| 5.9.2 Overlapped commands | 81 |
| 5.9.3 Incorrect logical unit selection | 82 |
| 5.9.4 Sense data | 82 |
| 5.9.4.1 Sense data introduction..... | 82 |
| 5.9.4.2 Asynchronous event reporting..... | 83 |
| 5.9.4.3 Autosense..... | 83 |
| 5.9.5 Unit Attention condition..... | 84 |
| 5.9.6 Hard reset..... | 85 |
| 5.9.7 Logical unit reset | 85 |
| 6 Task management functions..... | 86 |
| 6.1 Introduction..... | 86 |
| 6.2 ABORT TASK..... | 87 |
| 6.3 ABORT TASK SET | 87 |
| 6.4 CLEAR ACA | 88 |
| 6.5 CLEAR TASK SET | 88 |
| 6.6 LOGICAL UNIT RESET..... | 89 |
| 6.7 TARGET RESET | 89 |
| 6.8 WAKEUP | 89 |

| | |
|--|-----|
| 6.9 Task management SCSI transport protocol services | 90 |
| 6.10 Task management function example..... | 91 |
| 7 Task Set Management..... | 92 |
| 7.1 Introduction to task set management | 92 |
| 7.2 Controlling task set management..... | 92 |
| 7.3 Task management events | 93 |
| 7.4 Task states | 93 |
| 7.4.1 Overview..... | 93 |
| 7.4.1.1 Task state nomenclature | 93 |
| 7.4.1.2 Suspended information..... | 93 |
| 7.4.2 Enabled task state | 93 |
| 7.4.3 Blocked task state | 94 |
| 7.4.4 Dormant task state | 94 |
| 7.4.5 Ended task state..... | 94 |
| 7.4.6 Task states and task lifetimes | 94 |
| 7.5 Task attributes | 95 |
| 7.5.1 Simple task..... | 95 |
| 7.5.2 Ordered task..... | 95 |
| 7.5.3 Head of queue task | 95 |
| 7.5.4 ACA task..... | 95 |
| 7.6 Task state transitions..... | 96 |
| 7.7 Task set management examples..... | 97 |
| 7.7.1 Introduction..... | 97 |
| 7.7.2 Head of queue tasks..... | 98 |
| 7.7.3 Ordered tasks..... | 99 |
| 7.7.4 ACA task..... | 100 |
| Annex A (informative) | |
| Identifiers and names for objects | 101 |
| A.1 Identifiers and names overview..... | 101 |
| A.2 Identifiers and names..... | 101 |
| A.3 SCSI transport protocol acronyms and bibliography..... | 103 |
| Annex B (informative) | |
| Terminology mapping | 105 |
| Bibliography | 106 |

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

Tables

| | |
|---|-----|
| 1 Single level logical unit number structure for 256 or fewer logical units..... | 40 |
| 2 Single level logical unit number structure for 257 to 16 384 logical units..... | 41 |
| 3 Eight byte logical unit number structure adjustments | 42 |
| 4 Eight Byte logical unit number structure | 43 |
| 5 Format of addressing fields..... | 43 |
| 6 ADDRESS METHOD field values..... | 43 |
| 7 Logical unit addressing | 44 |
| 8 Peripheral device addressing..... | 44 |
| 9 Flat space addressing..... | 45 |
| 10 Extended logical unit addressing | 46 |
| 11 LENGTH field values | 46 |
| 12 Two byte extended logical unit addressing format..... | 46 |
| 13 Four byte extended logical unit addressing format | 46 |
| 14 Six byte extended logical unit addressing format..... | 46 |
| 15 Eight byte extended logical unit addressing format | 46 |
| 16 Logical unit extended address methods | 47 |
| 17 Well known logical unit extended address format..... | 47 |
| 18 Mapping nexus to SAM-2 identifiers | 49 |
| 19 Command Descriptor Block (CDB) Format..... | 63 |
| 20 OPERATION CODE byte | 63 |
| 21 Group Code values | 63 |
| 22 CONTROL byte | 64 |
| 23 Status codes | 65 |
| 24 Autosense, CA, and ACA Interactions | 75 |
| 25 Blocking and aborting tasks when a CA or ACA is established..... | 76 |
| 26 Task handling when neither CA nor ACA is in effect | 77 |
| 27 Handling for new tasks from a faulted initiator port during CA..... | 77 |
| 28 Handling for new tasks from a faulted initiator port during ACA..... | 78 |
| 29 Handling for new tasks from non-faulted initiator ports during CA..... | 79 |
| 30 Handling for new tasks from non-faulted initiator ports during ACA..... | 80 |
| 31 Task Management Functions..... | 86 |
| 32 Task State Nomenclature | 93 |
| 33 Task attribute and state indications in examples | 97 |
| 34 Dormant task blocking boundary requirements | 99 |
| A.1 Object size and support requirements..... | 101 |
| A.2 Object identifier size for each SCSI transport protocol..... | 102 |
| A.3 Object identifier format for each SCSI transport protocol..... | 102 |
| A.4 Object name size for each SCSI transport protocol | 103 |
| A.5 Object name format for each SCSI transport protocol..... | 103 |
| B.1 SAM-2 to SAM terminology mapping | 105 |

STANDARDS CANADA. Click to view the full PDF of ISO/IEC 14776-412:2006

Figures

| | Page |
|--|------|
| 0 SCSI document structure | 9 |
| 1 Requirements precedence | 11 |
| 2 Example hierarchy diagram | 25 |
| 3 Example state diagram | 27 |
| 4 Client-Server model | 29 |
| 5 SCSI client-server model | 30 |
| 6 SCSI I/O system and domain model | 31 |
| 7 Overall SCSI domain model | 32 |
| 8 SCSI domain model | 33 |
| 9 Service delivery subsystem model | 33 |
| 10 SCSI initiator device model | 35 |
| 11 SCSI target device model | 36 |
| 12 SCSI target/initiator device model | 37 |
| 13 Logical unit model | 39 |
| 14 Eight Byte logical unit number structure adjustments | 42 |
| 15 SCSI device functional models | 50 |
| 16 Multiple port target SCSI device structure model | 51 |
| 17 Multiple port SCSI initiator device structure model | 52 |
| 18 Multiple port target/initiator SCSI device structure model | 53 |
| 19 SCSI target device configured in a single SCSI domain | 54 |
| 20 SCSI target device configured in multiple SCSI domains | 54 |
| 21 SCSI target device and SCSI initiator device configured in a single SCSI domain | 55 |
| 22 Dependent logical unit model | 56 |
| 23 Example of hierarchical system diagram | 57 |
| 24 Protocol service reference model | 58 |
| 25 Protocol service model | 59 |
| 26 Request-Response ULP transaction and related LLP services | 60 |
| 27 Model for Data-In and Data-Out data transfers | 69 |
| 28 Command processing events | 73 |
| 29 Linked command processing events | 74 |
| 30 Task management processing events | 91 |
| 31 Example of Dormant state task behavior | 94 |
| 32 Task states | 96 |
| 33 Head of queue tasks and blocking boundaries (example 1) | 98 |
| 34 Head of queue tasks and blocking boundaries (example 2) | 98 |
| 35 Ordered tasks and blocking boundaries | 99 |
| 36 ACA task example | 100 |

INFORMATION TECHNOLOGY - SMALL COMPUTER SYSTEM INTERFACE (SCSI) -

Part 412: Architecture Model - 2 (SAM-2)

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC Publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC Publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC Publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC Publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon this ISO/IEC publication or any other IEC or ISO publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14776-412 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the title page.

INTRODUCTION

General

The set of SCSI standards consists of this International Standard and the SCSI implementation standards (see SCSI standards family).

The set of SCSI standards specifies the interfaces, functions and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

SCSI standards family

Figure 1 shows the relationship of this standard to the other standards and related projects in the SCSI family standards.

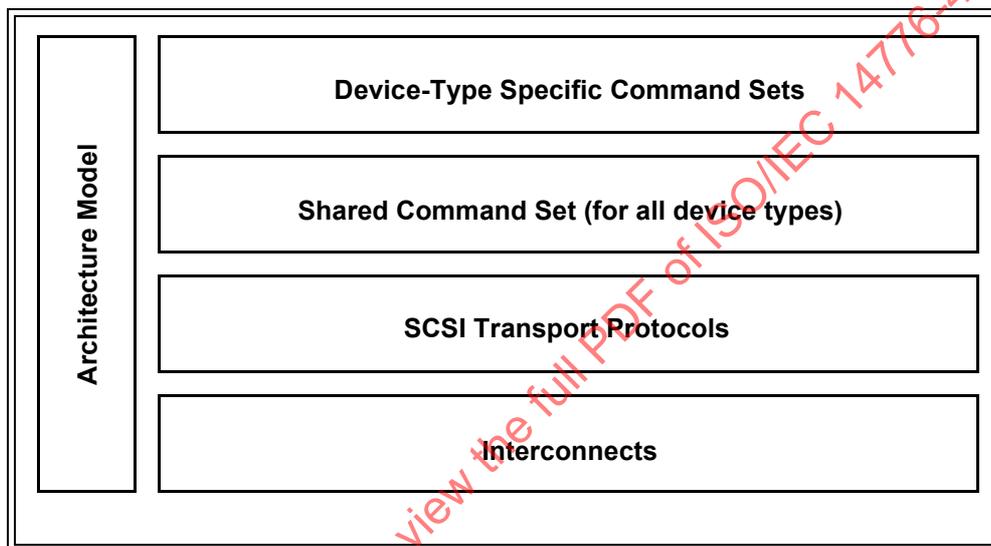


Figure 0 – SCSI document structure

Figure 0 shows the general applicability of the documents with respect to one another. Figure 0 does not imply a relationship such as a hierarchy, protocol stack or system architecture.

The functional areas identified in Figure 0 characterize the scope of standards within a group as follows:

Architecture Model: Defines the SCSI systems model, the functional partitioning of the SCSI standard set and requirements applicable to all SCSI implementations and implementation standards.

Device-Type Specific Command Sets: Implementation standards that define specific device types including a device model for each device type. These standards specify the required commands and behaviour that is specific to a given device type and prescribe the requirements to be followed by a SCSI initiator device when sending commands to a SCSI target device having the specific device type. The commands and behaviours for a specific device type may include reference commands and behaviours that are shared by all SCSI devices.

Shared Command Set: An implementation standard that defines a model for all SCSI device types. This standard specifies the required commands and behaviour that is common to all SCSI devices, regardless of device type, and prescribes the requirements to be followed by a SCSI initiator device when sending commands to any SCSI target device.

SCSI Transport Protocols: Implementation standards that define the requirements for exchanging information so that different SCSI devices are capable of communicating.

Interconnects: Implementation standards that define the communications mechanism employed by the SCSI transport protocols. These standards may describe the electrical and signaling requirements essential for SCSI devices to interoperate over a given interconnect.

For references, see bibliography.

The SCSI Architecture Model-2 (SAM-2) standard is divided into seven clauses and two annexes:

| | |
|--------------|---|
| Clause 1 | Scope |
| Clause 2 | Normative references |
| Clause 3 | Definitions, symbols and abbreviations |
| Clause 4 | SCSI architecture model |
| Clause 5 | SCSI command model of the SCSI architecture |
| Clause 6 | Task management functions common to SCSI devices |
| Clause 7 | Task set management capabilities common to SCSI devices |
| Annex A | Identifier and name definitions of the SCSI transport protocols |
| Annex B | Terminology mapping |
| Bibliography | |

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

INFORMATION TECHNOLOGY - SMALL COMPUTER SYSTEM INTERFACE (SCSI) -

Part 412: Architecture Model - 2 (SAM-2)

1 General

1.1 Scope

This part of ISO/IEC 14776 defines a reference model that specifies common behaviours for SCSI devices and an abstract structure that is generic to all SCSI I/O system implementations.

This International Standard specifies generic requirements that pertain to SCSI implementation standards and implementation requirements.

1.2 Precedence requirements

An implementation requirement specifies behaviour in terms of measurable or observable parameters that apply to an implementation. Examples of implementation requirements defined in this International Standard are the command descriptor block format and the status values to be returned upon command completion.

Generic requirements are transformed to implementation requirements by an implementation standard. An example of a generic requirement is the hard reset behaviour specified in 5.9.6.

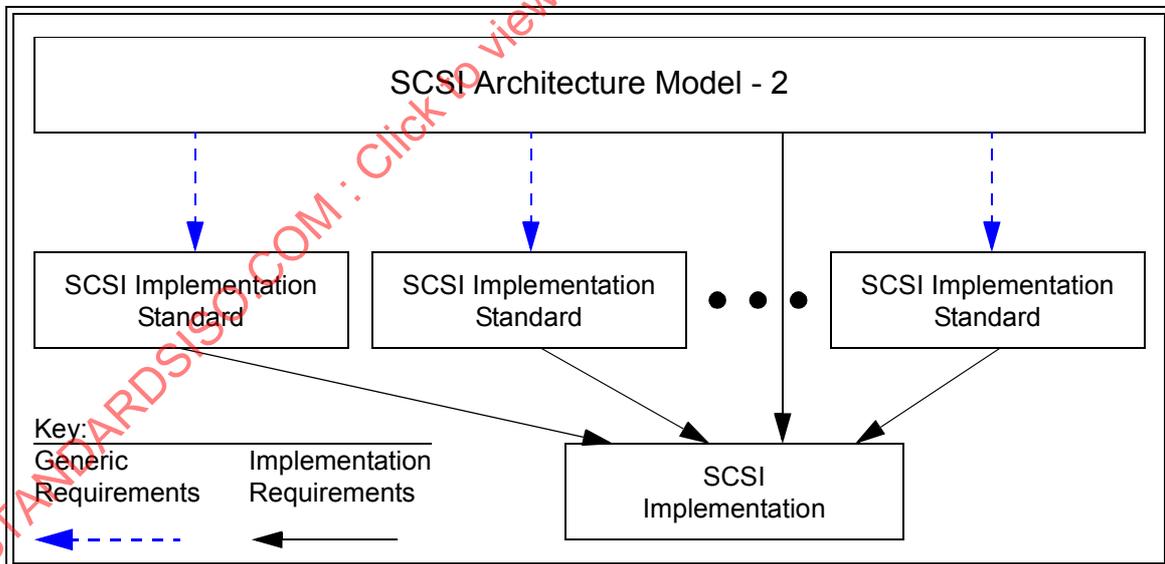


Figure 1 — Requirements precedence

As shown in figure 1, all SCSI implementation standards shall reflect the generic requirements defined herein. In addition, an implementation claiming SCSI compliance shall conform to the applicable implementation requirements defined in this standard and the appropriate SCSI implementation standards. In the event of a conflict between this document and other SCSI standards under the jurisdiction of ISO/IEC JTC 1/SC 25, the requirements of this standard shall apply.

2 Normative reference

The following referenced document is indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 14776-452, *Information technology – Small Computer System Interface (SCSI) – Part 452: Primary Commands-2 (SPC-2)*

For all other references, see bibliography.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

3 Definitions, symbols, abbreviations and conventions

3.1 Definitions

For the purpose of this international standard the following definitions apply.

3.1.1

ACA command

command performed by a task with the ACA attribute (see 3.1.4, 4.10, and 7.5.4).

3.1.2

additional sense code

a combination of the ADDITIONAL SENSE CODE and ADDITIONAL SENSE CODE QUALIFIER fields in the sense data (see 3.1.104 and SPC-2)

3.1.3

application client

an object that is the source of SCSI commands

3.1.4

auto contingent allegiance (ACA)

one of the possible conditions of a task set following the return of a CHECK CONDITION status (see 5.9.1)

3.1.5

blocked task state

when in this state a task is prevented from completing due to a CA or ACA condition

3.1.6

blocking boundary

a task set boundary denoting a set of conditions that inhibit tasks outside the boundary from entering the enabled task state

3.1.7

byte

an 8-bit construct

3.1.8

call

act of invoking a procedure

3.1.9

client-server

relationship established between a pair of distributed entities where one (the client) requests the other (the server) to perform some operation or unit of work on the client's behalf.

3.1.10

client

entity that requests a service from a server

3.1.11

code value

defined numeric value, possibly a member of a series of defined numeric values, representing an identified and described instance or condition. Code values are defined to be used in a specific field (see 3.1.35), in a procedure input data parameter (see 3.6.2), in a procedure output data parameter, or in a procedure result

3.1.12

command

a request describing a unit of work to be performed by a device server

3.1.13

command descriptor block (CDB)

structure used to communicate a command from an application client to a device server. A CDB may have a fixed length of up to 16 bytes or a variable length of between 12 bytes and 260 bytes

3.1.14

completed command

a command that has ended by returning a status and service response of TASK COMPLETE or LINKED COMMAND COMPLETE

3.1.15

completed task

a task that has ended by returning a status and service response of TASK COMPLETE. The actual events comprising the TASK COMPLETE response are SCSI transport protocol specific

3.1.16

confirmation

response returned to a client or server that signals the completion of a service request

3.1.17

confirmed SCSI transport protocol service

service available at the SCSI transport protocol service interface that includes a confirmation of completion

3.1.18

contingent allegiance (CA)

one of the possible conditions of a task set following the return of a CHECK CONDITION status (see 5.9.1)

3.1.19

control mode page

the mode page that identifies the settings of several device server behaviours that may be of interest to an application client or may be changed by an application client. Fields in the Control mode page are referenced by name in this standard and SPC-2 contains a complete definition of the Control mode page

3.1.20

current task

a task that has a data transfer SCSI transport protocol service request in progress (see 5.4.3) or is in the process of sending command status. Each SCSI transport protocol standard should define the SCSI transport protocol specific conditions under which a task is considered a current task

3.1.21

dependent logical unit

a logical unit that is addressed via some other logical unit(s) in a hierarchical logical unit structure (see 3.1.38), also a logical unit that is at a higher numbered level in the hierarchy than the referenced logical unit (see 4.13)

3.1.22

device identifier

a term used by previous versions of this standard (see Annex B)

3.1.23

device model

description of a type of SCSI target device (e.g., block, stream)

3.1.24

device server

an object within a logical unit that processes SCSI tasks according to the requirements for task management described in clause 7

3.1.25

device service request

a request submitted by an application client conveying a SCSI command to a device server

3.1.26**device service response**

the response returned to an application client by a device server on completion of a SCSI command

3.1.27**domain**

I/O system consisting of a set of SCSI devices that interact with one another by means of a service delivery subsystem

3.1.28**dormant task state**

when in this state a task is prevented from entering the enabled task state (see 3.1.29) due to the presence of certain other tasks in the task set

3.1.29**enabled task state**

when in this state a task may complete at any time or is waiting to receive the next command in a series of linked commands

3.1.30**ended command**

completed or aborted command

3.1.31**faulted initiator port**

SCSI initiator port to which a CHECK CONDITION status was returned. The faulted initiator port condition is cleared when the CA or ACA condition resulting from the CHECK CONDITION status is cleared

3.1.32**faulted task set**

task set that contains a faulting task. The faulted task set condition is cleared when the CA or ACA condition resulting from the CHECK CONDITION status is cleared

3.1.33**faulting command**

a command that completed with a status of CHECK CONDITION

3.1.34**faulting task**

a task that has completed with a status of CHECK CONDITION

3.1.35**field**

a group of one or more contiguous bits, part of a larger structure such as a CDB (see 3.1.13) or sense data (see 3.1.104)

3.1.36**function complete**

a logical unit response indicating that a task management function has finished. The events comprising this response are SCSI transport protocol specific

3.1.37**hard reset**

a SCSI device action in response to a reset event in which SCSI target port performs the operations described in 5.9.6

3.1.38**hierarchical logical unit**

an inverted tree structure for forming and parsing logical unit numbers (see 3.1.60) containing up to four addressable levels (see 4.13)

3.1.39

I_T nexus

a nexus between a SCSI initiator port and a SCSI target port (see 4.11)

3.1.40

I_T_L nexus

a nexus between a SCSI initiator port, a SCSI target port, and a logical unit (see 4.11)

3.1.41

I_T_L_Q nexus

a nexus between a SCSI initiator port, a SCSI target port, a logical unit, and a tagged task (see 4.11)

3.1.42

I_T_L_x nexus

either an I_T_L nexus or an I_T_L_Q nexus (see 4.11)

3.1.43

I/O operation

operation defined by an unlinked SCSI command, a series of linked SCSI commands or a task management function

3.1.44

implementation specific

a requirement or feature that is defined in a SCSI standard but whose implementation may be specified by the system integrator or vendor

3.1.45

implementation option

an option whose actualization within an implementation is at the discretion of the implementor

3.1.46

initiator

term used by previous versions of this standard (see Annex B)

3.1.47

initiator device name

SCSI device name of a SCSI initiator device (see 4.7.1)

3.1.48

initiator identifier

term used by previous versions of this standard (see Annex B)

3.1.49

initiator port identifier

value by which a SCSI initiator port is referenced within a domain (see 4.7.1)

3.1.50

initiator port name

a SCSI port name (see 3.1.93) of a SCSI initiator port or of a SCSI target/initiator port when operating as a SCSI initiator port (see 4.7.1)

3.1.51

interconnect subsystem

one or more interconnects that appear as a single path for the transfer of information between SCSI devices in a domain

3.1.52

in transit

information that has been sent to a remote entity but not yet received

3.1.53**layer**

subdivision of the architecture constituted by SCSI initiator device and SCSI target device elements at the same level relative to the interconnect

3.1.54**linked CDB**

CDB with the LINK bit in the CONTROL byte set to one

3.1.55**linked command**

one in a series of SCSI commands processed by a single task that collectively make up a discrete I/O operation. In such a series, each command is represented by the same I_T_L_x nexus, and all, except the last, have the LINK bit in the CDB CONTROL byte set to one

3.1.56**logical unit**

SCSI target device object, containing a device server and task manager, that implements a device model and manages tasks to process SCSI commands sent by an application client (see 4.8)

3.1.57**logical unit reset**

a logical unit action in response to a logical unit reset event in which the logical unit performs the operations described in 5.9.7

3.1.58**logical unit reset event**

an event that triggers a logical unit reset from a logical unit as described in 5.9.7

3.1.59**logical unit inventory**

the list of the logical unit numbers reported by a REPORT LUNS command (see SPC-2)

3.1.60**logical unit number (LUN)**

64-bit identifier for a logical unit

3.1.61**logical unit option**

option pertaining to a logical unit whose actualization is at the discretion of the logical unit implementor

3.1.62**lower level protocol (LLP)**

protocol used to carry the information representing upper level protocol transactions

3.1.63**media information**

information stored within a SCSI device that is non-volatile (retained through a power cycle) and accessible to a SCSI initiator device through the processing of SCSI commands

3.1.64**name**

a label of an object that is unique within a specified context and should never change (e.g., the term name and world wide identifier (WWID) may be interchangeable)

3.1.65**nexus**

a relationship between two SCSI devices, and the SCSI initiator port and SCSI target port objects within those SCSI devices (see 4.11)

3.1.66

non-faulted initiator port

a SCSI initiator port that is not a faulted initiator port (see 3.1.31)

3.1.67

object

an architectural abstraction or container that encapsulates data types, services or other objects that are related in some way

3.1.68

peer-to-peer protocol service

a service used by an upper level protocol implementation to exchange information with its peer

3.1.69

peer entities

entities within the same layer

3.1.70

pending command

from the point of view of the application client, the description of command between the time that the application client calls the **Send SCSI Command** SCSI transport protocol service and the time one of the SCSI target device responses described in 5.5 is received

3.1.71

port

synonymous with SCSI port (see 3.1.91)

3.1.72

procedure

an operation that is invoked through an external calling interface

3.1.73

protocol

a specification and/or implementation of the requirements governing the content and exchange of information passed between distributed entities through the service delivery subsystem

3.1.74

protocol option

function whose definition within a SCSI transport protocol standard is optional

3.1.75

queue

the arrangement of tasks within a task set (see 3.1.126), usually according to the temporal order in which they were created

3.1.76

receiver

a client or server that is the recipient of a service delivery transaction

3.1.77

reference model

a standard model used to specify system requirements in an implementation independent manner.

3.1.78

request

a transaction invoking a service

3.1.79**request-response transaction**

interaction between a pair of distributed, cooperating entities, consisting of a request for service submitted to an entity followed by a response conveying the result

3.1.80**request-confirmation transaction**

interaction between a pair of cooperating entities, consisting of a request for service submitted to an entity followed by a response from the entity confirming request completion

3.1.81**reset event**

a SCSI transport protocol specific event that triggers a hard reset from a SCSI device as described in 5.9.6

3.1.82**response**

a transaction conveying the result of a request

3.1.83**SCSI application layer**

The protocols and procedures that implement or issue SCSI commands and task management functions by using services provided by a SCSI transport protocol layer.

3.1.84**SCSI device:**

A device that contains one or more SCSI ports that are connected to a service delivery subsystem and supports a SCSI application protocol.

3.1.85**SCSI device identifier**

synonymous with SCSI port identifier (see 3.1.92)

3.1.86**SCSI device name**

a name (see 3.1.64) of a SCSI device that is world wide unique within the SCSI transport protocol of a SCSI domain in which the SCSI device has SCSI ports (see 4.7.6). The SCSI device name may be made available to other SCSI devices or SCSI ports in that SCSI domain in SCSI transport protocol specific ways

3.1.87**SCSI I/O system**

an I/O system, consisting of two or more SCSI devices, a SCSI interconnect and a SCSI transport protocol that collectively interact to perform SCSI I/O operations

3.1.88**SCSI identifier**

a term used by previous versions of this standard (see Annex B)

3.1.89**SCSI initiator device**

a SCSI device containing application clients and SCSI initiator ports that originate device service and task management requests to be processed by a SCSI target device. When used, this term refers to SCSI initiator devices or SCSI target/initiator devices that are using the SCSI target/initiator port as a SCSI initiator port

3.1.90**SCSI initiator port**

a SCSI initiator device object that acts as the connection between application clients and the service delivery subsystem through which requests and responses are routed. In all cases when this term is used it refers to an initiator port or a SCSI target/initiator port operating as a SCSI initiator port

3.1.91

SCSI port

a SCSI device resident object that connects the application client, device server or task manager to the service delivery subsystem through which requests and responses are routed. SCSI port is synonymous with port. A SCSI port is either a SCSI initiator port (see 3.1.90) or a SCSI target port (see 3.1.95)

3.1.92

SCSI port identifier

value by which a SCSI port is referenced within a domain. The SCSI port identifier is either an initiator port identifier (see 3.1.49) or a target port identifier (see 3.1.117)

3.1.93

SCSI port name

a name (see 3.1.64) of a SCSI port that is world wide unique within the SCSI transport protocol of the SCSI domain of that SCSI port (see 4.7.7). The name may be made available to other SCSI devices or SCSI ports in that SCSI domain in SCSI transport protocol specific ways

3.1.94

SCSI target device

a SCSI device containing logical units and SCSI target ports that receives device service and task management requests for processing. When used, this term refers to SCSI target devices or SCSI target/initiator devices that are using the SCSI target/initiator port as a SCSI target port

3.1.95

SCSI target port

a SCSI target device object that contains a task router and acts as the connection between device servers and task managers and the service delivery subsystem through which requests and responses are routed. When this term is used it refers to a SCSI target port or a SCSI target/initiator port operating as a SCSI target port

3.1.96

SCSI target/initiator device

a SCSI device that has all the characteristics of a SCSI target device and a SCSI initiator device

3.1.97

SCSI target/initiator port

a SCSI device resident object that has all the characteristics of a SCSI target port and a SCSI initiator port

3.1.98

SCSI transport protocol layer

the protocol and services used by a SCSI application layer to transport data representing a SCSI application protocol transaction

3.1.99

SCSI transport protocol service confirmation

a signal from the lower level SCSI transport protocol layer notifying the upper layer that a SCSI transport protocol service request has completed

3.1.100

SCSI transport protocol service indication

a signal from the lower level SCSI transport protocol layer notifying the upper level that a SCSI transport protocol transaction has occurred

3.1.101

SCSI transport protocol service request

a call to the lower level SCSI transport protocol layer to begin a SCSI transport protocol service transaction

3.1.102

SCSI transport protocol service response

a reply from the upper level protocol layer in response to a SCSI transport protocol service indication

3.1.103**sender**

a client or server that originates a service delivery transaction

3.1.104**sense data**

data returned to an application client as a result of an autosense operation, asynchronous event report, or REQUEST SENSE command (see 5.9.4). Fields in the sense data are referenced by name in this standard. See SPC-2 for a complete sense data format definition

3.1.105**sense key**

a field in the sense data (see 3.1.104 and SPC-2)

3.1.106**server**

an entity that performs a service on behalf of a client

3.1.107**service**

any operation or function performed by a SCSI object that is invoked by other SCSI objects

3.1.108**service delivery failure**

any non-recoverable error causing the corruption or loss of one or more service delivery transactions while in transit

3.1.109**service delivery subsystem**

the part of a SCSI I/O system that transmits service requests to a logical unit or SCSI target device and returns logical unit or SCSI target device responses to a SCSI initiator device

3.1.110**service delivery transaction**

a request or response sent through the service delivery subsystem

3.1.111**signal** (noun)

a detectable asynchronous event possibly accompanied by descriptive data and parameters

3.1.112**signal** (verb)

the act of generating such an event

3.1.113**standard INQUIRY data**

data returned to an application client as a result of an INQUIRY command. Fields in the standard INQUIRY data are referenced by name in this standard and SPC-2 contains a complete definition of the standard INQUIRY data format

3.1.114**target**

term used in previous versions of this standard (see Annex B)

3.1.115**target device name**

a SCSI device name (see 3.1.86) of a SCSI target device (see 4.7.2)

3.1.116

target identifier

term used by previous versions of this standard (see Annex B)

3.1.117

target port identifier

a value by which a SCSI target port is referenced within a domain (see 4.7.2)

3.1.118

target port name

a SCSI port name of a SCSI target port or of a SCSI target/initiator port when operating as a SCSI target port (see 4.7.2)

3.1.119

target/initiator device name

a SCSI device name (see 3.1.86) of a SCSI target/initiator device (see 4.7.3)

3.1.120

task

an object within the logical unit representing the work associated with a command or a group of linked commands

3.1.121

task management function

a task manager service capable of being requested by an application client to affect the processing of one or more tasks

3.1.122

task management request

a request submitted by an application client, invoking a task management function to be processed by a task manager

3.1.123

task management response

the response returned to an application client by a task manager on completion of a task management request

3.1.124

task manager

a server within a logical unit that controls the sequencing of one or more tasks and processes task management functions.

3.1.125

task router

an object in a SCSI target port that routes commands and task management functions between the service delivery subsystem (see 3.1.109) and the appropriate logical unit's task manager (see 3.1.124).

3.1.126

task set

a group of tasks within a logical unit, whose interaction is dependent on the task management (e.g., queuing), CA, and ACA requirements (see 4.8)

3.1.127

third-party command

SCSI command that requires a logical unit within a SCSI target device to assume the SCSI initiator device role and send SCSI command(s) to another SCSI target device

3.1.128

transaction

a cooperative interaction between two entities, involving the exchange of information or the processing of some request by one entity on behalf of the other

3.1.129**unconfirmed SCSI transport protocol service**

a service available at the SCSI transport protocol service interface that does not result in a completion confirmation

3.1.130**unlinked command**

a SCSI command having the LINK bit set to zero in the CDB CONTROL byte

3.1.131**upper level protocol (ULP)**

an application-specific protocol processed through services provided by a lower level protocol

3.1.132**wakeup**

a SCSI target port returning from the sleep power condition to the active power condition (see SPC-3)

3.1.133**wakeup event**

an event that triggers a wakeup from a SCSI target port as described in SPC-3

3.1.134**well known logical unit**

a logical unit that only performs specific functions (see 4.9.9). Well known logical units allow an application client to issue requests to receive and manage specific information usually relating to a SCSI target device

3.1.135**well known logical unit number (W-LUN)**

the logical unit number that identifies a well known logical unit

3.2 Acronyms

| | |
|-------|---|
| ACA | Auto Contingent Allegiance (see 3.1.4) |
| AER | Asynchronous Event Reporting (see 5.9.4.2) |
| CA | Contingent Allegiance (see 3.1.18) |
| CDB | Command Descriptor Block (see 3.1.13) |
| LLP | Lower Level Protocol (see 3.1.62) |
| LUN | Logical Unit Number (see 3.1.60) |
| MMC-2 | SCSI Multi-Media Commands -2 |
| n/a | Not Applicable |
| RAID | Redundant Array of Independent Disks |
| SBC | SCSI-3 Block Commands |
| SCSI | The architecture defined by the family of standards described in the bibliography |
| SPI-4 | SCSI Parallel Interface-4 |
| SPC-2 | SCSI Primary Commands-2 |
| SPC-3 | SCSI Primary Commands-3 |
| SSC | SCSI-3 Stream Commands ULP Upper Level Protocol (see 3.1.131) |
| VPD | Vital Product Data (see SPC-2) |
| W-LUN | Well known logical unit number (see 3.1.135) |

3.3 Keywords**3.3.1****invalid**

a keyword used to describe an illegal or unsupported bit, byte, word, field or code value. Receipt by a device server of an invalid bit, byte, word, field or code value shall be reported as error

3.3.2

mandatory

a keyword indicating an item that is required to be implemented as defined in this standard

3.3.3

may

a keyword that indicates flexibility of choice with no implied preference (synonymous with "may or may not")

3.3.4

may not

a keyword that indicates flexibility of choice with no implied preference (synonymous with "may or may not")

3.3.5

obsolete

a keyword indicating that an item was defined in prior SCSI standards but has been removed from this standard

3.3.6

option, optional

keywords that describe features that are not required to be implemented by this standard. However, if any optional feature defined by this standard is implemented, then it shall be implemented as defined in this standard

3.3.7

SCSI transport protocol specific

implementation of the referenced item is defined by a SCSI transport protocol standard

3.3.8

reserved

a keyword referring to bits, bytes, words, fields, and code values that are set aside for future standardization. A reserved bit, byte, word, or field shall be set to zero, or in accordance with a future extension to this standard. Recipients are not required to check reserved bits, bytes, words, or fields for zero values. Receipt of reserved code values in defined fields shall be reported as error

3.3.9

shall

a keyword indicating a mandatory requirement. Designers are required to implement all such mandatory requirements to ensure interoperability with other products that conform to this standard

3.3.10

should

a keyword indicating flexibility of choice with a strongly preferred alternative; equivalent to the phrase "it is strongly recommended"

3.3.11

vendor specific

specification of the referenced item is determined by the SCSI device vendor

3.4 Editorial conventions

Certain words and terms used in this standard have a specific meaning beyond the normal English meaning. These words and terms are defined either in the glossary or in the text where they first appear.

Upper case is used when referring to the name of a numeric value defined in this specification or a formal attribute possessed by an entity. When necessary for clarity, names of objects, procedures, parameters or discrete states are capitalized or set in bold type. Names of fields are identified using small capital letters (e.g., NACA bit).

Callable procedures are identified by a name in bold type, such as **Execute Command** (see clause 5). Names of procedural arguments are denoted by capitalizing each word in the name. For instance, Sense Data is the name of an argument in the **Execute Command** procedure call.

Quantities having a defined numeric value are identified by large capital letters. CHECK CONDITION, for example, refers to the numeric quantity defined in table 23 (see 5.3.1). Quantities having a discrete but unspecified value are identified using small capital letters. As an example, TASK COMPLETE, indicates a quantity returned by the **Execute Command** procedure call (see clause 5). Such quantities are associated with an event or indication whose observable behavior or value is specific to a given implementation standard.

Lists sequenced by letters (e.g., a-red, b-blue, c-green) show no priority relationship between the listed items. Numbered lists (e.g., 1-red, 2-blue, 3-green) show a priority ordering between the listed items.

If a conflict arises between text, tables or figures, the order of precedence to resolve the conflicts is text; then tables; and finally figures. Not all tables or figures are fully described in the text. Tables show data format and values.

Notes do not constitute any requirements for implementors.

3.5 Numeric conventions

Digits 0 through 9 in the text of this standard that are not immediately followed by lower-case "b" or "h" are decimal values. Digits 0 and 1 immediately followed by lower case "b" are binary values. Digits 0 through 9 and the upper-case letters "A" through "F" immediately followed by lower-case "h" are hexadecimal values.

Digits of large numbers are grouped by the use of spaces (e.g., 12 345, not 12,345).

3.6 Notation conventions

3.6.1 Hierarchy diagram conventions

Hierarchy diagrams show how objects are related to each other. The hierarchy diagram of figure 2, for example, shows the relationships among the objects comprising an object called Book. For this example, a book object is defined as containing a table of contents object, an optional preface object, one or more chapter objects, and an optional index object. Further contents definitions are provided for the preface and chapter objects. A preface object contains zero or more figure objects, one outline object, and an introductory text object. A chapter object contains one or more section objects and zero or more figure objects.

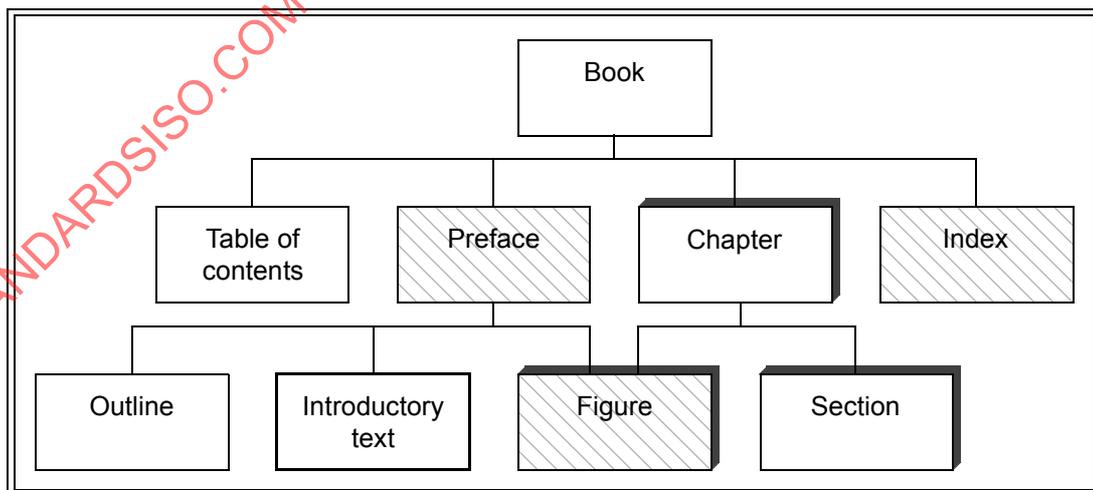


Figure 2 — Example hierarchy diagram

In the corresponding hierarchy diagram, labelled boxes denote the above objects. The composition and relation of one object to others is shown by the connecting lines. In this case, the connecting lines indicate the relationship between the book object and its constituent table of contents, preface, chapter and index objects. Similarly, connecting lines show that a chapter object contains section and figure objects. Note that the figure object also may be a component of the preface object.

In the hierarchy diagram, objects that are required to have one and only one instance are shown as simple boxes, as is the case for the book and table of contents objects. The hierarchy diagram shows multiple instances of an object by the presence of a shadow, as is the case for the chapter, figure and section objects. Objects that are optional are indicated by light diagonal lines, as is the case for the preface, figure and index objects. An object that may not have any instances, have only one instance, or have multiple instances is shown with both diagonal lines and a shadow, as is the case for the figure object. The instance indications shown in a hierarchy diagram are approximate. Detailed requirements appear in the accompanying text.

3.6.2 Notation for procedures and functions

In this standard, the model for functional interfaces between entities is the callable procedure. Such interfaces are specified using the following notation:

[Result =] Procedure Name (IN ([input-1] [,input-2] ...), OUT ([output-1] [,output-2] ...))

Where:

Result: A single value representing the outcome of the procedure or function.

Procedure Name: A descriptive name for the function to be performed.

Input-1, Input-2, ...: A comma-separated list of names identifying caller-supplied input data parameters.

Output-1, Output-2, ...: A comma-separated list of names identifying output data parameters to be returned by the procedure.

"[...]": Brackets enclosing optional or conditional parameters and arguments.

This notation allows data parameters to be specified as inputs and outputs. The following is an example of a procedure specification:

Found = Search (IN (Pattern, Item List), OUT ([Item Found]))

Where:

Found = Flag

Flag, if set, indicates that a matching item was located.

Input Arguments:

Pattern = ... /* Definition of **Pattern** parameter */
Parameter containing the search pattern.

Item List = Item<NN> /* Definition of **Item List** as an array of NN **Item** parameters*/
Contains the items to be searched for a match.

Output Arguments:

Item Found = Item ... /* Item located by the search procedure */
This parameter is only returned if the search succeeds.

3.6.3 Notation for state diagrams

All state diagrams use the notation shown in figure 3.

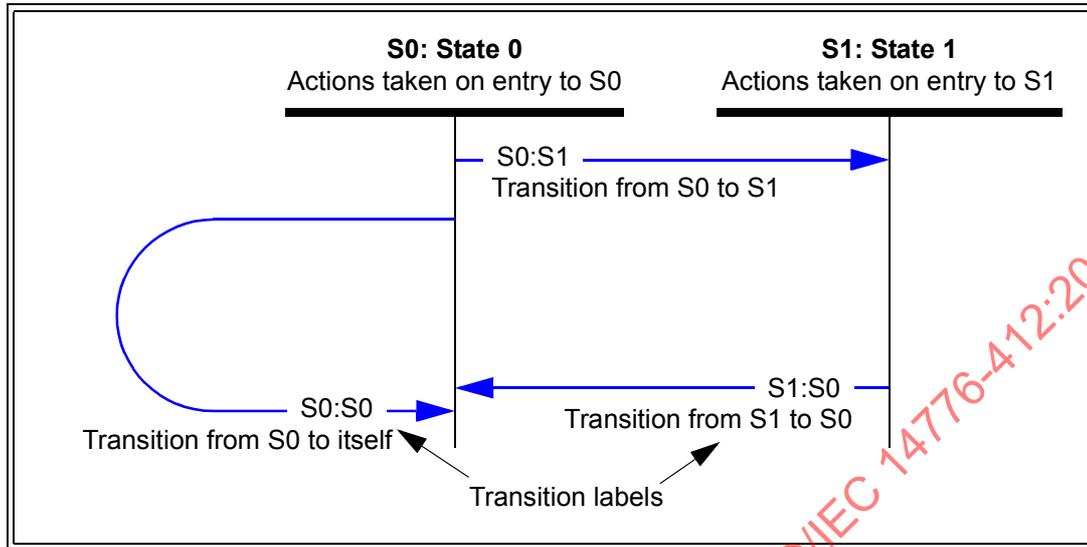


Figure 3 — Example state diagram

The state diagram is followed by a list of the state transitions, using the transition labels. Each transition is described in the list with particular attention to the conditions that cause the transition and special conditions related to the transition to occur. Using figure 3 as an example, the transition list might read as follows:

Transition S0:S1: This transition occurs when state S0 is exited and state S1 is entered.

Transition S1:S0: This transition occurs when state S1 is exited and state S0 is entered.

Transition S0:S0: This transition occurs when state S0 transitions to itself. The reason for a transition from S0 to itself is to specify that the actions taken whenever state S0 is entered are repeated every time the transition occurs.

A system specified in this manner has the following properties:

- time elapses only within discrete states;
- state transitions are logically instantaneous; and
- every time a state is entered, the actions of that state are started. Note that this means that a transition that points back to the same state restarts the actions from the beginning.

4 SCSI Architecture Model

4.1 Introduction

The purpose of the SCSI architecture model is to

- a) provide a basis for the coordination of SCSI standards development that allows each standard to be placed into perspective within the overall SCSI Architecture model;
- b) identify areas for developing standards and provide a common reference for maintaining consistency among related standards so that independent teams of experts may work productively and independently on the development of standards within each functional area; and
- c) provide the foundation for application compatibility across all SCSI interconnect and SCSI transport protocol environments by specifying generic requirements that apply uniformly to all implementation standards within each functional area.

The development of this standard is assisted by the use of an abstract model. To specify the external behavior of a SCSI system, elements in a system are replaced by functionally equivalent components within this model. Only externally observable behavior is retained as the standard of behavior. The description of internal behavior in this standard is provided only to support the definition of the observable aspects of the model. Those aspects are limited to the generic properties and characteristics needed for host applications to interoperate with SCSI devices in any SCSI interconnect and SCSI transport protocol environment. The model does not address other requirements that may be essential to some I/O system implementations such as the mapping from SCSI device addresses to network addresses, the procedure for discovering SCSI devices on a network, and the definition of network authentication policies for SCSI initiator devices or SCSI target devices. These considerations are outside the scope of the architecture model.

The set of SCSI standards specifies the interfaces, functions, and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

The SCSI architecture model is described in terms of objects (see 3.1.67), protocol layers and service interfaces between objects. As used in this standard, objects are abstractions, encapsulating a set of related functions, data types, and other objects. Certain objects, such as an interconnect, are defined by SCSI, while others, such as a task, are needed to understand the functioning of SCSI but have implementation definitions outside the scope of SCSI. That is, although such objects exhibit well-defined and observable behaviors, they do not exist as separate physical elements. An object may be a single numeric parameter, such as a logical unit number, or a complex entity that performs a set of operations or services on behalf of another object.

Service interfaces are defined between distributed objects and protocol layers. The template for a distributed service interface is the client-server model described in 4.2. The structure of a SCSI I/O system is specified in 4.4 by defining the relationship among objects. The set of distributed services to be provided are specified in clause 5 and clause 6.

Requirements that apply to each SCSI transport protocol standard are specified in the SCSI transport protocol service model described in 5.4 and 6.9. The model describes required behavior in terms of layers, objects within layers and SCSI transport protocol service transactions between layers.

4.2 The SCSI distributed service model

Service interfaces between distributed objects are represented by the client-server model shown in figure 4. Dashed horizontal lines with arrowheads denote a single request-response transaction as it appears to the client and server. The solid lines with arrowheads indicate the actual transaction path through the service delivery subsystem. In such a model, each client or server is a single thread of processing that runs concurrently with all other clients or servers.

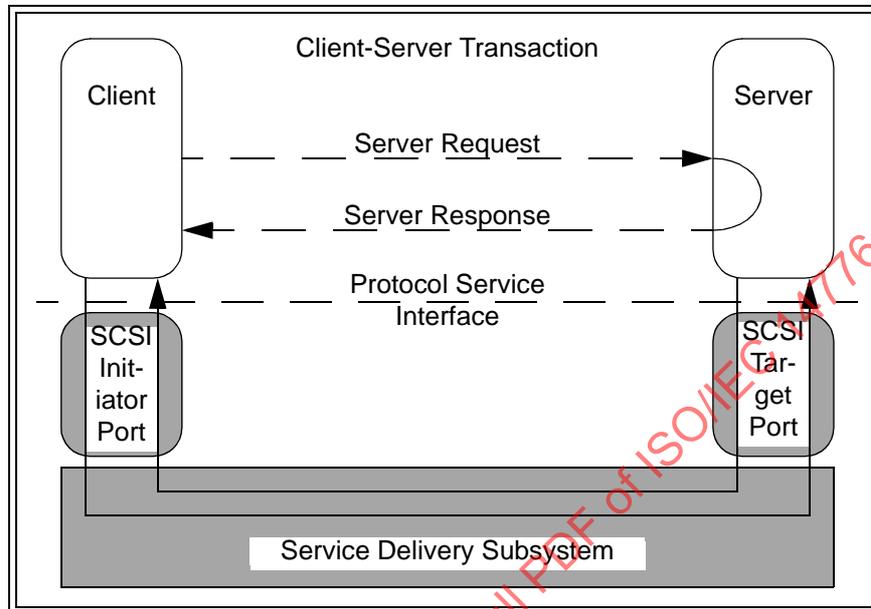


Figure 4 — Client-Server model

A client-server transaction is represented as a remote procedure call with inputs supplied by the caller (the client). The procedure is processed by the server and returns outputs and a procedure status. A client directs requests to a remote server, via the client's service delivery subsystem, and receives a completion response or a failure notification. The request identifies the server and the service to be performed and includes the input data. The response conveys the output data and request status. The function of the service delivery subsystem is to transport an error-free copy of the request or response between sender and receiver. A failure notification indicates that a condition has been detected, such as a reset or service delivery failure, that precludes request completion.

As seen by the client, a request becomes pending when it is passed to the SCSI initiator port for transmission. The request is complete when the server response is received or when a failure notification is sent. As seen by the server, the request becomes pending upon receipt and completes when the response is passed to its service delivery subsystem for return to the client. As a result there may be a time skew between the server and client's perception of request status and logical unit state. All references to a pending command or task management function in this standard are from the application client's point of view.

Client-server relationships are not symmetrical. A client may only originate requests for service. A server may only respond to such requests. The client calls the server-resident procedure and waits for completion. From the client's point of view, the behavior of a remote service invoked in this manner is indistinguishable from a conventional procedure call. In this model, confirmation of successful request or response delivery by the sender is not required. The model assumes that delivery failures are detected by the client's SCSI port or within service delivery subsystem.

4.3 The SCSI client-server model

As shown in figure 5, each SCSI target device contains one or more logical units and provides services performed by device servers and task management functions performed by task managers. A logical unit is an object that implements one of the device functional models described in the SCSI command standards and processes SCSI commands such as reading from or writing to the media. Each pending SCSI command or series of linked commands defines a unit of work to be performed by the logical unit. Each unit of work is represented within the SCSI target device by a task that may be externally referenced and controlled through requests issued to the task manager.

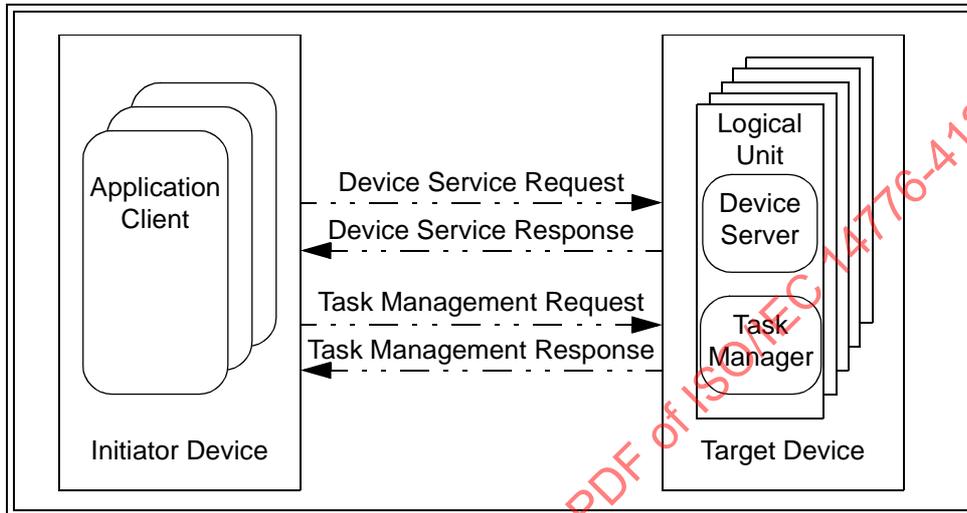


Figure 5 — SCSI client-server model

All requests originate from application clients residing within a SCSI initiator device. An application client is independent of the interconnect and SCSI transport protocol. In an implementation, an application client may correspond to the device driver and any other code within the operating system that is capable of managing I/O requests without requiring knowledge of the interconnect or SCSI transport protocol. In the architecture model, an application client creates one or more application client tasks each of which issues a single SCSI command, series of linked SCSI commands, or task management function. Application client tasks are considered to be part of their parent application client. An application client task ceases to exist once the command, series of linked commands, or task management function ends. Consequently, there is one application client task for each pending command, series of linked commands, or task management request.

As described in 4.2, each request takes the form of a procedure call with arguments and a status to be returned. An application client may request processing of a SCSI command through a request directed to the device server within a logical unit. Each device service request contains a CDB, defining the operation to be performed, along with a list of command specific inputs and other parameters specifying how the command is to be processed. If supported by a logical unit, a sequence of linked commands may be used to define an extended I/O operation.

A task is an object within the logical unit representing the work associated with a command or series of linked commands. A new command or the first in a series of linked commands causes the creation of a task. The task persists until a command completion response is sent or until the task is ended by a task management function or exception condition. For an example of the processing for a single command see 5.8.1. For an example of linked command processing see 5.8.2.

An application client may request processing of a task management function through a request directed to the task manager within the logical unit. The interactions between the task manager and application client when a task management request is processed are shown in 6.10.

4.4 The SCSI structural model

The SCSI structural model represents a view of the elements comprising a SCSI I/O system as seen by the application clients interacting with the system. As shown in figure 6, the fundamental object is the SCSI domain that represents an I/O system. A domain is made up of SCSI devices and a service delivery subsystem that transports commands, data, and related information. A SCSI device contains application clients or device servers or both and the infrastructure to support them.

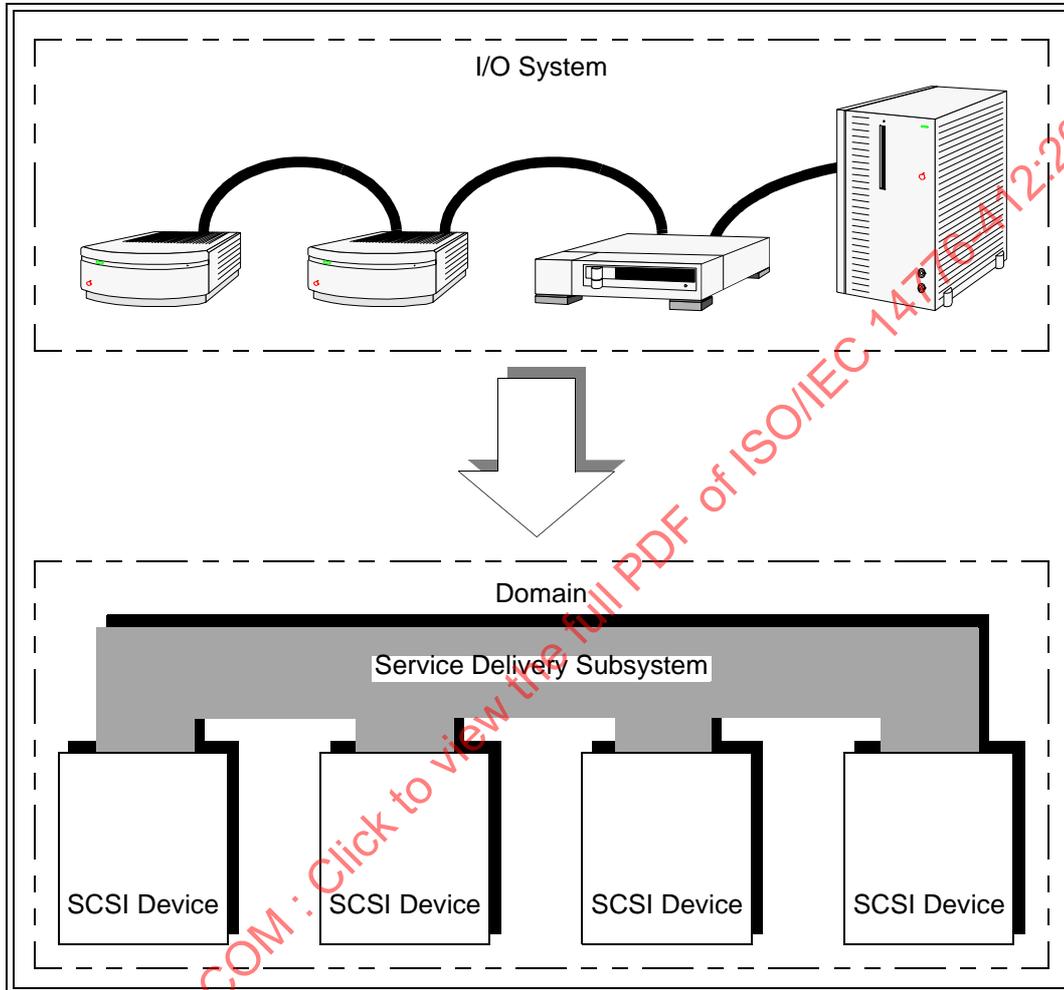


Figure 6 — SCSI I/O system and domain model

Figure 7 shows the main functional components of the SCSI domain. This standard defines these components in greater detail.

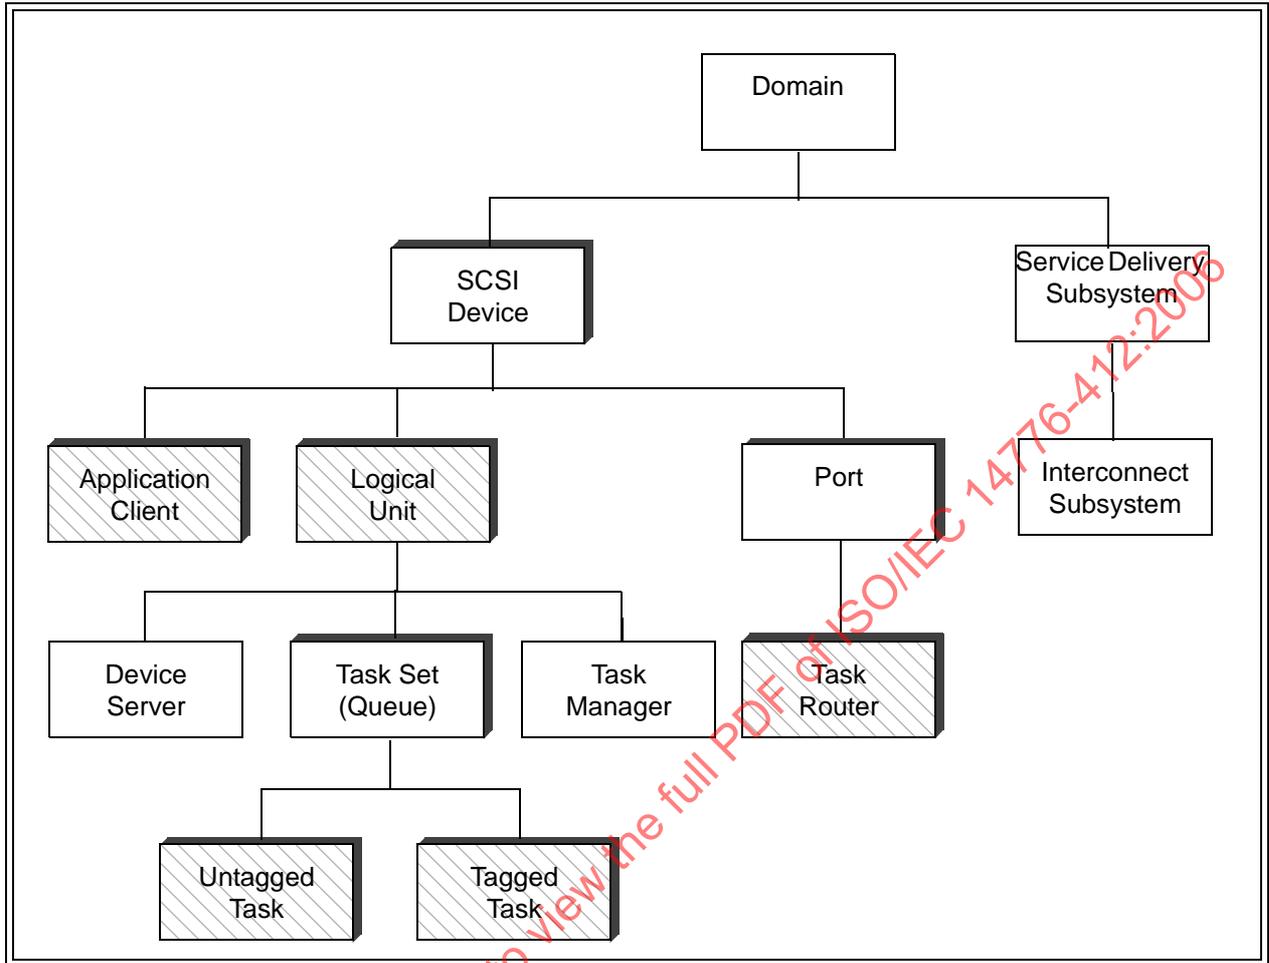


Figure 7 — Overall SCSI domain model

4.5 SCSI domain

A SCSI domain is composed of at least one SCSI device, at least one SCSI target port and at least one SCSI initiator port interconnected by a service delivery subsystem (see figure 8).

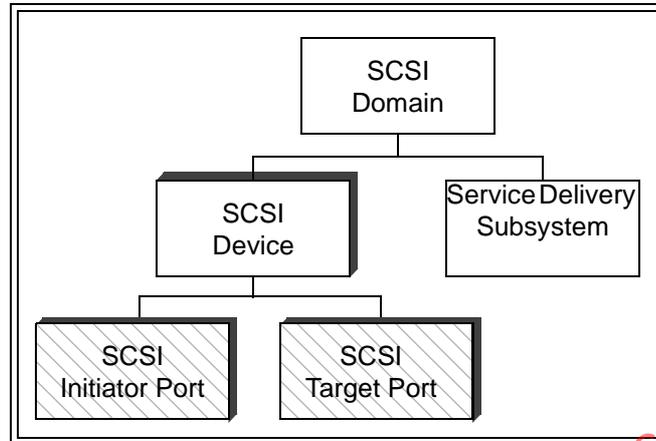


Figure 8 — SCSI domain model

A SCSI device is an object that originates or services SCSI commands. As described in 4.7, when a SCSI device originates a command it is called a SCSI initiator device and that command is transmitted through a SCSI initiator port or a SCSI target/initiator port. A SCSI device containing logical units that service commands is called a SCSI target device and receives commands through a SCSI target port or a SCSI target/initiator port. The service delivery subsystem connects all the SCSI ports in the SCSI domain, providing a mechanism through which application clients and device servers communicate (see 4.6). The boundaries of a SCSI domain are established by the system implementor, within the constraints of a specific SCSI transport protocol and interconnect standards.

4.6 The service delivery subsystem

4.6.1 The service delivery subsystem object

The service delivery subsystem connects SCSI ports (see 3.1.91) and is composed of an interconnect subsystem (see figure 9).




Figure 9 — Service delivery subsystem model

The interconnect subsystem is a set of one or more interconnects that appear to a client or server as a single path for the transfer of requests, responses, and data between SCSI devices.

The service delivery subsystem is assumed to provide error-free transmission of requests and responses between client and server. Although a device driver in a SCSI implementation may perform these transfers through several interactions with its SCSI transport protocol layer, the architecture model portrays each operation, from the viewpoint of the application client, as occurring in one discrete step. In this model, the data comprising an outgoing request is sent in a single package containing all the information required to process the remote procedure call. Similarly, an incoming server response is returned in a package enclosing the output data and status. The request or response package is sent when it is passed to the SCSI port for transmission; it is in transit until delivered and received when it has been forwarded to the receiver via the destination SCSI device's SCSI port.

4.6.2 Synchronizing client and server states

The client is usually informed of changes in server state through the arrival of server responses. In the architecture model such state changes occur after the server has sent the associated response and possibly before the response has been received by the SCSI initiator device. For example, the SCSI target device changes state upon processing the **Send Command Complete** procedure call (see 5.4.2), but the SCSI initiator device is not informed of the state change until the **Command Complete Received** SCSI transport protocol service confirmation arrives.

Some SCSI transport protocols may require the SCSI target device to verify that the response has been received successfully before completing a state change. State changes controlled in this manner are said to be synchronized. Since synchronized state changes are not assumed or required by the architecture model, there may be a time lag between the occurrence of a state change within the SCSI target device and the SCSI initiator device's awareness of that change.

The model assumes that state synchronization, if required by a SCSI transport protocol standard, is enforced by the service delivery subsystem transparently to the server (i.e., whenever the server invokes a SCSI transport protocol service to return a response as described in 6.9 and 5.4, it is assumed that the service delivery port for such a SCSI transport protocol does not return control to the server until the response has been successfully delivered to the SCSI initiator device).

4.6.3 Request/Response ordering

In this standard, request or response transactions are said to be in order if, relative to a given pair of sending and receiving SCSI ports, transactions are delivered in the order they were sent.

A sender may occasionally require control over the order in which its requests or responses are presented to the receiver (e.g., the sequence in which requests are received is often important whenever a SCSI initiator device issues a series of SCSI commands with the ORDERED attribute to a logical unit as described in clause 7). In this case, the order in which these commands are completed, and hence the final state of the logical unit, may depend on the order in which these commands are received. Similarly, the SCSI initiator device acquires knowledge about the state of pending commands and task management functions and may subsequently take action based on the nature and sequence of SCSI target device responses (e.g., if the SCSI initiator device aborts a command whose completion response is in transit and the abort response is received out of order, the SCSI initiator device may incorrectly conclude that no further responses are expected from that command).

The manner in which ordering constraints are established is vendor specific. An implementation may choose to delegate this responsibility to the application client (e.g., the device driver). In-order delivery may be an intrinsic property of the service delivery subsystem or a requirement established by the SCSI transport protocol standard.

The SCSI architecture model assumes in-order delivery to be a property of the service delivery subsystem. This assumption is made to simplify the description of behavior and does not constitute a requirement. This specification makes no assumption about, or places any requirement on the ordering of requests or responses between tasks or task management functions received from different SCSI initiator ports.

4.7 SCSI devices

A SCSI device is a SCSI target device, a SCSI initiator device, or a SCSI target/initiator device.

A SCSI initiator device contains at least one SCSI initiator port and is capable of originating SCSI commands and task management requests (see 4.7.1). A SCSI target device contains at least one SCSI target port and is capable of processing SCSI commands and task management requests (see 4.7.2). A SCSI target/initiator device contains at least one SCSI target/initiator port and is capable of originating and processing SCSI commands and task management requests (see 4.7.3). To be functional, a SCSI domain needs to contain a SCSI target port or a SCSI target/initiator port operating as a SCSI target port and a SCSI initiator port or SCSI target/initiator port operating as a SCSI initiator port.

4.7.1 SCSI initiator device

A SCSI initiator device (see figure 10) contains:

- a) Zero or more initiator device names;
- b) One or more SCSI initiator ports each containing an initiator port identifier and an optional initiator port name; and
- c) One or more application clients.

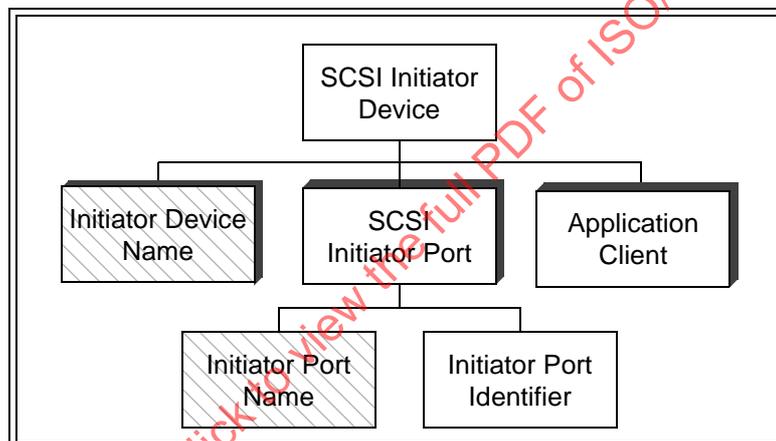


Figure 10 — SCSI initiator device model

An initiator port identifier is a value that is the SCSI port identifier (see 4.7.4) for an initiator port.

An initiator device name is a name (see 3.1.64) that is a SCSI device name (see 4.7.6) for a SCSI initiator device. A SCSI initiator device shall have no more than one initiator device name for each supported SCSI transport protocol. A SCSI transport protocol standard may place additional requirements on initiator device names.

An initiator port name is a name (see 3.1.64) that is the SCSI port name (see 4.7.7) for the initiator port. A SCSI transport protocol standard may place additional requirements on initiator port names.

Application clients are the sources of commands and task management functions.

4.7.2 SCSI target device

A SCSI target device (see figure 11) contains:

- a) Zero or more target device names;
- b) One or more SCSI target ports each containing a task router, SCSI target port identifier, and an optional target port name; and

c) One or more logical units.

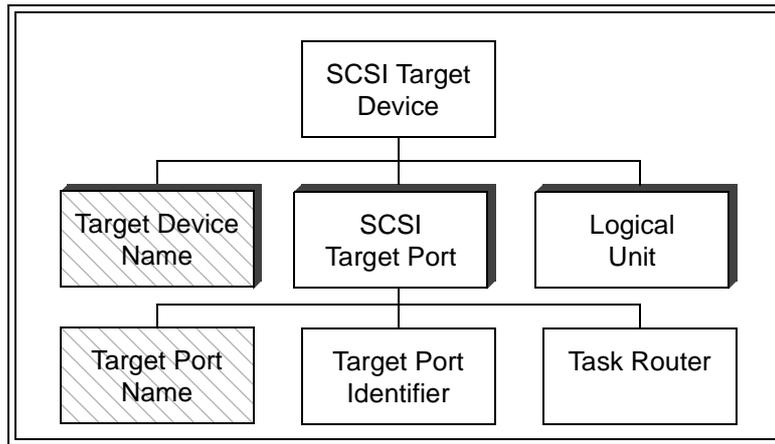


Figure 11 — SCSI target device model

A SCSI target port identifier is a value that is a SCSI port identifier (see 4.7.4) for a SCSI target port.

A target device name is a name (see 3.1.64) that is a SCSI device name (see 4.7.6) for a SCSI target device. A SCSI target device shall have no more than one target device name for each supported SCSI transport protocol. A SCSI transport protocol standard may place additional requirements on target device names.

A target port name is a name (see 3.1.64) that is the SCSI port name (see 4.7.7) for the target port. A SCSI transport protocol standard may place additional requirements on target port names.

A task router routes commands and task management functions between the service delivery subsystem and the appropriate logical unit's task manager (see 4.7.5).

A logical unit is the object to which SCSI commands are addressed. One of the logical units within the SCSI target device shall be accessed using the logical unit number zero. See 4.8 for a description of the logical unit.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

4.7.3 SCSI target/initiator device

A SCSI target/initiator device (see figure 12) contains:

- Zero or more target/initiator device names;
- One or more SCSI target/initiator ports each containing a task router, target port identifier, an initiator port identifier, an optional target port name and an optional initiator port name;
- One or more logical units; and
- One or more application clients.

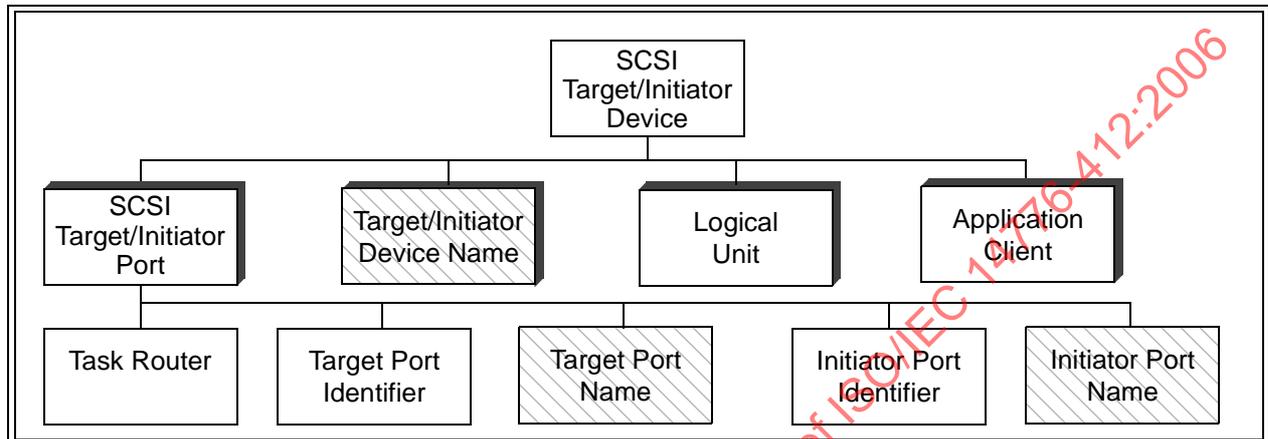


Figure 12 — SCSI target/initiator device model

The target port identifier and the initiator port identifier are values containing a SCSI port identifier (see 4.7.4) for a SCSI target/initiator port. The target port identifier and the initiator port identifier may or may not be identical.

A target/initiator device name is a name (see 3.1.64) that is a SCSI device name (see 4.7.6) for a SCSI target/initiator device. A SCSI target/initiator device shall have no more than one target/initiator device name for each supported SCSI transport protocol. A SCSI transport protocol standard may place additional requirements on target/initiator device names.

The target port name and initiator port name are names (see 3.1.64) that are the SCSI port name (see 4.7.7) for the target/initiator port when operating as a target port and initiator port, respectively. The target port name and the initiator port name may or may not be identical. A SCSI transport protocol standard may place additional requirements on target port names and initiator port names.

When the SCSI target/initiator device is operating as a SCSI target device a task router routes the commands and task management functions between the service delivery subsystem and the appropriate logical unit (see 4.7.5).

A logical unit is the object to which SCSI commands are sent. One of the logical units within the SCSI target/initiator device shall be accessed using the logical unit number zero. See 4.8 for a description of the logical unit.

When the SCSI target/initiator device is operating as a SCSI initiator device an application client is the source of commands and task management functions.

4.7.4 SCSI port identifier

The SCSI port identifier is equivalent to SCSI identifier. The SCSI port identifier object represents either an initiator port identifier for a SCSI initiator port, or a target port identifier for a SCSI target port. SCSI port identifier is used when either a SCSI initiator port or SCSI target port is applicable or when other context in the description identifies the SCSI initiator port or SCSI target port usage.

4.7.5 SCSI task router

The task router routes tasks and task management functions to the selected logical unit. Any task that is sent to a logical unit that is not known to the task router is handled as described in 5.9.3. Any task management function that is not sent to a specific logical unit shall be broadcast to all logical units known to the task router.

4.7.6 SCSI device name

A SCSI device name is an optional name (see 3.1.64) for a SCSI device that is world wide unique within the SCSI transport protocol of each SCSI domain in which the SCSI device has SCSI ports. A SCSI device may have more than one name if that device has SCSI ports in different SCSI transport protocol domains. A SCSI device shall have no more than one name for each supported SCSI transport protocol. A SCSI device name shall never change and may be used to persistently identify a SCSI device in contexts where specific references to port names or port identifiers is not required.

A SCSI transport protocol standard may require that a SCSI device include a SCSI device name if the SCSI device has SCSI ports in a SCSI domain of that SCSI transport protocol. The SCSI device name may be made available to other SCSI devices or SCSI ports in a given SCSI domain in SCSI transport protocol specific ways.

4.7.7 SCSI port name

A SCSI port name is an optional name (see 3.1.64) of a SCSI port that is world wide unique within the SCSI transport protocol of the SCSI domain of that SCSI port. A SCSI port may have at most one name. A SCSI port name shall never change and may be used to persistently identify a SCSI initiator port or SCSI target port in contexts similar to those where a SCSI port identifier (see 4.7.4) may be used.

A SCSI transport protocol standard may require that a SCSI port include a SCSI port name if the SCSI port is in a SCSI domain of that SCSI transport protocol. The SCSI port name may be made available to other SCSI devices or SCSI ports in the given SCSI domain in SCSI transport protocol specific ways.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

4.8 Logical units

A logical unit (see figure 13) contains:

- a) A logical unit number;
 - A) If access controls (see SPC-3) are not in effect, one logical unit number per logical unit; or
 - B) If access controls are in effect, one logical unit number per SCSI initiator port that has access rights plus one default logical unit number per logical unit;
- b) A device server;
- c) A task manager; and
- d) One or more task sets each of which may contain zero or more untagged tasks or a combination of zero or more tagged tasks and zero or more untagged tasks.

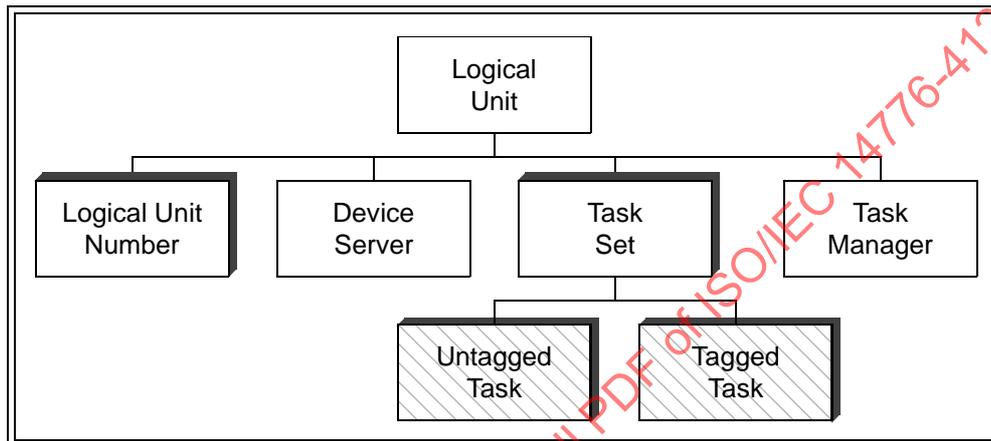


Figure 13 — Logical unit model

A logical unit number is a field (see 4.9) containing up to 64 bits that identifies the logical unit within a SCSI target device when accessed by a SCSI target port. If any logical unit within the scope of a SCSI target device includes dependent logical units in its composition, all logical unit numbers within the scope of the SCSI target device shall have the format described in 4.9.4. Otherwise, the logical unit numbers should have the format described in 4.9.3.

A device server is the object that processes the operations requested by the received commands.

The task manager controls the sequencing of one or more tasks within a logical unit. The task manager also carries out the task management functions specified in clause 6. There is one task manager per logical unit.

The order in which task management requests are processed is not specified by this standard. This standard does not require in-order delivery of such requests, as defined in 4.6.3, or processing by the task manager in the order received. To guarantee the processing order of task management requests referencing a specific logical unit, a SCSI initiator port should not have more than one such request pending to that logical unit.

A task set is composed of zero or more untagged tasks or a combination of zero or more tagged tasks and zero or more untagged tasks. See 4.10 for additional restrictions on the untagged tasks and tagged tasks in a task set.

Task (see 4.10) refers to either a tagged task or an untagged task. The interactions among the tasks in a task set are determined by the requirements for task set management specified in clause 7 and the CA or ACA requirements specified in 5.9.1. The number of task sets per logical unit and the boundaries between task sets are governed by the TST field in the Control mode page (see SPC-2).

4.9 Logical unit numbers

4.9.1 Logical unit numbers overview

All logical unit number formats described in this standard are hierarchical in structure even when only a single level in that hierarchy is used. The HiSUP bit shall be set to one in the standard INQUIRY data (see SPC-2) when any logical unit number format described in this standard is used. Non-hierarchical formats are outside the scope of this standard.

4.9.2 LUN 0 address

All SCSI devices shall accept LUN 0 as a valid address. For SCSI devices that support the hierarchical addressing model the LUN 0 shall be the logical unit that an application client addresses to determine information about the SCSI target device and the logical units contained within the SCSI target device.

To address the LUN 0 of a SCSI device the peripheral device address method shall be used.

4.9.3 Single level logical unit number structure

When the single level subset format is used, the HiSUP bit shall be set to one in the standard INQUIRY data (see SPC-2) returned by the logical unit with the logical unit number zero.

If a SCSI target device contains 256 or fewer logical units, none of which are dependent logical units (see 4.13) or extended addressing logical units (see 4.9.8), then its logical unit numbers shall have the format shown in table 1, that is a single level subset of the format described in 4.13.

Table 1 — Single level logical unit number structure for 256 or fewer logical units

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|-------------|--|---|-------------------------------|---|---|---|---|---|-------|
| 0 | ADDRESS METHOD (00b) | | BUS IDENTIFIER (00h) | | | | | | |
| 1 | SINGLE LEVEL LUN (00h to FFh, inclusive) | | | | | | | | |
| 2 | (MSB) | | Null second level LUN (0000h) | | | | | | (LSB) |
| 3 | (MSB) | | Null third level LUN (0000h) | | | | | | (LSB) |
| 4 | (MSB) | | Null forth level LUN (0000h) | | | | | | (LSB) |
| 5 | (MSB) | | Null forth level LUN (0000h) | | | | | | (LSB) |
| 6 | (MSB) | | Null forth level LUN (0000h) | | | | | | (LSB) |
| 7 | (MSB) | | Null forth level LUN (0000h) | | | | | | (LSB) |

All logical unit number structure fields shall be zero except the SINGLE LEVEL LUN field (see table 1). The value in the SINGLE LEVEL LUN field shall be between 0 and 255. The 00b in the ADDRESS METHOD field and the 00h in the BUS IDENTIFIER field specify addressing for a logical unit at the current level (see 4.9.4).

If a SCSI target device contains more than 256 and less than 16 385 logical units, none of which are dependent logical units (see 4.13) or extended addressing logical units (see 4.9.8), then its logical unit numbers that are greater than 255 shall have the format shown in table 2, that is a single level subset of the format described in 4.13. Logical unit numbers between 0 and 255 should have the format shown in table 1 but may have the format shown in table 2.

Table 2 — Single level logical unit number structure for 257 to 16 384 logical units

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|--|---|-------------------------------|---|---|---|---|-------|
| 0 | ADDRESS METHOD (01b) | | (MSB) | | | | | |
| 1 | SINGLE LEVEL LUN (0100h to 3FFFh, inclusive) | | | | | | | (LSB) |
| 2 | (MSB) | | Null second level LUN (0000h) | | | | | |
| 3 | | | | | | | | (LSB) |
| 4 | (MSB) | | Null third level LUN (0000h) | | | | | |
| 5 | | | | | | | | (LSB) |
| 6 | (MSB) | | Null forth level LUN (0000h) | | | | | |
| 7 | | | | | | | | (LSB) |

All logical unit number structure fields shall be zero except the SINGLE LEVEL LUN field (see table 2). The value in the SINGLE LEVEL LUN field shall be between 256 and 16 383. The 01b in the ADDRESS METHOD field specifies flat address space addressing for a logical unit at the current level (see 4.9.7).

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-4:2006

4.9.4 Eight byte logical unit number structure

The eight byte logical unit number structure (see table 4) allows up to four levels of SCSI devices to be addressed under a single SCSI target device. Each level shall use byte 0 and byte 1 to define the address and/or location of the SCSI device to be addressed on that level.

If the logical unit number specifies that the command is to be relayed to the next layer then the current layer shall use byte 0 and byte 1 of the eight byte logical unit number structure to determine the address of the SCSI device to which the command is to be sent. When the command is sent to the SCSI target device the eight byte logical unit number structure that was received shall be adjusted to create a new eight byte logical unit number structure (see table 3 and figure 14).

SCSI devices shall keep track of the addressing information necessary to transmit information back through all intervening layers to the task's originating SCSI initiator port.

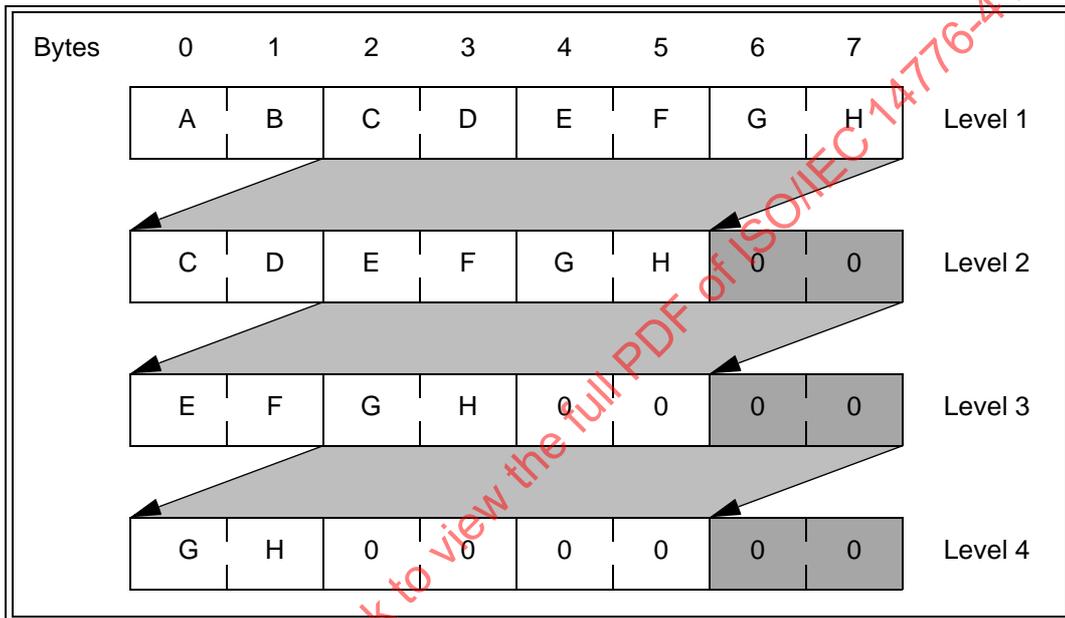


Figure 14 — Eight Byte logical unit number structure adjustments

Table 3 — Eight byte logical unit number structure adjustments

| Byte position | | |
|---------------|-----------|----------|
| Old | | New |
| 0 & 1 | Moves to | Not Used |
| 2 & 3 | Moves to | 0 & 1 |
| 4 & 5 | Moves to | 2 & 3 |
| 6 & 7 | Moves to | 4 & 5 |
| N/A | zero fill | 6 & 7 |

The eight byte logical unit number structure requirements as viewed from the application client are shown in table 4.

Table 4 — Eight Byte logical unit number structure

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|-------|-------------------------|---|---|---|---|---|-------|
| 0 | (MSB) | FIRST LEVEL ADDRESSING | | | | | | (LSB) |
| 1 | | SECOND LEVEL ADDRESSING | | | | | | (LSB) |
| 2 | (MSB) | THIRD LEVEL ADDRESSING | | | | | | (LSB) |
| 3 | | FOURTH LEVEL ADDRESSING | | | | | | (LSB) |
| 4 | (MSB) | | | | | | | (LSB) |
| 5 | | | | | | | | (LSB) |
| 6 | (MSB) | | | | | | | (LSB) |
| 7 | | | | | | | | (LSB) |

The FIRST LEVEL ADDRESSING field specifies the first level address of a SCSI device. See table 5 for a definition of the FIRST LEVEL ADDRESSING field.

The SECOND LEVEL ADDRESSING field specifies the second level address of a SCSI device. See table 5 for a definition of the SECOND LEVEL ADDRESSING field.

The THIRD LEVEL ADDRESSING field specifies the third level address of a SCSI device. See table 5 for a definition of the THIRD LEVEL ADDRESSING field.

The FOURTH LEVEL ADDRESSING field specifies the fourth level address of a SCSI device. See table 5 for a definition of the FOURTH LEVEL ADDRESSING field.

The SCSI device pointed to in the FIRST LEVEL ADDRESSING, SECOND LEVEL ADDRESSING, THIRD LEVEL ADDRESSING, and FOURTH LEVEL ADDRESSING fields may be any physical or logical device addressable by an application client.

Table 5 — Format of addressing fields

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|-------------------------|---|-------|---|---|---|---|-------|
| n-1 | ADDRESS METHOD | | (MSB) | | | | | (LSB) |
| n | ADDRESS METHOD SPECIFIC | | | | | | | (LSB) |

The ADDRESS METHOD field defines the contents of the ADDRESS METHOD SPECIFIC field. See table 6 for the address methods defined for the ADDRESS METHOD field. The ADDRESS METHOD field only defines address methods for entities that are directly addressable by an application client.

Table 6 — ADDRESS METHOD field values

| Code | Description | Reference |
|------|---|-----------|
| 10b | Logical unit addressing method | 4.9.5 |
| 00b | Peripheral device addressing method | 4.9.6 |
| 01b | Flat space addressing method | 4.9.7 |
| 11b | Extended logical unit addressing method | 4.9.8 |

4.9.5 Logical unit addressing method

If the logical unit addressing method is selected the SCSI device should relay the received command to the addressed dependent logical unit. Any command that is not relayed to a dependent logical unit shall be terminated with a CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID COMMAND OPERATION CODE.

NOTE 1 - A SCSI device may filter (i.e., not relay) commands to prevent commands with deleterious effects from reaching a dependent logical unit (e.g., a WRITE command directed to a logical unit that is participating in a RAID volume).

See table 7 for the definition of the ADDRESS METHOD SPECIFIC field used when the logical unit addressing method is selected.

Table 7 — Logical unit addressing

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|------------|---|--------|-----|---|---|---|---|
| n-1 | 1 | 0 | TARGET | | | | | |
| n | BUS NUMBER | | | LUN | | | | |

The TARGET field, BUS NUMBER field, and LUN field address the logical unit to which the received command shall be relayed. The command shall be relayed to the logical unit specified by the LUN field within the SCSI target device specified by the TARGET field located on the bus specified by the BUS NUMBER field. The SCSI target device information in the TARGET field may be a target port identifier (see 4.7.2) or it may be a mapped representation of a target port identifier, when the range of possible target port identifiers is too large to fit in the TARGET field.

NOTE 2 - The value of target port identifiers within the TARGET field are defined by individual standards. (e.g., SCSI Parallel Interface -2 standard defines target port identifiers to be in the range 0 to 7, 0 to 15, and 0 to 31).

4.9.6 Peripheral device addressing method

If the peripheral device addressing method is selected the SCSI device should relay the received command to the addressed dependent logical unit. Any command that is not relayed to a dependent logical unit shall be terminated with a CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID COMMAND OPERATION CODE.

NOTE 3 - A SCSI device may filter (i.e., not relay) commands to prevent commands with deleterious effects from reaching a dependent logical unit (e.g., a WRITE command directed to a logical unit that is participating in a RAID volume).

See table 8 for the definition of the ADDRESS METHOD SPECIFIC field used when the peripheral device addressing method is selected.

Table 8 — Peripheral device addressing

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|------------|---|----------------|---|---|---|---|---|
| n-1 | 0 | 0 | BUS IDENTIFIER | | | | | |
| n | TARGET/LUN | | | | | | | |

The BUS IDENTIFIER field identifies the bus or path that the SCSI device shall use to relay the received command. The BUS IDENTIFIER field may use the same value encoding as the BUS NUMBER field (see 4.9.5). However, bus identifier zero shall specify that the command is to be relayed to a logical unit within the SCSI device at the current level.

The TARGET/LUN field specifies the address of the peripheral device to which the SCSI device shall relay the received command. The meaning and usage of the TARGET/LUN field depends on whether the BUS IDENTIFIER field contains zero.

A BUS IDENTIFIER field of zero specifies a logical unit at the current level. This representation of a logical unit may be used either when the SCSI device at the current level does not use hierarchical addressing for assigning LUNs to entities or when the SCSI device at the current level includes entities that need LUNs but are not attached to SCSI buses (e.g., fans, cache, controllers, etc.). When the BUS IDENTIFIER field contains zero, the command shall be relayed to the current level logical unit specified by the TARGET/LUN field within or joined to the current level SCSI device.

A BUS IDENTIFIER field greater than zero represents a SCSI domain that connects a group of SCSI devices to the current level SCSI device. Each SCSI domain shall be assigned a unique bus identifier number from 1 to 63. These bus identifiers shall be used in the BUS IDENTIFIER field when assigning addresses to peripheral devices attached to the SCSI domains. When the BUS IDENTIFIER field is greater than zero, the command shall be relayed to the logical unit with the logical unit number zero within the SCSI target device specified in the TARGET/LUN field located in the SCSI domain specified by the BUS IDENTIFIER field. The SCSI target device information in the TARGET/LUN field may be a target port identifier (see 4.7.2) or it may be a mapped representation of a target port identifier, when the range of possible target port identifiers is too large to fit in the TARGET/LUN field.

NOTE 4 - The value of target port identifiers within the TARGET/LUN field are defined by individual standards. (e.g., SCSI Parallel Interface -2 standard defines target port identifiers to be in the range 0 to 7, 0 to 15, and 0 to 31).

The SCSI device located within the current level shall be addressed by a BUS IDENTIFIER field and a TARGET/LUN field of all zeros, also known as LUN 0 (see 4.9.2).

4.9.7 Flat space addressing method

All SCSI commands are allowed when the flat space addressing method is used, however, the addressed logical unit is not required to support all SCSI commands. Any command that is not supported shall be terminated with a CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID COMMAND OPERATION CODE.

In the response to an INQUIRY command, the addressed logical unit shall return a valid SCSI peripheral device type (e.g., direct access device, streaming device).

See table 9 for the definition of the ADDRESS METHOD SPECIFIC field used when the flat space addressing method is selected.

Table 9 — Flat space addressing

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|-------------|-----|---|-------|---|---|---|---|-------|--|
| n-1 | 0 | 1 | (MSB) | | | | | | |
| n | LUN | | | | | | | (LSB) | |

The LUN field specifies the address of the logical unit to which the current level shall direct the received command.

4.9.8 Extended logical unit addressing

Extended logical unit addressing builds on the formats defined for dependent logical units (see 4.13) but may be used by SCSI devices having single level logical unit structure. In dependent logical unit addressing, the logical unit information at each level fits in exactly two bytes. Extended logical unit addresses have sizes of two bytes, four bytes, six bytes, or eight bytes.

Extended logical units are identified by the ADDRESS METHOD field (see table 6 in 4.9) in the same manner as is the case for dependent logical units. An ADDRESS METHOD field value of 11b specifies the extended logical unit addressing method.

See table 10 for the definition of the ADDRESS METHOD SPECIFIC field used when the extended logical unit addressing method is selected.

Table 10 — Extended logical unit addressing

| | | | | | | | | |
|-----------------|----------------------------------|---|--------|---|-------------------------|---|---|---|
| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| n | 1 | 1 | LENGTH | | EXTENDED ADDRESS METHOD | | | |
| m | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |

The LENGTH field (see table 11) specifies the length of the EXTENDED ADDRESS METHOD SPECIFIC field.

Table 11 — LENGTH field values

| Value | Length of the EXTENDED ADDRESS METHOD SPECIFIC Field | Reference |
|-------|--|-----------|
| 00b | One byte | table 12 |
| 01b | Three bytes | table 13 |
| 10b | Five bytes | table 14 |
| 11b | Seven bytes | table 15 |

Table 12, table 13, table 14, and table 15 show the four extended logical unit addressing formats.

Table 12 — Two byte extended logical unit addressing format

| | | | | | | | | |
|-----------------|----------------------------------|---|--------------|---|-------------------------|---|---|---|
| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| n | 1 | 1 | LENGTH (00b) | | EXTENDED ADDRESS METHOD | | | |
| n+1 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |

Table 13 — Four byte extended logical unit addressing format

| | | | | | | | | |
|-----------------|----------------------------------|---|--------------|---|-------------------------|---|---|---|
| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| n | 1 | 1 | LENGTH (01b) | | EXTENDED ADDRESS METHOD | | | |
| n+1 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| n+3 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| | (LSB) | | | | | | | |

Table 14 — Six byte extended logical unit addressing format

| | | | | | | | | |
|-----------------|----------------------------------|---|--------------|---|-------------------------|---|---|---|
| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| n | 1 | 1 | LENGTH (10b) | | EXTENDED ADDRESS METHOD | | | |
| n+1 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| n+5 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| | (LSB) | | | | | | | |

Table 15 — Eight byte extended logical unit addressing format

| | | | | | | | | |
|-----------------|----------------------------------|---|--------------|---|-------------------------|---|---|---|
| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0 | 1 | 1 | LENGTH (11b) | | EXTENDED ADDRESS METHOD | | | |
| 1 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| 7 | EXTENDED ADDRESS METHOD SPECIFIC | | | | | | | |
| | (LSB) | | | | | | | |

The EXTENDED ADDRESS METHOD field combined with the LENGTH field (see table 16) specifies the type and size of extended logical unit address found in the EXTENDED ADDRESS METHOD SPECIFIC field.

Table 16 — Logical unit extended address methods

| EXTENDED ADDRESS METHOD Code | LENGTH Code(s) | Description | Reference |
|------------------------------|----------------|-------------------------|-----------|
| 0h | 00b - 11b | Reserved | |
| 1h | 00b | Well known logical unit | 4.9.9 |
| 1h | 01b - 11b | Reserved | |
| 2h - Fh | 00b - 11b | Reserved | |

4.9.9 Well known logical unit addressing

A SCSI target device may support zero or more W-LUNs. A single SCSI target device shall only support one instance of each supported well known logical unit. All W-LUNs within a SCSI target device shall be accessible from all SCSI target ports contained within the SCSI target device.

See table 17 for the definition of the EXTENDED ADDRESS METHOD SPECIFIC field used when the well known logical unit extended address method is selected.

Table 17 — Well known logical unit extended address format

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-------|---|--------------|---|------------------------------|---|---|---|
| n | 1 | 1 | LENGTH (00b) | | Well known logical unit (1h) | | | |
| n+1 | W-LUN | | | | | | | |

The W-LUN field specifies well known logical unit to be addressed (see SPC-3).

4.10 Tasks

4.10.1 The task object

The task object represents either a tagged task or an untagged task. The composition of a task includes a definition of the work to be performed by the logical unit in the form of a command or a group of linked commands. A tagged task is represented by an I_T_L_Q nexus (see 4.11) and is composed of a definition of the work to be performed by the logical unit, and a task attribute (see 7.5). An untagged task is represented by an I_T_L nexus (see 4.11) and is composed of a definition of the work to be performed by the logical unit, and implicitly a SIMPLE task attribute (see 7.5).

The I_T_L_Q nexus representing a tagged task includes a tag (see 4.10.2) allowing many uniquely identified tagged tasks to be present concurrently in a single task set. A tagged task also includes one of the task attributes described in 7.5 that allows the application client to specify processing relationships between various tagged tasks. An untagged task does not include a tag in its I_T_L nexus, thus restricting the number of concurrent untagged tasks in a single task set to one per SCSI initiator port. An untagged task is assumed to have a SIMPLE task attribute.

Every SCSI transport protocol shall support tagged tasks and may support untagged tasks. If the SCSI transport protocol upon which a SCSI device operates supports untagged tasks, the SCSI device is not required to support tagged tasks.

An I_T_L_x nexus that is in use (i.e., during the interval bounded by the events specified in 5.5) shall be unique as seen by the SCSI initiator port originating the command and the logical unit to which the command was addressed, otherwise an overlapped command condition exists (see 5.9.2). An I_T_L_x nexus is unique if one or more of its components is unique within the specified time interval. An untagged task shall be unique with respect to all tagged tasks in the task set.

A SCSI initiator device shall not cause the creation of more than one untagged task from a specific SCSI initiator port having identical values for the target port identifier and logical unit number. A SCSI initiator device shall not create more than one task from a specific SCSI initiator port having identical values for the target port identifier, logical unit number, and tag.

4.10.2 Task tags

A tag is a field containing up to 64 bits that is a component of an I_T_L_Q nexus. A SCSI initiator device assigns tag values in each I_T_L_Q nexus in a way that ensures that the nexus uniqueness requirements stated in 4.10.1 are met.

4.11 The nexus object

The nexus object represents a relationship between a SCSI initiator port, a SCSI target port, optionally a logical unit, and optionally a task.

The nexus object may refer to any one or all of the following relationships:

- a) One SCSI initiator port to one SCSI target port (an I_T nexus);
- b) One SCSI initiator port to one SCSI target port to one logical unit (an I_T_L nexus);
- c) One SCSI initiator port to one SCSI target port to one logical unit to one tagged task (an I_T_L_Q nexus);
or
- d) Either an I_T_L nexus or an I_T_L_Q nexus (denoted as an I_T_L_x nexus).

Table 18 maps the nexus object to other identifier objects.

Table 18 — Mapping nexus to SAM-2 identifiers

| Nexus | Identifiers contained in nexus | Reference |
|---------|---|---------------------------------|
| I_T | Initiator Port Identifier Target Port Identifier | 4.7.1 4.7.2 |
| I_T_L | Initiator Port Identifier Target Port Identifier Logical Unit Number | 4.7.1 4.7.2 4.8 |
| I_T_L_Q | Initiator Port Identifier Target Port Identifier Logical Unit Number Tag | 4.7.1 4.7.2 4.8 4.10.2 |

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

4.12 SCSI ports

4.12.1 SCSI port configurations

A SCSI device may contain only SCSI target ports, only SCSI initiator ports, only SCSI target/initiator ports or any combination of ports. Some of the port configurations possible for a SCSI device are shown in figure 15.

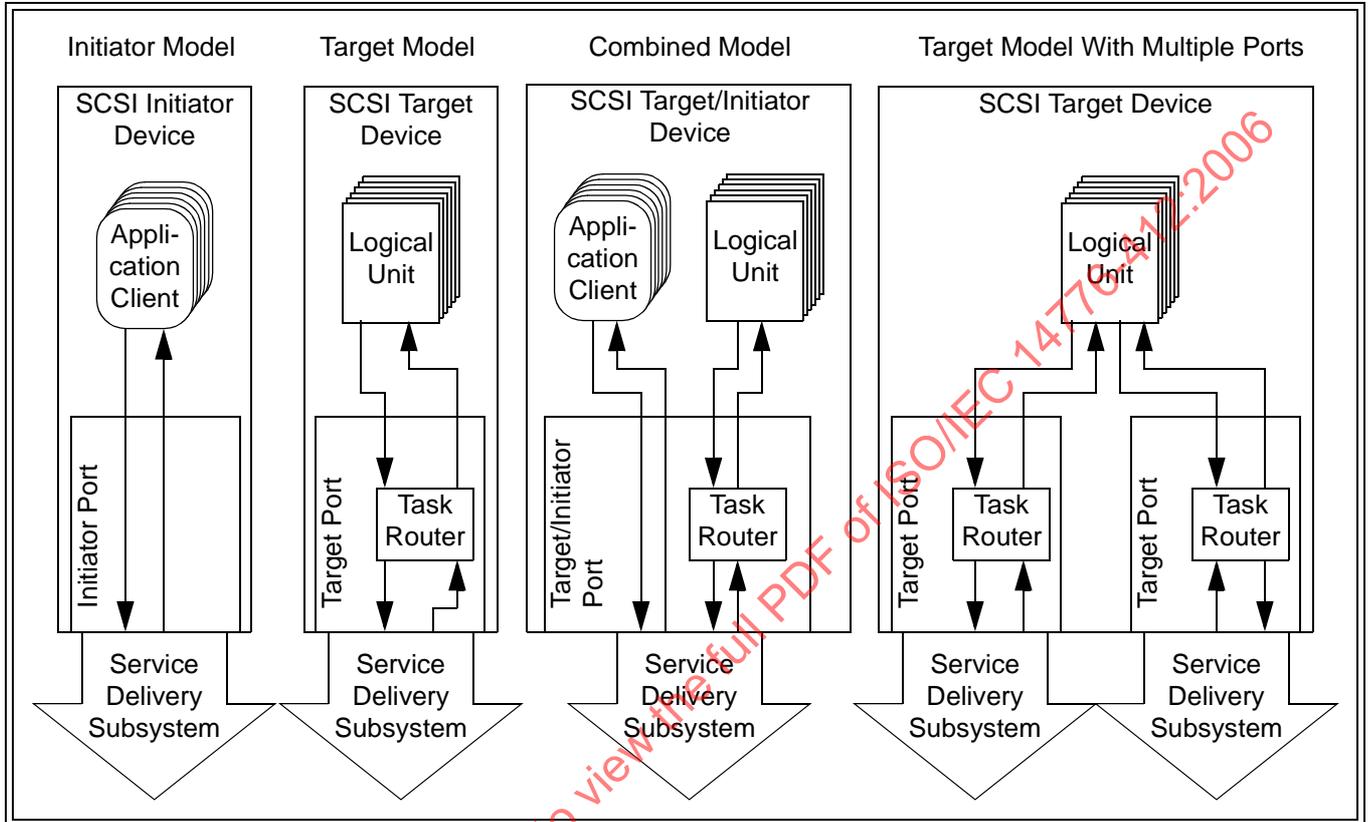


Figure 15 — SCSI device functional models

A SCSI target/initiator device is referred to by the role its port takes when it participates in an I/O operation. When a SCSI target/initiator device receives SCSI commands or task management functions, the SCSI target/initiator device takes on the characteristics of and is referred to as a SCSI target device. When a SCSI target/initiator device issues SCSI commands or task management functions, the SCSI target/initiator device takes on the characteristics of and is referred to as a SCSI initiator device.

4.12.2 SCSI devices with multiple ports

The model for a SCSI device with multiple ports is a single SCSI target device (see 4.7.2), SCSI initiator device (see 4.7.1), or SCSI target/initiator device (see 4.7.3) with multiple ports. Similarly, a single SCSI target port or SCSI initiator port may respond to multiple SCSI identifiers, with the model for such a SCSI port being one of multiple SCSI target ports or SCSI initiator ports (i.e., one for each SCSI identifier).

The SCSI identifiers representing the ports shall meet the requirements for initiator port identifiers (see 4.7.1) or target port identifiers (see 4.7.2) or both. SCSI target/initiator devices with multiple ports implement both target and initiator models and combine the SCSI target/initiator port structures in vendor specific ways that meet product requirements while maintaining the model for SCSI devices with multiple ports for the target and initiator functions performed by the product. How a multiple port SCSI device is viewed by counterpart SCSI devices in the SCSI domain also depends on whether a SCSI initiator port is examining a SCSI target port or SCSI target/initiator port, or a SCSI target port is servicing a SCSI initiator port or SCSI target/initiator port. The structures and views of SCSI devices are asymmetric for SCSI target ports and SCSI initiator ports.

4.12.3 Multiple port target SCSI device structure

Figure 16 shows the structure of a SCSI target device with multiple SCSI target ports. Each SCSI target port consists of a task router that is shared by a collection of logical units. Each logical unit contains a single task manager and a device server.

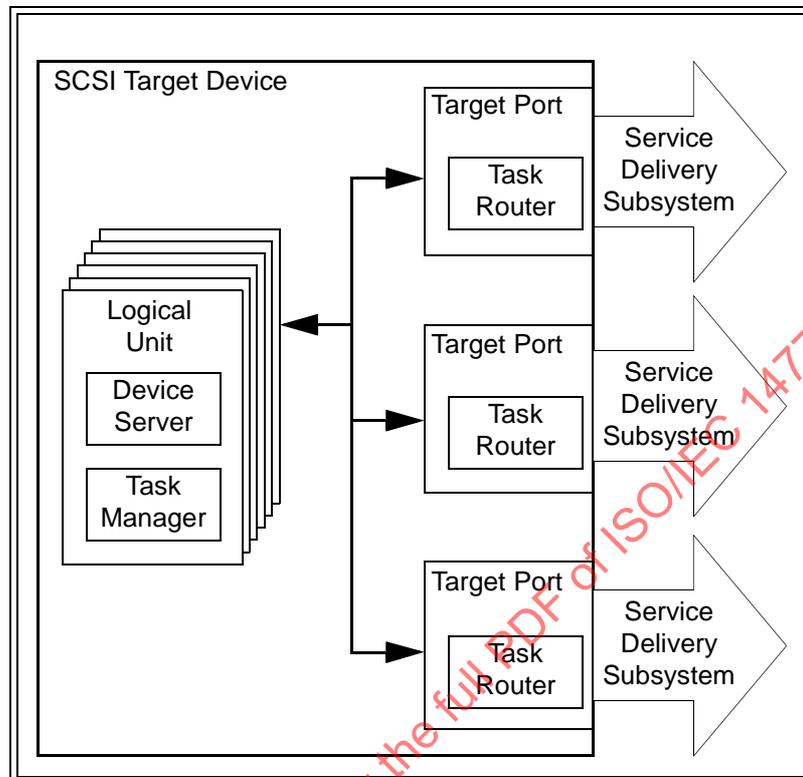


Figure 16 — Multiple port target SCSI device structure model

Two-way communications shall be possible between all logical units and all SCSI target ports, however, communications between any logical unit and any SCSI target port may be inactive. Two-way communications shall be available between each task manager and all task routers. Each SCSI target port shall accept commands sent to LUN 0 and the task router shall route them to a device server for processing. The REPORT LUNS commands (see SPC-2) shall be accepted by the logical unit with the logical unit number zero from any SCSI target port and shall return the logical unit inventory available via that SCSI target port. The availability of the same logical unit through multiple SCSI target ports is discovered by matching SCSI port name or identifier values in the INQUIRY command Device Identification VPD page (see SPC-2).

4.12.4 Multiple port initiator SCSI device structure

Figure 17 shows the structure of a SCSI initiator device with multiple SCSI initiator ports. Each SCSI initiator port is shared by a collection of application clients.

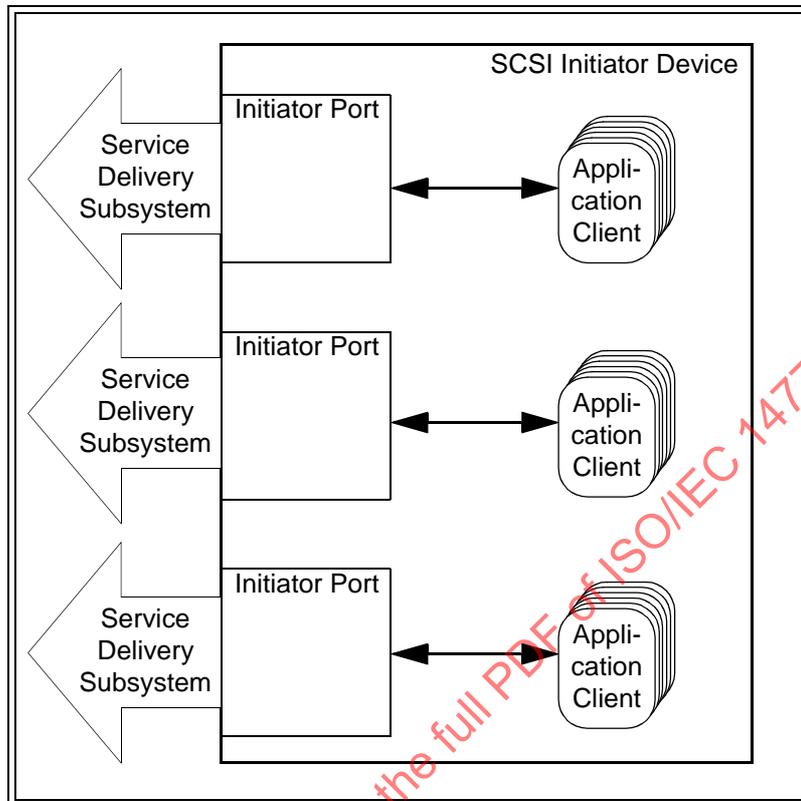


Figure 17 — Multiple port SCSI initiator device structure model

Two-way communications shall be possible between an application client and its associated SCSI initiator port. This standard does not specify or require the definition of any mechanisms by which a SCSI target device would have the ability to discover that it is communicating with multiple ports on a single SCSI initiator device. In those SCSI transport protocols where such mechanisms are defined, they shall not have any effect on how commands are processed (e.g., reservations shall be handled as if no such mechanisms exist).

4.12.5 Multiple port target/initiator SCSI device structure

Figure 18 shows the structure of a SCSI target/initiator device with multiple SCSI target/initiator ports. Each SCSI target/initiator port consists of a task router and is shared by a collection of logical units and application clients. Each logical unit contains a single task manager and a device server.

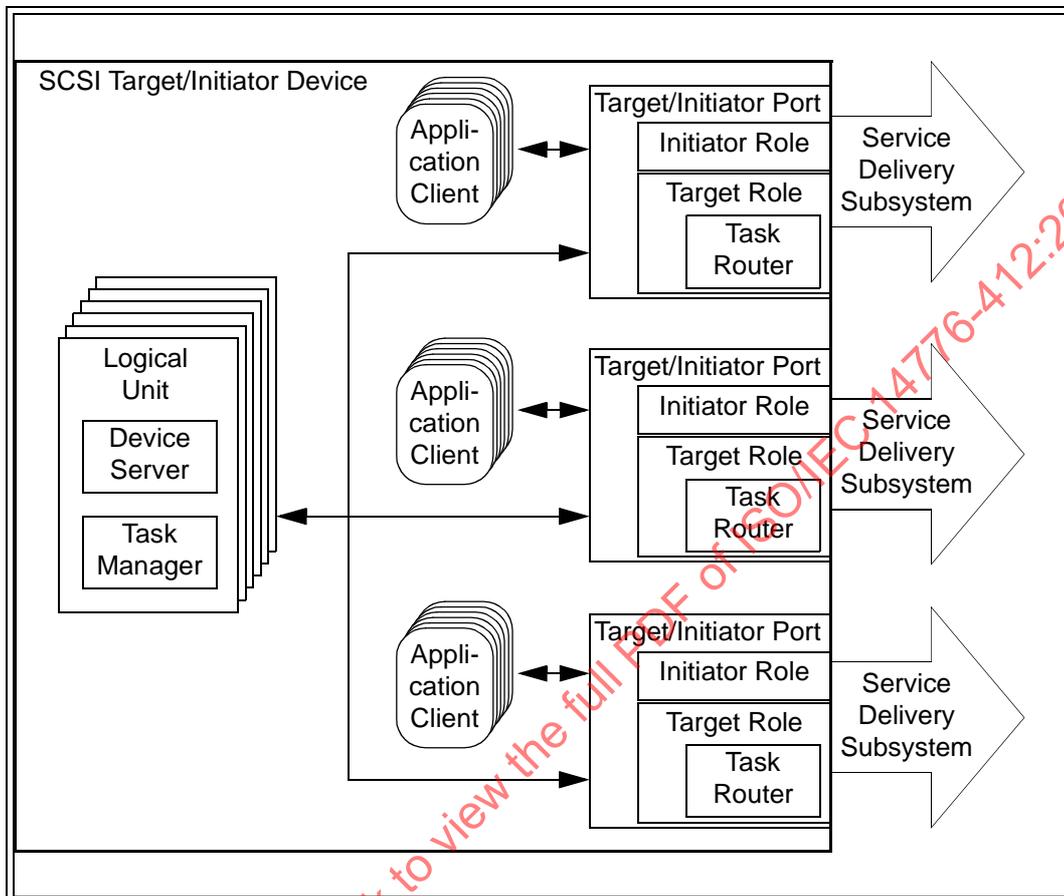


Figure 18 — Multiple port target/initiator SCSI device structure model

Two-way communications shall be possible between all logical units and all SCSI target/initiator ports, however, communications between any logical unit and any SCSI target/initiator port may be inactive. Two-way communications shall be possible between an application client and its associated SCSI target/initiator port. Each SCSI target/initiator port shall accept commands sent to LUN 0 and the task router shall route them to a device server for processing. The REPORT LUNS commands (see SPC-2) shall be accepted by the logical unit with the logical unit number zero from any SCSI target/initiator port and shall return the logical unit inventory available via that SCSI target/initiator port. The availability of the same logical unit through multiple SCSI target/initiator ports is discovered by matching SCSI port name or identifier values in the INQUIRY command Device Identification VPD page (see SPC-2).

This standard does not specify or require the definition of any mechanisms by which a SCSI target device would have the ability to discover that it is communicating with multiple SCSI initiator ports on a single SCSI target/initiator device. In those SCSI transport protocols where such mechanisms are defined, they shall not have any effect on how commands are processed (e.g., reservations shall be handled as if no such mechanisms exist).

4.12.6 SCSI initiator device view of a multiple port SCSI target device

A SCSI target device may be connected to multiple domains such that a SCSI initiator port is only able to communicate with logical units using a single SCSI target port. However, SCSI target devices with multiple SCSI ports may be configured where application clients have the ability to discover that one or more logical units are accessible via multiple SCSI target ports. Figure 19 and figure 20 show two examples of such configurations.

Figure 19 shows a SCSI target device with multiple SCSI target ports participating in a single SCSI domain with two SCSI initiator devices. There are three SCSI devices, one of which has two SCSI target ports, and two of which have one SCSI initiator port each. There are two SCSI target port identifiers and two initiator port identifiers in this SCSI domain. Using the INQUIRY command Device Identification VPD page (see SPC-2), the application clients in each of the SCSI initiator devices have the ability to discover the logical units in the SCSI target devices are accessible via multiple SCSI target port identifiers (i.e., SCSI target ports) and map the configuration of the SCSI target devices.

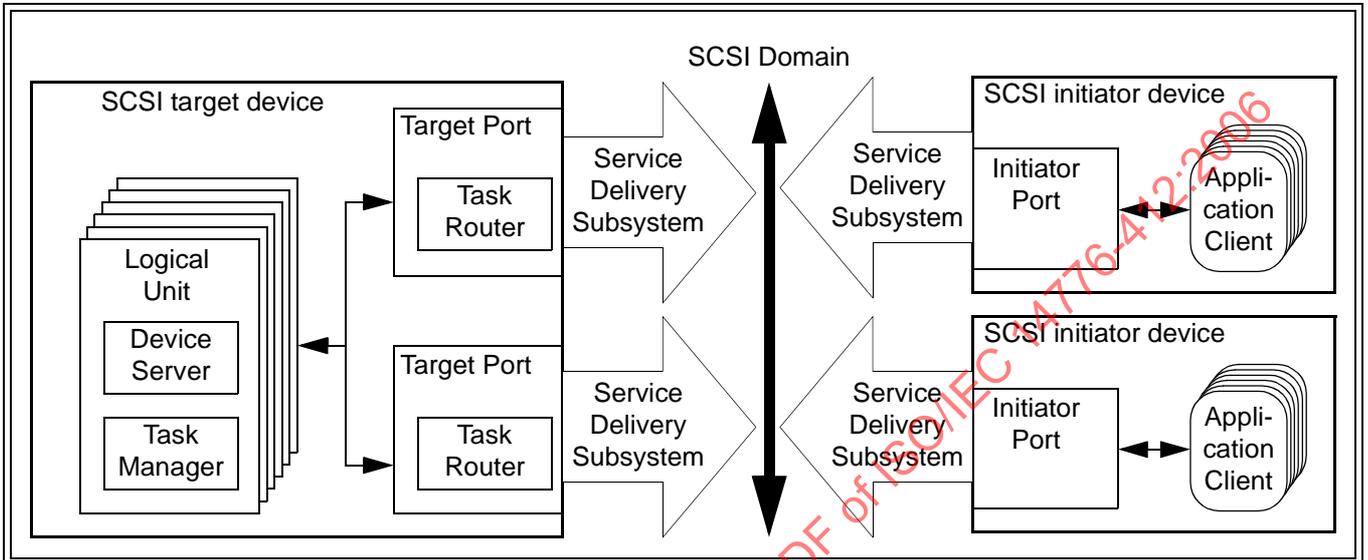


Figure 19 — SCSI target device configured in a single SCSI domain

Figure 20 shows a SCSI target device with multiple SCSI target ports participating in two SCSI domains and a SCSI initiator device with multiple SCSI initiator ports participating in the same two SCSI domains. There is one SCSI target device with two SCSI target ports and one SCSI initiator device with two SCSI initiator ports. There is one SCSI target port identifier and one initiator port identifier in each of the two SCSI domains. Using the INQUIRY command Device Identification VPD page (see SPC-2), the application clients in the SCSI initiator device have the ability to discover that logical units in the SCSI target device are accessible via multiple ports and map the configuration. However, application clients may not be able to distinguish between the configuration shown in figure 20 and the configuration shown in figure 21.

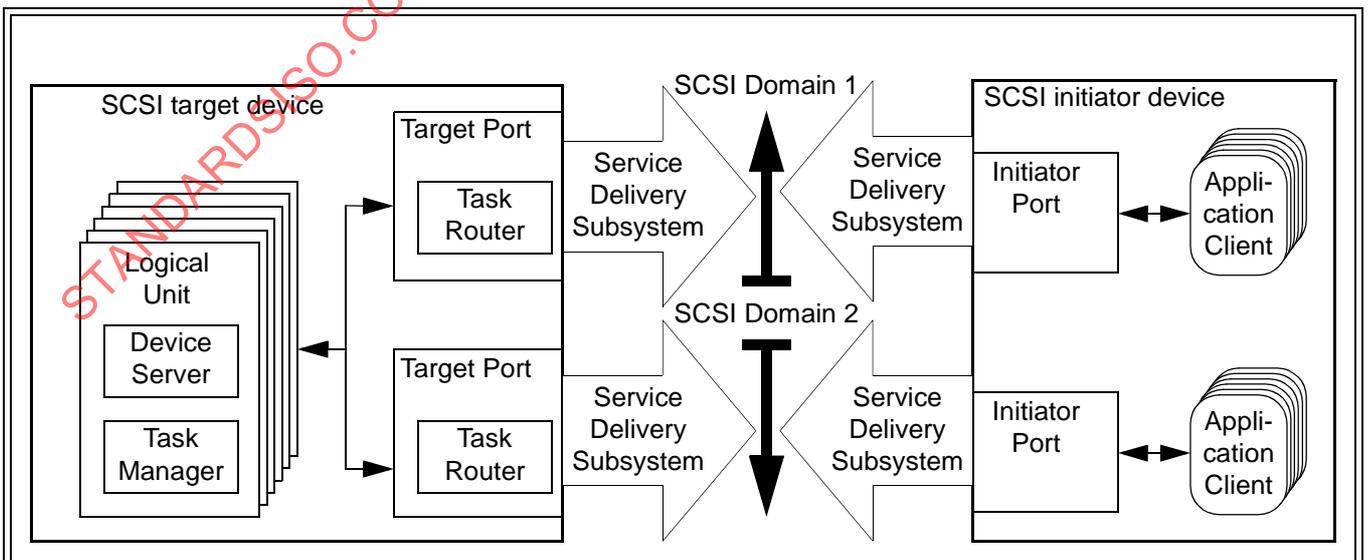


Figure 20 — SCSI target device configured in multiple SCSI domains

Figure 21 shows the same configuration as figure 20 except that the two SCSI domains have been replaced by a single SCSI domain.

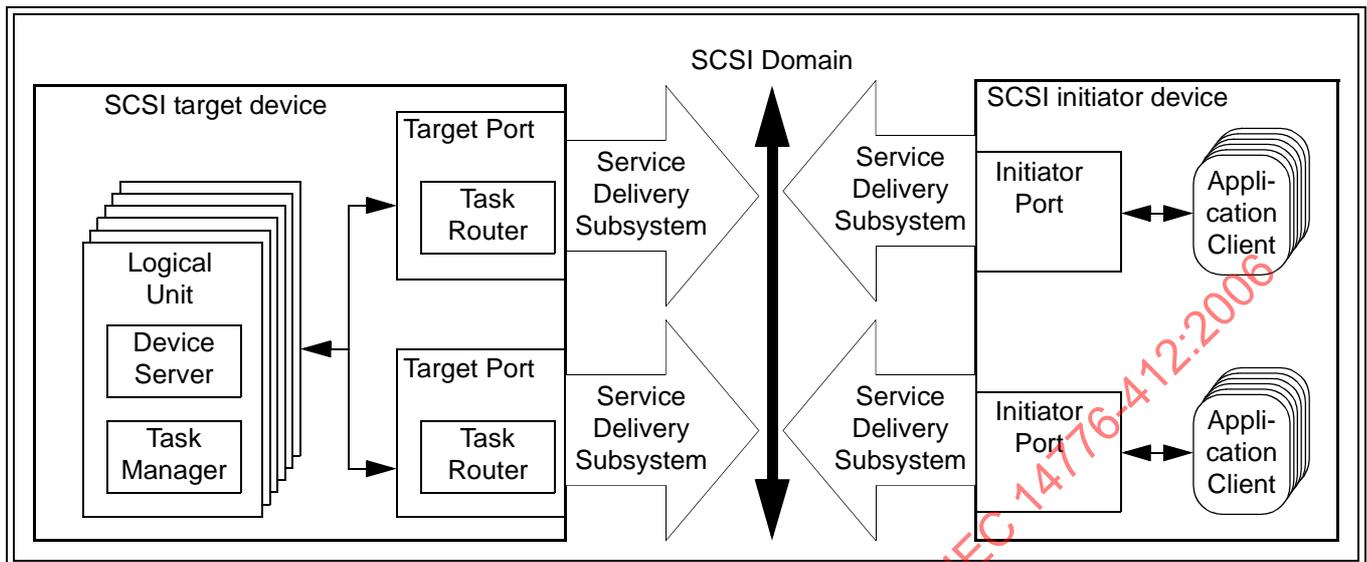


Figure 21 — SCSI target device and SCSI initiator device configured in a single SCSI domain

This model for application client determination of multiple SCSI target port configurations relies on information that is available only to the application clients via SCSI commands. The SCSI initiator ports in the SCSI initiator devices (figure 19) or SCSI initiator device (figure 20 and figure 21) are unable to distinguish the multiple SCSI target ports from individual SCSI target ports in two separate SCSI target devices.

4.12.7 SCSI target device view of a multiple port SCSI initiator device

This standard does not require a SCSI target device to have the ability to detect the presence of a SCSI initiator device with multiple SCSI initiator ports. Therefore, a SCSI target device handles a SCSI initiator device with multiple SCSI initiator ports exactly as it would handle multiple separate SCSI initiator devices. For example, a SCSI target device handles the configurations shown in figure 20 and figure 21 in exactly the same way it handles the configuration shown in figure 19.

NOTE 5 - The implications of this view of a SCSI initiator device are more far-reaching than are immediately apparent. For example, if a SCSI initiator device makes an exclusive access reservation via one SCSI initiator port, then access will be denied to the other SCSI initiator port(s) on that same SCSI initiator device.

4.13 Model for dependent logical units

Optionally, the model for a logical unit (see 4.8) may include one or more unique logical units embedded within another logical unit. The embedded logical units are called dependent logical units (see 3.1.21). In such cases, the model hierarchy diagram in 4.8 is modified to become the diagram shown in figure 22.

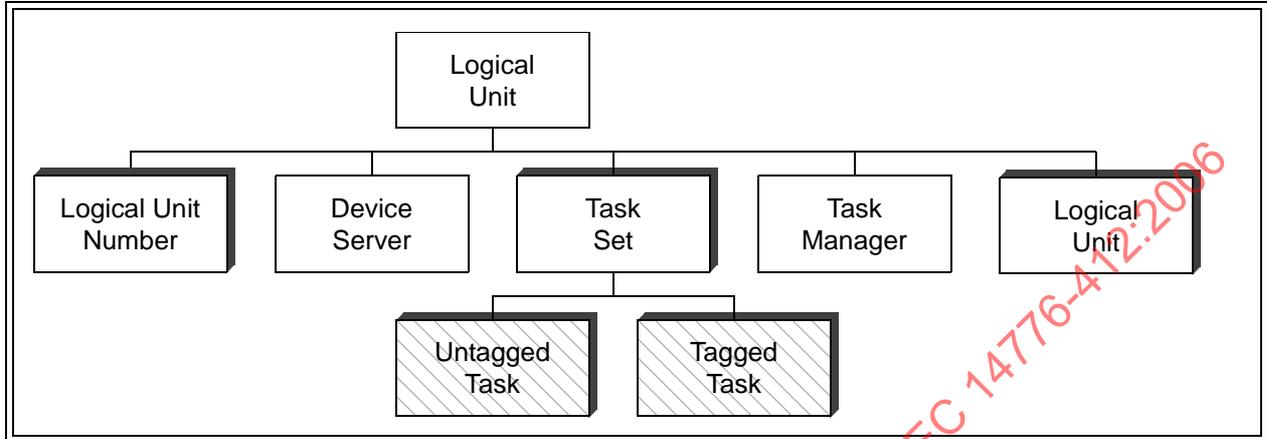


Figure 22 — Dependent logical unit model

When the dependent logical unit model is utilized, the hierarchical logical unit structure defined in 4.9.4 shall be used. If any logical unit within a SCSI target device includes dependent logical units, all logical unit numbers within the SCSI target device shall have the format described in 4.9.4. A device server that implements the hierarchical structure for dependent logical units described in this subclause shall set the HISUP bit to one in the standard INQUIRY data returned by the logical unit with the logical unit number zero (see SPC-2).

The hierarchical logical unit structure is an inverted tree containing up to four addressable levels. The example in figure 23 is a three-level system that consists of:

- a) One SCSI initiator device that has three SCSI target devices attached in a single SCSI domain that is unable to add more SCSI target devices. One of the SCSI target devices is the level 1 SDDL. The level 1 SDDL has two SCSI target ports, one in each of the SCSI domains containing a SCSI initiator device;
- b) One SCSI initiator device has three SCSI target devices attached in a single SCSI domain that is able to add more SCSI target devices. One of the SCSI target devices is the level 1 SDDL;
- c) The level 1 SDDL has three SCSI domains (called buses for hierarchical addressing purposes) with SCSI target devices attached and is capable of connecting more SCSI domains;
 - A) Two of the SCSI domains contain two SCSI target devices each and these SCSI domains are unable to add more SCSI target devices. One of the SCSI target devices is the level 2 SDDL;
 - B) One of the SCSI domains contains two SCSI target devices and is able to add more SCSI target devices;
 - C) The level 2 SDDL has three SCSI domains with SCSI target devices attached and is capable of connecting more SCSI domains;
 - a) Two of the SCSI domains contain two SCSI target devices each and these SCSI domains are unable to add more SCSI target devices; and
 - b) One of the SCSI domains contains two SCSI target devices and is able to add more SCSI target devices.

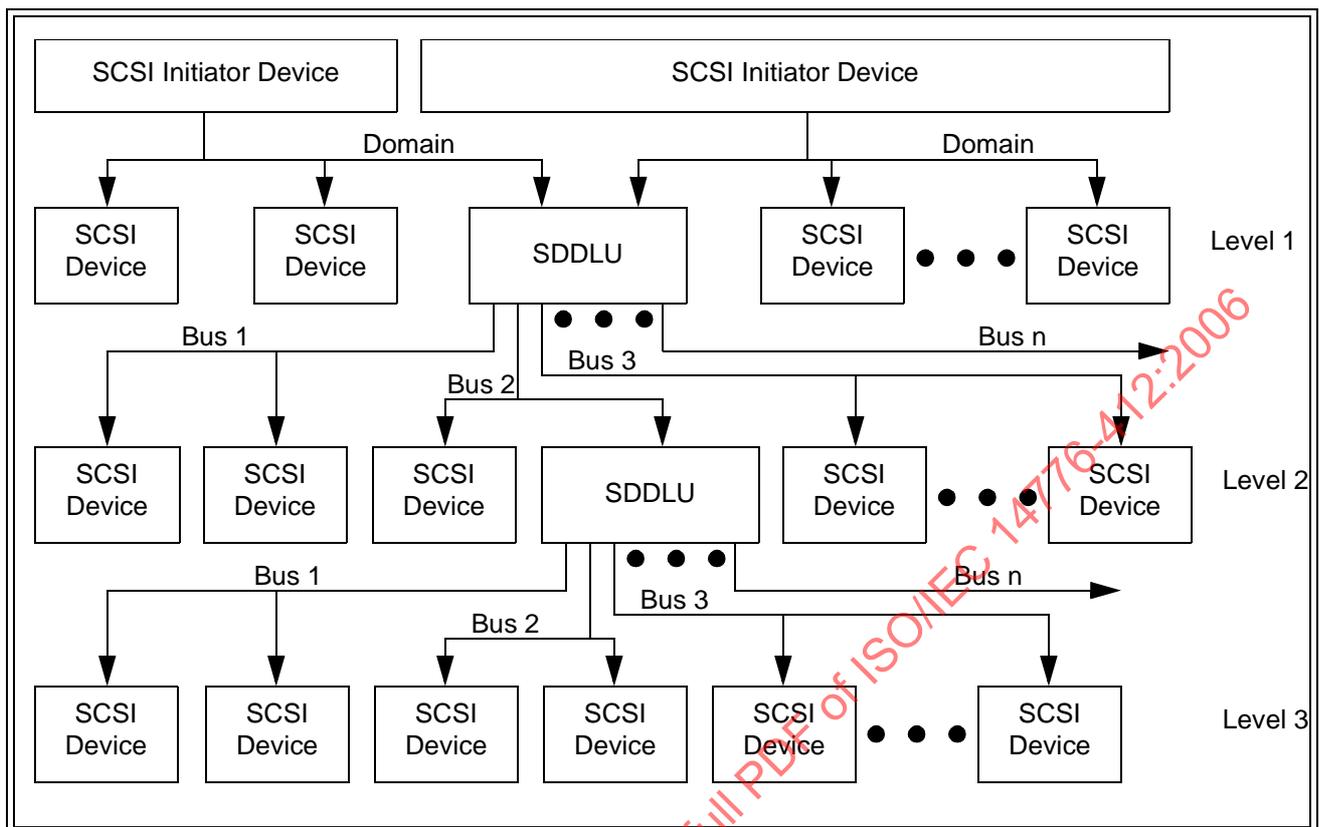


Figure 23 — Example of hierarchical system diagram

SCSI devices at each level in the tree are referenced by one of the following address methods:

- Logical unit address method (see 4.9.5);
- Peripheral device address method (see 4.9.6);
- Flat space addressing method (see 4.9.7); or
- Extended logical unit addressing method (see 4.9.8).

All peripheral device addresses, except LUN 0 (see 4.9.2), default to vendor specific values. All addressable entities may default to vendor specific values or may be defined by an application client (e.g., by the use of SCC-2 configuration commands).

Within the hierarchical system there may be SCSI target devices that have multiple logical units connected to them through separate SCSI initiator ports. The SCSI domains accessed by these SCSI initiator ports are referred to as buses. A SCSI target device that has SCSI devices attached to these buses shall assign numbers, other than zero, to those buses. The bus numbers shall be used as components of the logical unit numbers to the logical units attached to those buses, as described in 4.9.5 and 4.9.6.

SCSI target devices shall assign a bus number of zero to all the logical units under control by the SCSI target device that are not connected through a SCSI domain where the SCSI target device functions as a SCSI initiator device.

4.14 The SCSI model for distributed communications

The SCSI model for communications between distributed objects is based on the technique of layering as shown in figure 24.

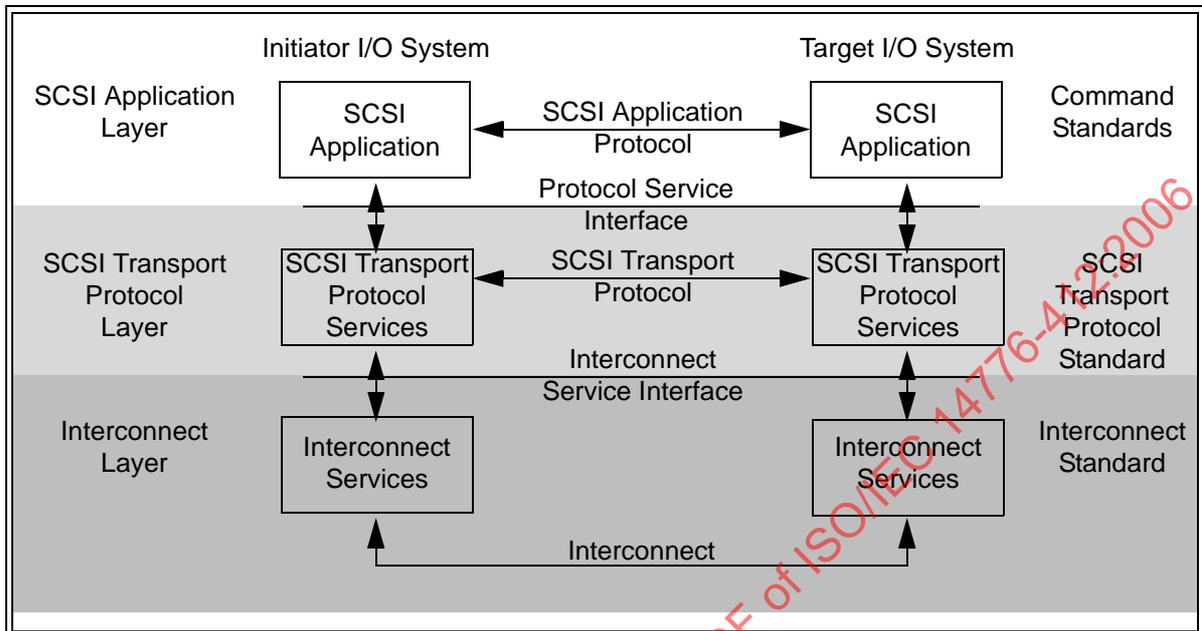


Figure 24 — Protocol service reference model

The layers comprising this model and the specifications defining the functionality of each layer are denoted by horizontal sequences. A layer consists of peer entities that communicate with one another by means of a protocol. Except for the interconnect layer, such communication is accomplished by invoking services provided by the adjacent lower layer. By convention, the layer from which a request for service originates is called the upper level protocol layer or ULP layer. The layer providing the service is referred to as the lower level protocol layer or LLP layer. The following layers are defined.

SCSI application layer: Contains the clients and servers that originate and process SCSI I/O operations by means of a SCSI application protocol;

SCSI transport protocol layer: Consists of the services and protocols through which clients and servers communicate; and

Interconnect layer: Comprised of the services, signaling mechanism and interconnect subsystem needed for the physical transfer of data from sender to receiver. In the SCSI model, the interconnect layer is known as the service delivery subsystem.

The set of protocol services implemented by the service delivery subsystem are intended to identify external behavioral requirements that apply to SCSI transport protocol standards. While these protocol services may serve as a guide for designing reusable software or firmware that is adaptable to different SCSI transport protocols, there is no requirement for an implementation to provide the service interfaces specified in this standard.

The protocol service interface is defined in this standard in representational terms using protocol services. The protocol service interface implementation is defined in each SCSI transport protocol standard. The interconnect service interface is described as appropriate in each SCSI transport protocol standard.

Interactions between the ULP and LLP layers are defined with respect to the ULP layer and may originate in either layer. An outgoing interaction is modeled as a procedure call invoking an LLP service. An incoming interaction is modeled as a signal sent by the LLP layer that may be accompanied by parameters or data. Both types of interaction are described using the notation for procedures specified in 3.6.2. In this model, input arguments are defined relative to the layer receiving an interaction (i.e., an input is a parameter supplied to the receiving layer by the layer initiating the interaction).

The following types of service interactions between layers are defined:

SCSI transport protocol service request: A request from the ULP layer invoking a service provided by the LLP layer.

SCSI transport protocol service indication: A signal from the LLP layer informing the ULP layer that an asynchronous event has occurred (e.g., a reset or the receipt of a peer-to-peer protocol transaction).

SCSI transport protocol service response: A call to the LLP layer invoked by the ULP layer in response to a SCSI transport protocol service indication. A SCSI transport protocol service response may be invoked to return a reply from the invoking ULP to the ULP peer.

SCSI transport protocol service confirmation: A signal from the LLP layer notifying the ULP layer that a SCSI transport protocol service request has completed, has been terminated, or has failed to transit the interconnect layer. A confirmation may communicate parameters that indicate the completion status of the SCSI transport protocol service request or any other status. A SCSI transport protocol service confirmation may be used to convey a response from the ULP peer.

The services provided by an LLP layer are either confirmed or unconfirmed. A ULP service request invoking a confirmed service always results in a confirmation from the LLP layer.

Figure 25 shows the relationships between the four protocol service types.

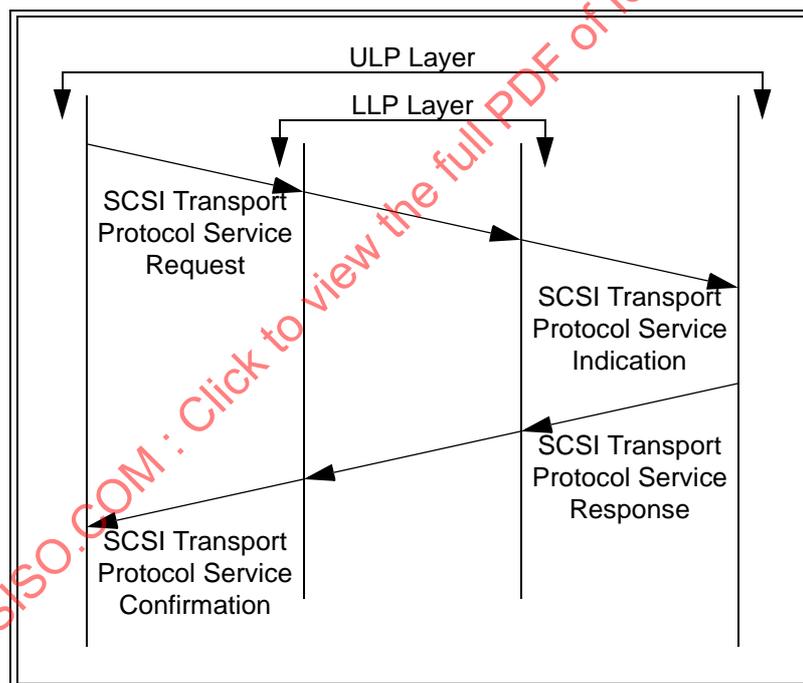


Figure 25 — Protocol service model

Figure 26 shows how protocol services may be used to process a client-server request-response transaction at the SCSI application layer.

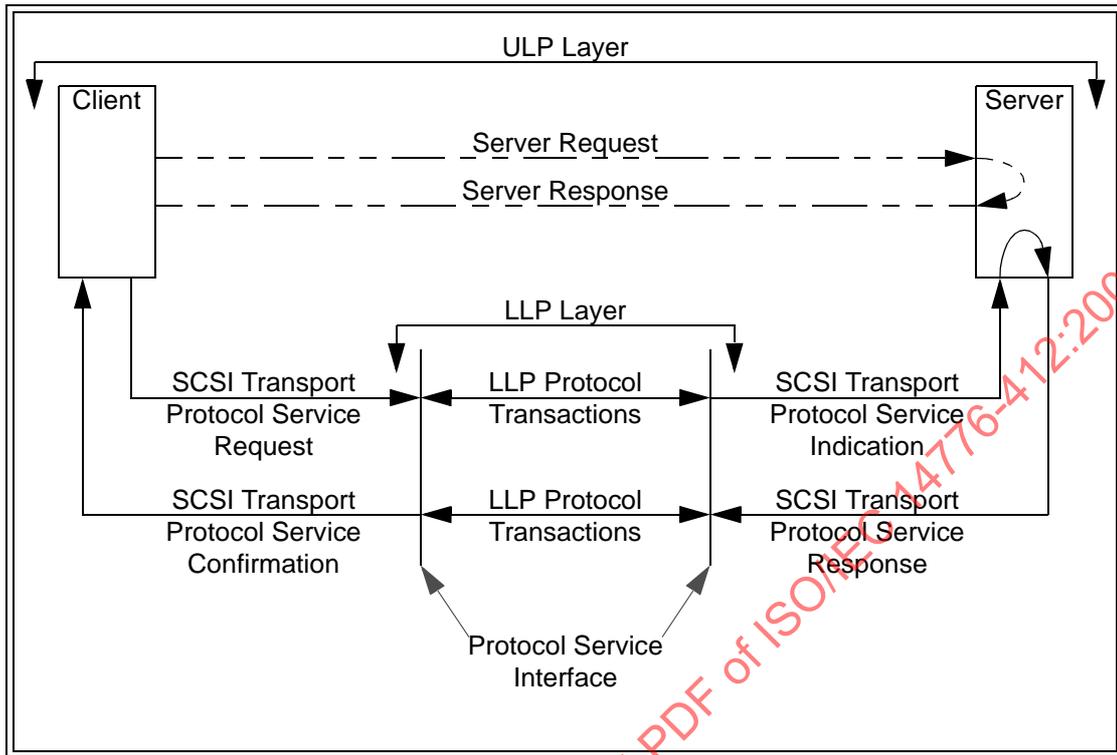


Figure 26 — Request-Response ULP transaction and related LLP services

The dashed lines in figure 26 show a SCSI application protocol transaction as it may appear to sending and receiving entities within the client and server. The solid lines in figure 26 show the corresponding SCSI transport protocol services and LLP transactions that are used to transport the data.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

5 SCSI Command Model

5.1 The Execute Command remote procedure

An application client requests the processing of a SCSI command by invoking the SCSI transport protocol services described in 5.4, the collective operation of which is conceptually modeled in the following remote procedure:

Service response =Execute Command (IN (I_T_L_x Nexus, CDB, [Task Attribute], [Data-In Buffer Size], [Data-Out Buffer], [Data-Out Buffer Size], [Autosense Request], [Command Reference Number]), OUT ([Data-In Buffer], [Sense Data], Status))

Input Arguments:

- I_T_L_x Nexus:** Either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).
- CDB:** Command descriptor block (see 5.2).
- Task Attribute:** A value specifying one of the task attributes defined in 7.5. This argument shall not be specified for an untagged command or the second and subsequent commands in a sequence of linked commands. Untagged tasks shall implicitly have the SIMPLE attribute. The attribute of a task that processes linked commands shall be set according to the Task Attribute argument specified for the first command in the sequence.
- Data-In Buffer Size:** The number of bytes available for data transfers to the Data-In Buffer (see 5.4.3).
- Data-Out Buffer:** A buffer containing command specific information to be sent to the logical unit, such as data or parameter lists needed to service the command. The content of the Data-Out Buffer shall not change during the lifetime of the command (see 5.5) as viewed by the application client.
- Data-Out Buffer Size:** The number of bytes available for data transfers from the Data-Out Buffer (see 5.4.3).
- Autosense Request:** An argument requesting the automatic return of sense data by means of the autosense mechanism specified in 5.9.4.3. It is not an error for the application client to provide this argument when autosense is not supported by the SCSI transport protocol or logical unit. SCSI transport protocols may require that the Autosense Request argument always request automatic return of the sense data.
- Command Reference Number (CRN):** When this argument is used, all sequential commands of an I_T_L nexus shall include a CRN argument that is incremented by one. The initial, wrap, and reset CRN values shall be one. The CRN value zero shall be reserved for use as defined by the SCSI transport protocol. It is not an error for the application client to provide this argument when CRN is not supported by the SCSI transport protocol or logical unit.

Output Arguments:

Data-In Buffer: A buffer to contain command specific information returned by the logical unit by the time of command completion. The application client shall not assume that the buffer contents are valid unless the command completes with a status of GOOD, CONDITION MET, INTERMEDIATE, or INTERMEDIATE-CONDITION MET. While some valid data may be present for other values of status, the application client should obtain additional information from the logical unit, such as sense data, to determine the state of the buffer contents. If the command ends with a service response of SERVICE DELIVERY OR TARGET FAILURE, the application client shall consider this parameter to be undefined.

Sense Data: A buffer to contain sense data returned by means of the autosense mechanism (see 5.9.4.3). If the command ends with a service response of SERVICE DELIVERY OR TARGET FAILURE, the application client shall consider this parameter to be undefined.

Status: A one-byte field containing command completion status (see 5.3). If the command ends with a service response of SERVICE DELIVERY OR TARGET FAILURE, the application client shall consider this parameter to be undefined.

Service Response assumes one of the following values:

- TASK COMPLETE:** A logical unit response indicating that the task has ended. The status parameter shall have one of the values specified in 5.3 other than INTERMEDIATE or INTERMEDIATE-CONDITION MET.
- LINKED COMMAND COMPLETE:** Logical unit responses indicating that the task has not ended and that a linked command has completed successfully. As specified in 5.3, the status parameter shall have a value of INTERMEDIATE or INTERMEDIATE-CONDITION MET.
- SERVICE DELIVERY OR TARGET FAILURE:** The command has been ended due to a service delivery failure (see 3.1.108) or SCSI target device malfunction. All output parameters are invalid.

The actual SCSI transport protocol events corresponding to a response of TASK COMPLETE, LINKED COMMAND COMPLETE or SERVICE DELIVERY OR TARGET FAILURE shall be specified in each SCSI transport protocol standard.

An application client requests processing of a linked command by setting the LINK bit to one in the CDB CONTROL byte as specified in 5.2.3. The task attribute is determined by the Task Attribute argument specified for the first command in the sequence. Upon receiving a response of LINKED COMMAND COMPLETE, an application client may issue the next command in the series through an **Execute Command** remote procedure call having the same I_T_L_x nexus and omitting the Task Attribute argument. If the logical unit receives the next command in a series of linked commands before completing the current command in that linked command series, the overlapped command condition described in 5.9.2 shall result.

5.2 Command descriptor block (CDB)

5.2.1 CDB format

The CDB defines the operation to be performed by the device server. For some commands, the CDB is accompanied by a list of command parameters contained in the Data-Out Buffer defined in 5.1. The parameters required for each command are specified in the applicable SCSI command standards.

If a logical unit validates reserved CDB fields and receives a reserved field within the CDB that is not zero or receives a reserved CDB code value, the logical unit shall terminate the command with CHECK CONDITION status; the sense key shall be set to ILLEGAL REQUEST with an additional sense code of INVALID FIELD IN CDB (see SPC-2).

For all commands, if the logical unit detects an invalid parameter in the CDB, then the logical unit shall complete the command without altering the media information.

All CDBs shall have an OPERATION CODE as the first byte. All CDBs, except the CDB for operation code 7Fh, shall have a CONTROL byte as the last byte. The format for the CDBs with operation code 7Fh is defined in SPC-2.

Some operation codes provide for modification of their operation based on a service action. In such cases, the combination of operation code value and service action code value may be modeled as a single, unique command determinate. The location of the SERVICE ACTION field in the CDB varies depending on the operation code value.

The general format for all CDBs except the CDB for operation code 7Fh is shown in table 19. The remaining parameters depend on the command to be processed. All SCSI transport protocol standards shall accept CDBs less than or equal to 16 bytes in length. CDBs using the format shown in table 19 shall not exceed sixteen bytes in length.

Table 19 — Command Descriptor Block (CDB) Format

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|-----------------------------|---|---|---|---|---|---|---|
| 0 | OPERATION CODE | | | | | | | |
| 1 | Command specific parameters | | | | | | | |
| n-1 | | | | | | | | |
| n | CONTROL | | | | | | | |

5.2.2 OPERATION CODE byte

The first byte of a SCSI CDB shall contain an operation code. The OPERATION CODE (see table 20) of the CDB has a GROUP CODE field and a COMMAND CODE field. The three-bit GROUP CODE field provides for eight groups of command codes. The five-bit COMMAND CODE field provides for thirty-two command codes in each group. A total of 256 possible operation codes exist. Operation codes are defined in the SCSI command standards. The group code value shall determine the length of the CDB (see table 21).

Table 20 — OPERATION CODE byte

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|------------|---|---|--------------|---|---|---|---|
| | GROUP CODE | | | COMMAND CODE | | | | |

The value in the GROUP CODE field specifies one of the groups shown in table 21.

Table 21 — Group Code values

| Group Code | Meaning |
|------------|-----------------------|
| 000b | 6 byte commands |
| 001b | 10 byte commands |
| 010b | 10 byte commands |
| 011b | reserved ^a |
| 100b | 16 byte commands |
| 101b | 12 byte commands |
| 110b | vendor specific |
| 111b | vendor specific |

^a The format the commands using the group code 011b and operation code 7Fh is described in SPC-2. With the exception of operation code 7Fh, all group code 011b operation codes are reserved.

5.2.3 CONTROL byte

The CONTROL byte is the last byte of every CDB, except for the CDB for operation code 7Fh. The CONTROL byte is defined in table 22.

Table 22 — CONTROL byte

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|-----------------|---|----------|---|---|------|----------|------|
| | Vendor specific | | Reserved | | | NACA | Obsolete | LINK |

All SCSI transport protocol standards shall define as mandatory the functionality needed for a logical unit to implement the NACA bit and LINK bit.

The NACA (Normal ACA) bit is used to select whether a contingent allegiance (CA) or an auto contingent allegiance (ACA) is established if the command returns with CHECK CONDITION status. An NACA bit set to one specifies that an ACA shall be established. An NACA bit set to zero specifies that a CA shall be established. The actions for CA and ACA are specified in 5.9.1.2. All logical units shall implement support for the NACA value of zero (i.e., CA) and may support the NACA value of one (i.e., ACA). The ability to support a NACA value of one is indicated with the NORMACA bit in the standard INQUIRY data (see SPC-2).

If the NACA bit is set to one but the logical unit does not support ACA, the logical unit shall complete the command with a CHECK CONDITION status, sense key of ILLEGAL REQUEST, an additional sense code of INVALID FIELD IN CDB and establish a CA condition. The requirements for handling the resulting CA condition shall be as described in 5.9.1.

The LINK bit is used to continue the task across multiple commands. Support for the LINK bit is optional. The application client sets the LINK bit to one to specify a request for continuation of the task across two or more SCSI commands. If the LINK bit is set to one and the command completes successfully, a logical unit that supports the LINK bit shall continue the task and return a status of INTERMEDIATE or INTERMEDIATE-CONDITION MET and a service response of LINKED COMMAND COMPLETE (see 5.3). The logical unit shall complete the command with a status of CHECK CONDITION and a sense key of ILLEGAL REQUEST if the LINK bit is set to one and the logical unit does not support linked commands.

Bit 1 provides an obsolete way to request interrupts between linked commands.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14776-412:2006

5.3 Status

5.3.1 Status codes

The status codes are specified in table 23. Status shall be sent from the device server to the application client whenever a command ends with a service response of TASK COMPLETE or LINKED COMMAND COMPLETE.

Table 23 — Status codes

| Status Code | Status | Task Ended | Service Response |
|-----------------|----------------------------|------------|-------------------------|
| 00h | GOOD | Yes | TASK COMPLETE |
| 02h | CHECK CONDITION | Yes | TASK COMPLETE |
| 04h | CONDITION MET | Yes | TASK COMPLETE |
| 08h | BUSY | Yes | TASK COMPLETE |
| 10h | INTERMEDIATE | No | LINKED COMMAND COMPLETE |
| 14h | INTERMEDIATE-CONDITION MET | No | LINKED COMMAND COMPLETE |
| 18h | RESERVATION CONFLICT | Yes | TASK COMPLETE |
| 22h | Obsolete | | |
| 28h | TASK SET FULL | Yes | TASK COMPLETE |
| 30h | ACA ACTIVE | Yes | TASK COMPLETE |
| 40h | TASK ABORTED | Yes | TASK COMPLETE |
| All other codes | Reserved | | |

Definitions for each status code are as follows:

GOOD. This status indicates that the device server has successfully completed the task.

CHECK CONDITION. This status indicates that an CA or ACA condition has occurred (see 5.9.1). Autosense data may be delivered (see 5.9.4.3).

CONDITION MET. This status shall be returned whenever the requested operation specified by an unlinked command is satisfied (see the PRE-FETCH commands in the SBC standard).

BUSY. This status indicates that the logical unit is busy. This status shall be returned whenever a logical unit is temporarily unable to accept a command. The recommended application client recovery action is to issue the command again at a later time. If the UA_INTLCK_CTRL field in the Control mode page contains 11b (see SPC-3), termination of a command with BUSY status shall cause an unit attention condition to be established for the SCSI initiator port that sent the command with an additional sense code of PREVIOUS BUSY STATUS unless a PREVIOUS BUSY STATUS unit attention condition already exists.

INTERMEDIATE. This status or INTERMEDIATE-CONDITION MET shall be returned for each successfully completed command in a series of linked commands (except the last command), unless the command is terminated with CHECK CONDITION, RESERVATION CONFLICT, TASK SET FULL, or BUSY status. If INTERMEDIATE or INTERMEDIATE-CONDITION MET status is not returned, the series of linked commands is terminated and the task is ended. This status is the equivalent of GOOD status for linked commands.

INTERMEDIATE-CONDITION MET. This status is returned whenever the requested operation specified by a linked command is satisfied (see the PRE-FETCH commands in the SBC standard), unless the command is terminated with CHECK CONDITION, RESERVATION CONFLICT, TASK SET FULL, or BUSY status. If INTERMEDIATE or INTERMEDIATE-CONDITION MET status is not returned, the series of linked commands is terminated and the task is ended.

RESERVATION CONFLICT. This status shall be returned whenever a SCSI initiator port attempts to access a logical unit or an element of a logical unit in a way that conflicts with an existing reservation. (See the RESERVE, RELEASE, PERSISTENT RESERVE OUT and PERSISTENT RESERVE IN commands in SPC-2).

If the UA_INTLCK_CTRL field in the Control mode page contains 11b (see SPC-3), termination of a command with RESERVATION CONFLICT status shall cause an unit attention condition to be established for the SCSI initiator port that sent the command with an additional sense code of PREVIOUS RESERVATION CONFLICT STATUS unless a PREVIOUS RESERVATION CONFLICT STATUS unit attention condition already exists.

TASK SET FULL. This status shall be implemented if the logical unit supports the creation of tagged tasks (see 4.10). This status shall not be implemented if the logical unit does not support the creation of tagged tasks.

When the logical unit has at least one task in the task set for a SCSI initiator port and a lack of task set resources prevents accepting a received tagged task from that SCSI initiator port into the task set, TASK SET FULL shall be returned. When the logical unit has no task in the task set for a SCSI initiator port and a lack of task set resources prevents accepting a received tagged task from that SCSI initiator port into the task set, BUSY should be returned.

When the logical unit has at least one task in the task set and a lack of task set resources prevents accepting a received untagged task into the task set, BUSY should be returned.

The logical unit should allow at least one command in the task set for each supported SCSI initiator port that has identified itself to the SCSI target port by a SCSI transport protocol specific procedure or by the successful transmission of a command.

If the UA_INTLCK_CTRL field in the Control mode page contains 11b (see SPC-3), termination of a command with TASK SET FULL status shall cause an unit attention condition to be established for the SCSI initiator port that sent the command with an additional sense code of PREVIOUS TASK SET FULL STATUS unless a PREVIOUS TASK SET FULL STATUS unit attention condition already exists.

ACA ACTIVE. This status shall be returned when an ACA exists within a task set and a SCSI initiator port issues a command for that task set when at least one of the following is true:

- a) There is a task with the ACA attribute (see 7.5.4) in the task set;
- b) The SCSI initiator port issuing the command did not cause the ACA condition; or
- c) The task created to process the command did not have the ACA attribute and the NACA bit was set to one in the CDB CONTROL byte of the faulting command (see 5.9.1).

The SCSI initiator port may reissue the command after the ACA condition has been cleared.

TASK ABORTED. This status shall be returned when a task is aborted by another SCSI initiator port and the Control mode page TAS bit is set to one (see 5.7.3).

5.3.2 Status precedence

If more than one condition applies to a completed task, the precedence for deciding the condition to be reported shall be:

- 1) Reporting a CHECK CONDITION status for any of the following unit attention conditions;
 - a) POWER ON, RESET, OR BUS DEVICE RESET OCCURRED;
 - b) POWER ON OCCURRED;
 - c) SCSI BUS RESET OCCURRED;
 - d) BUS DEVICE RESET FUNCTION OCCURRED;
 - e) DEVICE INTERNAL RESET;
 - f) TRANSCEIVER MODE CHANGED TO SINGLE-ENDED;
 - g) TRANSCEIVER MODE CHANGED TO LVD; or
 - h) I_T NEXUS LOSS OCCURRED;
- 2) Reporting a RESERVATION CONFLICT status;
- 3) Reporting a BUSY, RESERVATION CONFLICT, ACA ACTIVE or TASK SET FULL status; and
- 4) Reporting any other status.

5.4 SCSI transport protocol services in support of Execute Command

5.4.1 Overview

The SCSI transport protocol services that support the **Execute Command** remote procedure call are described in 5.4. Two groups of SCSI transport protocol services are described. The SCSI transport protocol services that support the request and confirmation for the **Execute Command** remote procedure call are described in 5.4.2. The SCSI transport protocol services that support the data transfers associated with processing a SCSI command are described in 5.4.3.

5.4.2 Execute Command request/confirmation SCSI transport protocol services

All SCSI transport protocol standards shall define the SCSI transport protocol specific requirements for implementing the **Send SCSI Command** SCSI transport protocol service request and the **Command Complete Received** confirmation. Support for the **SCSI Command Received** indication and **Send Command Complete** response by a SCSI transport protocol standard is optional. All SCSI I/O systems shall implement these SCSI transport protocols as defined in the applicable SCSI transport protocol specification.

SCSI Transport Protocol Service Request:

Send SCSI Command (IN (I_T_L_x Nexus, CDB, [Task Attribute], [Data-In Buffer Size], [Data-Out Buffer], [Data-Out Buffer Size], [Autosense Request], [Command Reference Number]))

Input Arguments:

- I_T_L_x Nexus:** Either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).
- CDB:** Command descriptor block (see 5.2).
- Task Attribute:** A value specifying one of the task attributes defined in 7.5. For specific requirements on the Task Attribute argument see 5.1.
- Data-In Buffer Size:** The number of bytes available for data transfers to the Data-In Buffer (see 5.4.3).
- Data-Out Buffer:** A buffer containing command specific information to be sent to the logical unit, such as data or parameter lists needed to service the command (see 5.1). The content of the Data-Out Buffer shall not change during the lifetime of the command (see 5.5) as viewed by the application client.
- Data-Out Buffer Size:** The number of bytes available for data transfers from the Data-Out Buffer (see 5.4.3).
- Autosense Request:** An argument (see 5.1) requesting the automatic return of sense data by means of the autosense mechanism specified in 5.9.4.3.
- Command Reference Number (CRN):** When this argument is used, all sequential commands of an I_T_L nexus shall include a CRN argument that is incremented by one (see 5.1).

SCSI Transport Protocol Service Indication:

SCSI Command Received (IN (I_T_L_x Nexus, CDB, [Task Attribute], [Autosense Request], [Command Reference Number]))

Input Arguments:

I_T_L_x Nexus: Either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

CDB: Command descriptor block (see 5.2).

Task Attribute: A value specifying one of the task attributes defined in 7.5. For specific requirements on the Task Attribute argument see 5.1.

Autosense Request: This parameter is only present if the **Autosense Request** parameter was specified in the **Send SCSI Command** call and autosense delivery is supported by the SCSI transport protocol and logical unit.

Command Reference Number (CRN): When this argument is used, all sequential commands of an I_T_L nexus shall include a CRN argument that is incremented by one (see 5.1).

SCSI Transport Protocol Service Response (from device server):

Send Command Complete (IN (I_T_L_x Nexus, [Sense Data], Status, Service Response))

Input Arguments:

I_T_L_x Nexus: Either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

Sense Data: If present, this argument instructs the SCSI target port to return sense information to the SCSI initiator port automatically (see 5.9.4.3).

Status: Command completion status (see 5.1).

Service Response: Possible service response information for the command (see 5.1).

SCSI Transport Protocol Service Confirmation:

Command Complete Received (IN (I_T_L_x Nexus, [Data-In Buffer], [Sense Data], Status, Service Response))

Input Arguments:

I_T_L_x Nexus: Either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

Data-In Buffer: A buffer containing command specific information returned by the logical unit on command completion (see 5.1).

Sense Data: Autosense data (see 5.9.4.3).

Status: Command completion status (see 5.1).

Service Response: Service response for the command (see 5.1).

5.4.3 Data transfer SCSI transport protocol services

5.4.3.1 Introduction

The data transfer services described in 5.4.3 provide mechanisms for moving data to and from the SCSI initiator port in response to commands transmitted using the **Execute Command** remote procedure call. All SCSI transport protocol standards shall define the protocols required to implement these services.

The application client's Data-In Buffer and/or Data-Out Buffer each appears to the device server as a single, logically contiguous block of memory large enough to hold all the data required by the command (see figure 27). The model allows either unidirectional or bidirectional data transfer. The processing of a SCSI command may require the transfer of data from the application client using the Data-Out Buffer, or to the application client using the Data-In Buffer, or both to and from the application client using both the Data-In Buffer and the Data-Out Buffer.

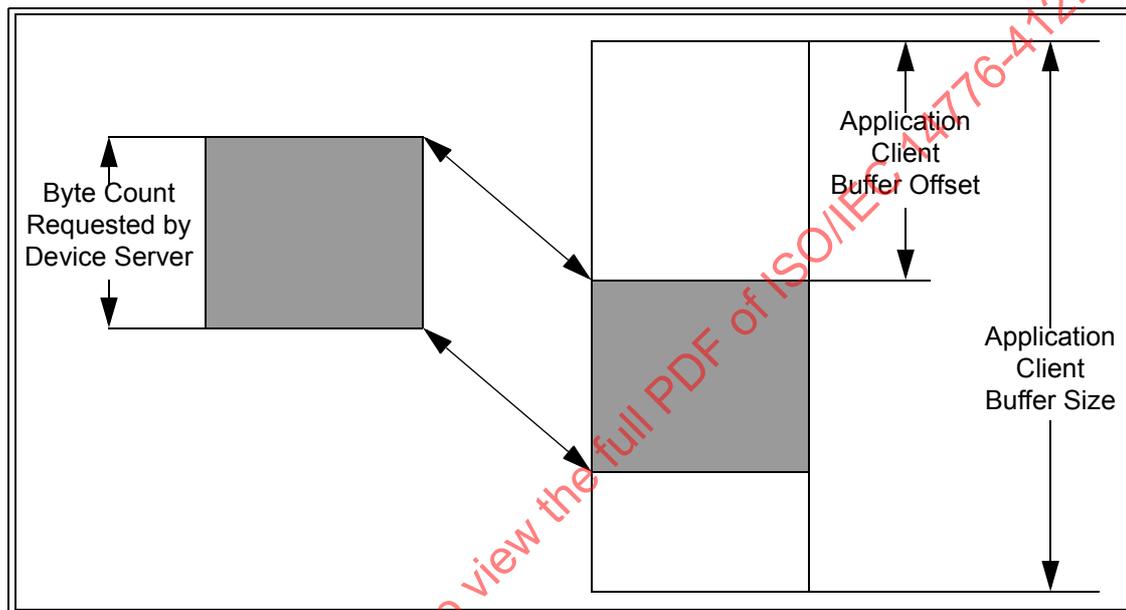


Figure 27 — Model for Data-In and Data-Out data transfers

It is assumed that the buffering resources available to the logical unit are limited and may be less than the amount of data that is capable of being transferred in one SCSI command. Such data needs to be moved between the application client and the media in segments that are smaller than the transfer size specified in the SCSI command. The amount of data moved per segment is usually a function of the buffering resources available to the logical unit. Figure 27 shows the model for such incremental data transfers.

The movement of data between the application client and device server is controlled by the following arguments:

Application Client Buffer Size: The total number of bytes in the application client's buffer (Data-In or Data-Out).

Application Client Buffer Offset: Offset in bytes from the beginning of the application client's buffer (Data-In or Data-Out) to the first byte of transferred data.

Byte Count Requested by Device Server: Number of bytes to be moved by the data transfer request.

For any specific data transfer SCSI transport protocol service request, the **Byte Count Requested by Device Server** is less than or equal to the combination of **Application Client Buffer Size** minus the **Application Client Buffer Offset**.

If a SCSI transport protocol supports random buffer access, the offset and byte count specified for each data segment to be transferred may overlap. In this case the total number of bytes moved for a command is not a reliable indicator of highest byte transferred and shall not be used by a SCSI initiator device or SCSI target device implementation to determine whether all data has been transferred.

All SCSI transport protocol standards shall define support for a resolution of one byte for the above arguments. A SCSI initiator device shall support a resolution of one byte. A SCSI target device may support any resolution.

Random buffer access occurs when the device server requests data transfers to or from segments of the application client's buffer that have an arbitrary offset and byte count. Buffer access is sequential when successive transfers access a series of monotonically increasing, adjoining buffer segments. Support for random buffer access by a SCSI transport protocol standard is optional. A device server implementation designed for any SCSI transport protocol implementation should be prepared to use sequential buffer access when necessary.

The LLP confirmed services specified in 5.4.3.2 and 5.4.3.3 are used by the device server to request the transfer of command data to or from the application client. The SCSI initiator device SCSI transport protocol service interactions are unspecified.

The model provides only for the transfer phases to be sequential. Provision for overlapping transfer phases is outside the scope of this standard.

5.4.3.2 Data-In delivery service

Request:

Send Data-In (IN (I_T_L_x Nexus, Device Server Buffer, Application Client Buffer Offset, Request Byte Count))

Argument descriptions:

I_T_L_x Nexus: either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

Device Server Buffer: Buffer to which data is to be transferred.

Application Client Buffer Offset: Offset in bytes from the beginning of the application client's buffer to the first byte of transferred data.

Request Byte Count: Number of bytes to be moved by this request.

Confirmation:

Data-In Delivered (IN (I_T_L_x Nexus))

This confirmation notifies the device server that the specified data was successfully delivered to the application client buffer.

Argument descriptions:

I_T_L_x Nexus: either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

5.4.3.3 Data-Out delivery service

Request:

Receive Data-Out (IN (I_T_L_x Nexus, Application Client Buffer Offset, Request Byte Count, Device Server Buffer))

Argument descriptions:

I_T_L_x Nexus: either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

Device Server Buffer: Buffer from which data is to be transferred.

Application Client Buffer Offset: Offset in bytes from the beginning of the application client's buffer to the first byte of transferred data.

Request Byte Count: Number of bytes to be moved by this request.

Confirmation:**Data-Out Received (IN (I_T_L_x Nexus))**

This confirmation notifies the device server that the requested data has been successfully delivered to its buffer.

Argument descriptions:

I_T_L_x Nexus: either an I_T_L nexus or an I_T_L_Q nexus (see 4.11).

5.5 Task and command lifetimes

This subclause specifies the events delimiting the beginning and end (i.e., lifetime) of a task or pending SCSI command from the viewpoint of the device server and application client.

The device server shall create a task upon receiving a **SCSI Command Received** indication unless the command represents a continuation of a linked command as described in 5.1.

The task shall exist until:

- a) The device server sends a SCSI transport protocol service response for the task of TASK COMPLETE; or
- b) The task is aborted as described in 5.7.

The application client assumes that the task exists and maintains an application client task to interact with the task from the time the **Send SCSI Command** SCSI transport protocol service request is invoked until it receives one of the following SCSI target device responses:

- a) A service response of TASK COMPLETE for that task;
- b) Notification of an unit attention condition with one of the following additional sense codes;
 - A) COMMANDS CLEARED BY ANOTHER INITIATOR (if in reference to the task set containing the task);
 - B) Any additional sense code whose ADDITIONAL SENSE CODE field contains 29h (e.g., POWER ON, RESET, OR BUS DEVICE RESET OCCURRED; POWER ON OCCURRED; SCSI BUS RESET OCCURRED; BUS DEVICE RESET FUNCTION OCCURRED; DEVICE INTERNAL RESET; TRANSCEIVER MODE CHANGED TO SINGLE-ENDED; or TRANSCEIVER MODE CHANGED TO LVD);
- c) A service response of SERVICE DELIVERY OR TARGET FAILURE for the command. In this case, system implementations shall guarantee that the task associated with the failed command has ended;
- d) A service response of FUNCTION COMPLETE following an ABORT TASK task management request directed to the specified task;
- e) A service response of FUNCTION COMPLETE following an ABORT TASK SET or a CLEAR TASK SET task management function directed to the task set containing the specified task;
- f) A service response of FUNCTION COMPLETE in response to a LOGICAL UNIT RESET task management function directed to the logical unit; or
- g) A service response of FUNCTION COMPLETE following a TARGET RESET task management function directed to a SCSI target port with access to the logical unit.

To the application client, the command is pending from the time it calls the **Send SCSI Command** SCSI transport protocol service until one of the above responses or a service response of LINKED COMMAND COMPLETE is received.

When a SCSI transport protocol does not require state synchronization (see 4.6.2), there may be a time skew between the completion of a device server request-response transaction as seen by the application client and device server. As a result, the lifetime of a task or command as it appears to the application client normally is different from the lifetime observed by the device server.

5.6 Task management function lifetime

The application client assumes that the task management function is in process from the time the **Send Task Management Request** SCSI transport protocol service request is invoked until it receives one of the following SCSI target device responses:

- a) A service response of FUNCTION COMPLETE, FUNCTION REJECTED, or SERVICE DELIVERY OR TARGET FAILURE is received for that task management function; or
- b) Notification of an unit attention condition with any additional sense code whose additional sense code field contains 29h (e.g., POWER ON, RESET, OR BUS DEVICE RESET OCCURRED; POWER ON OCCURRED; SCSI BUS RESET OCCURRED; BUS DEVICE RESET FUNCTION OCCURRED; DEVICE INTERNAL RESET; TRANSCIVER MODE CHANGED TO SINGLE-ENDED; or TRANSCIVER MODE CHANGED TO LVD).

5.7 Aborting tasks

5.7.1 Mechanisms that cause tasks to be aborted

A task is aborted when an event or SCSI initiator device action causes termination of the task prior to its successful completion.

The following events cause a task or several tasks to be aborted:

- a) The return of an **Execute Command** service response of SERVICE DELIVERY OR TARGET FAILURE as described in 5.1;
- b) A logical unit reset (see 5.9.7);
- c) A hard reset (see 5.9.6);
- d) A power on condition; or
- e) SCSI transport protocol specific events.

An action transmitted via a SCSI initiator port may abort task(s) created via the SCSI initiator port itself, task(s) created via another SCSI initiator port, or both its own tasks and tasks created via another SCSI initiator port.

The following actions affect only the task(s) created via the SCSI initiator port that transmits the action:

- a) Completion of an ABORT TASK task management function directed to the specified task;
- b) Completion of an ABORT TASK SET task management function under the conditions specified in 6.3;
- c) An CA or ACA condition was established (see 5.9.1.2) and the QERR field was set to 01b or 11b in the Control mode page (see SPC-2); or
- d) An ACA condition was cleared and the task had the ACA attribute (see 6.4).

The following actions affect the task(s) created via the SCSI initiator port that transmits the action and/or task(s) created via other SCSI initiator ports:

- a) Completion of a CLEAR TASK SET task management function referencing the task set containing the specified task;
- b) An CA or ACA condition was established (see 5.9.1.2) and the QERR field was set to 01b in the Control mode page (see SPC-2);
- c) Completion of a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action with a reservation key that is associated with the SCSI initiator port that created the task (see SPC-2);
- d) Completion of a LOGICAL UNIT RESET task management function (see 6.6) directed to the logical unit; or
- e) Completion of a TARGET RESET task management function (see 6.7) directed to a SCSI target port with access to the logical unit.

5.7.2 When a SCSI initiator port aborts its own tasks

When a SCSI initiator port causes its own task(s) to be aborted, no notification that the task(s) have been aborted shall be returned to the SCSI initiator port other than the completion response for the command or task

management function action that caused the task(s) to be aborted and notification(s) associated with related effects of the action (e.g., a reset unit attention condition).

5.7.3 When a SCSI initiator port aborts tasks from other SCSI initiator ports

When a SCSI initiator port causes the task(s) of another SCSI initiator port to be aborted, the other SCSI initiator port shall be notified that the task(s) have been aborted. The method of notification shall depend on the setting of the TAS bit in the Control mode page (see SPC-2) that applies to the other SCSI initiator port.

If the TAS bit is set to zero, the method of notification shall be an unit attention condition. The additional sense code set for the unit attention condition depends on the action that caused the task(s) to be aborted.

If the TAS bit is set to one, the method of notification shall be the termination of each aborted task with a TASK ABORTED status. The COMMANDS CLEARED BY ANOTHER INITIATOR unit attention condition shall not be established, however, the establishment of any other applicable unit attention condition shall not be affected.

When a logical unit is aborting one or more tasks from a SCSI initiator port with the TASK ABORTED status it should complete all of those tasks before entering additional tasks from that SCSI initiator port into the task set.

5.8 Command processing examples

5.8.1 Unlinked command example

An unlinked command is used to show the events associated with the processing of a single device service request (see figure 28). This example does not include error or exception conditions.

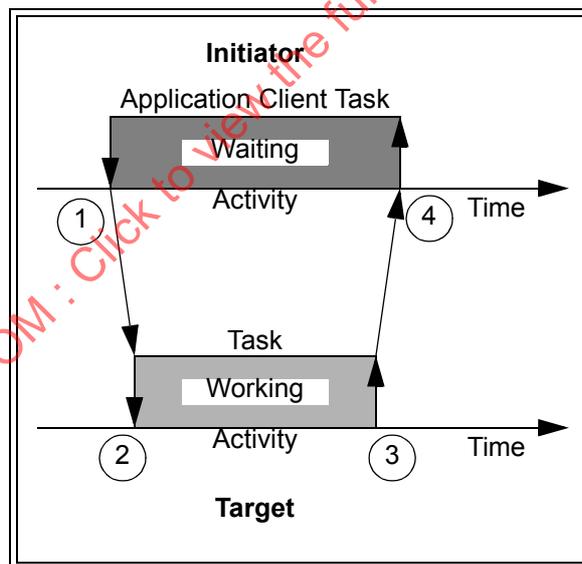


Figure 28 — Command processing events

The numbers in figure 28 identify the events described as follows:

- 1) The application client task performs an **Execute Command** remote procedure call by invoking the **Send SCSI Command** SCSI transport protocol service to send the CDB and other input parameters to the logical unit.
- 2) The device server is notified through a **SCSI Command Received** indication containing the CDB and command parameters. A task is created and entered into the task set. The device server may invoke the appropriate data delivery service one or more times to complete command processing.
- 3) The task ends upon completion of the command. On command completion, the **Send Command Complete** SCSI transport protocol service is invoked to return a status of GOOD and a service response of TASK COMPLETE.

- 4) A confirmation of **Command Complete Received** is passed to the application client task by the SCSI initiator port.

5.8.2 Linked command example

A task may consist of multiple commands linked together. After the logical unit notifies the application client that a linked command has successfully completed, the application client issues the next command in the series.

The example in figure 29 shows the events in a sequence of two linked commands.

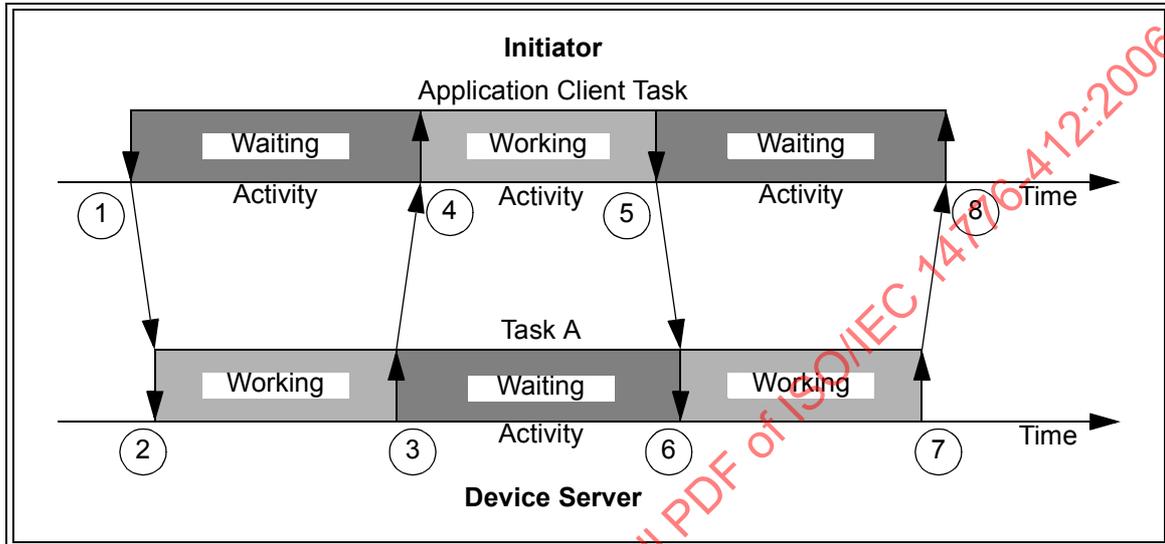


Figure 29 — Linked command processing events

The numbers in figure 29 identify the events described as follows:

- 1) The application client task performs an **Execute Command** remote procedure call by invoking the **Send SCSI Command** SCSI transport protocol service to send the CDB and other input parameters to the logical unit. The LINK bit is set to one in the CDB CONTROL byte (see 5.2.3).
- 2) The device server is notified through a **SCSI Command Received** indication containing the CDB and command parameters. A task (Task A) is created and entered into the task set.
- 3) Upon completion of the first command, the device server invokes the **Send Command Complete** SCSI transport protocol service with the status set to INTERMEDIATE or INTERMEDIATE-CONDITION MET and a service response of LINKED COMMAND COMPLETE. Task A is not terminated.
- 4) The SCSI initiator port returns the status and service response to the application client task by means of a **Command Complete Received** confirmation.
- 5) The application client task performs an **Execute Command** remote procedure call by means of the **Send SCSI Command** SCSI transport protocol service as described in 1). The Task Attribute argument is omitted. The LINK bit in the CDB CONTROL byte is set to zero.
- 6) The device server receives the last command in the sequence and processes the operation.
- 7) The command completes successfully. Task A is terminated. A **Send Command Complete** SCSI transport protocol service response of TASK COMPLETE, with status GOOD, is sent to the application client.
- 8) The SCSI initiator port delivers an **Command Complete Received** confirmation containing the service response and status to the application client task.

5.9 Command processing considerations and exception conditions

5.9.1 Contingent allegiance (CA) and auto contingent allegiance (ACA)

5.9.1.1 Overview

There are two mechanisms for returning sense data when a command is terminated with a CHECK CONDITION status: autosense (see 5.9.4.3) and the REQUEST SENSE command (see SPC-2). There are two mechanisms for altering task processing when a command is terminated with a CHECK CONDITION status: CA and ACA. CA alters task processing so that sense data is preserved for subsequent delivery. ACA alters task processing until a CLEAR ACA task management function (see 6.4) is requested. Table 24 provides an overview of how autosense, CA, and ACA interact.

Table 24 — Autosense, CA, and ACA Interactions

| Autosense Requested ^a | NACA Value ^b | Tasks Blocked ^c | |
|----------------------------------|-------------------------|--|---|
| | | From | To ^d |
| No | 0 (i.e., CA) | Termination of a command with CHECK CONDITION status | Receipt of a command ^e |
| | 1 (i.e., ACA) | | Receipt of CLEAR ACA ^g |
| Yes | 0 (i.e., CA) | | Transmission of autosense data ^f |
| | 1 (i.e., ACA) | | Receipt of CLEAR ACA ^g |

^a Autosense is requested via the **Execute Command** remote procedure call (see 5.1).

^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).

^c The blocking of tasks is described in 5.9.1.2. If the QERR field in the Control mode page (see SPC-2) contains 01b or 11b, tasks are aborted instead of being blocked. If the TST field in the Control mode page contains 000b, tasks from all SCSI initiator ports are blocked or aborted. If the TST field in the Control mode page contains 001b, only tasks from the faulted initiator port are blocked or aborted.

^d This table covers only the normal methods for clearing a CA or ACA as seen by the faulted initiator port. Exception handling methods for clearing CA and ACA are described in 5.9.1.6 and 5.9.1.7.

^e The intent is that the next command from the faulted initiator port be a REQUEST SENSE command but the next command received clears the CA condition, regardless of what command that is.

^f Since the autosense data is transmitted coincident with the delivery of the CHECK CONDITION status (see 5.9.4.3), the interval during which tasks are blocked is not detectable by the application client. If the QERR field in the Control mode page (see SPC-2) contains 01b or 11b, the specified blocked tasks are aborted, an action that makes the CA condition detectable by the application client.

^g The CLEAR ACA task management function is described in 6.4. During ACA new tasks received by the logical unit are not allowed to enter the task set unless they have the ACA task attribute (see 7.5.4) and are from the faulted initiator port. One of the results of the ACA task attribute requirement is that commands in-flight when the CHECK CONDITION status occurs are returned unprocessed to the SCSI initiator port with an ACA ACTIVE status. Multiple commands may be sent one at a time using the ACA task attribute to recover from the CHECK CONDITION that caused the ACA condition without clearing the ACA.

NOTE 6 - Use of CA without autosense is practical for interlocked bus SCSI transport protocols such as SPI-4.

5.9.1.2 Establishing a CA or ACA

When a device server terminates a command with a CHECK CONDITION status, either an CA or ACA condition is established within the task set. If the NACA bit was zero in the CONTROL byte (see 5.2.3) of the faulting command, the device server shall create a CA condition. If the NACA bit was one in the CONTROL byte of the faulting command, the device server shall create an ACA condition.

When a CA or ACA condition is established, tasks in the dormant or enabled task state (see 7.4) shall either be aborted or blocked based on the contents of the TST and QERR field in the Control mode page (see SPC-2) as

shown in table 25. The TST (task set type) Control mode page field specifies the type of task set in the logical unit (see SPC-2). The QERR (queue error management) Control mode page field specifies how the device server handles blocked and dormant tasks when another task receives a CHECK CONDITION status (see SPC-2).

Table 25 — Blocking and aborting tasks when a CA or ACA is established


| QERR | TST | Action |
|------|------|---|
| 00b | 000b | All enabled tasks from all SCSI initiator ports shall transition to the blocked task state (see 7.6). All dormant tasks from all SCSI initiator ports shall remain in the dormant task state. |
| | 001b | All enabled tasks from the faulted initiator port shall transition to the blocked task state (see 7.6). All dormant tasks from the faulted initiator port shall remain in the dormant task state. All tasks from SCSI initiator ports other than the faulted initiator port shall not be affected by the establishment of this CA or ACA condition. |
| 01b | 000b | All enabled and dormant tasks from all SCSI initiator ports shall be aborted (see 5.7). |
| | 001b | All enabled and dormant tasks from the faulted initiator port shall be aborted (see 5.7). All tasks from SCSI initiator ports other than the faulted initiator port shall not be affected by the establishment of this CA or ACA condition. |
| 11b | 000b | All enabled and dormant tasks from the faulted initiator port shall be aborted (see 5.7). All enabled tasks from SCSI initiator ports other than the faulted initiator port shall transition to the blocked task state (see 7.6). All dormant tasks from SCSI initiator ports other than the faulted initiator port shall remain in the dormant task state. |
| | 001b | All enabled and dormant tasks from the faulted initiator port shall be aborted (see 5.7). All tasks from SCSI initiator ports other than the faulted initiator port shall not be affected by the establishment of this CA or ACA condition. |

After the CA or ACA condition is established:

- a) New tasks from the faulted initiator port shall be handled as described in 5.9.1.4, and
- b) New tasks from SCSI initiator ports other than the faulted initiator port shall be handled as described in 5.9.1.5.

A CA or ACA condition shall not cross task set boundaries and shall be preserved until it is cleared as described in 5.9.1.6 or 5.9.1.7. If requested by the application client and supported by the SCSI transport protocol and logical unit, sense data shall be returned via autosense as described in 5.9.4.3.

If the SCSI transport protocol does not enforce state synchronization as described in 4.6.2, there may be a time delay between the occurrence of the CA or ACA condition and the time at which the application client becomes aware of the condition.

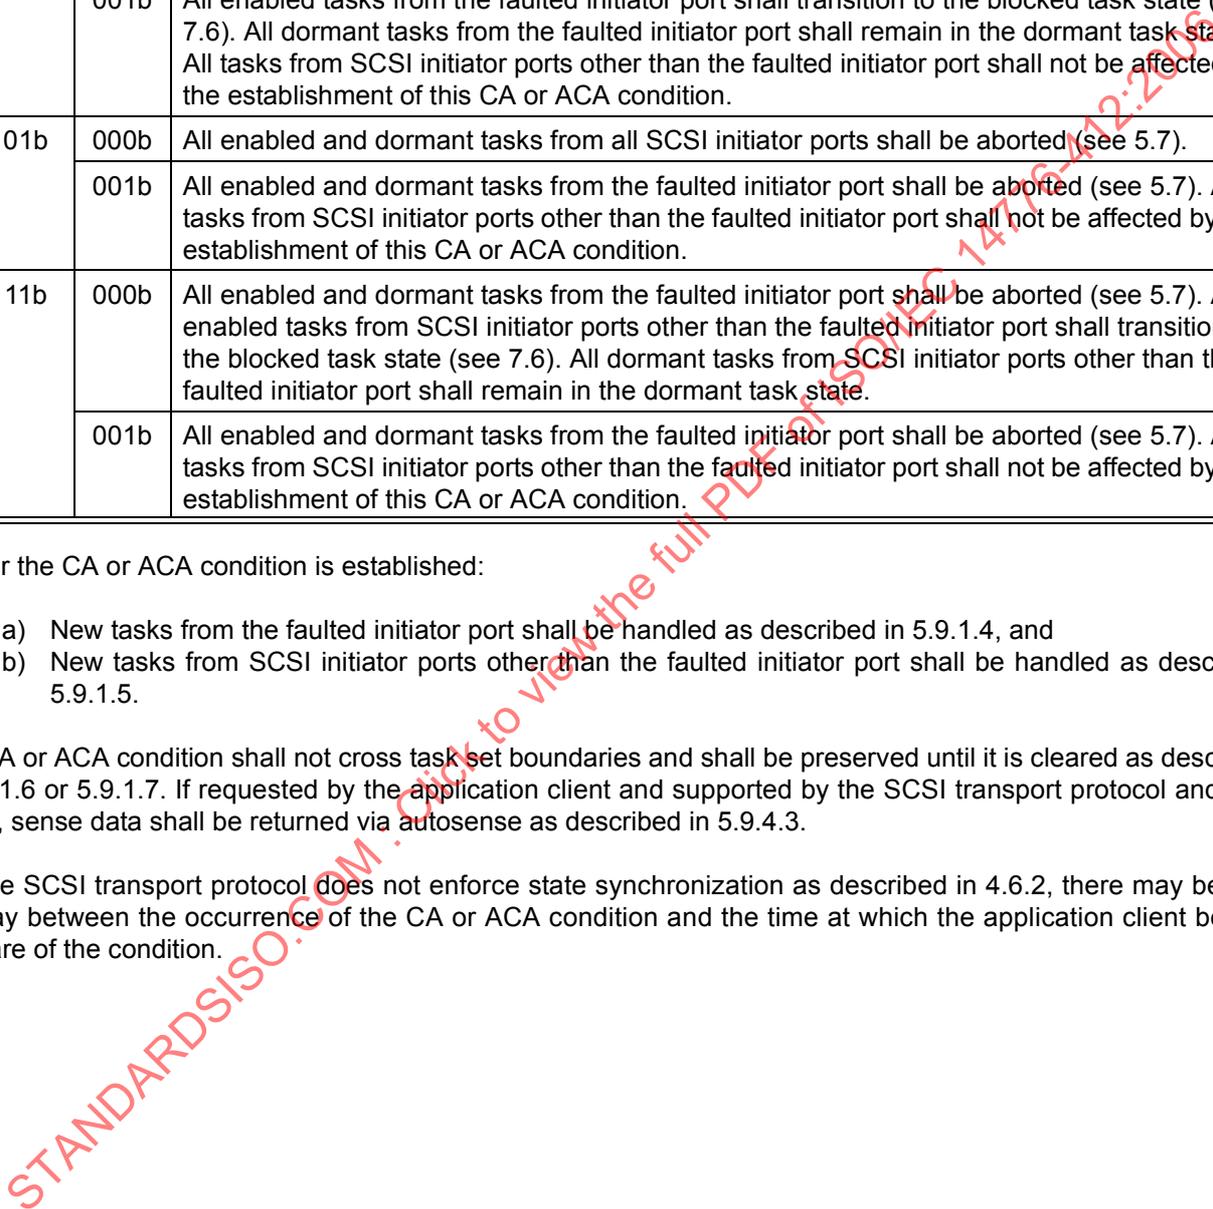

5.9.1.3 Handling tasks when neither CA or ACA is in effect

Table 26 describes the handling of tasks when neither a CA nor an ACA condition is in effect for the task set. The number of SCSI initiator ports in the task set is influenced by the TST field in the Control mode page (see SPC-2).

Table 26 — Task handling when neither CA nor ACA is in effect

| New Task Properties | | Device Server Action | Condition Established if New Task Terminates with a CHECK CONDITION status |
|--------------------------|-------------------------|---|--|
| Attribute ^a | NACA Value ^b | | |
| Any Attribute Except ACA | 0 | Process the task. ^c | CA |
| | 1 | | ACA |
| ACA | 0 | Terminate the command with CHECK CONDITION status, sense key of ILLEGAL REQUEST and additional sense code of INVALID MESSAGE ERROR. | CA |
| | 1 | | ACA |

^a Task attributes are described in 7.5.
^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).
^c All the conditions that affect the processing of commands (e.g., reservations) still apply.

5.9.1.4 Handling new tasks from the faulted initiator port when CA or ACA is in effect

Table 27 describes the handling of new tasks from the faulted initiator port when CA is in effect.

Table 27 — Handling for new tasks from a faulted initiator port during CA

| New Task Properties | | Device Server Action | Condition Established if New Task Terminates with a CHECK CONDITION status ^c |
|--------------------------|-------------------------|--|---|
| Attribute ^a | NACA Value ^b | | |
| Any Attribute Except ACA | 0 | Process the task. ^d | CA |
| | 1 | | ACA |
| ACA | 0 | Terminate the command with CHECK CONDITION status, sense key of ILLEGAL REQUEST, and additional sense code of INVALID MESSAGE ERROR. | CA |
| | 1 | | ACA |

^a Task attributes are described in 7.5.
^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).
^c The CA condition is cleared upon completion of any new task regardless of status. Termination of that new task with CHECK CONDITION status shall result in the establishment of a new CA or ACA based on the value of the NACA bit.
^d All the conditions that affect the processing of commands (e.g., reservations) still apply.

Table 28 describes the handling of new tasks from the faulted initiator port when ACA is in effect.

Table 28 — Handling for new tasks from a faulted initiator port during ACA

| New Task Properties | | ACA Task Present in the Task Set | Device Server Action | Condition Established If New Task Terminates with a CHECK CONDITION status |
|--------------------------|-------------------------|----------------------------------|--|--|
| Attribute ^a | NACA Value ^b | | | |
| ACA | 0 | No | Process the task. ^d | CA ^c |
| | 1 | No | | ACA ^c |
| | 0 or 1 | Yes | Terminate the task with ACA ACTIVE status. | n/a |
| Any Attribute Except ACA | 0 or 1 | n/a | Terminate the task with ACA ACTIVE status. | n/a |


^a Task attributes are described in 7.5.
^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).
^c If a task with the ACA attribute terminates with a CHECK CONDITION status, the existing ACA condition shall be cleared and a new CA or ACA condition shall be established based on the value of the NACA bit.
^d All the conditions that affect the processing of commands (e.g., reservations) still apply.

5.9.1.5 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect

5.9.1.5.1 Commands permitted from non-faulted initiator ports during CA or ACA

The device server shall process a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action (see SPC-2) while a CA or ACA condition is established when the command is received from a SCSI initiator port other than the faulted initiator port.

NOTE 7 - The processing of specific commands (e.g., PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action) the from SCSI initiator ports other than the faulted initiator port while a CA or ACA condition is in effect provides SCSI initiator ports other than the faulted initiator port the opportunity to recover from error conditions that the faulted initiator port cannot recover from itself.

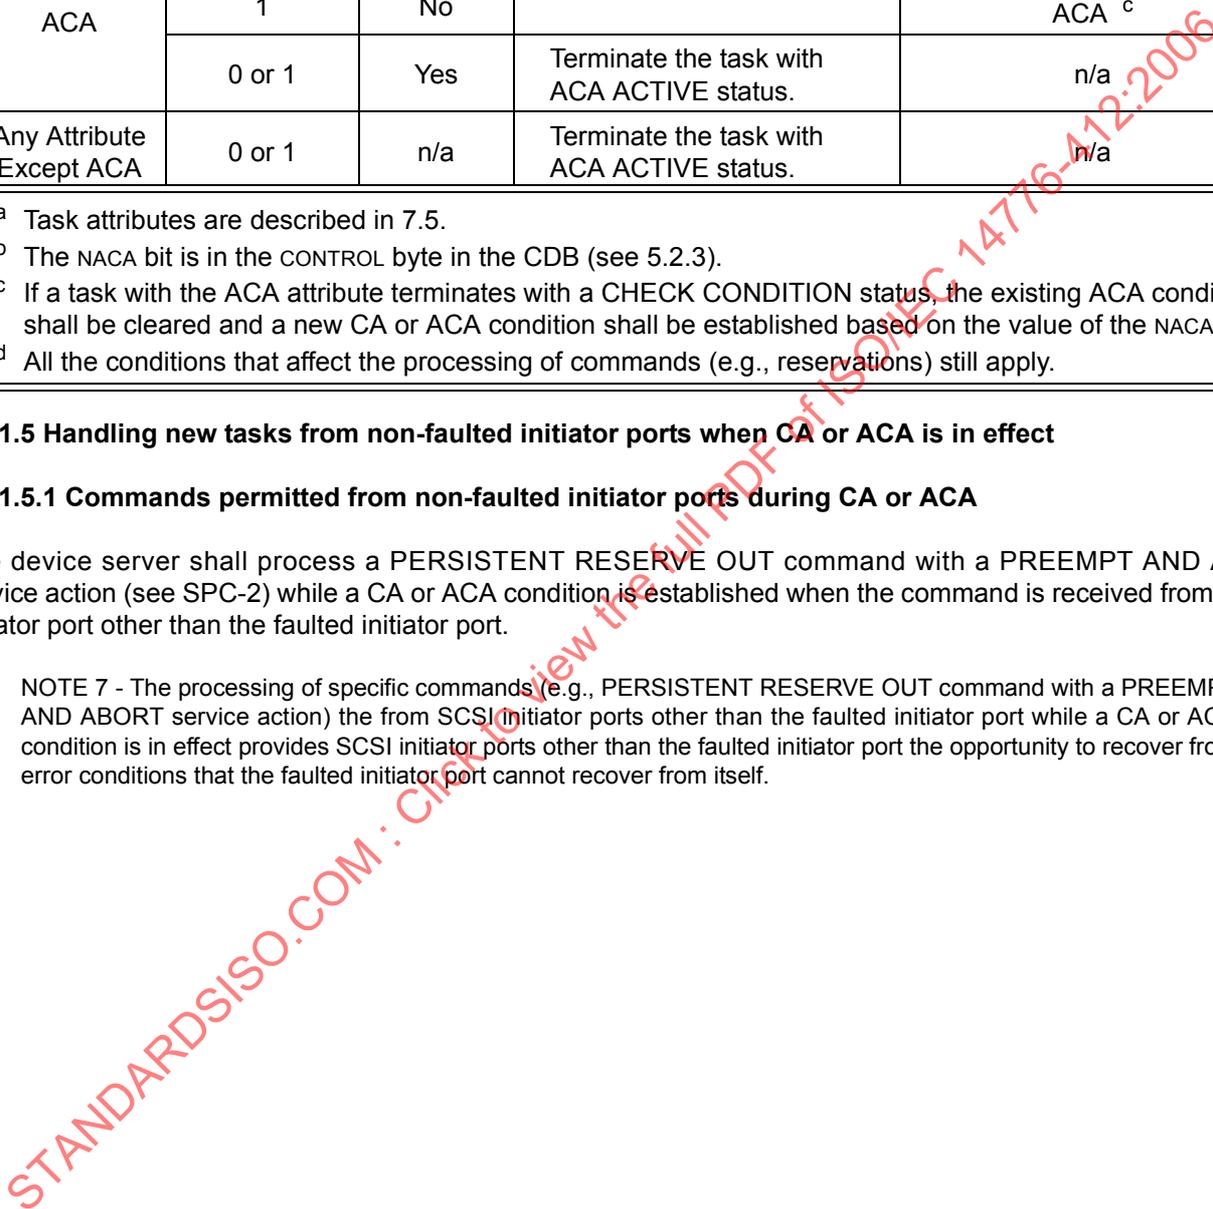

5.9.1.5.2 Handling new tasks from non-faulted initiator ports when CA or ACA is in effect

The handling of tasks created by SCSI initiator ports other than the faulted initiator port depends on the value in the TST field in the Control mode page (see SPC-2).

Table 29 describes the handling of new tasks from SCSI initiator ports other than the faulted initiator port when CA is in effect.

Table 29 — Handling for new tasks from non-faulted initiator ports during CA

| TST Field Value in Control mode page | New Task Properties | | New Command Permitted During CA ^c | Device Server Action | Condition Established If New Task Terminates with a CHECK CONDITION status |
|--------------------------------------|--------------------------|-------------------------|--|---|--|
| | Attribute ^a | NACA Value ^b | | | |
| 000b | ACA | n/a | n/a | Terminate the task with BUSY status. | n/a |
| | Any Attribute Except ACA | 0 or 1 | No | Terminate the task with BUSY status. | n/a |
| | | 0 | Yes | Process the task. | CA ^d |
| | | 1 | Yes | | ACA ^d |
| 001b | ACA | 0 | n/a | Terminate the command with CHECK CONDITION status, sense key of ILLEGAL REQUEST and additional sense code of INVALID MESSAGE ERROR. | CA |
| | | 1 | | ACA | |
| | Any Attribute Except ACA | 0 or 1 | n/a | Process the task. ^e | See 5.9.1.3. |

^a Task attributes are described in 7.5.
^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).
^c See 5.9.1.5.1.
^d If a permitted command terminates with a CHECK CONDITION status, the existing CA condition shall be cleared and a new CA or ACA condition shall be established for a new faulted initiator port based on the value of the NACA bit.
^e When the TST field in the Control mode page contains 001b, commands from SCSI initiator ports other than the faulted initiator port shall be processed as if the CA condition does not exist (see 5.9.1.3). In this case, the logical unit shall be capable of handling concurrent CA conditions and sense data for all SCSI initiator ports.

Table 30 describes the handling of new tasks from SCSI initiator ports other than the faulted initiator port when ACA is in effect.

Table 30 — Handling for new tasks from non-faulted initiator ports during ACA

| TST Field Value in Control mode page | New Task Properties | | New Command Permitted During ACA ^c | Device Server Action | Condition Established If New Task Terminates with a CHECK CONDITION status |
|--------------------------------------|--------------------------|-------------------------|---|---|--|
| | Attribute ^a | NACA Value ^b | | | |
| 000b | ACA | n/a | n/a | Terminate the task with ACA ACTIVE status. | n/a |
| | Any Attribute Except ACA | 0 | No | Terminate the task with BUSY status. | n/a |
| | | 1 | No | Terminate the task with ACA ACTIVE status. | n/a |
| | | 0 | Yes | Process the task. | CA ^d |
| | | 1 | Yes | | ACA ^d |
| 001b | ACA | 0 | n/a | Terminate the command with CHECK CONDITION status, sense key of ILLEGAL REQUEST and additional sense code of INVALID MESSAGE ERROR. | CA |
| | | 1 | | | ACA |
| | Any Attribute Except ACA | 0 or 1 | n/a | Process the task. ^e | See 5.9.1.3. |

^a Task attributes are described in 7.5.
^b The NACA bit is in the CONTROL byte in the CDB (see 5.2.3).
^c See 5.9.1.5.1.
^d If a permitted command terminates with a CHECK CONDITION status, the existing ACA condition shall be cleared and a new CA or ACA condition shall be established for a new faulted initiator port based on the value of the NACA bit.
^e When the TST field in the Control mode page contains 001b, commands from SCSI initiator ports other than the faulted initiator port shall be processed as if the ACA condition does not exist (see 5.9.1.3). In this case, the logical unit shall be capable of handling concurrent ACA conditions and sense data for all SCSI initiator ports.

5.9.1.6 Clearing a CA condition

A CA condition shall only be cleared:

- a) As a result of a power on or logical unit reset (see 5.9.7);
- b) By an ABORT TASK SET task management function (see 6.3) from the faulted initiator port;
- c) By a CLEAR TASK SET task management function (see 6.5) from any SCSI initiator port including the faulted initiator port if the TST field in the Control mode page (see SPC-2) contains 000b;
- d) By a CLEAR TASK SET task management function from the faulted initiator port if the TST field in the Control mode page (see SPC-2) contains 001b;
- e) By a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action from another SCSI initiator port that clears the tasks of the faulted initiator port (see SPC-2);
- f) When a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action from another SCSI initiator port terminates in a CHECK CONDITION status;
- g) Upon completion of a subsequent REQUEST SENSE command for the I_T_L nexus;
- h) Upon accepting any subsequent command other than a REQUEST SENSE command for the I_T_L nexus; or
- i) Upon sending sense data by means of the autosense mechanism (see 5.9.4.3).

Case f) results in the establishment of a new CA or ACA for a new faulted initiator port based on the value of the NACA bit.

When a CA condition is cleared and no new CA or ACA condition is established, the state of all tasks in the task set shall be modified as described in clause 7.

5.9.1.7 Clearing an ACA condition

An ACA condition shall only be cleared:

- a) As the result of a power on or a logical unit reset (see 5.9.7);
- b) By a CLEAR ACA task management function (see 6.4) from the faulted initiator port;
- c) By a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action with the ACA task attribute from the faulted initiator port that clears the tasks of the faulted initiator port (see SPC-2);
- d) By a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action with a task attribute other than ACA from a SCSI initiator port other than the faulted initiator port that clears the tasks of the faulted initiator port;
- e) When a command with the ACA task attribute from the faulted initiator port terminates with a CHECK CONDITION status; or
- f) When a PERSISTENT RESERVE OUT command with a PREEMPT AND ABORT service action terminates in a CHECK CONDITION status.

Cases e) and f) result in the establishment of a new CA or ACA based on the value of the NACA bit.

When an ACA condition is cleared and no new CA or ACA condition is established, the state of all tasks in the task set shall be modified as described in clause 7.

5.9.2 Overlapped commands

An overlapped command occurs when a task manager detects the use of a duplicate I_T_L_x nexus (see 4.10.1) in a command before a pending task holding that I_T_L_x nexus completes its task lifetime (see 5.5). Each SCSI transport protocol standard shall specify whether or not a task manager is required to detect overlapped commands.

A task manager that detects an overlapped command shall abort all tasks for the faulted initiator port in the task set and the device server shall return CHECK CONDITION status for that command. The sense key shall be set to ABORTED COMMAND and the additional sense code shall be set to OVERLAPPED COMMANDS ATTEMPTED.

NOTES

- 8 An overlapped command may be indicative of a serious error and, if not detected, may result in corrupted data. This is considered a catastrophic failure on the part of the SCSI initiator device. Therefore, vendor specific error recovery procedures may be required to guarantee the data integrity on the medium. The SCSI target

device logical unit may return additional sense data to aid in this error recovery procedure (e.g., sequential-access devices may return the residue of blocks remaining to be written or read at the time the second command was received).

- 9 Some logical units may not detect an overlapped command until after the CDB has been received.

5.9.3 Incorrect logical unit selection

The SCSI target device's response to an incorrect logical unit number is described in this subclause.

The logical unit number may be incorrect because:

- a) The SCSI target device does not support the logical unit (e.g., some SCSI target devices support only one peripheral device).

In response to any other command except REQUEST SENSE and INQUIRY, the SCSI target device shall terminate the command with CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to LOGICAL UNIT NOT SUPPORTED;

- b) The SCSI target device supports the logical unit, but the peripheral device is not currently attached to the SCSI target device.

In response to an INQUIRY command the SCSI target device shall return the INQUIRY data with the peripheral qualifier set to the value required in SPC-2. In response to a REQUEST SENSE command, the SCSI target device shall return sense data. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to LOGICAL UNIT NOT SUPPORTED.

In response to any other command except REQUEST SENSE and INQUIRY, the SCSI target device shall terminate the command with CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to LOGICAL UNIT NOT SUPPORTED;

- c) The SCSI target device supports the logical unit and the peripheral device is attached, but not operational.

In response to an INQUIRY command the SCSI target device shall return the INQUIRY data with the peripheral qualifier set to the value required in SPC-2. In response to REQUEST SENSE, the SCSI target device shall return sense data appropriate to the condition that is making the logical unit not operational.

The SCSI target device's response to any command other than INQUIRY and REQUEST SENSE is vendor specific; or

- d) The SCSI target device supports the logical unit but is incapable of determining if the peripheral device is attached or is not operational when it is not ready.

In response to an INQUIRY command the SCSI target device shall return the INQUIRY data with the peripheral qualifier set to the value specified in SPC-2. In response to a REQUEST SENSE command the SCSI target device shall return the REQUEST SENSE data with a sense key of NO SENSE.

The SCSI target device's response to any other command is vendor specific.

5.9.4 Sense data

5.9.4.1 Sense data introduction

Sense data shall be made available by the logical unit in the event a command completes with a CHECK CONDITION status or other conditions. The format, content and conditions under which sense data shall be prepared by the logical unit are specified in this standard, SPC-2, the applicable command set standard and applicable SCSI transport protocol standard.

Sense data shall be preserved by the logical unit for the SCSI initiator port until it is transferred by one of the methods listed below or until another task from that SCSI initiator port is entered into the task set.

The sense data may be transferred to the SCSI initiator device through any of the following methods:

- a) The REQUEST SENSE command (see SPC-2);
- b) An asynchronous event report (see 5.9.4.2); or
- c) Autosense delivery (see 5.9.4.3).

5.9.4.2 Asynchronous event reporting

Asynchronous event reporting is used by a logical unit to signal another SCSI device that an asynchronous event has occurred. The mechanism automatically returns sense data associated with the event. Each SCSI transport protocol standard should describe a mechanism for asynchronous event reporting. In this subclause, references to asynchronous event reporting assume that the SCSI device to be notified has enabled asynchronous event reports from the SCSI target device. Support for asynchronous event reporting is a logical unit option.

NOTE 10 - A SCSI device that is capable of producing asynchronous event reports at initialization time should provide means to disable generation of these reports. This may be done with a switch or jumper wire. SCSI devices that implement saved parameters may alternatively save the asynchronous event reporting permissions either on a per SCSI device basis or as a system wide option.

Parameters managing the use of asynchronous event reporting are contained in the Control mode page (see SPC-2).

Asynchronous event reporting is used to signal a SCSI device that one of the following events has occurred:

- a) An exception condition was encountered after command completion;
- b) A newly initialized device is available;
- c) Some other type of unit attention condition has occurred; or
- d) An asynchronous event has occurred.

An example of a) occurs in a SCSI target device that implements a write cache. If the SCSI target device is unable to write cached data to the medium, it may use an asynchronous event report to inform the SCSI initiator device of the failure.

An example of b) is a logical unit that generates an asynchronous event report, following a power-on cycle, to notify other SCSI devices that it is ready to accept I/O commands.

An example of c) occurs in a SCSI target device that supports removable media. Asynchronous event reporting may be used to inform a SCSI initiator device of a not-ready-to-ready transition (medium changed) or of an operator initiated event (e.g., activating a write protect switch or activating a start or stop switch).

An example of d) is a sequential-access device performing a REWIND command with the IMMEDIATE bit set to one (see SSC). An asynchronous event report may be used to inform a SCSI initiator device that the beginning of medium has been reached. Completion of a CD-ROM AUDIO PLAY command (see MMC-2) started in the immediate mode is another example of this case.

Sense data accompanying the asynchronous event report identifies the condition (see 5.9.4.1).

An exception condition encountered after command completion shall be reported to a specific SCSI initiator port once per occurrence of the event causing it. The logical unit may choose to use an asynchronous event report or to return CHECK CONDITION status on a subsequent command, but not both. Notification of an exception condition encountered after command completion shall be reported only to the SCSI initiator port or SCSI initiator ports that sent the affected task or tasks.

Asynchronous event reports may be used to notify SCSI devices that a system resource has become available. If a logical unit uses this method of reporting, the sense key in the asynchronous event report sense data shall be set to UNIT ATTENTION.

5.9.4.3 Autosense

Autosense is the automatic return of sense data to the application client coincident with the completion of a SCSI command under the conditions described in this subclause. Except for the SCSI Parallel Interface with information unit transfers disabled (see SPI-4), all SCSI transport protocols shall support autosense.

If supported by the SCSI transport protocol and logical unit and requested by the **Execute Command** remote procedure call (see 5.1), the device server shall only return sense data in this manner coincident with the

completion of a command with a status of CHECK CONDITION. After autosense data is sent the following shall be cleared:

- a) The CA condition (see 5.9.1.6), if any; and
- b) The sense data, except sense data associated with an unit attention condition when the UA_INTLCK_CTRL field in the Control mode page (see SPC-3) contains 10b or 11b.

Autosense shall not affect ACA (see 5.9.1) or the sense data associated with an unit attention condition when the UA_INTLCK_CTRL field contains 10b or 11b.

SCSI transport protocol standards that support autosense shall require an autosense implementation to:

- a) Notify the logical unit when autosense data has been requested for a command; and
- b) Inform the application client when autosense data has been returned upon command completion (see 5.1).

It is not an error for the application client to request the automatic return of sense data when autosense is not supported by the SCSI transport protocol or logical unit implementation. If the application client requested the return of sense data through the autosense facility and the SCSI transport protocol layer does not support this feature, then the confirmation returned by the SCSI initiator port should indicate that no sense data was returned. If the SCSI transport protocol layer supports autosense but the logical unit does not, then the SCSI target device should indicate that no sense data was returned. In either case, sense information shall be preserved and the application client may issue a command to retrieve it.

5.9.5 Unit Attention condition

Each logical unit shall generate an unit attention condition whenever the logical unit has been reset as described in 5.9.7 or by a power-on reset. In addition, a logical unit shall generate an unit attention condition for each SCSI initiator port whenever one of the following events occurs:

- a) A removable medium may have been changed;
- b) The mode parameters in effect for this SCSI initiator port have been changed by another SCSI initiator port (see SPC-2);
- c) The version or level of microcode has been changed (see SPC-2);
- d) Tasks for this SCSI initiator port were cleared by another SCSI initiator port;
- e) INQUIRY data has been changed (see SPC-2);
- f) The logical unit inventory has been changed (see SPC-2);
- g) The mode parameters in effect for the SCSI initiator port have been restored from non-volatile memory (see SPC-2);
- h) A change in the condition of a synchronized spindle; or
- i) Any other event requiring the attention of the SCSI initiator device.

Logical units may queue unit attention conditions. After the first unit attention condition is cleared, another unit attention condition may exist (e.g., a power on condition followed by a microcode change condition).

An unit attention condition shall persist on the logical unit for each SCSI initiator port until that SCSI initiator port clears the condition as described in the remainder of this subclause.

If an INQUIRY command enters the enabled task state, the logical unit shall perform the INQUIRY command and shall neither report nor clear any unit attention condition.

If a REPORT LUNS command enters the enabled task state, the logical unit shall perform the REPORT LUNS command and shall not report any unit attention condition. The logical unit shall clear any unit attention condition established in response to a change in the logical unit inventory for all logical units for the SCSI initiator port that sent the REPORT LUNS command. The logical unit shall not clear any other unit attention condition.

If a REQUEST SENSE command enters the enabled task state while an unit attention condition exists for the SCSI initiator port that sent the REQUEST SENSE command, then the logical unit shall either:

- a) Report any pending sense data and preserve all unit attention conditions on the logical unit; or,
- b) Report an unit attention condition for the SCSI initiator port that sent the REQUEST SENSE command. The logical unit may discard any pending sense data and shall clear the reported unit attention condition for that SCSI initiator port.

If the logical unit has already generated the CA or ACA condition for an unit attention condition, the logical unit shall report the unit attention condition (i.e., option b) above).

If a command other than INQUIRY, REPORT LUNS, or REQUEST SENSE enters the enabled task state while an unit attention condition exists for the SCSI initiator port that sent the command, the logical unit shall terminate the command with a CHECK CONDITION status. The logical unit shall provide sense data that reports an unit attention condition for the SCSI initiator port that sent the command.

If a logical unit reports an unit attention condition with autosense (see 5.9.4.3) or with an asynchronous event report (see 5.9.4.2) and the UA_INTLCK_CTRL field in the Control mode page contains 00b (see SPC-3), then the logical unit shall clear the reported unit attention condition for that SCSI initiator port on the logical unit. If the UA_INTLCK_CTRL field in the Control mode page contains 10b or 11b, the logical unit shall not clear unit attention conditions reported with autosense or an asynchronous event report.

5.9.6 Hard reset

A hard reset is a SCSI target port action in response to a reset event within the service delivery subsystem. A wakeup event (see 3.1.133) is a reset event. The definition of additional reset events is SCSI transport protocol specific. Each SCSI transport protocol standard that defines reset events shall specify the SCSI target port's action in response to reset events.

The SCSI target port's response to a hard reset shall include initiating the equivalent of a logical unit reset for all logical units as described in 5.9.7.

While the task manager response to task management requests is subject to the presence of access restrictions, as managed by ACCESS CONTROL OUT commands (see SPC-3), a hard reset in response to a reset event within the service delivery subsystem shall be unaffected by access controls.

5.9.7 Logical unit reset

A logical unit reset is:

- a) The action in response to a LOGICAL UNIT RESET task management request (see 6.6) or some other logical unit reset event; or
- b) One of the actions in response to a TARGET RESET task management function (see 6.7) or a hard reset (see 5.9.6).

The definition of logical unit reset events is dependent on the SCSI transport protocol.

To process a logical unit reset the logical unit shall:

- a) Abort all tasks as described in 5.7;
- b) Clear a CA (see 5.9.1.6) or ACA (see 5.9.1.7) condition, if one is present;
- c) Release all reservations established using the reserve/release management method (persistent reservations shall not be affected);
- d) Return the logical unit's operating mode to the appropriate initial conditions, similar to those conditions that would be found following device power-on. The MODE SELECT parameters (see SPC-2) shall be restored to their last saved values if saved values have been established. MODE SELECT parameters for which no saved values have been established shall be returned to their default values;
- e) Set an unit attention condition (see 5.9.5); and
- f) Initiate a logical unit reset for all dependent logical units (see 4.13).

In addition to the above, the logical unit shall perform any additional functions required by the applicable standards.

6 Task management functions

6.1 Introduction

Task management functions control the processing of one or more tasks. An application client requests a task management function by means of a procedure call having the following format:

Service Response = Function name (IN (nexus))

Service Response:

One of the following SCSI transport protocol specific responses shall be returned:

- FUNCTION COMPLETE:** A task manager response indicating that the requested function is complete. The task manager shall unconditionally return this response upon completion of a task management request supported by the logical unit or SCSI target device to which the request was directed.
- FUNCTION REJECTED:** An task manager response indicating that the operation is not supported by the logical unit or SCSI target device to which the function was directed.
- SERVICE DELIVERY OR TARGET FAILURE:** The request was terminated due to a service delivery failure (see 3.1.108) or SCSI target device malfunction. The task manager may or may not have successfully performed the specified function.

Each SCSI transport protocol standard shall define the actual events comprising each of the above service responses.

The task management functions are summarized in table 31.

Table 31 — Task Management Functions

| Task Management Function | Nexus | Reference |
|--------------------------|---------|-----------|
| ABORT TASK | I_T_L_Q | 6.2 |
| ABORT TASK SET | I_T_L | 6.3 |
| CLEAR ACA | I_T_L | 6.4 |
| CLEAR TASK SET | I_T_L | 6.5 |
| LOGICAL UNIT RESET | I_T_L | 6.6 |
| TARGET RESET | I_T | 6.7 |
| WAKEUP | I_T | 6.8 |

Argument descriptions:

Nexus: An I_T Nexus, I_T_L Nexus, or I_T_L_Q Nexus (see 4.11).

I_T Nexus: A SCSI initiator port and SCSI target port nexus (see 4.11).

I_T_L Nexus: A SCSI initiator port, SCSI target port, and logical unit nexus (see 4.11).

I_T_L_Q Nexus: A SCSI initiator port, SCSI target port, logical unit, and tag nexus (see 4.11).

The task manager response to task management requests is subject to the presence of access restrictions, as managed by ACCESS CONTROL OUT and ACCESS CONTROL IN commands (see SPC-3), as follows:

- a) A task management request of ABORT TASK, ABORT TASK SET, or CLEAR ACA shall not be affected by the presence of access restrictions;
- b) A task management request of CLEAR TASK SET or LOGICAL UNIT RESET received from a SCSI initiator port that is denied access to the logical unit (either because it has no access rights or because it is in the pending-enrolled state) shall cause no change to the logical unit;

- c) A TARGET RESET task management request shall initiate a logical unit reset as described in 5.9.7 for all logical units to which the SCSI initiator port has access, and shall cause no change to any logical units to which the SCSI initiator port is denied access; and
- d) The task management function Service Response shall not be affected by the presence of access restrictions.

6.2 ABORT TASK

Function call:

Service Response = ABORT TASK (IN (I_T_L_Q Nexus))

Description:

This function shall be supported by a logical unit if it supports tagged tasks and may be supported by a logical unit if it does not support tagged tasks.

The task manager shall abort the specified task, if it exists, as described in 5.7. Previously established conditions, including MODE SELECT parameters, reservations, CA, and ACA shall not be changed by the ABORT TASK function.

If the logical unit supports this function, a response of FUNCTION COMPLETE shall indicate that the task was aborted or was not in the task set. In either case, the SCSI target device shall guarantee that no further responses from the task are sent to the SCSI initiator port.

All SCSI transport protocol standards shall provide the functionality needed for a task manager to implement the ABORT TASK task management function.

6.3 ABORT TASK SET

Function Call:

Service Response = ABORT TASK SET (IN (I_T_L Nexus))

Description:

This function shall be supported by all logical units.

The task manager shall abort all tasks in the task set that were created by the SCSI initiator port routed through the SCSI target port as described in 5.7.

The task manager shall perform an action equivalent to receiving a series of ABORT TASK requests. All tasks from that SCSI initiator port in the task set shall be aborted. Tasks from other SCSI initiator ports or in other task sets shall not be aborted. A CA shall be cleared by the ABORT TASK SET function from the faulted initiator port (see 5.9.1.6). Other previously established conditions, including MODE SELECT parameters, reservations, and ACA shall not be changed by the ABORT TASK SET function.

All SCSI transport protocol standards shall provide the functionality needed for a task manager to implement the ABORT TASK SET task management function.

6.4 CLEAR ACA

Function Call

Service response = CLEAR ACA (IN (I_T_L Nexus))

Description:

This function shall be supported by a logical unit if it supports ACA (see 5.2.3).

The application client issues CLEAR ACA to clear an ACA condition from the task set serviced by the logical unit as specified in 5.9.1.7. For tasks with the ACA attribute (see 7.5.4) receipt of an CLEAR ACA function shall have the same effect as receipt of an ABORT TASK function (see 6.2). If successful, this function shall be terminated with a service response of FUNCTION COMPLETE.

If the task manager clears the ACA condition, any task within that task set may be completed subject to the requirements for task set management specified in clause 7.

While a CA is in effect (see 5.9.1), a logical unit that supports the CLEAR ACA task management function shall ignore all CLEAR ACA requests and shall return a service response of FUNCTION COMPLETE.

All SCSI transport protocol standards shall provide the functionality needed for a task manager to implement the CLEAR ACA task management function.

6.5 CLEAR TASK SET

Function Call:

Service response = CLEAR TASK SET (IN (I_T_L Nexus))

Description:

This function shall be supported by all logical units, except in the following cases, when support for this function is optional:

- a) The logical unit does not support tagged tasks (see 4.10); or
- b) The logical unit supports the basic task management model (see 7.2).

All tasks in the appropriate task set as defined by the TST field in the Control mode page (see SPC-2) shall be aborted as described in 5.7. The medium may have been altered by partially processed commands.

The CA condition (see 5.9.1.6), and all pending status and sense data for the task set defined by the TST field in the Control mode page shall be cleared. Other previously established conditions, including MODE SELECT parameters, reservations, and ACA shall not be changed by the CLEAR TASK SET function.

All SCSI transport protocol standards shall provide the functionality needed for a task manager to implement the CLEAR TASK SET task management function.

6.6 LOGICAL UNIT RESET

Function Call:

Service Response = LOGICAL UNIT RESET (IN (I_T_L Nexus))

Description:

This function shall be supported by all logical units.

Before returning a FUNCTION COMPLETE response, the logical unit shall perform the logical unit reset functions specified in 5.9.7.

NOTE 11 - Previous versions of this standard only required LOGICAL UNIT RESET support in logical units that supported hierarchical logical units.

All SCSI transport protocol standards shall provide the functionality needed for a task manager to implement the LOGICAL UNIT RESET task management function.

6.7 TARGET RESET

Function Call:

Service Response = TARGET RESET (IN (I_T Nexus))

Description:

Before returning a FUNCTION COMPLETE response, the SCSI target port shall cause logical unit reset functions to be performed as specified in 5.9.7 for every logical unit.

An application client should issue LOGICAL UNIT RESETs only to the logical units it is using rather than issuing a TARGET RESET. This avoids resetting logical units that other SCSI initiator ports, possibly in other SCSI initiator devices, may be using.

NOTE 12 - Previous versions of this standard required TARGET RESET support in all SCSI target devices. SCSI transport protocols may or may not require that TARGET RESET be supported. SCSI transport protocols may require additional actions beyond those specified here.

6.8 WAKEUP

Function Call:

Service response = WAKEUP (IN (I_T Nexus))

Description:

SCSI transport protocols may or may not define the WAKEUP function. This function may be supported by SCSI transport protocols whose interconnects support a shared wakeup signal or individual wakeup signals for each SCSI target port. This function may be supported by SCSI devices on SCSI transport protocols that support the function.

This function causes a wakeup event (see SPC-3) to be sent to either:

- a) The specified SCSI target port, on SCSI transport protocols supporting individual wakeup signals; or
- b) All SCSI target ports connected to the interconnect, on SCSI transport protocols supporting a shared wakeup signal.