
**Information technology — 130 mm optical
disk cartridges for information
interchange — Capacity: 5,2 Gbytes per
cartridge**

*Technologies de l'information — Cartouches de disques optiques de
130 mm pour l'échange d'informations — Capacité: 5,2 Gbytes par
cartouche*

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999

Contents	<i>Page</i>
Section 1 - General.....	1
1 Scope.....	1
2 Conformance.....	2
2.1 Optical Disk Cartridge (ODC)	2
2.2 Generating system.....	2
2.3 Receiving system.....	2
2.4 Compatibility statement	2
3 Reference	2
4 Definitions.....	2
4.1 asymmetry	3
4.2 band.....	3
4.3 case.....	3
4.4 clamping zone	3
4.5 control track	3
4.6 Cyclic Redundancy Check (CRC).....	3
4.7 defect management.....	3
4.8 direct overwrite	3
4.9 disk reference plane.....	3
4.10 entrance surface.....	3
4.11 Error Correction Code (ECC).....	3
4.12 format	3
4.13 hub.....	3
4.14 interleaving.....	3
4.15 Kerr rotation	3
4.16 land and groove.....	3
4.17 logical track.....	3
4.18 mark	3
4.19 mark edge.....	3
4.20 mark edge recording.....	3
4.21 optical disk	3
4.22 optical disk cartridge (ODC).....	3
4.23 physical track	3
4.24 polarization.....	3
4.25 pre-recorded mark	4
4.26 read power.....	4
4.27 recording layer	4
4.28 Reed-Solomon code	4
4.29 space.....	4
4.30 spindle	4
4.31 substrate	4
4.32 track pitch.....	4

©ISO/IEC 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland
 Printed in Switzerland

4.33 write-inhibit hole	4
4.34 write once functionality	4
4.35 zone.....	4
5 Conventions and notations.....	4
5.1 Representation of numbers	4
5.2 Names	4
6 List of acronyms	5
7 General description of the optical disk cartridge	5
8 General requirements.....	6
8.1 Environments.....	6
8.1.1 Test environment	6
8.1.2 Operating environment	6
8.1.3 Storage environment.....	6
8.1.4 Transportation.....	7
8.2 Temperature shock.....	7
8.3 Safety requirements	7
8.4 Flammability.....	7
9 Reference Drive	7
9.1 Optical system	7
9.2 Optical beam.....	9
9.3 Read channels	9
9.4 Tracking.....	9
9.5 Rotation of the disk.....	10
Section 2 - Mechanical and physical characteristics.....	10
10 Dimensional and physical characteristics of the case	10
10.1 General description of the case	10
10.2 Relationship of Sides A and B.....	10
10.3 Reference axes and case reference planes.....	10
10.4 Case drawings.....	10
10.5 Dimensions of the case	11
10.5.1 Overall dimensions	11
10.5.2 Location hole	12
10.5.3 Alignment hole	12
10.5.4 Surfaces on Reference Planes P.....	12
10.5.5 Insertion slots and detent features.....	13
10.5.6 Gripper slots	14
10.5.7 Write-inhibit holes.....	14
10.5.8 Media sensor holes	15
10.5.9 Head and motor window	16
10.5.10 Shutter.....	16
10.5.11 Slot for shutter opener	17
10.5.12 Shutter sensor notch.....	17
10.5.13 User label areas.....	18
10.6 Mechanical characteristics.....	18
10.6.1 Materials	18
10.6.2 Mass.....	18
10.6.3 Edge distortion.....	18
10.6.4 Compliance	18
10.6.5 Shutter opening force.....	18
10.7 Drop test	18
11 Dimensional, mechanical and physical characteristics of the disk	19
11.1 General description of the disk	19
11.2 Reference axis and plane of the disk.....	19
11.3 Dimensions of the disk	19
11.3.1 Hub dimension.....	19
11.4 Mechanical characteristics.....	20

11.4.1	Material	21
11.4.2	Mass	21
11.4.3	Moment of inertia	21
11.4.4	Imbalance	21
11.4.5	Axial deflection	21
11.4.6	Axial acceleration	21
11.4.7	Radial runout	21
11.4.8	Radial acceleration	22
11.4.9	Tilt	22
11.5	Optical characteristics	22
11.5.1	Index of refraction	22
11.5.2	Thickness	22
11.5.3	Birefringence	22
11.5.4	Vertical Birefringence	22
11.5.5	Reflectance	23
11.5.5.1	General	23
11.5.5.2	Measured value	23
11.5.5.3	Requirement	23
12	Interface between cartridge and drive	23
12.1	Clamping method	23
12.2	Clamping force	23
12.3	Capture cylinder	23
12.4	Disk position in the operating condition	24
Section 3 - Format of information		39
13	Track geometry	39
13.1	Track shape	39
13.2	Direction of track spiral	39
13.3	Track pitch	39
13.4	Logical track number	39
13.5	Physical track number	39
14	Track format	39
14.1	Physical track layout	39
14.2	Logical track layout	40
14.3	Radial alignment	40
14.4	Sector number	40
15	Sector format	40
15.1	Sector layout	40
15.2	Sector mark	42
15.3	VFO fields	43
15.4	Address Mark (AM)	44
15.5	ID fields	44
15.6	Postamble (PA)	44
15.7	Transition Area (TA ₁)	45
15.8	Gap	45
15.9	Flag	45
15.10	Auto Laser Power Control (ALPC)	45
15.11	Sync	45
15.12	Data field	46
15.12.1	User data bytes	46
15.12.2	CRC and ECC bytes	46
15.12.3	Bytes for Sector Written Flag (SWF)	46
15.12.4	The bytes following SWF in the Data field of the 1 024-byte and 512-byte sector format	46
15.12.5	Resync bytes	47
15.13	Postamble field (PA ₂)	47
15.14	Buffer field	47
15.15	Transition Area (TA ₂)	47
16	Recording code	47

17 Formatted Zone.....	48
17.1 General description of the Formatted Zone	48
17.2 Division of the Formatted Zone.....	48
17.2.1 Lead-in Zone.....	50
17.2.2 Manufacturer Zones.....	50
17.2.2.1 Outer Manufacturer Zone	50
17.2.2.2 Inner Manufacturer Zone	51
17.2.3 User Zone	51
17.2.4 Reflective Zone.....	51
17.2.5 Control Track Zones	51
17.3 Control Track PEP Zone.....	51
17.3.1 Recording in the PEP Zone.....	52
17.3.2 Format of the tracks of the PEP Zone.....	52
17.3.2.1 Format of a sector	52
17.3.2.1.1 Preamble field.....	53
17.3.2.1.2 Sync field.....	53
17.3.2.1.3 Sector Number field.....	53
17.3.2.1.4 Data field	53
17.3.2.1.5 CRC	55
17.3.2.2 Summary of the format of the Data field of a sector.....	56
17.4 Control Track SFP Zones	56
17.4.1 Duplicate of the PEP information.....	57
17.4.2 Media information	57
17.4.3 System Information	59
18 Layout of the User Zone	60
18.1 General description of the User Zone	60
18.2 Divisions of the User Zone	60
18.3 User Area.....	61
18.4 Defect Management Areas (DMAs)	66
18.5 Disk Definition Structure (DDS)	67
18.6 Rewritable Zone.....	70
18.6.1 Location	71
18.6.2 Partitioning	71
18.7 Embossed Zone.....	71
18.7.1 Location	71
18.7.2 Partitioning	71
18.7.3 Parity sectors.....	71
18.8 Write Once Zone.....	72
18.8.1 Location	72
18.8.2 Partitioning	72
19 Defect Management in the Rewritable and Write Once Zones.....	72
19.1 Initialization of the disk.....	72
19.2 Certification.....	73
19.2.1 Slipping Algorithm	73
19.2.2 Linear Replacement Algorithm	73
19.3 Disks not certified.....	73
19.4 Write procedure	74
19.5 Primary Defect List (PDL)	74
19.6 Secondary Defect List (SDL)	75
Section 4 - Characteristics of embossed information.....	76
20 Method of testing.....	76
20.1 Environment	76
20.2 Use of the Reference Drive.....	76
20.2.1 Optics and mechanics	76
20.2.2 Read power	77
20.2.3 Read channels	77
20.2.4 Tracking.....	77
20.3 Definition of signals	77
21 Signal from grooves.....	78

21.1	Cross-track signal.....	79
21.2	Push-pull ratio.....	79
21.3	Divided push-pull signal.....	79
21.4	Phase depth.....	80
21.5	Track location.....	80
22	Signals from Headers.....	80
22.1	Sector Mark Signals.....	80
22.2	VFO signals.....	80
22.3	Address Mark, ID and PA signals.....	81
22.4	Timing jitter.....	81
22.5	Asymmetry.....	81
23	Signals from embossed Recording fields.....	81
23.1	Signal amplitude.....	81
23.2	Asymmetry.....	82
23.3	Timing Jitter.....	82
23.4	Byte Errors.....	82
24	Signals from Control Track PEP marks.....	82
Section 5 - Characteristics of the recording layer.....		83
25	Method of testing.....	83
25.1	Environment.....	83
25.2	Reference Drive.....	83
25.2.1	Optics and mechanics.....	83
25.2.2	Read power.....	83
25.2.3	Read Channel.....	84
25.2.4	Tracking.....	84
25.2.5	Signal detection for testing purposes.....	84
25.3	Write conditions.....	84
25.3.1	Write pulse and power.....	84
25.3.2	Write magnetic field and temperature.....	85
25.3.3	Pulse power determination.....	85
25.3.4	Media power sensitivity.....	85
25.4	Erase conditions.....	86
25.4.1	Erase power.....	86
25.4.2	Erase magnetic field.....	86
25.5	Definition of signals.....	86
26	Magneto-optical characteristics.....	86
26.1	Figure of merit for magneto-optical signal.....	86
26.2	Imbalance of magneto-optical signal.....	86
27	Write characteristics.....	87
27.1	Resolution.....	87
27.2	Narrow-band signal-to-noise ratio (NBSNR).....	87
27.3	Cross-talk ratio.....	88
27.3.1	Rewritable track test method.....	88
27.4	Timing Jitter.....	88
27.5	Media thermal interaction.....	89
28	Erase power determination.....	89
Section 6 - Characteristics of user data.....		90
29	Method of testing.....	90
29.1	Environment.....	90
29.2	Reference Drive.....	90
29.2.1	Optics and mechanics.....	90
29.2.2	Read power.....	90
29.2.3	Read Channel.....	90
29.2.4	Mark Quality.....	91

29.2.5 Channel bit clock	91
29.2.6 Binary-to-digital converters	91
29.2.7 Error correction	91
29.2.8 Tracking	91
30 Minimum quality of a sector	91
30.1 Headers	92
30.1.1 Sector Mark	92
30.1.2 ID fields	92
30.2 User-written data	92
30.2.1 Recording field	92
30.2.2 Byte errors	92
30.2.3 Asymmetry	92
30.2.4 Timing jitter	92
31 Data interchange requirements	92
31.1 Tracking	92
31.2 User-written data	92
31.3 Embossed data	92
31.4 Quality of disk	92
Annexes	93
A - Air cleanliness class 100 000	93
B - Edge distortion test	94
C - Compliance test	96
D - Test method for measuring the adsorbent force of the hub	98
E - CRC for ID fields	100
F - Interleave, CRC, ECC, Resync for the data field	101
G - Determination of Resync pattern	110
H - Read Channel for measuring jitter	115
J - Timing jitter measuring procedure	116
K - Definition of write pulse shape	118
L - Measurement of figure of merit	120
M - Implementation Independent Mark Quality Determination (IIMQD) for the interchange of recorded media	121
N - Requirements for interchange	124
P - Measurement implementation for Cross-track signal	126
Q - Asymmetry measuring definition	127
R - Office environment	129
S - Derivation of the operating climatic environment	130
T - Transportation	135
U - Sector retirement guidelines	136
V - Track deviation measurement	137

W - Values to be implemented in existing and future standards 141

X - Measurement of the vertical birefringence of the substrate 142

Y - Guidelines for the use of Type WO and WO-DOW ODCs 144

Z - Laser power calibration for evaluation of media power sensitivity 145

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 15286 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 23, *Optical disk cartridges for information interchange*.

Annexes A to Q form an integral part of this International Standard. Annexes R to Z are for information only.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999

Information technology - 130 mm optical disk cartridges for information interchange - Capacity: 5,2 Gbytes per cartridge

Section 1 - General

1 Scope

This International Standard specifies the characteristics of a series of related 130 mm optical disk cartridges (ODCs) by using a number of Type designations.

A disk has two sides, called Side A and Side B. Each side can have a nominal capacity of 2,6 Gbytes.

Type R/W	provides for data to be written, read and erased many times over the recording surface of the corresponding disk side, using the thermo-magnetic and magneto-optical effects.
Type P-ROM	provides for a part of the disk surface to be pre-recorded and reproduced by stamping or other means. This part of the disk is read without recourse to the magneto-optical effect. All parts which are not pre-recorded provide for data to meet the requirements of Type R/W.
Type O-ROM	provides for the whole of the disk surface to be pre-recorded and reproduced by stamping or other means. The corresponding disk sides are read without recourse to the magneto-optical effect.
Type DOW	provides for data to be written and read many times over the recording surface of the corresponding disk side, using the direct overwrite thermo-magnetic and magneto-optical effects requiring a single external magnetic field.
Type P-DOW	provides for a part of the disk surface to be pre-recorded and reproduced by stamping or other means. This part of the disk is read without recourse to the magneto-optical effect. All parts which are not pre-recorded provide for data to meet the requirements of Type DOW.
Type WO	provides write once, read multiple functionality using the thermo-magnetic and magneto-optical effects.
Type WO-DOW	provides write once, read multiple functionality using the direct overwrite thermo-magnetic and magneto-optical effects.

In addition, for each Type, this International Standard provides for cartridges containing a disk with a sector size of 512 bytes, cartridges containing a disk with a sector size of 1 024 bytes and cartridges containing a disk with a sector size of 2 048 bytes. All sectors of a disk are the same size.

This International Standard specifies

- the conditions for conformance testing and the Reference Drive;
- the environments in which the cartridges are to be operated and stored;
- the mechanical, physical and dimensional characteristics of the cartridge, so as to provide mechanical interchangeability between data processing systems;

- the format of the information on the disk, both embossed and user-written, including the physical disposition of the tracks and sectors, the error correction codes, the modulation methods used;
- the characteristics of the embossed information on the disk;
- the magneto-optical characteristics of the disk, enabling processing systems to write data onto the disk;
- the minimum quality of user-written data on the disk, enabling data processing systems to read data from the disk.

This International Standard provides for interchange between optical disk drives. Together with a Standard for volume and file structure it provides for full data interchange between data processing systems.

2 Conformance

2.1 Optical Disk Cartridge (ODC)

An ODC shall be in conformance with this International Standard if it meets all mandatory requirements specified therein.

A claim of conformance with this International Standard shall specify the Type(s) implemented.

2.2 Generating system

A claim of conformance with this International Standard shall specify which of Types R/W, DOW, P-ROM, P-DOW, O-ROM, WO and WO-DOW is(are) supported. A system generating an ODC for interchange shall be in conformance with this International Standard if it meets the mandatory requirements of this Standard for the Type(s) supported.

2.3 Receiving system

A claim of conformance with this International Standard shall specify which Type(s) is(are) supported.

A system receiving an ODC for interchange shall be in conformance with this International Standard if it is able to process any recording made on the cartridge according to 2.1 on the Type(s) specified.

2.4 Compatibility statement

A claim of conformance with this International Standard shall include a statement listing any other International Optical Disk Cartridge Standard supported by the system for which conformance is claimed. This statement shall specify the number of the Standard (s), including, where appropriate, the ODC Type(s), or the Types of side, and whether support includes reading only or both reading and writing.

3 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

IEC 60950:1991, *Safety of information technology equipment*.

4 Definitions

For the purposes of this International Standard, the following definitions apply.

- 4.1 asymmetry** : The deviation between the centre levels of the signals which give maximum and minimum amplitude.
- 4.2 band** : An annular area within the user zone on the disk having a constant clock frequency.
- 4.3 case** : The housing for an optical disk, that protects the disk and facilitates disk interchange.
- 4.4 clamping zone** : The annular part of the disk within which the clamping force is applied by the clamping device.
- 4.5 control track** : A track containing the information on media parameters and format necessary for writing, reading and erasing the remaining tracks on the optical disk.
- 4.6 Cyclic Redundancy Check (CRC)** : A method for detecting errors in data.
- 4.7 defect management** : A method for handling the defective areas on the disk.
- 4.8 direct overwrite**: a thermo-magnetic recording method using a specially designed media that does not require a separate erase pass.
- 4.9 disk reference plane** : A plane defined by the perfectly flat annular surface of an ideal spindle onto which the clamping zone of the disk is clamped, and which is normal to the axis of rotation.
- 4.10 entrance surface** : The surface of the disk on to which the optical beam first impinges.
- 4.11 Error Correction Code (ECC)** : An error-detecting code designed to correct certain kinds of errors in data.
- 4.12 format** : The arrangement or layout of information on the disk.
- 4.13 hub** : The central feature on the disk which interacts with the spindle of the disk drive to provide radial centring and the clamping force.
- 4.14 interleaving** : The process of allocating the physical sequence of units of data so as to render the data more immune to burst errors.
- 4.15 Kerr rotation** : The rotation of the plane of polarization of an optical beam upon reflection from the recording layer as caused by the magneto-optical Kerr effect.
- 4.16 land and groove** : A trench-like feature of the disk, applied before the recording of any information, and used to define the track location. The groove is located nearer to the entrance surface than the land with which it is paired to form a track.
- 4.17 logical track** : Either 31 consecutive sectors for disks with 512-byte sectors, 17 consecutive sectors for disks with 1 024-byte sectors or 7 consecutive sectors for disks with 2 048-byte sectors in one or more physical tracks. The first sector of each logical track is assigned sector number 0.
- 4.18 mark** : A feature of the recording layer which may take the form of a magnetic domain, a pit, or any other type or form that can be sensed by the optical system. The pattern of marks represents the data on the disk.
- NOTE - Subdivisions of a sector which are named "mark" are not marks in the sense of this definition
- 4.19 mark edge** : The transition between a region with a mark and one without a mark or vice versa, along the track.
- 4.20 mark edge recording** : A recording method which uses a mark edge to represent a Channel bit.
- 4.21 optical disk** : A disk that will accept and retain information in the form of marks in a recording layer, that can be read with an optical beam.
- 4.22 optical disk cartridge (ODC)**: A device consisting of a case containing an optical disk.
- 4.23 physical track** : The path which is followed by the focus of the optical beam during one revolution of the disk. This path is not directly addressable.
- 4.24 polarization** : The direction of polarization of an optical beam is the direction of the electric vector of the beam.

NOTE - The plane of polarization is the plane containing the electric vector and the direction of propagation of the beam. The polarization is right-handed when to an observer looking in the direction of propagation of the beam, the end-point of the electric vector would appear to describe an ellipse in the clockwise sense.

4.25 pre-recorded mark : A mark so formed as to be unalterable by magneto-optical means.

4.26 read power : The read power is the optical power, incident at the entrance surface of the disk, used when reading.

NOTE - It is specified as a maximum power that may be used without damage to the written data. Lower power may be used providing that the signal-to-noise ratio and other requirements of this International Standard are met.

4.27 recording layer : A layer of the disk on, or in, which data is written during manufacture and/or use.

4.28 Reed-Solomon code : An error detection and/or correction code which is particularly suited to the correction of errors which occur in bursts or are strongly correlated.

4.29 space : The area between marks along the track.

4.30 spindle : The part of the disk drive which contacts the disk and/or hub.

4.31 substrate : A transparent layer of the disk, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer.

4.32 track pitch : The distance between adjacent track centrelines, measured in a radial direction.

4.33 write-inhibit hole : A hole in the case which, when detected by the drive to be open, inhibits both write and erase operations.

4.34 write-once functionality : A technique whereby a rewritable MO ODC is restricted to initialization and writing once only; erase is not permitted.

4.35 zone : An annular area of the disk.

5 Conventions and notations

5.1 Representation of numbers

- A measured value is rounded off to the least significant digit of the corresponding specified value. It implies that a specified value of 1,26 with a positive tolerance of +0,01, and a negative tolerance of -0,02 allows a range of measured values from 1,235 to 1,275.

- Letters and digits in parentheses represent numbers in hexadecimal notation.

- The setting of a bit is denoted by ZERO or ONE.

- Numbers in binary notation and bit combinations are represented by strings of ZEROs and ONES.

- Numbers in binary notation and bit combinations are shown with the most significant bit to the left.

- Negative values of numbers in binary notation are given in TWO's complement.

- In each field the data is recorded so that the most significant byte (byte 0) is recorded first. Within each byte the least significant bit is numbered 0 and is recorded last, the most significant bit (numbered 7 in an 8-bit byte) is recorded first. This order of recording applies also to the data input of the Error Detection and Correction circuits and their output.

- Unless otherwise stated, groups of decimal digits of the form xx ... x/yy ... y/zz ... z indicate that the value xx ... x applies to 2 048-byte sectors, yy ... y applies to 1 024-byte sectors and that the value zz ... z applies to 512-byte sectors.

5.2 Names

The names of entities, e.g. specific tracks, fields, etc., are given with a capital initial.

6 List of acronyms

ALPC	Auto Laser Power Control
AM	Address Mark
CRC	Cyclic Redundancy Code
DDS	Disk Definition Structure
DMA	Defect Management Area
DMP	Defect Management Pointers
DOW	Direct Overwrite
ECC	Error Correction Code
EDAC	Error Detection And Correction
ID	Identifier
LBA	Logical Block Address
LSB	Least Significant Byte
MO	Magneto-Optical
MSB	Most Significant Byte
ODC	Optical Disk Cartridge
O-ROM	Optical Read Only Memory
PA	Postamble
PDL	Primary Defect List
PEP	Phase-Encoded Part of the Control Tracks
P-DOW	Partial ROM Direct Overwrite
P-ROM	Partial Read Only Memory
RLL(1,7)	Run Length Limited (code)
R-S	Reed-Solomon (code)
R/W	Rewritable
R-S/LDC	Reed-Solomon Long Distance Code
SCSI	Small Computer System Interface
SDL	Secondary Defect List
SFP	Standard Formatted Part of the Control Tracks
SM	Sector Mark
SWF	Sector Written Flag
TA	Transition Area
TIA	Time Interval Analyzer
VFO	Variable Frequency Oscillator
WO	Write Once
WO-DOW	Write Once Direct Overwrite
ZCAV	Zoned Constant Angular Velocity

7 General description of the optical disk cartridge

The optical disk cartridge which is the subject of this International Standard consists of a case containing an optical disk.

The case is a protective enclosure for the disk. It has access windows covered by a shutter. The windows are automatically uncovered by the drive when the cartridge is inserted into it.

The optical disk consists of two sides assembled together with their recording layers on the inside.

The optical disk may be recordable on both sides. Data can be written onto the disk as marks in the form of magnetic domains in the recording layer and can be erased from it with a focused optical beam, using the thermo-magnetic effect. Data may be written over existing data by modulating the intensity of the optical beam. The data can be read with a focused optical beam, using the magneto-optical effect. The beam accesses the recording layer through the transparent substrate of the disk.

Part of the disk or the entire disk may contain read-only data in the form of pre-embossed pits. This data can be read using the diffraction of the optical beam by the embossed pits.

The entire disk may be used for write once recording of data using the thermo-magnetic effect. This data can be read using the magneto-optic effect.

8 General requirements

8.1 Environments

8.1.1 Test environment

The test environment is the environment where the air immediately surrounding the optical disk cartridge has the following properties:

temperature	: 23 °C ± 2 °C
relative humidity	: 45 % to 55 %
atmospheric pressure	: 60 kPa to 106 kPa
air cleanliness	: Class 100 000 (see annex A)

No condensation on or in the optical disk cartridge shall occur. Before testing, the optical disk cartridge shall be conditioned in this environment for 48 hours minimum. It is recommended that, before testing, the entrance surface of the disk be cleaned according to the instructions of the manufacturer of the disk.

Unless otherwise stated, all tests and measurements shall be made in this test environment.

8.1.2 Operating environment

This International Standard requires that an optical disk cartridge which meets all requirements of this Standard in the specified test environment provides data interchange over the specified ranges of environmental parameters in the operating environment. (See also annex R.)

The operating environment is the environment where the air immediately surrounding the optical disk cartridge has the following properties:

temperature	: 5 °C to 55 °C
relative humidity	: 3 % to 85 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 10 °C/h max.
relative humidity gradient	: 10 %/h max.
air cleanliness	: office environment (see also annex R.1)
magnetic field strength at the recording layer for any condition under which a beam is in focus	: 32 000 A/m max. (see also annex R.2)
magnetic field strength at the recording layer during any other condition	: 48 000 A/m max.

No condensation on or in the optical disk cartridge shall occur. If an optical disk cartridge has been exposed to conditions outside those specified in this clause, it shall be acclimatized in an allowed operating environment for at least 2 hours before use. (See also annex S).

8.1.3 Storage environment

The optical disk cartridge without any protective enclosure shall not be stored in an environment outside the range allowed for storage. The storage environment is defined as an environment where the air immediately surrounding the optical disk cartridge has the following properties:

temperature	: -10 °C to 55 °C
relative humidity	: 3 % to 90 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 15 °C/h max.
relative humidity gradient	: 10 %/h max.
air cleanliness	: Office environment (see also annex R.1)

magnetic field strength at the recording layer: 48 000 A/m max.

No condensation on or in the optical disk cartridge shall occur.

8.1.4 Transportation

This International Standard does not specify requirements for transportation; guidance is given in annex T.

8.2 Temperature shock

The optical disk cartridge shall withstand a temperature shock of up to 20 °C when inserted into, or removed from, the drive.

8.3 Safety requirements

The cartridge shall satisfy the safety requirements of Standard IEC 60950, when used in the intended manner or in any foreseeable use in an information processing system.

8.4 Flammability


The cartridge and its components shall be made from materials that comply with the flammability class for HB materials, or better, as specified in Standard IEC 60950.

9 Reference Drive

The Reference Drive is a drive several critical components of which have well defined properties and which is used to test the write, read and erase parameters of the disk for conformance to this International Standard. The critical components vary from test to test. This clause gives an outline of all components; components critical for tests in specific clauses are specified in those clauses.

9.1 Optical system

The basic set-up of the optical system of the Reference Drive used for measuring the write, read and erase parameters is shown in figure 1. Different components and locations of components are permitted, provided that the performance remains the same as that of the set-up in figure 1. The optical system shall be such that the detected light reflected from the entrance surface of the disk is minimized so as not to influence the accuracy of the measurements.

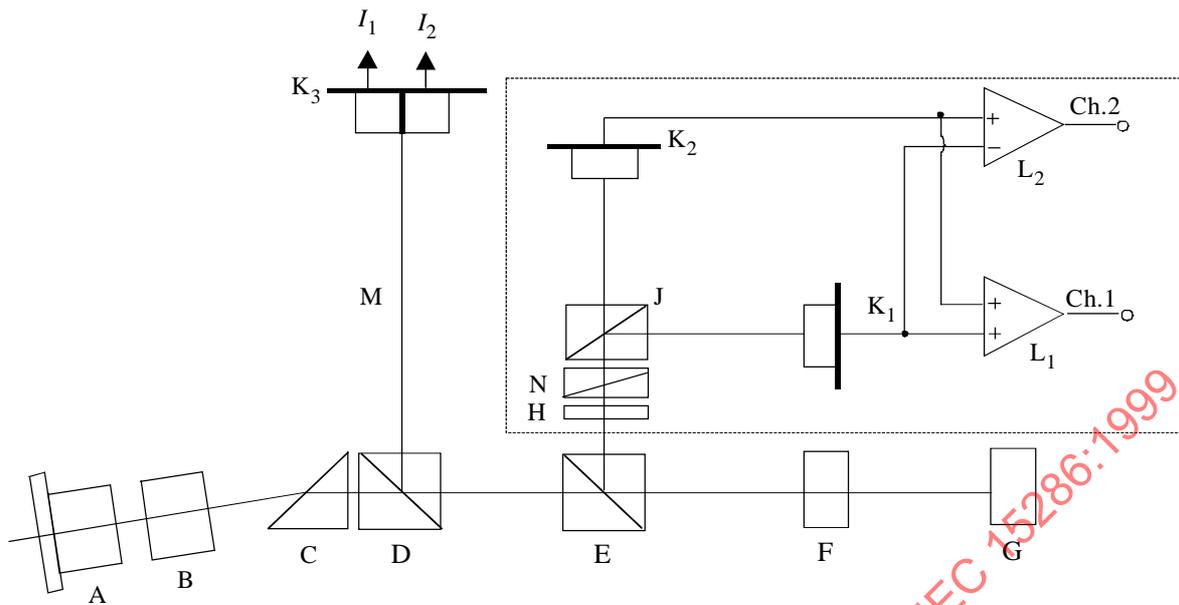

95-0041-A

A	Laser diode	G	Optical disk
B	Collimator lens	H	Optional half-wave plate
C	Optional shaping prism	I_1, I_2	Tracking signals from photodiode K_3
Ch.1	Channel 1	J	Polarizing beam splitter
Ch.2	Channel 2	K_1, K_2	Photodiodes for Channels 1 and 2
D	Beam splitter	K_3	Split photodiode
E	Polarizing beam splitter	L_1, L_2	d.c.-coupled amplifiers
F	Objective lens	M	Tracking Channel (see 20.3)
		N	Phase retarder

Figure 1 - Optical system of the Reference Drive

In the absence of polarization changes in the disk, the polarizing beam splitter J shall be aligned to make the signal of detector K_1 equal to that of detector K_2 . The direction of polarization in this case is called the neutral direction. The phase retarder N shall be adjusted such that the optical system does not have more than $2,5^\circ$ phase retardation between the neutral polarization and the polarization perpendicular to it. This position of the retarder is called the neutral position.

The phase retarder can be used for the measurement of the narrow-band signal-to-noise ratio (see 27.2).

The beam splitter J shall have a p-s intensity reflectance ratio of at least 100.

The beam splitter E shall have an intensity reflectance R_p from F to H of nominally 0,30 for the neutral polarization direction. The reflectance R_s for the polarization perpendicular to the neutral direction shall be nominally 0,95. The actual value of R_s shall not be smaller than 0,90.

The imbalance of the magneto-optical signal is specified for a beam splitter with nominal reflectance. If the measurement is made on a drive with reflectance's R_p' and R_s' for beam splitter E, then the measured imbalance shall be multiplied by

$$\sqrt{\frac{R_s R_p'}{R_p R_s'}}$$

to make it correspond to the nominal beam splitter E.

The output of Channel 1 is the sum of the currents through photodiodes K_1 and K_2 , and is used for reading embossed marks. The output of Channel 2 is the difference between photo-diode currents, and is used for reading user-written marks with the magneto-optical effect.

9.2 Optical beam

The focused optical beam used for writing, reading and erasing data shall have the following properties:

- | | | | |
|----|---|--|------------------|
| a) | Wavelength (λ) | 685 nm | +10 nm
-10 nm |
| b) | Wavelength (λ) divided by the numerical aperture of the objective lens (NA) | $\lambda / NA = 1,245 \mu\text{m} \pm 0,018 \mu\text{m}$ | |
| c) | Filling D/W of the aperture of the objective lens | $0,85 \pm 0,05$ | |
| d) | Variance of the wavefront of the optical beam near the recording layer after passing through an ideal substrate | 0 to $\lambda^2/330$ | |
| e) | Polarization | Linear - parallel to the groove where appropriate | |
| f) | Extinction ratio | 0,01 max. | |
| g) | The optical power and pulse width for writing, reading and erasing are specified in later clauses of this standard. | | |

D is the diameter of the lens aperture and W is the beam diameter of the Gaussian beam where the intensity is $1/e^2$ of the maximum intensity.

The extinction ratio is the ratio of the minimum over the maximum power observed behind a linear polarizer in the optical beam, which is rotated over at least 180° .

9.3 Read channels

Two read channels shall be provided to generate signals from the marks in the recording layer. Channel 1 shall be used for reading the embossed marks, using the diffraction of the optical beam by the marks. Channel 2 shall be used for reading the written marks, using the rotation of the polarization of optical beam due to the magneto-optical effect of the marks. The read amplifiers after the photo-detectors in Channel 1 and Channel 2 shall have a flat response within 1dB from d.c. to 37 MHz.

Unless otherwise stated, the signal of Channel 1 and 2 are not equalized before detection. The signal from both channels shall be low-pass filtered with a 3-pole Butterworth filter with a cut-off frequency of one half the Channel clock frequency.

9.4 Tracking

The Tracking Channel of the drive provides the tracking error signals to control the servos for the axial and radial tracking of the optical beam. The method of generating the axial tracking error is not

specified for the Reference Drive. The radial tracking error is generated by a split photodiode detector in the tracking Channel. The division of the diode runs parallel to the image of the tracks on the diode.

The requirements for the accuracy with which the focus of the optical beam must follow the tracks is specified in 20.2.4.

9.5 Rotation of the disk

The spindle shall position the disk as specified in 12.4. It shall rotate the disk at $50,0 \text{ Hz} \pm 0,5 \text{ Hz}$. The direction of rotation of the disk side being tested shall be counter-clockwise when viewed from the objective lens.

Section 2 - Mechanical and physical characteristics

10 Dimensional and physical characteristics of the case

10.1 General description of the case

The case (see figure 3) is a rigid protective container of rectangular shape. It has spindle windows on both sides to allow the spindle of the drive to clamp the disk by its hub. Both sides of the case have a head window, one for the optical head of the drive, the other for the magnetic head providing the necessary magnetic fields. A shutter uncovers the windows upon insertion into the drive, and automatically covers them upon removal from the drive. The case has write-inhibit, reflectance detection, and rotation direction detection features, and gripper slots for an autochanger.

10.2 Relationship of Sides A and B

The features essential for physical interchangeability are represented in figure 3. When Side A of the cartridge faces upwards, Side A of the disk faces downwards. Sides A and B of the case are identical as far as the features given here are concerned, except as noted below. The description is given for one side only. References to Sides A and B can be changed to B or A respectively.

Only the shutter and the slot for the shutter opener, described in 10.5.10 and 10.5.11, are not identical for both sides of the case.

10.3 Reference axes and case reference planes

There is a reference plane P for each side of the case. Each reference plane P contains two orthogonal axes X and Y to which the dimensions of the case are referred. The intersection of the X and Y axes defines the centre of the location hole. The X axis extends through the centre of the alignment hole.

10.4 Case drawings

The case is represented schematically by the following drawings.

- Figure 2 shows the hub dimensions.
- Figure 3 shows a composite drawing of Side A of the case in isometric form, with the major features identified from Side A.
- Figure 4 shows the envelope of the case with respect to a location hole at the intersection of the X and Y axes and reference plane P.
- Figure 5 shows the surfaces S1, S2, S3 and S4 which establish the reference plane P.
- Figure 5a shows the details of surface S3.
- Figure 6 shows the details of the insertion slot and detent.
- Figure 7 shows the gripper slots, used for automatic handling.
- Figure 8 shows the write-inhibit holes.

- Figure 9 shows the media ID sensor holes.
- Figure 10 shows the shutter sensor notch.
- Figure 11 shows the head and motor window.
- Figure 12 shows the shutter opening features.
- Figure 13 shows the capture cylinder.
- Figure 14 shows the user label areas.

10.5 Dimensions of the case

The dimensions of the case shall be measured in the test environment. The dimensions of the case in an operating environment can be estimated from the dimensions specified in this clause.

10.5.1 Overall dimensions

The total length of the case (see figure 4) shall be

$$L_1 = 153,0 \text{ mm} \pm 0,4 \text{ mm}$$

The distance from the top of the case to the reference axis X shall be

$$L_2 = 127,0 \text{ mm} \pm 0,3 \text{ mm}$$

The distance from the bottom of the case to the reference axis X shall be

$$L_3 = 26,0 \text{ mm} \pm 0,3 \text{ mm}$$

The total width of the case shall be

$$L_4 = 135,0 \text{ mm} \begin{matrix} + 0,0 \text{ mm} \\ - 0,6 \text{ mm} \end{matrix}$$

The distance from the left-hand side of the cartridge to the reference axis Y shall be

$$L_5 = 128,5 \text{ mm} \begin{matrix} + 0,0 \text{ mm} \\ - 0,5 \text{ mm} \end{matrix}$$

The distance from the right-hand side of the cartridge to the reference axis Y shall be

$$L_6 = 6,5 \text{ mm} \pm 0,2 \text{ mm}$$

The width shall be reduced on the top by the radius

$$R_1 = L_4$$

originating from a point defined by L_5 and

$$L_7 = 101,0 \text{ mm} \pm 0,3 \text{ mm}$$

The two corners of the top shall be rounded with a radius

$$R_2 = 1,5 \text{ mm} \pm 0,5 \text{ mm}$$

and the two corners at the bottom with a radius

$$R_3 = 3,0 \text{ mm} \pm 1,0 \text{ mm}$$

The thickness of the case shall be

$$L_8 = 11,00 \text{ mm} \pm 0,30 \text{ mm}$$

The eight long edges of the case shall be rounded with a radius

$$R_4 = 1,0 \text{ mm max}$$

10.5.2 Location hole

The centre of the location hole (see figure 4) shall coincide with the intersection of the reference axes X and Y. It shall have a square form with a side length of

$$L_9 = 4,10 \text{ mm} \begin{array}{l} + 0,00 \text{ mm} \\ - 0,06 \text{ mm} \end{array}$$

held to a depth of

$$L_{10} = 1,5 \text{ mm (i.e. typical wall thickness)}$$

after which a cavity extends through to the alignment hole on the opposite side of the case.

The lead-in edges shall be rounded with a radius

$$R_5 = 0,5 \text{ mm max}$$

10.5.3 Alignment hole

The centre of the alignment hole (see figure 4) shall lie on reference axis X at a distance of

$$L_{11} = 122,0 \text{ mm} \pm 0,2 \text{ mm}$$

from the reference axis Y.

The dimensions of the hole shall be

$$L_{12} = 4,10 \text{ mm} \begin{array}{l} + 0,00 \text{ mm} \\ - 0,06 \text{ mm} \end{array}$$

and

$$L_{13} = 5,0 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

held to a depth of L_{10} , after which a cavity extends through to the location hole on the opposite side of the case.

The lead-in edges shall be rounded with radius R_5 .

10.5.4 Surfaces on Reference Planes P

The reference plane P (see figures 5 and 5a) for a side of the case shall contain four surfaces (S_1 , S_2 , S_3 and S_4) on that side of the case, specified as follows:

- Two circular surfaces S_1 and S_2 .

Surface S_1 shall be a circular area centred around the square location hole and have a diameter of

$$D_1 = 9,0 \text{ mm min}$$

Surface S_2 shall be a circular area centred around the rectangular alignment hole and have a diameter of

$$D_2 = 9,0 \text{ mm min}$$

- Two elongated surfaces S_3 and S_4 , that follow the contour of the cartridge and shutter edges.

Surfaces S_3 and S_4 are shaped symmetrically.

Surface S_3 shall be defined by two circular sections with radii

$$R_6 = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

with an origin given by

$$L_{14} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{15} = 86,0 \text{ mm} \pm 0,3 \text{ mm}$$

and

$$R_7 = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

with an origin given by

$$L_{16} = 1,9 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{17} = 124,5 \text{ mm} \pm 0,3 \text{ mm}$$

The arc with radius R_7 shall continue on the right hand side with radius

$$R_8 = 134,0 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,7 \text{ mm} \end{array}$$

which is a dimension resulting from $L_5 + L_{14} + R_6$ with an origin given by L_5 and L_7 . A straight, vertical line shall smoothly join the arc of R_6 to the arc of R_8 .

The left-hand side of S_3 shall be bounded by radius

$$R_9 = 4,5 \text{ mm} \pm 0,3 \text{ mm}$$

which is a dimension resulting from $L_{18} + L_{14} - R_6$ with an origin given by

$$L_{18} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{19} = 115,5 \text{ mm} \pm 0,3 \text{ mm}$$

The left-hand side of the boundary shall be closed by two straight lines. The first one shall smoothly join the arc of R_6 to the arc of R_9 . The second one shall run from the left hand tangent of R_7 to its intersection with R_9 . Along the left hand side of surface S_3 there shall be a zone to protect S_3 from being damaged by the shutter. In order to keep this zone at a minimum practical width

$$R_{10} = 4,1 \text{ mm max}$$

This radius originates from the same point as R_9 .

10.5.5 Insertion slots and detent features

The case shall have two symmetrical insertion slots with embedded detent features (see figure 6). The slots shall have a length of

$$L_{20} = 26,0 \text{ mm} \pm 0,3 \text{ mm}$$

a width of

$$L_{21} = 6,0 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

and a depth of

$$L_{22} = 3,0 \text{ mm} \pm 0,1 \text{ mm}$$

located

$$L_{23} = 2,5 \text{ mm} \pm 0,2 \text{ mm}$$

from reference plane P.

The slots shall have a lead-in chamfer given by

$$L_{24} = 0,5 \text{ mm max}$$

$$L_{25} = 5,0 \text{ mm max}$$

The detent notch shall be a semi-circle of radius

$$R_{11} = 3,0 \text{ mm} \pm 0,2 \text{ mm}$$

with the origin given by

$$L_{26} = 13,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{27} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{73} = 114,0 \text{ mm} \pm 0,3 \text{ mm}$$

The dimensions L_2 , L_{26} , and L_{73} are interrelated, their values shall be such so that they are all three within specification.

10.5.6 Gripper slots

The case shall have two symmetrical gripper slots (see figure 7) with a depth of

$$L_{28} = 5,0 \text{ mm} \pm 0,3 \text{ mm}$$

from the edge of the case and a width of

$$L_{29} = 6,0 \text{ mm} \pm 0,3 \text{ mm}$$

The upper edge of a slot shall be

$$L_{30} = 12,0 \text{ mm} \pm 0,3 \text{ mm}$$

above the bottom of the case.

10.5.7 Write-inhibit holes

Sides A and B shall each have a write-inhibit hole (see figure 8). The case shall include a device for opening and closing each hole. The hole at the left-hand side of Side A of the case, is the write-inhibit hole for Side A of the disk. The protected side of the disk shall be made clear by inscriptions on the case or by the fact that the device for Side A of the disk can only be operated from Side A of the case.

When writing and erasing on Side A of the disk is not allowed, the write-inhibit hole shall be open all through the case. It shall have a diameter

$$D_3 = 4,0 \text{ mm min}$$

Its centre shall be specified by

$$L_{31} = 8,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{32} = 111,0 \text{ mm} \pm 0,3 \text{ mm}$$

on Side A of the case.

When writing is allowed on Side A of the disk, the write-inhibit hole shall be closed on Side A of the case, at a depth of typically L_{10} , i.e. the wall thickness of the case. In this state, the opposite side of the same hole, at Side B of the case, shall be closed and not recessed from the reference plane P of Side B of the case by more than

$$L_{33} = 0,5 \text{ mm}$$

The opposite side of the write-inhibit hole for protecting Side B of the disk shall have a diameter D_3 . Its centre shall be specified by L_{31} and

$$L_{34} = 11,0 \text{ mm} \pm 0,2 \text{ mm}$$

on Side A of the case.

10.5.8 Media sensor holes

There shall be two sets of four media sensor holes (see figure 9). The set of holes at the lower left hand corner of Side A of the case pertains to Side A of the disk. The holes shall extend through the case, and have a diameter of

$$D_4 = 4,0 \text{ mm} \begin{matrix} + 0,3 \text{ mm} \\ - 0,0 \text{ mm} \end{matrix}$$

the positions of their centres shall be specified by L_{32} , L_{34} and

$$\begin{aligned} L_{35} &= 19,5 \text{ mm} \pm 0,2 \text{ mm} \\ L_{36} &= 17,0 \text{ mm} \pm 0,2 \text{ mm} \\ L_{37} &= 23,0 \text{ mm} \pm 0,2 \text{ mm} \\ L_{38} &= 29,0 \text{ mm} \pm 0,2 \text{ mm} \\ L_{39} &= 93,0 \text{ mm} \pm 0,3 \text{ mm} \\ L_{40} &= 99,0 \text{ mm} \pm 0,3 \text{ mm} \\ L_{41} &= 105,0 \text{ mm} \pm 0,3 \text{ mm} \end{aligned}$$

A hole is deemed to be open when there is no obstruction in this hole over a diameter D_4 all through the case.

A hole for Side A of the disk is deemed to be closed, when the hole is closed on both Side A and Side B of the case. The closure shall be recessed from reference plane P by

$$L_{42} = 0,1 \text{ mm max}$$

The holes are numbered consecutively from 1 to 4. Number 1 is the hole closest to the left hand edge of the case.

Hole No. 1 shall indicate high reflectance of Type O-ROM disks. The hole shall be open for a Type O-ROM disk with high reflectance. The hole shall be closed for ODCs of Type R/W, DOW, P-ROM, P-DOW, WO, and WO-DOW specified by this standard.

Hole No. 2 shall indicate whether Side B shall not be used, in which case the hole shall be open. When Side B shall be used, the hole shall be closed.

An optical disk cartridge conforming to this International Standard does not use holes No. 3 and 4. The holes shall be closed. The meaning of the each hole shall be as in table 1.

Table 1 - Media sensor holes

Sensor hole No.	Indication	Closed	Open
1	Reflectance range of disks	Low reflectance	High reflectance
2	Disk side accessible	Yes	No
3	Not used	Always	-
4	Not used	Always	-

10.5.9 Head and motor window

The case shall have a window on each side to enable the optical head and the motor to access the disk (see figure 11). The dimensions are referenced to a centreline, located at a distance of

$$L_{46} = 61,0 \text{ mm} \pm 0,2 \text{ mm}$$

to the left of reference axis Y.

The width of the head access shall be

$$L_{47} = 20,00 \text{ mm min}$$

$$L_{48} = 20,00 \text{ mm min}$$

and its height shall extend from

$$L_{49} = 118,2 \text{ mm min to}$$

$$L_{50} = 57,0 \text{ mm max}$$

The four inside corners shall be rounded with a radius of

$$R_{12} = 3,0 \text{ mm max}$$

The motor access shall have a diameter of

$$D_5 = 35,0 \text{ mm min}$$

and its centre shall be defined by L_{46} and

$$L_{51} = 43,0 \text{ mm} \pm 0,2 \text{ mm}$$

10.5.10 Shutter

The case shall have a spring-loaded, unidirectional shutter (see figure 12) with an optional latch, designed to completely cover the head and motor windows when closed. A shutter movement of 41,5 mm minimum shall be sufficient to ensure that the head and motor window is opened to the minimum size specified in 10.5.9. The shutter shall be free to slide in a recessed area of the case in such a way as to ensure that the overall thickness of the case and shutter shall not exceed L_8 .

The right-hand side of the top of the shutter shall have a lead-in ramp with an angle

$$A_2 = 16^\circ \text{ max}$$

The distance from the reference planes P to the nearest side of the ramp shall be

$$L_{52} = 2,5 \text{ mm max}$$

The left hand side of the shutter shall not extend closer than

$$L_{52B} = 14,0 \text{ mm min}$$

to the datum plane.

10.5.11 Slot for shutter opener

The shutter shall have only one slot (see figure 12) in which the shutter opener of the drive can engage to open the shutter. The slot shall be dimensioned as follows:

When the shutter is closed, the vertical edge used to push the shutter open shall be located at a distance of

$$L_{53} = 34,5 \text{ mm} \pm 0,5 \text{ mm}$$

from reference axis Y on Side B of the case.

The length of the slot shall be

$$L_{54} = 4,5 \text{ mm} \pm 0,1 \text{ mm}$$

and the angle of the lead-out ramp shall be

$$A_3 = 52,5^\circ \pm 7,5^\circ$$

The depth of the slot shall be

$$L_{55} = 3,5 \text{ mm} \pm 0,1 \text{ mm}$$

The width of the slot from the reference plane P of Side B of the case shall be

$$L_{56} = 6,0 \text{ mm} \begin{array}{l} + 0,5 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

If a shutter latch is employed, the distance between the latch and reference plane P of Side B of the case shall be

$$L_{57} = 2,5 \text{ mm max}$$

The edges of the case beneath the shutter, upon which the shutter door opening mechanism may slide, shall have a thickness of

$$B_1 = 1,0 \text{ mm min}$$

located at

$$B_2 = 0,9 \text{ mm max}$$

from plane P (see detail A in figure 12).

The four edges shall also be straight to within

$$\text{STR (straightness of surface)} = 0,2 \text{ mm}$$

in both planes for length C_1 . (Length C_1 is defined by the manufacturer's shutter design. See detail in figure 12.)

10.5.12 Shutter sensor notch

The shutter sensor notch (see figure 10) is used to ensure that the shutter is fully open after insertion of the optical disk cartridge into the drive. Therefore, the notch shall be exposed only when the shutter is fully open.

The dimensions shall be

$$L_{43} = 3,5 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{44} = 71,0 \text{ mm} \pm 0,3 \text{ mm}$$

and

$$+ 0,0 \text{ mm}$$

$$L_{45} = 9,0 \text{ mm} \\ - 2,0 \text{ mm}$$

The notch shall have a lead-out ramp with an angle

$$A_1 = 45^\circ \pm 2^\circ$$

10.5.13 User label areas

The case shall have the following minimum areas for user labels (see figure 14):

- on Side A and Side B: 35,0 mm x 65,0 mm
- on the bottom side: 6,0 mm x 98,0 mm

These areas shall be recessed by 0,2 mm min. Their positions are specified by the following dimensions and relations between dimensions.

L_{61}	= 4,5 mm min
$L_{62} - L_{61}$	= 65,0 mm min
$L_{64} - L_{63}$	= 35,0 mm min
L_{65}	= 4,5 mm min
$L_{66} - L_{65}$	= 65,0 mm min
$L_{67} + L_{68}$	= 35,0 mm min
$L_8 - L_{71} - L_{72}$	= 6,0 mm min
$L_4 - L_{69} - L_{70}$	= 98,0 mm min

10.6 Mechanical characteristics

All requirements of this clause shall be met in the operating environment.

10.6.1 Materials

The case shall be constructed from any suitable materials such that it meets the requirements of this International Standard.

10.6.2 Mass

The mass of the case without the optical disk shall not exceed 150 g.

10.6.3 Edge distortion

The cartridge shall meet the requirement of the edge distortion test defined in annex B.

10.6.4 Compliance

The cartridge shall meet the requirement of the compliance (flexibility) test defined in annex C. The requirement guarantees that a cartridge can be constrained in the proper plane of operation within the drive.

10.6.5 Shutter opening force

The spring force on the shutter shall be such that the force required to open the shutter does not exceed 3N.

It shall be sufficiently strong to close a free-sliding shutter, irrespective of the orientation of the case.

10.7 Drop test

The optical disk cartridge shall withstand dropping on each surface and on each corner from a height of 760 mm on to a concrete floor covered with a vinyl layer 2 mm thick. The cartridge shall withstand all such impacts without any functional failure.

11 Dimensional, mechanical and physical characteristics of the disk

11.1 General description of the disk

The disk shall consist of two sides.

Each disk side shall consist of a circular substrate with a hub on one face and a recording layer coated on the other face. The recording layer can be protected from environmental influences by a protective layer. The Formatted Zone (see clause 17) of the substrate shall be transparent to allow an optical beam to focus on the recording layer through the substrate.

The two disk sides shall be assembled with the recording layer facing inwards.

The circular hubs are in the centre of the disk. They interact with the spindle of the drive, and provide the radial centring of the clamping force.

11.2 Reference axis and plane of the disk

Some dimensions of the hub are referred to a Disk Reference Plane P (see figure 2). The Disk Reference Plane P is different from that described in 10.3 for the cartridge. P is defined by the perfectly flat annular surface of an ideal spindle onto which the clamping zone of the disk is clamped, and which is normal to the axis of rotation of this spindle. This axis A passes through the centre of the centre hole of the hub, and is normal to Disk Reference Plane P.

11.3 Dimensions of the disk

The dimensions of the disk shall be measured in the test environment. The dimensions of the disk in an operating environment can be estimated from the dimensions specified in this clause.

The outer diameter of the disk shall be 130,0 mm nominal. The tolerance is determined by the movement of the disk inside the case allowed by 12.3 and 12.4.

The total thickness of the disk outside the hub area shall be 2,40 mm min. and 2,80 mm max.

Note - Disks that conform to ISO/IEC 10089 and ISO/IEC 15486 are known to exist which have a total thickness of 3,2 mm.

The clamping zone is the area on the disk where the clamping mechanism of the optical drive grips the disk and is defined by D_6 and D_7 .

The clearance zone is the area between the outer diameter of the clamping zone (D_6) and the inner diameter of the reflective zone (see clause 17).

The clearance zone shall be excluded from the total thickness requirement, however there shall be no projection from the Disk Reference Plane P in the direction of the optical system of more than 0,2 mm in this zone.

11.3.1 Hub dimension

The outer diameter of the hub (see figure 2) shall be

$$D_8 = 25,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

The height of the hub shall be

$$h_1 = 2,2 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

The diameter of the centre hole of the hub shall be

$$D_9 = 4,004 \text{ mm} \begin{array}{l} + 0,012 \text{ mm} \\ - 0,000 \text{ mm} \end{array}$$

The height of the top of the centring hole at diameter D_9 , measured above the Disk Reference Plane P, shall be

$$h_2 = 1,9 \text{ mm min}$$

The centring length at diameter D_9 shall be

$$h_3 = 0,5 \text{ mm min}$$

The hole shall have a diameter larger than, or equal to, D_9 between the centring length and the Disk Reference Plane P. The hole shall extend through the substrate.

There shall be a radius at the rim of the hub at diameter D_9 with height

$$h_4 = 0,2 \text{ mm} \pm 0,1 \text{ mm}$$

At the two surfaces which it intersects, the radius shall be blended to prevent offsets or sharp ridges.

The height of the chamfer at the rim of the hub at diameter D_8 shall be

$$h_5 = 0,2 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

The angle of the chamfer shall be 45° , or a corresponding full radius shall be used.

The outer diameter of the magnetizable ring shall be

$$D_{10} = 19,0 \text{ mm min}$$

The inner diameter of the magnetizable ring shall be

$$D_{11} = 8,0 \text{ mm max}$$

This thickness of the magnetizable material shall be

$$h_6 = 0,5 \text{ mm min}$$

The position of the top of the magnetizable ring relative to the Disk Reference Plane P shall be

$$h_7 = 2,2 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

The outer diameter of the clamping zone shall be

$$D_6 = 35,0 \text{ mm min}$$

The inner diameter of the zone shall be

$$D_7 = 27,0 \text{ mm max}$$

11.4 Mechanical characteristics

All requirements in this clause must be met in the operating environment.

11.4.1 Material

The disk shall be made from any suitable materials such that it meets the requirements of this Standard. The only material properties specified by this International Standard are the magnetic properties of the magnetizable zone in the hub (see 11.3.1) and the optical properties of the substrate in the Formatted Zone (see 11.5).

11.4.2 Mass

The mass of the disk shall not exceed 120 g.

11.4.3 Moment of inertia

The moment of inertia of the disk relative to axis A shall not exceed 0,22 g·m².

11.4.4 Imbalance

The imbalance of the disk relative to axis A shall not exceed 0,01 g·m.

11.4.5 Axial deflection

The axial deflection of the disk is measured as the axial deviation of the recording layer. Thus it comprises the tolerances on the thickness of the substrate, on its index of refraction and the deviation of the entrance surface from the Disk Reference Plane P on each side of the disk. The nominal position of the recording layer with respect to the Disk Reference Plane P on each side of the disk is determined by the nominal thickness of the substrate.

The deviation of any point of the recording layer from its nominal position, in a direction normal to the Disk Reference Plane P, shall not exceed ± 0,19 mm for rotational frequencies of the disk as specified in 9.5. The deviation shall be measured by the optical system defined in clause 9.

11.4.6 Axial acceleration

The maximum allowed axial error e_{\max} (see annex V) shall not exceed ± 0,7 μm, measured using the Reference Servo for axial tracking of the recording layer. The rotational frequency of the disk shall be as specified in 9.5. The stationary part of the motor is assumed to be motionless (no external disturbances). The measurement shall be made using a servo with the transfer function

$$H_s(i\omega) = \frac{1}{3} \times \left(\frac{\omega_0}{i\omega} \right)^2 \times \frac{1 + \frac{3ia}{\omega_0}}{1 + \frac{i\omega}{3\omega_0}}$$

where

$$\omega = 2\pi f$$

$$\omega_0 / 2\pi = 1550 \text{ Hz}$$

$$i = \sqrt{-1}$$

or any other servo with $|1+H|$ within 20% of $|1+H_s|$ in the bandwidth of 50 Hz to 170 kHz. Thus, the

disk shall not require an acceleration of more than 22 m/s² at low frequencies from the servo motor of the Reference Servo.

11.4.7 Radial runout

The radial runout of the tracks in the recording layer in the Information zone is measured as seen by the optical head of the Reference Drive. Thus it includes the distance between the axis of rotation of the spindle and reference axis A, the tolerances on the dimensions between axis A and the location of the track, and effects of non-uniformity's in the index of refraction.

The difference between the maximum and the minimum distance of any track from the axis of rotation, measured along a fixed radial line over one physical track of the disk, shall not exceed 50 µm as measured by the optical system under conditions of a hub mounted on a perfect sized test fixture shaft, for rotational frequencies of the disk as specified in 9.5.

11.4.8 Radial acceleration

The maximum allowed radial error e_{\max} (see annex V) shall not exceed $\pm 0,09 \mu\text{m}$, measured using the Reference Servo for radial tracking of the tracks. The rotational frequency of the disk shall be as specified in 9.5. The stationary part of the motor is assumed to be motionless (no external disturbances). The measurement shall be made using a servo with the transfer function

$$H_s(i\omega) = \frac{1}{3} \times \left(\frac{\omega_0}{i\omega} \right)^2 \times \frac{1 + \frac{3ia}{\omega_0}}{1 + \frac{i\omega}{3\omega_0}}$$

where

$$\omega = 2\pi f$$

$$\omega_0 / 2\pi = 2\,340 \text{ Hz}$$

$$i = \sqrt{-1}$$

or any other servo with $|1+H|$ within 20% of $|1+H_s|$ in the bandwidth of 50 Hz to 170 kHz. Thus, the disk shall not require an acceleration of more than 6,5 m/s² at low frequencies from the servo motor of the Reference Servo.

11.4.9 Tilt

The tilt angle, defined as the angle which the normal to the entrance surface, averaged over a circular area of 1 mm diameter, makes with the normal to the Disk Reference Plane P, shall not exceed 2,8 mrad.

11.5 Optical characteristics

11.5.1 Index of refraction

Within the Formatted Zone (see clause 17) the index of refraction of the substrate shall be within the range from 1,46 to 1,60.

11.5.2 Thickness

The thickness of the substrate from the entrance surface to the recording layer, within the Formatted Zone shall be:

$$0,509\,3 \times \frac{n^3}{n^2 - 1} \times \frac{n^2 + 0,265\,0}{n^2 + 0,592\,9} \text{ mm} \pm 0,05 \text{ mm}$$

where n is the index of refraction.

11.5.3 Birefringence

The effect of the birefringence of the substrate is included in the measurement of the imbalance of the magneto optical signal in Channel 2 of the Reference Drive (see 26.2)

11.5.4 Vertical Birefringence

The principal vertical birefringence value shall be contained as follows:

$$0 \leq |N_p - N_z| \leq 500 \times 10^{-6}$$

where N_p is the index of refraction along any direction in the plane of the disk and N_z is the index of refraction normal to the plane of the disk. (See annex X).

11.5.5 Reflectance

11.5.5.1 General

The reflectance R is the value of the reflectance in-groove of an unrecorded and grooved area of the User Zone, measured through the substrate and does not include the reflectance of the entrance surface.

The nominal value R of the reflectance shall be specified by the manufacturer

- in byte 3 of the Control Track PEP Zone (see 17.3.2.1.4), and
- in byte 19 of the Control Track SFP Zone (see 17.4.2).

11.5.5.2 Measured value

The measured value R_m of the reflectance shall be measured under the conditions a) to f) of 9.2 and those of 20.2.2 using the split photo detector $(I_1+I_2)_{IG}$.

Measurements shall be made in the User Zone in any track without embossed data fields.

11.5.5.3 Requirement

The value of R at the standard wavelength specified in 9.2 shall lie within the range of 0,10 to 0,25 for Type R/W, DOW, P-ROM, P-DOW, WO or WO-DOW disks and shall be not less than 0,35 for Type O-ROM disks.

At any point in the User Zone, the measured reflectance R_m shall meet the following requirement.

$$R(1 - 0,15) \leq (R_{mmax} + R_{mmin})/2 \leq R(1 + 0,15)$$

This requirement specifies the acceptable range for R_m , for all disks within the same value R . Additionally, the variation of R_m shall meet the requirement

$$(R_{mmax} - R_{mmin}) / (R_{mmax} + R_{mmin}) \leq 0,13$$

where

R_{mmax} is the maximum value of measured reflectance in the User Zone, and

R_{mmin} is the minimum value of measured reflectance in the User Zone.

12 Interface between cartridge and drive

12.1 Clamping method

When the cartridge is inserted into the drive, the shutter of the case is opened and the drive spindle engages the disk. The disk is held against the spindle by an axial clamping force, provided by the magnetizable material in the hub and the magnets in the spindle. The radial positioning of the disk is provided by the centering of the axis of the spindle in the centre hole of the hub. A turntable of the spindle shall support the disk in its clamping zone, determining the axial position of the disk in the case.

12.2 Clamping force

The clamping force exerted by the spindle shall be less than 14 N.

The adsorbent force measured by the test device specified in annex D shall be in the range of 8,0 N to 12,0 N.

12.3 Capture cylinder

The capture cylinder (see figure 13) is defined as the volume in which the spindle can expect the centre of the hole of the hub to be at the maximum height of the hub, just prior to capture. The size of the cylinder limits the allowable play of the disk inside its cavity in the case. This cylinder is referred to

perfectly located and perfectly sized alignment and location pins in the drive, and includes tolerances of dimensions of the case and the disk between the two pins mentioned and the centre of the hub. The bottom of the cylinder is parallel to the Disk Reference Plane P, and shall be located at a distance of

$$L_{58} = 0,5 \text{ mm min.}$$

above the Disk Reference Plane P of Side B of the case when Side A of the disk is to be used. The top of the cylinder shall be located at a distance of

$$L_{59} = 4,3 \text{ mm max.}$$

above the same Disk Reference Plane P, i.e. that of Side B. The diameter of the cylinder shall be

$$D_{12} = 3,0 \text{ mm max.}$$

Its centre shall be defined by the nominal values of L_{46} and L_{51} .

12.4 Disk position in the operating condition


When the disk is in the operating condition (see figure 13) within the drive, the position of the active recording layer shall be

$$L_{60} = 5,35 \text{ mm} \pm 0,15 \text{ mm}$$

above the Disk Reference Plane P of that side of the case that faces the optical system. Moreover, the torque to be exerted on the disk in order to maintain a rotational frequency of 50 Hz shall not exceed 0,01 N·m, when the axis of rotation is within a circle of diameter

$$D_{13} = 0,2 \text{ mm max.}$$

and a centre given by the nominal values of L_{46} and L_{51} .

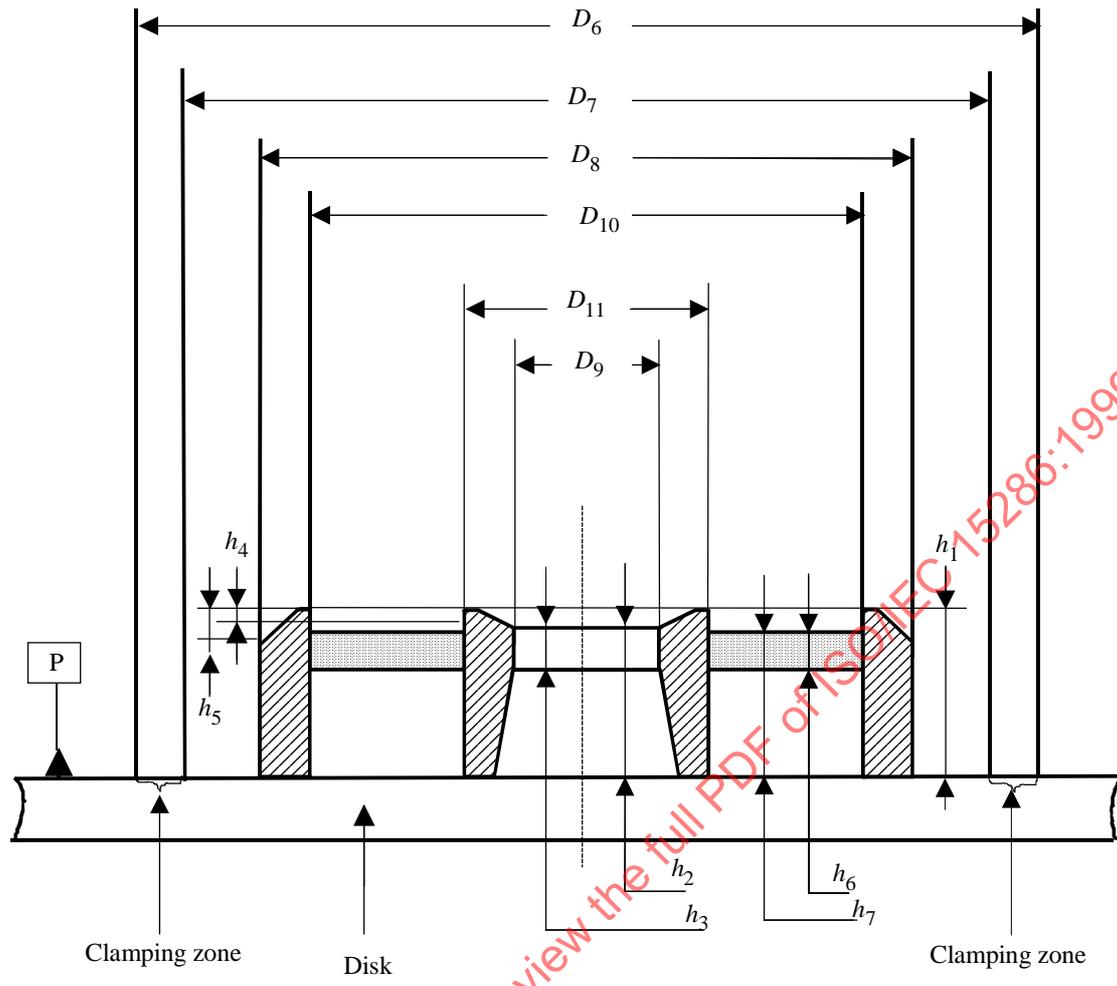

94-0131-A

Figure 2 - Hub dimensions

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999


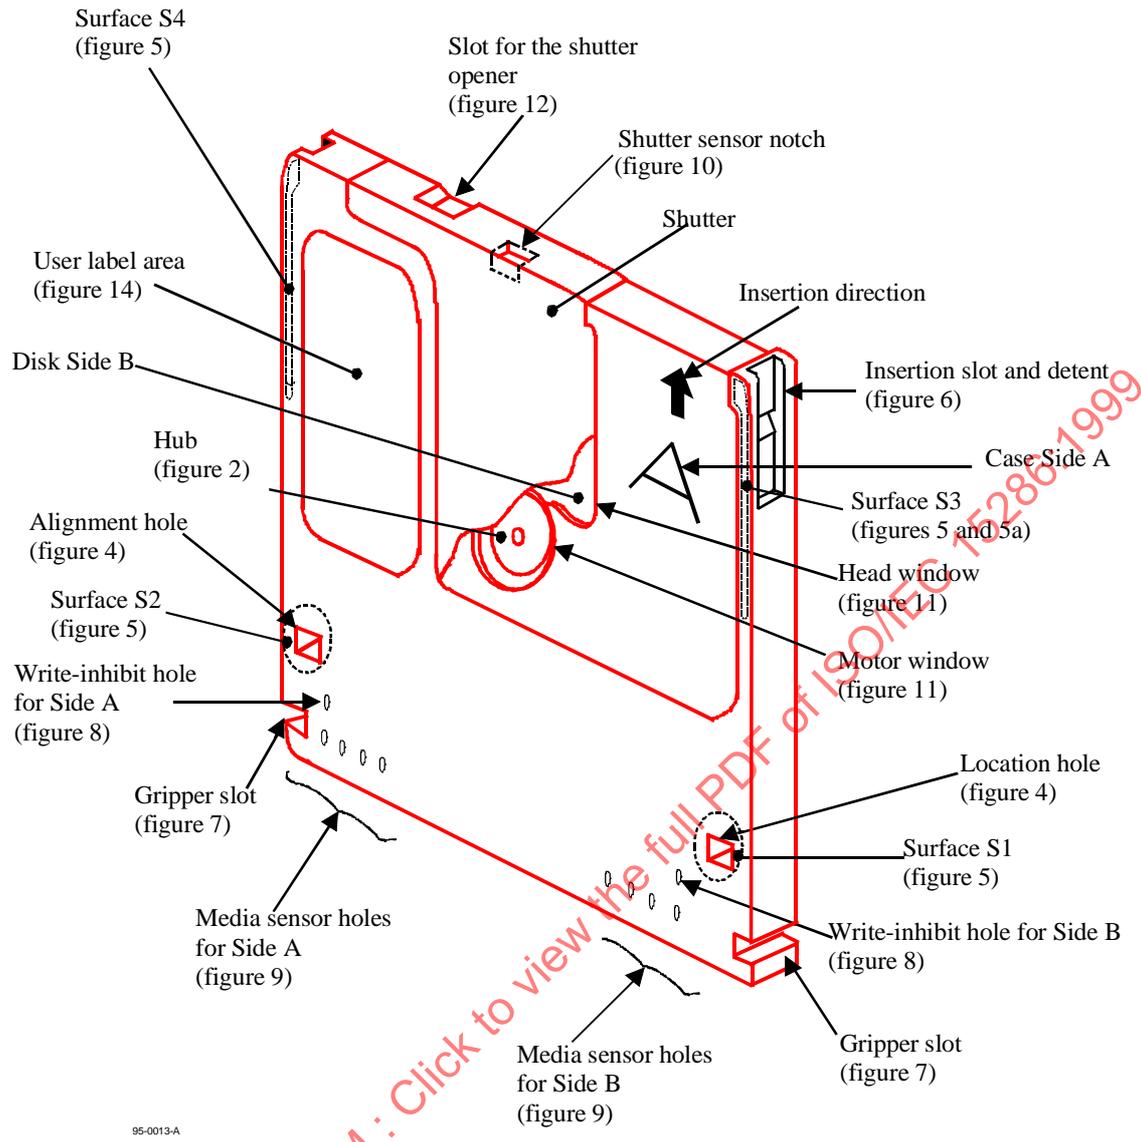


Figure 3 - Case

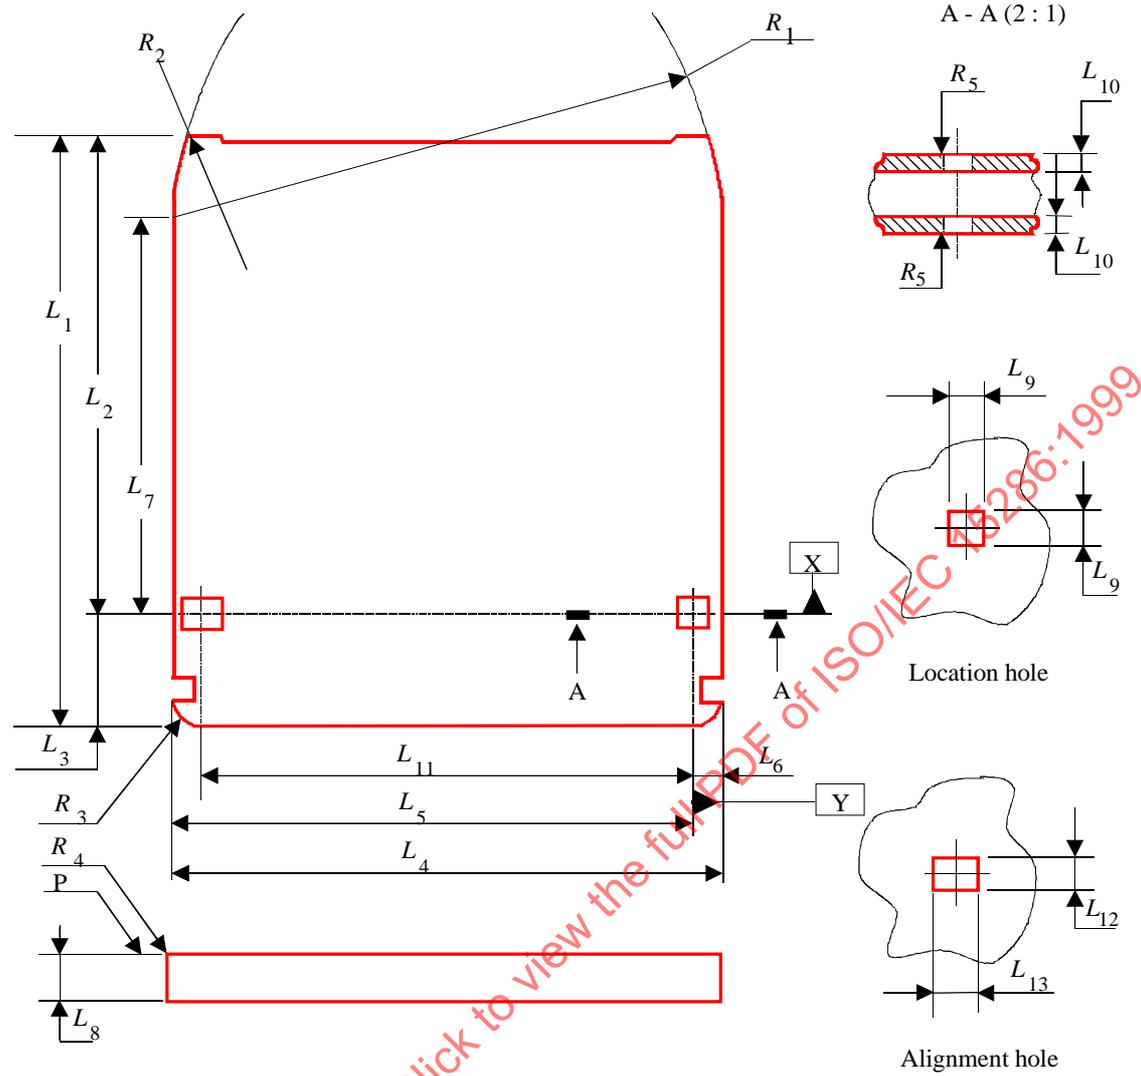

95-0014-A

Figure 4 - Overall dimensions and reference axes


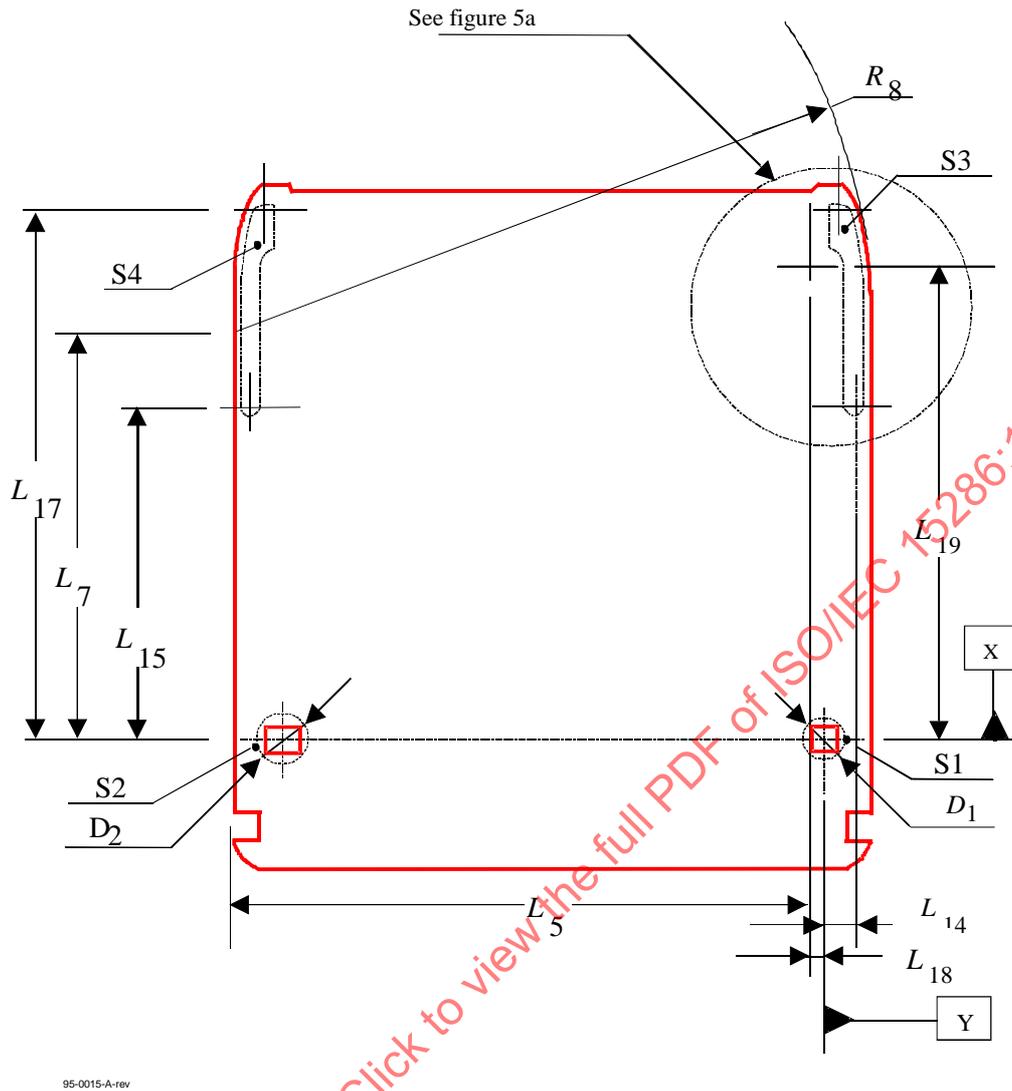



Figure 5 - Surfaces S1, S2, S3 and S4 of the reference plane P

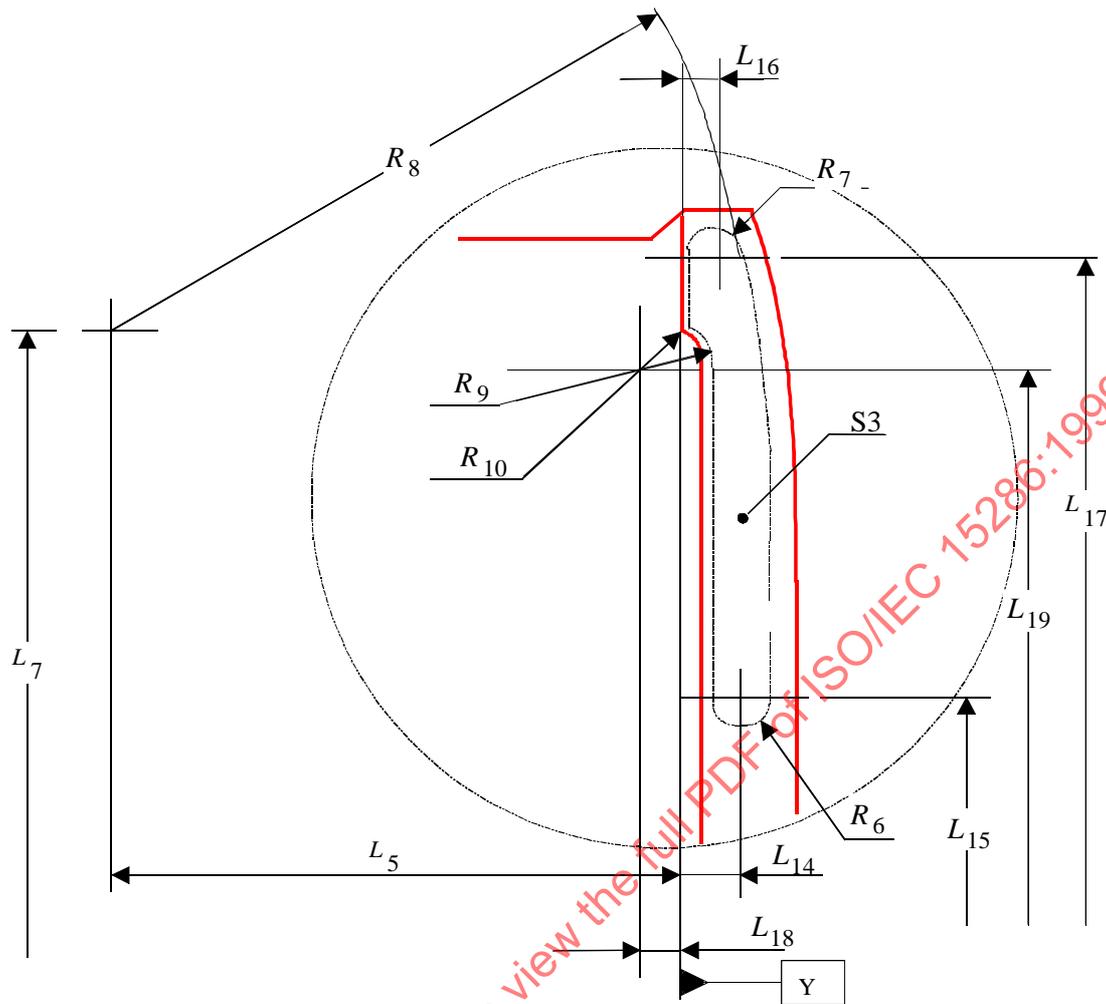

95-0016-A-rev


Figure 5a - Detail of surface S3

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 15286:1999

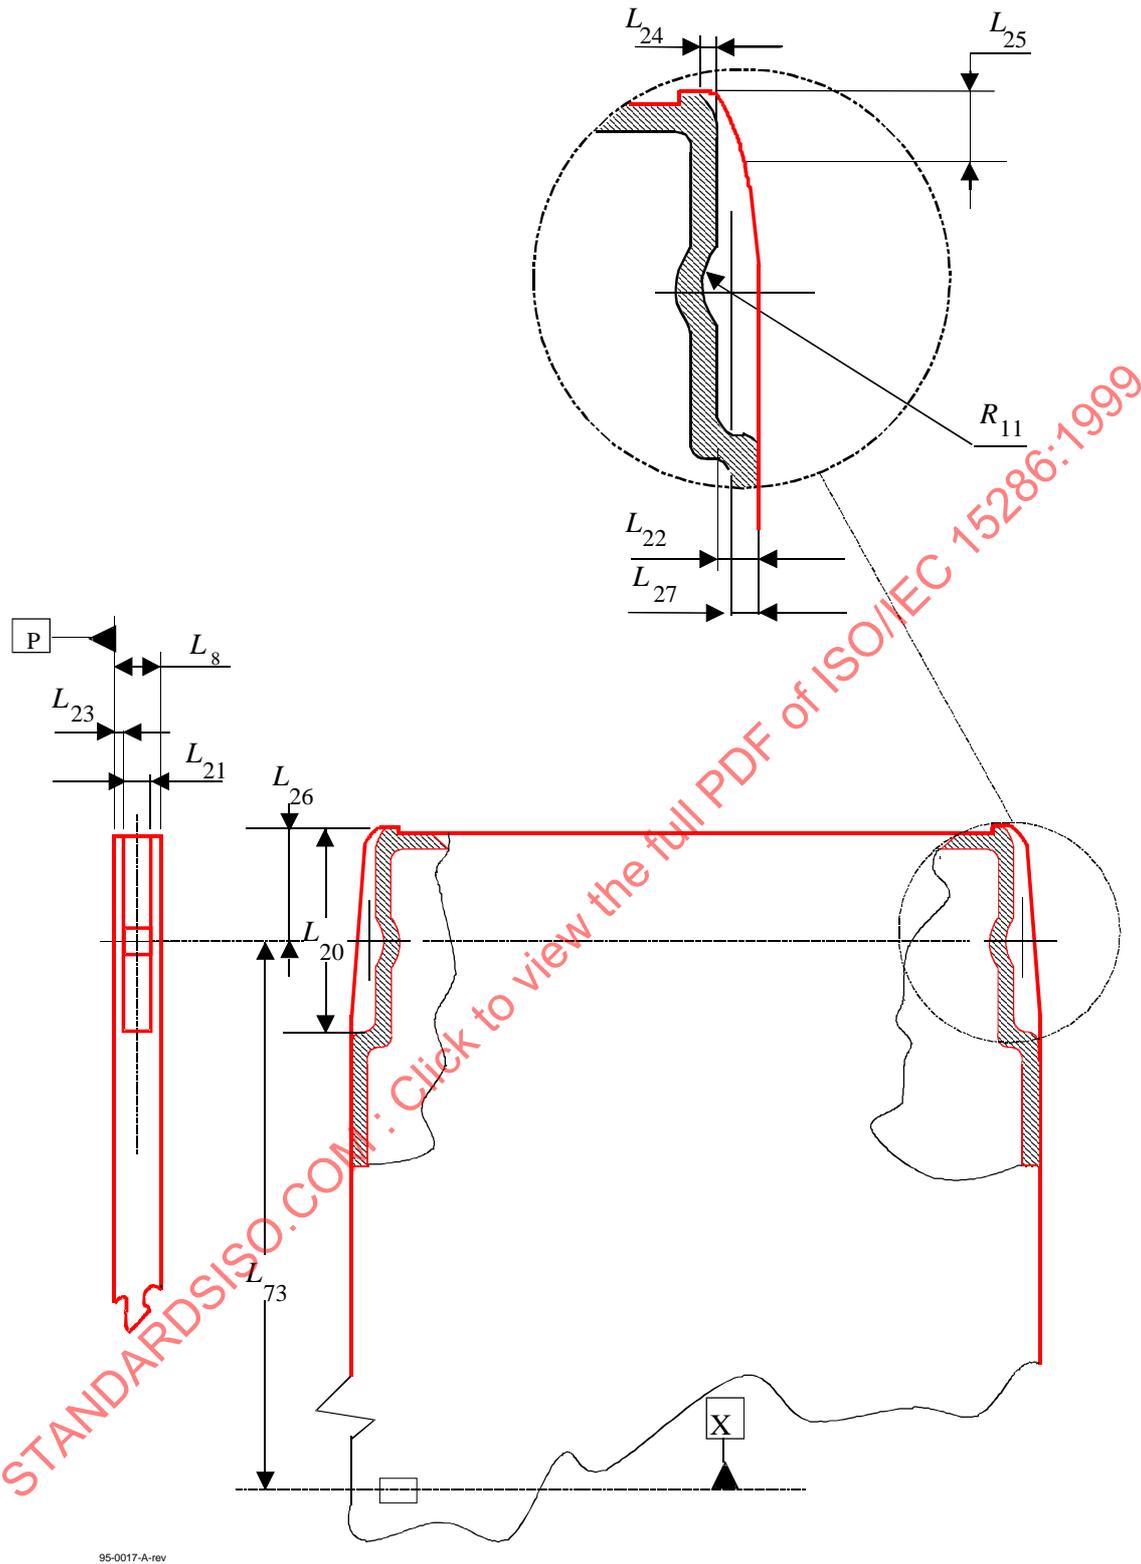

95-0017-A-rev

Figure 6 - Insertion slot and detent

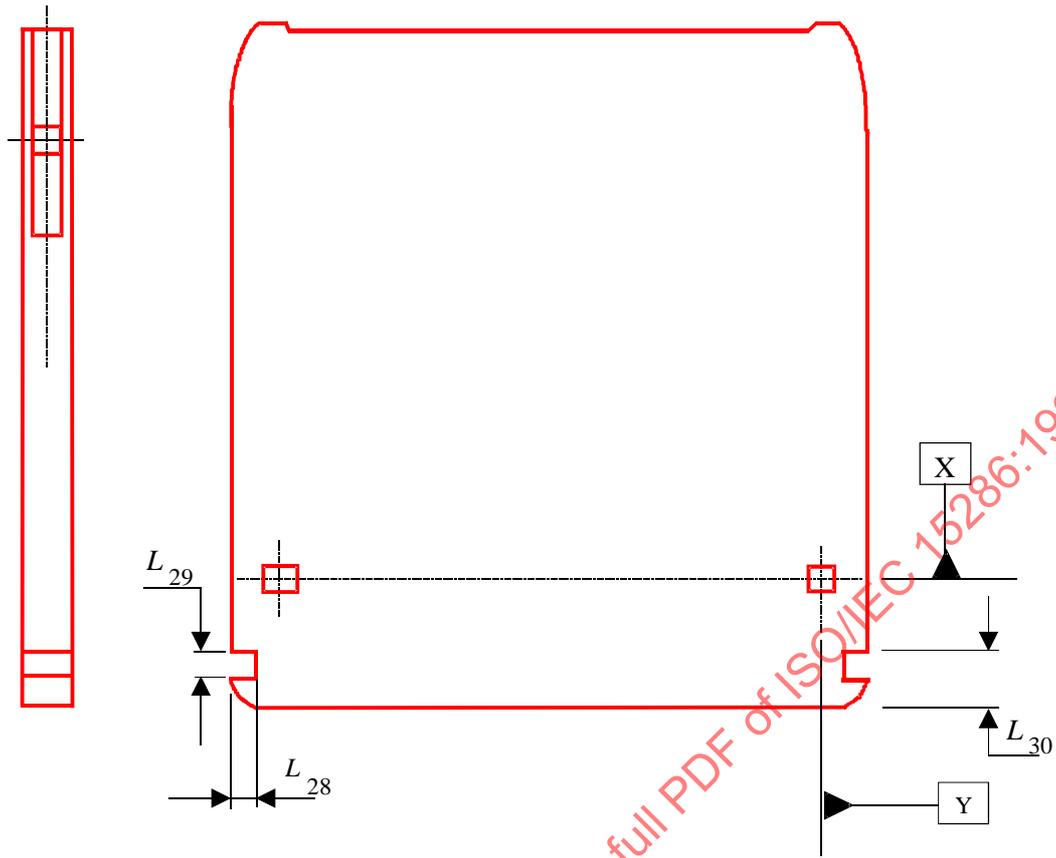

95-0018-A-rev

Figure 7 - Gripper slots

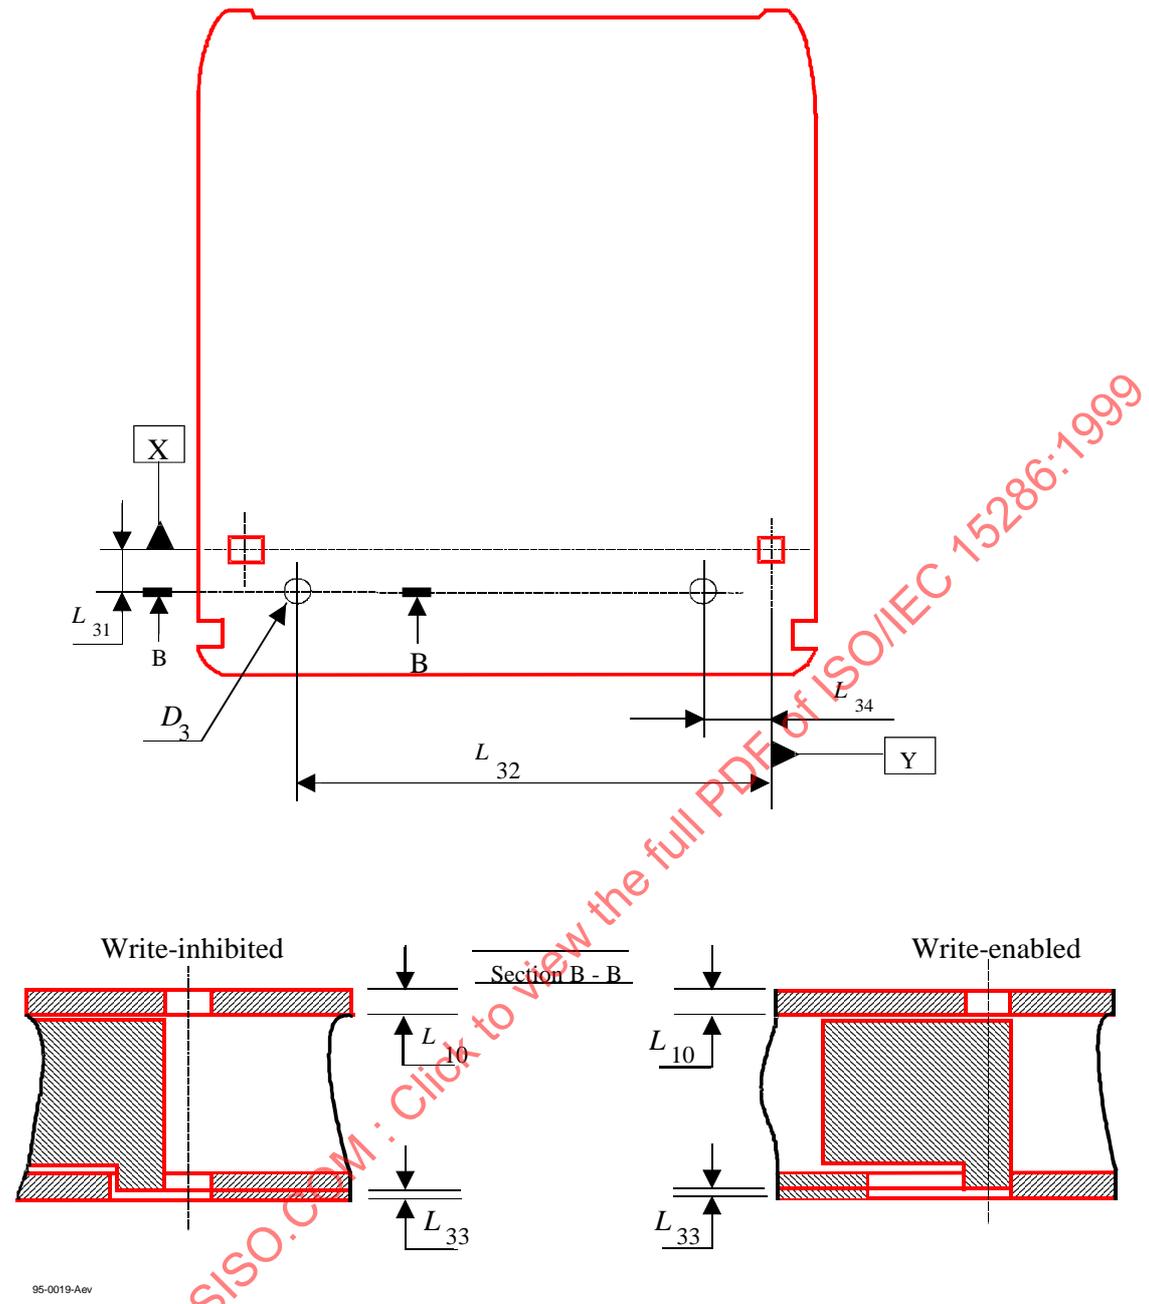


Figure 8 - Write-Inhibit holes

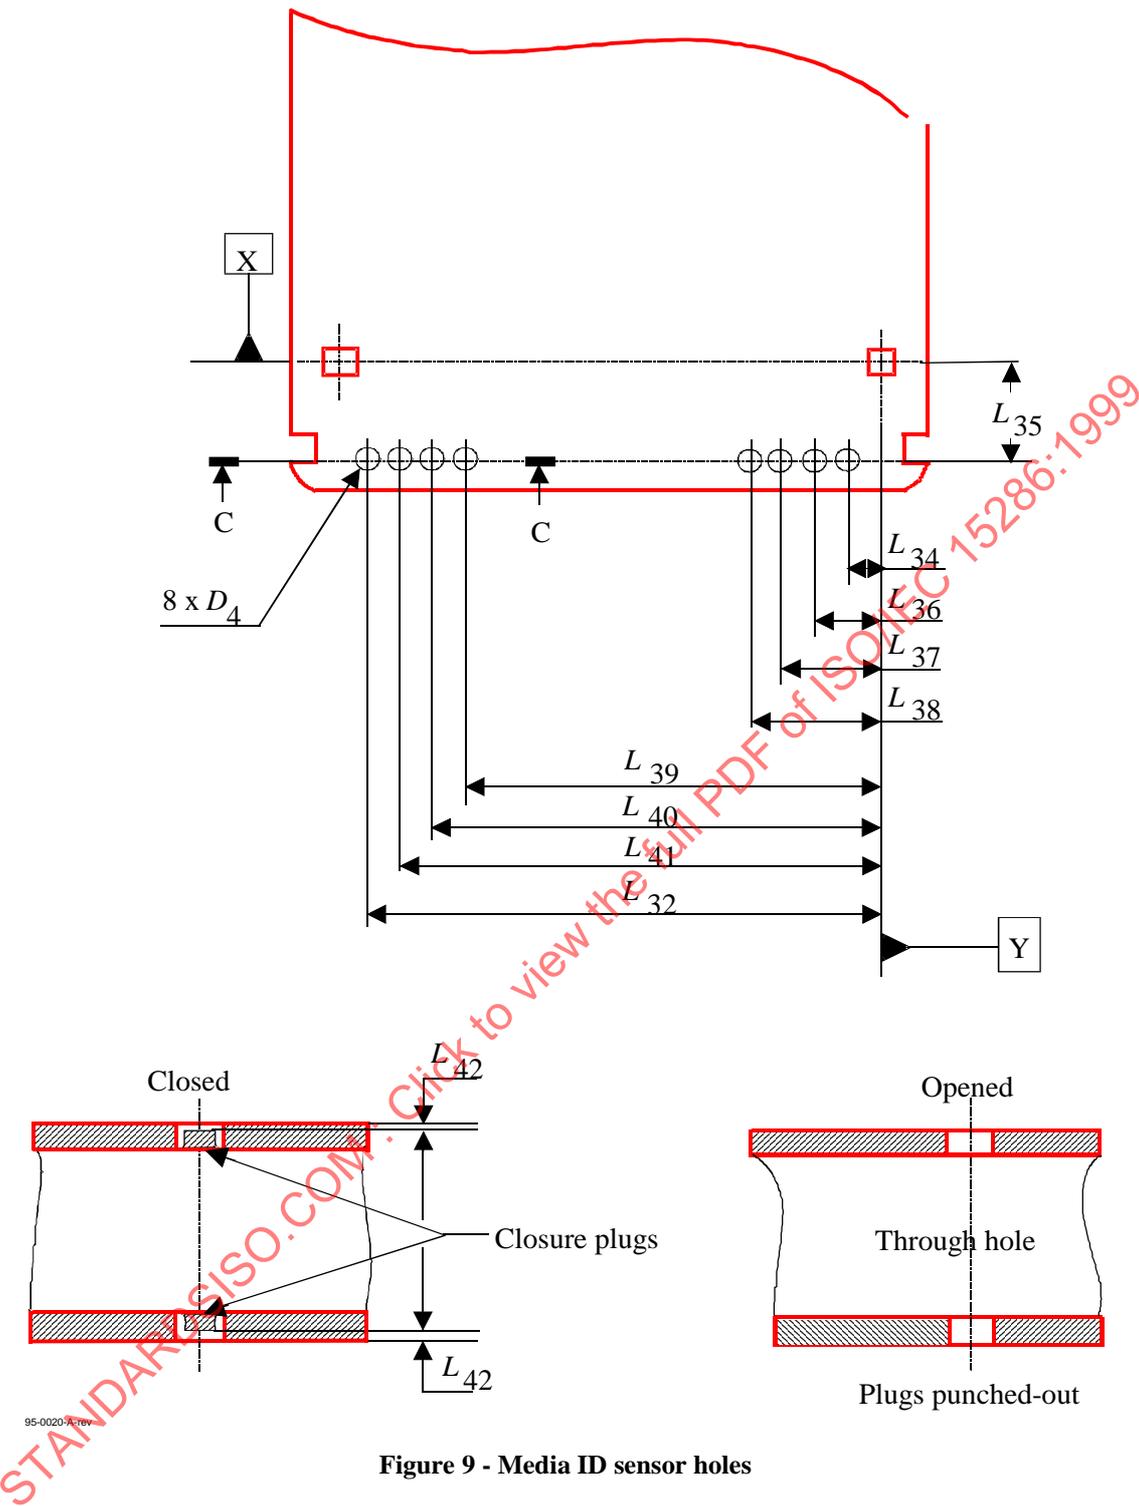


Figure 9 - Media ID sensor holes


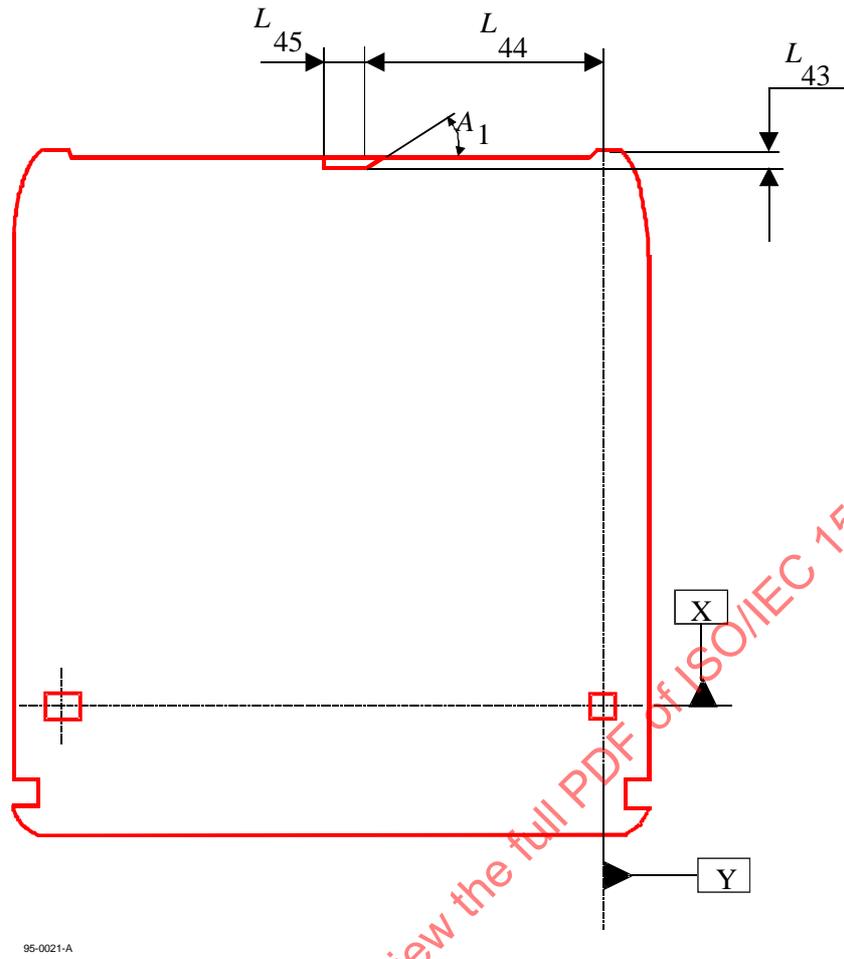



Figure 10 - Shutter sensor notch viewed from Side A

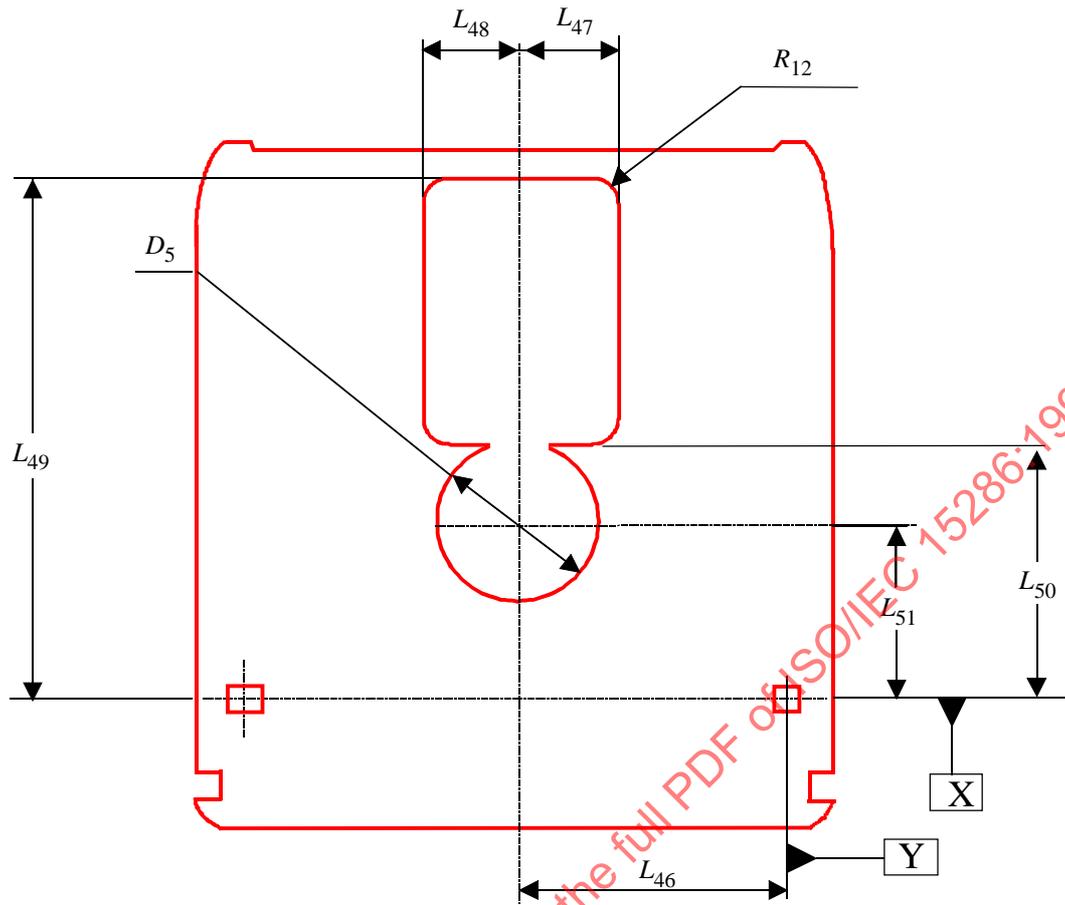

95-0022-A


Figure 11 - Head and motor window

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 15286:1999

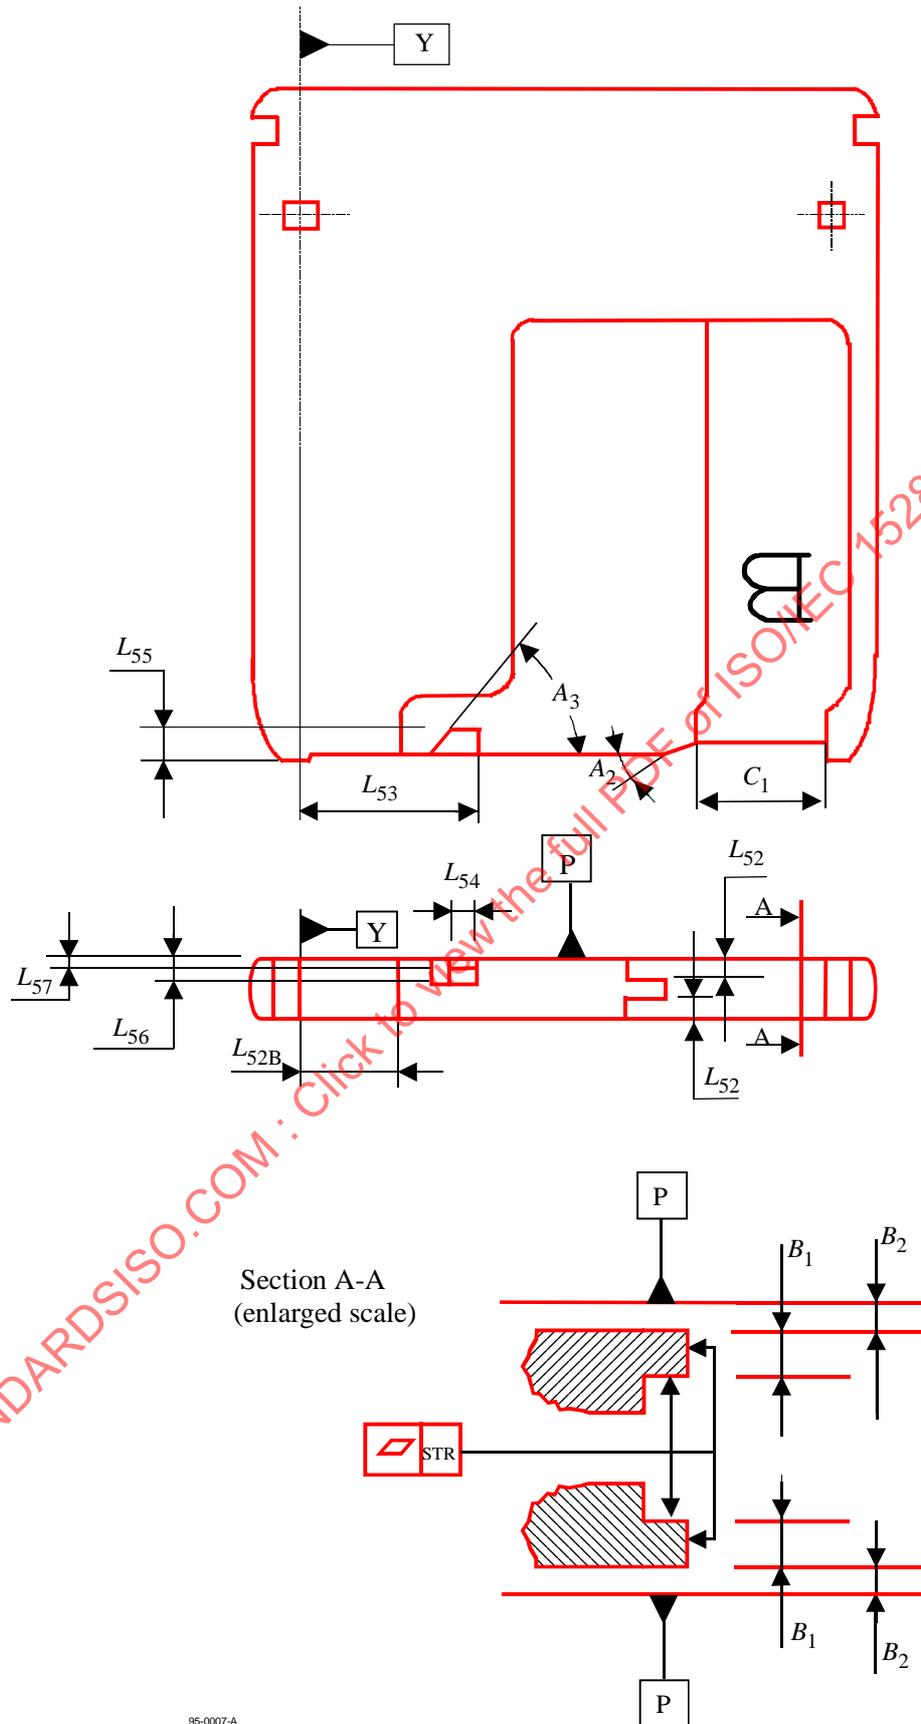

95-0007-A

Figure 12 - Shutter opening features

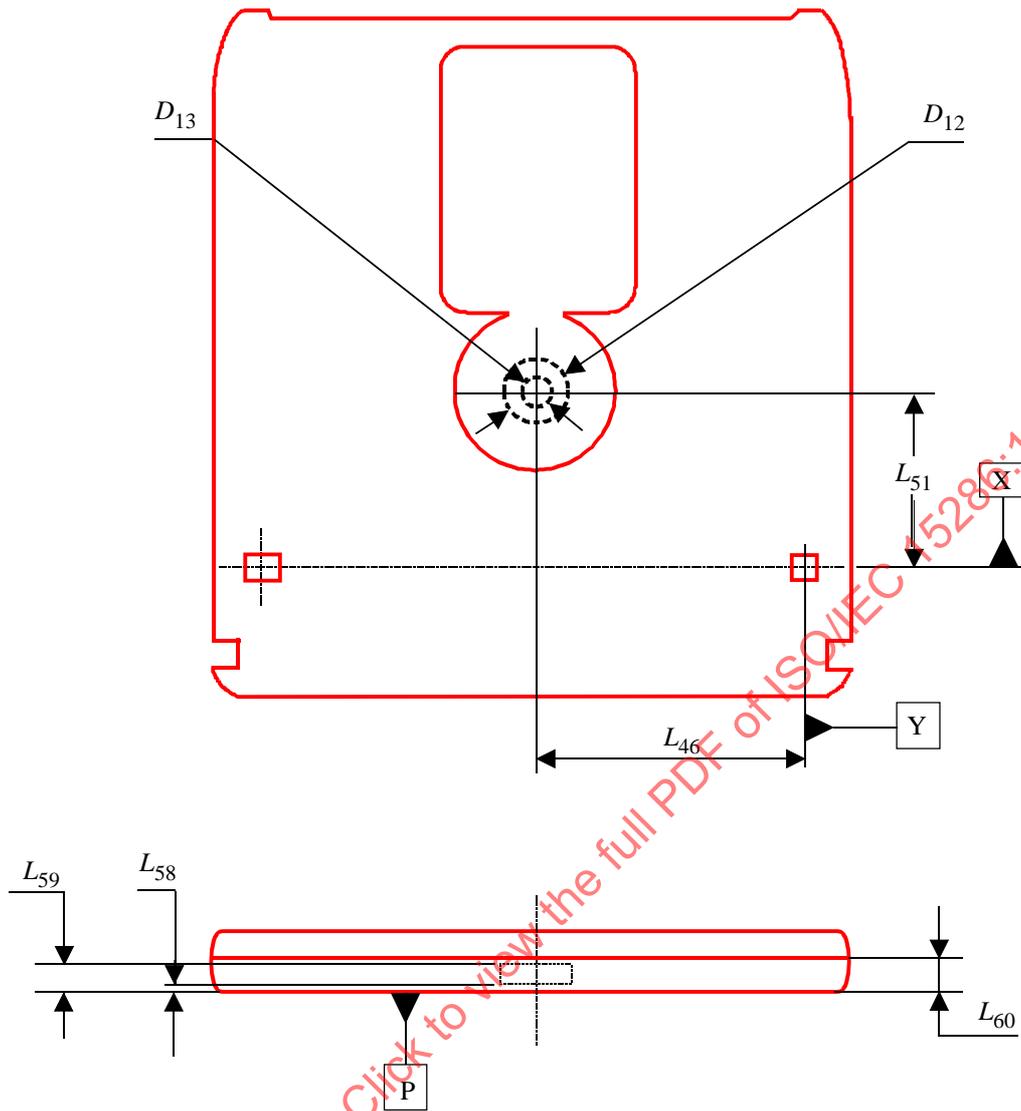

95-0024-A

Figure 13 - Capture cylinder

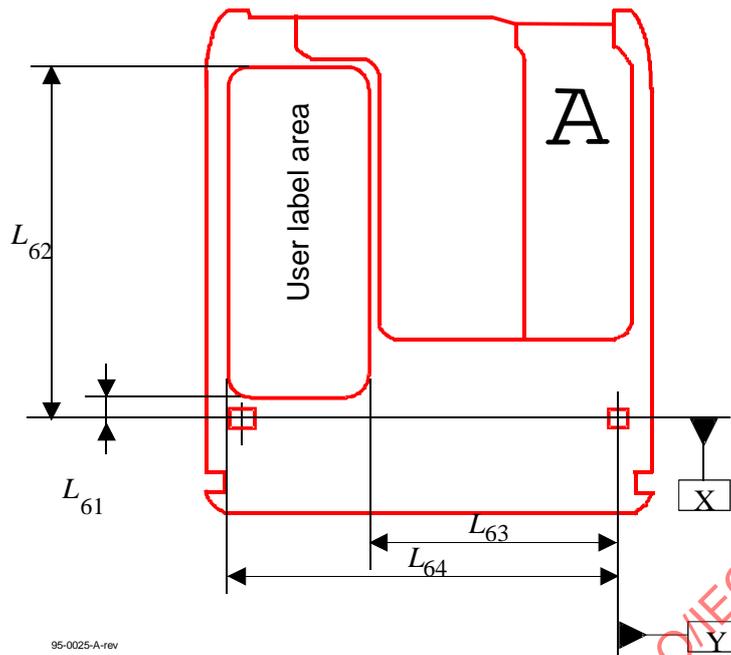


Figure 14a - User label area on Side A

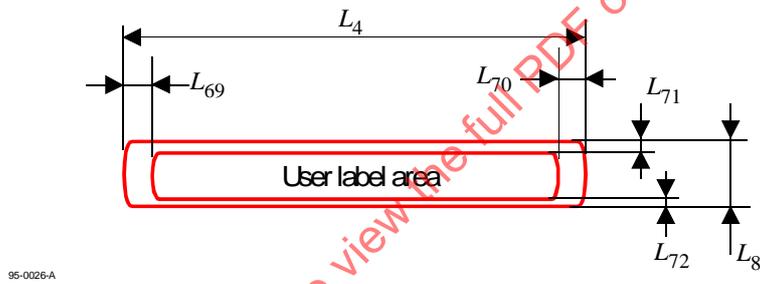


Figure 14b - User label area on bottom surface

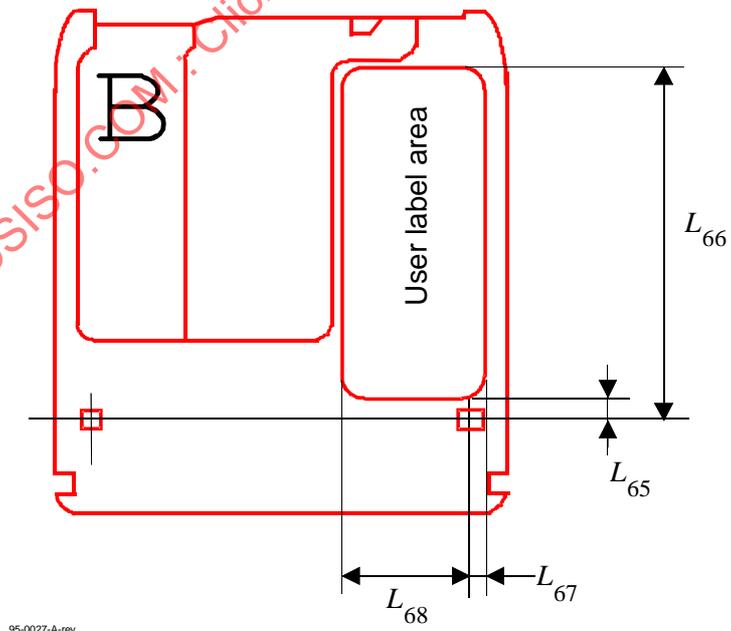


Figure 14c - User label area on Side B

Section 3 - Format of information

13 Track geometry

13.1 Track shape

The Formatted Zone shall contain tracks intended for the continuous servo tracking method (see table 4).

A track consists of a land-groove-land combination, where each land is shared with a neighboring track. A groove is a trench-like feature, the bottom of which is located nearer to the entrance surface than the land. The centre of the track, i.e. where the recording is made, is the centre of the groove. The lands shall be continuous. Grooves shall occur only in areas without embossed Headers and embossed Recording Fields. The shape of the land is determined by the requirements in clause 21.

This International Standard distinguishes between physical and logical tracks. A physical track forms a 360° turn of a continuous spiral. A logical track is a portion of a physical track containing a defined number of consecutive sectors (see 14.2).

13.2 Direction of track spiral

The track shall spiral inward from the outer diameter to the inner diameter.

13.3 Track pitch

The track pitch is the distance between adjacent track centrelines, measured in a radial direction. It shall be $0,85 \mu\text{m} \pm 0,05 \mu\text{m}$ except in the Control Track PEP Zone. The width of a group of bands corresponding to 35 294 physical tracks shall be $30,00 \text{ mm} \pm 0,10 \text{ mm}$.

13.4 Logical track number

Each logical track shall be identified by a logical track number (see 15.5). Unless otherwise stated all track numbers refer to logical tracks only.

Track 0 shall be located at radius $62,10 \text{ mm} \pm 0,10 \text{ mm}$ for 2 048-byte sectors and $62,00 \text{ mm} \pm 0,10 \text{ mm}$ for 1 024-byte and 512-byte sectors.

The logical track numbers of logical tracks located at radii smaller than that of track 0 shall be increased by 1 for each track.

The logical track numbers of logical tracks located at radii larger than that of track 0 shall be negative, and decrease by 1 for each track. Their value is given in TWO's complement, thus track -1 is indicated by (3FFFF).

13.5 Physical track number

In cases where track numbers refer to physical tracks this is clearly stated.

Physical track 0 shall begin with sector 0 of logical track 0.

The track numbers of physical tracks located at radii smaller than that of physical track 0 shall be increased by 1 for each physical track.

The track numbers of physical tracks located at radii larger than that of physical track 0 shall be negative, and decrease by 1 for each physical track.

14 Track format

14.1 Physical track layout

All sectors on the disk shall be the same size.

For disks with 2 048-byte sectors, on each physical track there shall be 22 to 45 sectors. Each sector shall comprise 2 635 bytes. A byte is represented on the disk by 12 Channel bits. Hence, the length of

one Channel bit is determined by the requirement that there are $(22 \text{ to } 45) \times 2\,635 \times 12 = 695\,640$ to $1\,422\,900$ Channel bits on a physical track. The sectors shall be equally spaced over a physical track in such a way that the distance between the first Channel bit of a sector and the first Channel bit of the next sector shall be $31\,620$ Channel bits ± 5 Channel bits. At the rotational speed of 50 Hz, the period T of a Channel bit equals

$$T = \frac{10^9}{50 \times (695\,640 \text{ to } 1\,422\,900)} \text{ ns} = 28,8 \text{ ns to } 14,1 \text{ ns}$$

For disks with $1\,024$ -byte sectors, on each physical track there shall be 41 to 85 sectors. Each sector shall comprise $1\,416$ bytes. A byte is represented on the disk by 12 Channel bits. Hence, the length of one Channel bit is determined by the requirement that there are $(41 \text{ to } 85) \times 1\,416 \times 12 = 696\,672$ to $1\,444\,320$ Channel bits on a physical track. The sectors shall be equally spaced over a physical track in such a way that the distance between the first Channel bit of a sector and the first Channel bit of the next sector shall be $16\,992$ Channel bits ± 5 Channel bits. At the rotational speed of 50 Hz, the period T of a Channel bit equals

$$T = \frac{10^9}{50 \times (696\,672 \text{ to } 1\,444\,320)} \text{ ns} = 28,7 \text{ ns to } 13,8 \text{ ns}$$

For disks with 512 -byte sectors, on each physical track there shall be 70 to 144 sectors. Each sector shall comprise 826 bytes. A byte is represented on the disk by 12 Channel bits. Hence, the length of one Channel bit is determined by the requirement that there are $(70 \text{ to } 144) \times 826 \times 12 = 693\,840$ to $1\,427\,328$ Channel bits on a physical track. The sectors shall be equally spaced over a physical track in such a way that the distance between the first Channel bit of a sector and the first Channel bit of the next sector shall be $9\,912$ Channel bits ± 5 Channel bits. At the rotational speed of 50 Hz, the period T of a Channel bit equals

$$T = \frac{10^9}{50 \times (693\,840 \text{ to } 1\,427\,328)} \text{ ns} = 28,8 \text{ ns to } 14,0 \text{ ns}$$

14.2 Logical track layout

On each logical track there shall be $7/17/31$ sectors.

14.3 Radial alignment

The Headers of the sectors in each band shall be radially aligned in such a way that the distance between the first Channel bit of sectors in adjacent physical tracks shall be less than 5 Channel bits.

The Headers of the first sector in all bands shall be radially aligned in such a way that the distance between the first Channel bit of the first sectors of each band shall be less than 120 Channel bits.

14.4 Sector number

The sectors of a logical track shall be numbered consecutively from 0 to $6/16/30$.

15 Sector format

15.1 Sector layout

Sectors shall have one of the three layouts shown in figures 15, 16 and 17 depending on the number of user bytes in the Data field. The number of user bytes per sector is specified by byte 1 of each of the Control Track Zones. The pre-formatted header area of 64 bytes, Transition Area (TA1) area of 1 byte and the ALPC and Gap area of 17 bytes are the same for three sector formats.

On the disk 8 -bit bytes shall be represented by 12 Channel bits (see clause 16).

In figure 15, figure 16 and figure 17 the numbers below the fields indicate the number of bytes in each field.

SM	VFO ₁	AM	ID ₁	VFO ₂	AM	ID ₂	PA ₁
8	26	1	5	16	1	5	2

Pre-formatted Header

Gap	Flag	Gap	ALPC
4	5	2	6

ALPC and Gaps

Pre-formatted Header	TA ₁	ALPC, Gaps	VFO ₃	Sync	Data field	PA ₂	Buffer	TA ₂
64	1	17	27	4	2 498 User Data, SWF, CRC, Resync	2	21	1

Figure 15 - Sector format for 2 048 user bytes

SM	VFO ₁	AM	ID ₁	VFO ₂	AM	ID ₂	PA ₁
8	26	1	5	16	1	5	2

Pre-formatted Header

Gap	Flag	Gap	ALPC
4	5	2	6

ALPC and Gaps

Pre-formatted Header	TA ₁	ALPC, Gaps	VFO ₃	Sync	Data field	PA ₂	Buffer	TA ₂
64	1	17	27	4	1 278 (User Data, SWF, CRC, Resync)	2	22	1

Figure 16 - Sector format for 1 024 user bytes

SM	VFO ₁	AM	ID ₁	VFO ₂	AM	ID ₂	PA ₁
8	26	1	5	16	1	5	2

Pre-formatted Header

Gap	Flag	Gap	ALPC
4	5	2	6

ALPC and Gaps

Pre-formatted Header	TA ₁	ALPC, Gaps	VFO ₃	Sync	Data field	PA ₂	Buffer	TA ₂
64	1	17	27	4	690 (User Data, SWF, CRC, Resync)	2	20	1

Figure 17 - Sector format for 512 user bytes

15.2 Sector Mark

The Sector Mark shall consist of an embossed pattern that does not occur in RLL (1,7) code (see 16) and is intended to enable the drive to identify the start of the sector without recourse to a phase-locked loop.

The Sector Mark shall have a length of 96 Channel bits and shall consist of pre-recorded, continuous, long marks of different Channel bit lengths followed by a lead-in to the VFO₁ field. This pattern does not exist in data.

There are two kinds of Sector Marks to identify even-numbered and odd-numbered bands. The Sector Mark pattern shall be as shown in figure 18, where T corresponds to the time length of one Channel bit. The signal obtained from a mark is less than a signal obtained from space. The lead-in shall have the Channel bit pattern 000101 for odd-numbered bands and 000001 for even-numbered bands.

The Sector Mark pattern used for the Inner Manufacturer Zone, the Inner Control Track SFP, the Transition Zone, and the Inner Guard Band shall be the same pattern as that used in band 23/44/37. The Sector Mark pattern used for the Lead-in Zone, the Outer Control Track SFP, the Outer Manufacturer Zone, and the Outer Guard Band shall be the same pattern as that used in band 0.

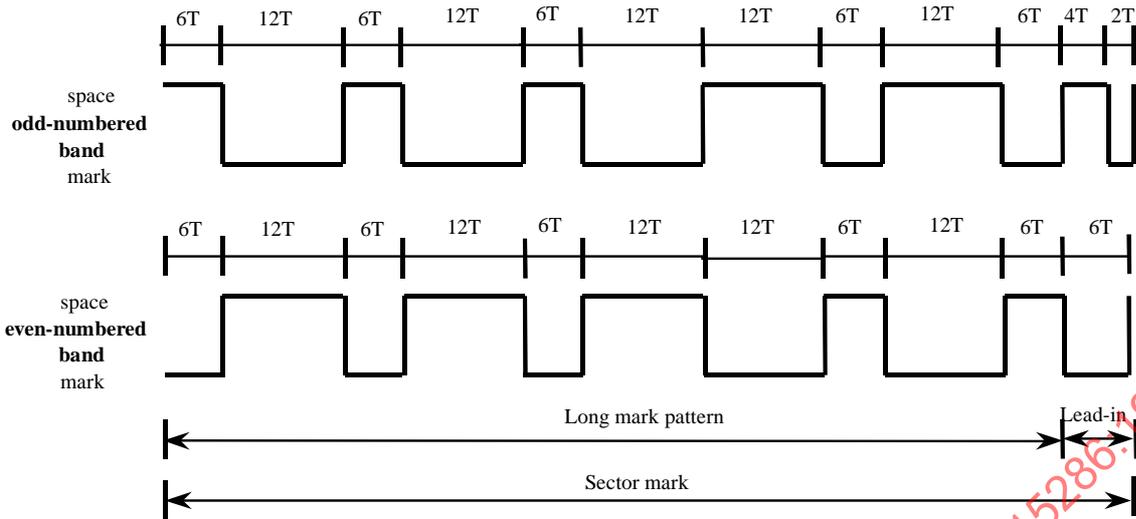


Figure 18 - Sector Mark pattern

15.3 VFO fields

There shall be three fields designated VFO₁, VFO₂ and VFO₃ (figure 19) to synchronize the VFO.

These fields shall be embossed, except for rewritable and write once sectors, in which case the VFO₃ field shall be written by the drive when data is written to the sector.

The continuous Channel bit pattern for VFO fields shall be:

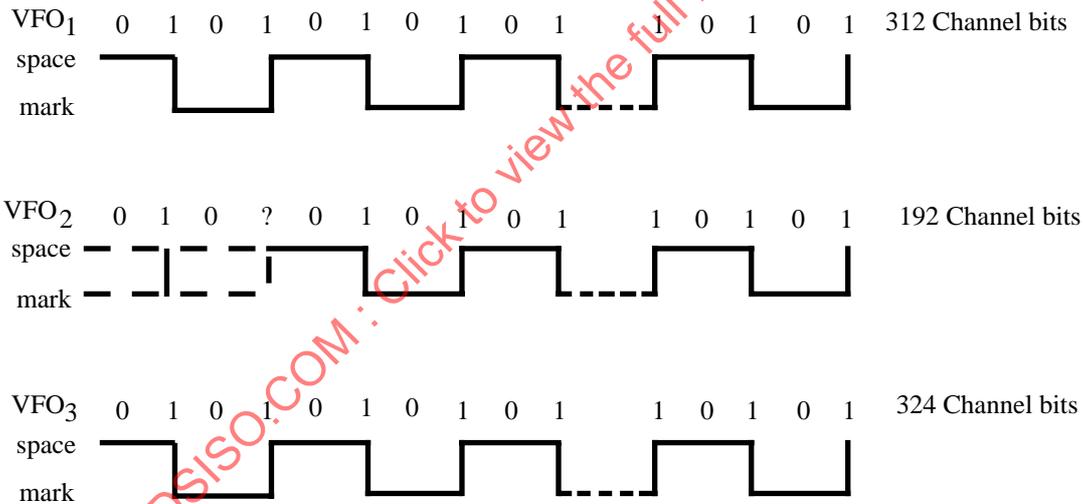


Figure 19 - VFO Field Patterns

The starting bits of VFO₂ shall be ZERO ONE ZERO considered as encoded from input bits ONE ZERO.

The fourth bit (denoted by ?) shall be set to either a ONE or ZERO so as to produce the mark-space pattern as defined. The objective is to set the 9T space between the trailing edge of the last mark of the VFO fields and the leading edge of the first mark of the following Address Mark. This value shall be such to produce the same pattern thereafter as the other VFO fields and to end this field in the trailing edge of an embossed mark.

The start of the VFO₃ field shall be not more than 6 Channel bits from the ideal position given in this International Standard. This tolerance allows for timing inaccuracies of the optical drive controller and shall be compensated for by the ALPC preceding the VFO₃ field and by the Buffer field at the end of the sector.

The value of the 4th bit (identified by ?) shall be such as to end this field in the trailing edge of an embossed mark such that the following gap field is always recorded as a space. Due to the use of the RLL (1,7) encoding scheme (see 16), the framing of the last byte of the CRC in the ID₂ field is uncertain within a few bit times. The Postamble allows the last byte of the CRC to achieve closure and permits the ID field to always end in a predictable manner. This is necessary in order to locate the following field in a consistent manner.

15.7 Transition Area (TA₁)

There are two Transition Areas in each sector. Each Transition Area shall be equal in length to 12 channel bits.

This area is used for transition from embossed headers to grooved areas. This area shall not contain user information. For embossed sectors TA₁ shall be embossed with a continuous 2T pattern.

15.8 Gap

There are two Gap fields in each sector.

The first Gap shall be equal in length to 48 Channel bits. It is the first field after TA₁ and gives the drive some time for processing after it has finished reading the header.

The second Gap shall be equal in length to 24 Channel bits.

The contents of the two Gap fields are not specified, and shall be ignored in interchange. For embossed sectors, the Gap shall be embossed with a continuous 2T pattern.

15.9 Flag

This field is intended to prevent inadvertent write operations over previously written data on Types WO and WO-DOW media. For Types R/W, O-ROM and DOW media and rewritable sectors of Types P-ROM and P-DOW media, the contents of this field are not specified, and shall be ignored in interchange. For embossed sectors, the Flag shall be embossed with a continuous 2T pattern of 60 Channel bits (0101010101...01).

For Type WO and Type WO-DOW media, the contents of this field are not specified, and shall be ignored in interchange. For sectors in the User Area of the User Zone, the Flag shall be unrecorded if the Data field of the sector is unrecorded and shall be recorded with a continuous 2T pattern of 60 Channel bits (0101010101...01) if the Data field of the sector is recorded.

15.10 Auto Laser Power Control (ALPC)

This field shall be equal in length to 72 Channel bits. It is intended for testing the laser power level.

In the case of R/W, DOW, WO or WO-DOW sectors, and the rewritable sectors of P-ROM and P-DOW, the contents of this field are not specified, and shall be ignored in interchange. For embossed sectors, the ALPC shall be embossed with a continuous 2T pattern.

15.11 Sync

The sync field is intended to allow the drive to obtain byte synchronization for the following Data field. It shall have a length of 48 Channel bits and be recorded with the bit pattern

0100 0010 0100 0010 0010 0010 0100 0100 1000 0010 0100 10x0

where the value x shall be as follows:

if the first data bits of the following Data field are set to ZERO ZERO, x shall be set to ONE

if the first data bits of the following Data field are not set to ZERO ZERO, x shall be set to ZERO.

15.12 Data field

The Data field is intended for recording user data. It shall consist of either:

- 2 498 bytes comprising
 - 2 048 user bytes
 - 442 bytes for CRC, ECC and Resync
 - 8 bytes for Sector Written Flag (SWF)
- 1 278 bytes comprising
 - 1 024 user bytes
 - 242 bytes for CRC, ECC and Resync
 - 8 bytes for Sector Written Flag (SWF)
 - 4 (FF)-bytes

or

- 690 bytes comprising
 - 512 user bytes
 - 164 bytes for CRC, ECC and Resync
 - 8 bytes for Sector Written Flag (SWF)
 - 6 (FF)-bytes.

The disposition of these bytes in the Data field is specified in annex F.

The first two data bits of the Data field shall be encoded using table 2. When doing this, the last Channel bit from the Sync field shall be used as input to the encoder.

The first three Channel bits of the Data field shall be decoded using table 3. When doing this, the last two Channel bits from the Sync field shall be used as input to the decoder.

15.12.1 User data bytes

These bytes are at the disposal of the user for recording information. There are 2 048, 1 024 or 512 such bytes depending on the sector format.

15.12.2 CRC and ECC bytes

The Cyclic Redundancy Check bytes and Error Correction Code bytes are used by the error detection and correction system to rectify erroneous data. The ECC is a Reed-Solomon code of degree 16.

The computation of the check bytes of the CRC and ECC shall be as specified in annex F.

15.12.3 Bytes for Sector Written Flag (SWF)

There shall be 8 bytes for Sector Written Flag. They are intended for use by drives handling Type WO and WO-DOW disks and indicate whether or not a sector on a disk of this type have been previously written (see also annex Y).

For Type WO and WO-DOW disks, this field shall be unrecorded when the sector does not contain user data. When user data have been written to the sector, the bytes of this field shall be set to (FF).

For all other Types of disks, these bytes shall always be set to (FF) when data is recorded in the sector.

15.12.4 The bytes following SWF in the Data field of the 1 024-byte and 512-byte sector format

The four and six bytes following SWF in the Data field of the 1 024-byte and 512-byte sector format shall be set to (FF), respectively.

15.12.5 Resync bytes

The Resync bytes enable a drive to regain byte synchronization after a large defect in the data field.

Annex G specifies the Resync bytes and the criteria for selection of which of the two bytes is to be used.

The Resync fields shall be inserted among the rest of the bytes of the Data field as specified in annex F.

15.13 Postamble field (PA₂)

This field shall have a nominal length of 24 Channel bits which shall be used for RLL (1,7) closure.

This field shall end in a space to ensure that the Buffer field (see 15.14) shall consist of spaces.

Permitted PA₂ patterns can either be PA₁ as defined in clause 15.6, or any other valid RLL (1,7) closure which shall end in space but shall not contain a bit sequence of ONE ONE.

15.14 Buffer field

The Buffer field is needed for four reasons. Firstly, the tolerance on the header-to-header distance as specified in 14.1. Secondly, the tolerance in the start of the VFO₃ field as specified in 15.3. Thirdly, the actual length of the written data, as determined by the runout of the track and the speed variations of the disk during writing of the data. Fourthly, to ensure that all data written previously, the length of which is subject to the above tolerances, has been erased.

For embossed sectors, the Buffer shall be embossed with a continuous 2T pattern.

15.15 Transition Area (TA₂)

This area is used for transition from grooved areas to embossed headers and shall be equal in length to 12 Channel bits. This area shall not contain user information. For embossed sectors TA₂ shall be embossed with a continuous 2T pattern.

16 Recording code

The 8-bit bytes in the two ID fields and in the data field shall be encoded into Channel bits on the disk according to table 2 and annex G. Channel bits in these fields shall be decoded to information bits according to table 3 and annex G. All other fields in a sector have already been defined in terms of Channel bits. Write pulses shall produce marks in a manner such that the edge between a mark and a space or a space and a mark corresponds to a Channel bit that is a ONE.

The recording code used to record all data in the formatted areas of the disk shall be the run-length limited code known as RLL (1,7) as defined in tables 2 and 3.

Table 2 - Encoding of input bits to Channel bits

Preceding Channel bit	Current input bits	Following input bits	Channel bits RLL(1,7)
0 or 1	00	00 or 01	001
0	00	10 or 11	000
1	00	10 or 11	010
0	01	00 or 01	001
0	01	10 or 11	000
1	01	00	010
1	01	01, 10, or 11	000
0	10	00 or 01	101
0	10	10 or 11	010
0	11	00	010
0	11	01, 10, or 11	100

The coding shall start at the first bit of the first byte of the field to be converted. After a Resync field the RLL (1,7) coding shall start again with the last two input bits of the Resync bytes.

Table 3 - Decoding of Channel bits to information bits

Preceding Channel bits	Current Channel bits	Following Channel bits	Decoded information bits
10	000	00, 01, or 10	00
00 or 01	000	00, 01, or 10	01
00	001	00 or 01	01
01 or 10	001	00 or 01	00
00 or 10	010	00	11
00 or 10	010	01 or 10	10
01	010	00	01
01	010	01 or 10	00
00 or 10	100	00, 01, or 10	11
00 or 10	101	00 or 01	10

17 Formatted Zone

17.1 General description of the Formatted Zone

The Formatted Zone contains all information on the disk relevant for data interchange. The information comprises embossed tracking provisions, embossed headers, embossed data and, possibly, user-written data. In this clause the term 'data' is reserved for the content of the Data field of a sector, which, in general, is transferred to the host.

Clause 17 defines the layout of the information; the characteristics of signals obtained from this information are specified in section 4 and 6.

17.2 Division of the Formatted Zone

The Formatted Zone shall be divided into zones containing the logical tracks indicated in table 4.

The dimensions are given as reference only, and are nominal locations. The tolerance on the location of logical track 0 is specified in clause 13.4. The tolerances on other radii are determined by the tolerance on the track pitch as specified in 13.3.

The location of the zones defined in table 4 are also shown in figure 21.

Table 4 – Layout of the Formatted Zone

	Radius in mm		
	2 048-byte sectors	1 024-byte sectors	512-byte sectors
- Lead-in Zone	62,50 to 62,30	62,50 to 62,30	62,50 to 62,30
- Outer Control Track SFP Zone	62,30 to 62,25	62,30 to 62,25	62,30 to 62,25
- Outer Manufacturer Zone	62,25 to 62,10	62,25 to 62,00	62,25 to 62,00
(Guard Band)	(62,25 to 62,25)	(62,25 to 62,25)	(62,25 to 62,25)
(Test Zone for manufacturers)	(62,25 to 62,24)	(62,25 to 62,24)	(62,25 to 62,24)
(Test Zone for drives)	(62,24 to 62,10)	(62,24 to 62,00)	(62,24 to 62,00)
(Guard Band)	(62,10 to 62,10)	(62,00 to 62,00)	(62,00 to 62,00)
- User Zone	62,10 to 29,68	62,00 to 30,14	62,00 to 29,96
- Inner Manufacturer Zone	29,68 to 29,55	30,14 to 29,70	29,96 to 29,70
(Guard Band)	(29,68 to 29,68)	(30,14 to 30,13)	(29,96 to 29,95)
(Test Zone for drives)	(29,68 to 29,56)	(30,13 to 29,71)	(29,95 to 29,71)
(Test Zone for manufacturers)	(29,56 to 29,55)	(29,71 to 29,71)	(29,71 to 29,71)
(Guard Band)	(29,55 to 29,55)	(29,71 to 29,70)	(29,71 to 29,70)
- Inner Control Track SFP Zone	29,55 to 29,51	29,70 to 29,52	29,70 to 29,52
- Transition Zone for SFP	29,51 to 29,50	29,52 to 29,50	29,52 to 29,50
- Control Track PEP Zone	29,50 to 29,00	29,50 to 29,00	29,50 to 29,00
- Reflective Zone	29,00 to 27,00	29,00 to 27,00	29,00 to 27,00

	Logical Track Address		
	2 048-byte sectors	1 024-byte sectors	512-byte sectors
- Lead-in Zone	-3 015 to -1 531	-2 940 to -1 766	-2 736 to -1 657
- Outer Control Track SFP Zone	-1 530 to -1 126	-1 765 to -1 471	-1 656 to -1 369
- Outer Manufacturer Zone	-1 125 to -1	-1 470 to -1	-1 368 to -1
(Guard Band)	-1 125 to -1 100	-1 470 to -1 451	-1 368 to -1 349
(Test Zone for manufacturers)	-1 099 to -1 048	-1 450 to -1 411	-1 348 to -1 309
(Test Zone for drives)	-1 047 to -27	-1 410 to -21	-1 308 to -21
(Guard Band)	-26 to -1	-20 to -1	-20 to -1
- User Zone	0 to 182 507	0 to 138 914	0 to 130 111
- Inner Manufacturer Zone	182 508 to 183 013	138 915 to 140 144	130 112 to 130 794
(Guard Band)	182 508 to 182 520	138 915 to 138 924	130 112 to 130 121
(Test Zone for drives)	182 521 to 182 974	138 925 to 140 114	130 122 to 130 764
(Test Zone for manufacturers)	182 975 to 183 000	140 115 to 140 134	130 765 to 130 784
(Guard Band)	183 001 to 183 013	140 135 to 140 144	130 785 to 130 794
- Inner Control Track SFP Zone	183 014 to 183 145	140 145 to 140 677	130 795 to 131 284
- Transition Zone for SFP	183 146 to 183 190	140 678 to 140 724	131 285 to 131 330
- Control Track PEP Zone	N/A	N/A	N/A
- Reflective Zone	N/A	N/A	N/A

Radius (mm)			Zone Name	Content					
2 048-byte sectors	1024-byte sectors	512-byte sectors							
Max 62,50	Max 62,50	Max 62,50	Lead-in Zone						
62,30	62,30	62,30	SFP Zone	SFP1	SFP2	SFP3	SFP4	SFP
62,25	62,25	62,25	Outer Manufacture Zone						
62,10	62,00	62,00	User Zone	DMAs					
				User Area					
				DMAs					
29,68	30,14	29,96	Inner Manufacture Zone						
29,55	29,70	29,70	SFP Zone	SFP1	SFP2	SFP3	SFP4	SFP
29,51	29,52	29,52	Transition Zone						
29,50	29,50	29,50	PEP Zone	PEP		PEP		PEP	
29,00	29,00	29,00	Reflective Zone						
27,00	27,00	27,00							

Figure 21 - Location of the defined Zones

17.2.1 Lead-in Zone

The Lead-in Zone shall be used for positioning purposes only.

17.2.2 Manufacturer Zones

There shall be an Inner and an Outer Manufacturer Zone. They are provided to allow the media manufacturer to perform tests on the disk, including write operations, in an area located away from recorded information.

17.2.2.1 Outer Manufacturer Zone

The Outer Manufacturer Zone shall comprise 1 125/1 470/1 368 logical tracks.

The Outer Manufacturer Zone is divided into four parts: Two Guard bands and in between the actual Test Zones for drives and manufacturers.

The Test Zone for drives is intended for tests to enable a drive to set its write power and should not be used by media manufacturers, and shall not consist of embossed data in the case of fully rewritable or partially embossed disks. The tracks used for testing should be chosen from the Test Zone for drives in

a random way, so as to ensure a gradual degradation of the entire Test Zone due to use. Then each track in this zone will remain representative for the characteristics of tracks in the Data Zone of the disk.

The Test Zone for manufacturers is intended for quality tests by the media manufacturer and should not be used by drives.

The Test Zone for manufacturers may have embossed marks in the data field (see 15.12) that need not comply with the requirements of 15.12 or clause 16. The information in this zone is not specified by this International Standard and shall be ignored in interchange.

Logical tracks - 1 to -26/-20/-20 are a buffer and shall not be used.

All physical tracks in the Outer Manufacturer Zone shall contain 45/85/144 sectors.

17.2.2.2 Inner Manufacturer Zone

The Inner Manufacturer Zone is also divided into four parts (see 17.2.2.1).

All physical tracks of the Inner Manufacturer zone shall contain 22/41/70 sectors.

17.2.3 User Zone

The Data fields in the User Zone can be user-written or contain embossed data, in the format of clause 15, depending upon the type of the disk.

The layout of the User Zone and its sub-divisions is specified in clause 18.

17.2.4 Reflective Zone

This International Standard does not specify the format of the Reflective Zone, except that it shall have the same recording layer as the remainder of the Formatted Zone.

17.2.5 Control Track Zones

The three zones on each side of the disk

Control track PEP Zone

Inner Control Track SFP Zone

Outer Control Track SFP Zone

shall be used for recording control track information.

The control track information shall be recorded in two different formats, the first format in the Control Track PEP Zone, and the second format in the Inner and Outer Control Track SFP Zones.

The Control Track PEP Zone shall be recorded using low frequency phase-encoded modulation.

The Inner and Outer Control Track SFP Zones shall each consist of tracks recorded by the same modulation method and format as is used in the User Zone (see clauses 16 and 18).

The Transition Zone for SFP is an area in which the format changes from the Control Track PEP Zone which contains no servo information to a zone including servo information.

All physical tracks in the Inner Control Track SFP Zone shall have 22/41/70 sectors.

All physical tracks in the Outer Control Track SFP Zone shall have 45/85/144 sectors.

17.3 Control Track PEP Zone

The information contained in the Control Track PEP Zone gives a general characterization of the disk. It specifies the type of disk, the ECC, the tracking method, etc.

This zone shall not contain any servo information. All information shall be pre-recorded in phase-encoded modulation. The marks in all tracks of this zone shall be radially aligned, so as to allow information recovery from this zone without radial tracking being established by the drive.

The read power shall not exceed 0,65 mW.

17.3.1 Recording in the PEP Zone

In the PEP Zone there shall be 561 to 567 PEP-Channel bit cells per physical track. A PEP-Channel bit cell shall be 656 PEP-Channel bits ± 1 PEP-Channel bits long. A PEP-Channel bit is recorded by writing marks in either the first or the second half of the cell.

A mark shall be nominally two PEP-Channel bits long and shall be separated from adjacent marks by a space of nominally two PEP-Channel bits.

A ZERO shall be represented by a change from marks to spaces at the centre of the cell and a ONE by a change from spaces to marks at this centre.

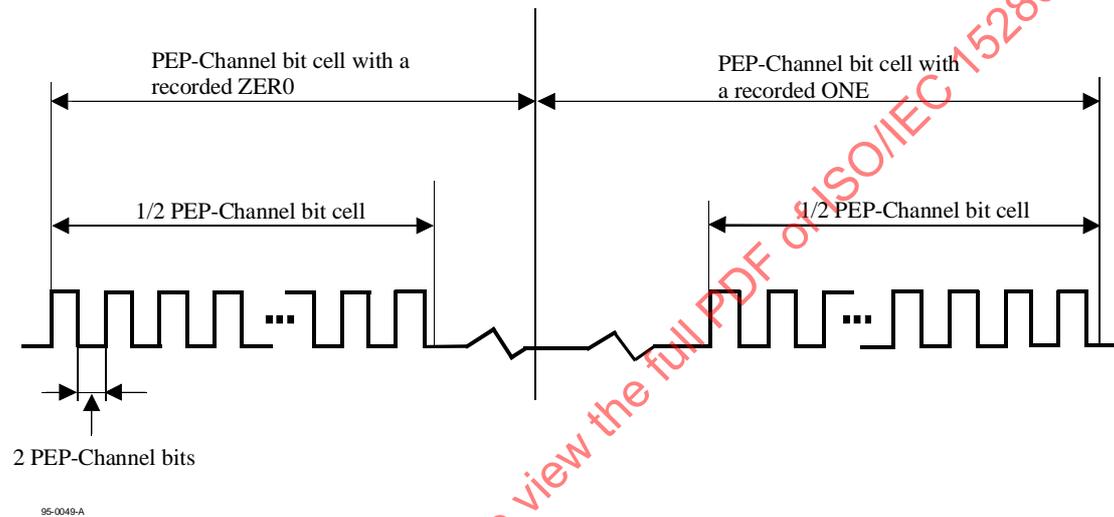


Figure 22 - Example of phase-encoded modulation in the PEP Zone

Requirements for the density of the tracks and the shape of marks in the Control Track PEP Zone are specified in clause 24.

17.3.2 Format of the tracks of the PEP Zone

Each physical track in the PEP Zone shall have three sectors. The numbers below the fields in figure 23 indicate the number of PEP-Channel bits in each field.

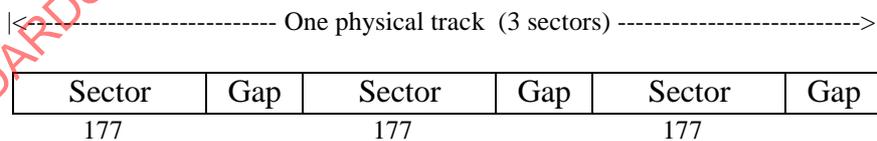


Figure 23 - Track format in the PEP Zone

The gaps between sectors shall be unrecorded areas having a length corresponding to 10 to 12 PEP-Channel bit cells.

17.3.2.1 Format of a sector

Each sector of 177 PEP-Channel bits shall have the following layout.

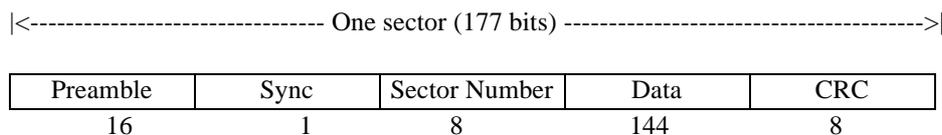


Figure 24 - Sector format in the PEP Zone

17.3.2.1.1 Preamble field

This field shall consist of 16 PEP-Channel bits set to ZERO.

17.3.2.1.2 Sync field

This field shall consist of 1 PEP-Channel bit set to ONE.

17.3.2.1.3 Sector Number field

This field shall consist of eight bits specifying in binary notation the Sector Number from 0 to 2.

17.3.2.1.4 Data field

This field shall comprise 18 8-bit bytes numbered 0 to 17. These bytes shall specify the following.

Byte 0

bit 7 shall be set to ZERO indicating the continuous servo tracking method,

bits 6 to 4 shall be set to 110 indicating a logical ZCAV.

Other settings of these bits are prohibited by this International Standard (see also annex W).

bit 3 shall be set to ZERO

bits 2 to 0 shall be set to 010 indicating RLL (1,7) mark edge modulation,

Other settings of these bits are prohibited by this International Standard.

Byte 1

bit 7 shall be set to ZERO

bits 6 to 4 specify the error correction code:

- when set to 000 shall indicate R-S LDC degree 16, and 10 interleaves.
- when set to 001 shall indicate R-S LDC degree 16, and 5 interleaves.
- when set to 010 shall indicate R-S LDC degree 16, and 20 interleaves.

Other settings of these bits are prohibited by this International Standard.

bit 3 shall be set to ZERO

bits 2 to 0 these bits shall specify in binary notation the power n of 2 in the following formula which expresses the number of user bytes per sector

$$256 \times 2^n$$

Values of n other than 1, 2 or 3 are prohibited by this International Standard.

Byte 2

This byte shall specify in binary notation the number of sectors in each logical track.

Byte 3

This byte shall give the manufacturer's specification for the baseline reflectance R of the disk when measured at a nominal wavelength of 685 nm. It is specified as a number n such that

$$n = 100 R.$$

Byte 4

This byte shall specify that the recording is in-groove in the user zone and it shall indicate the signal amplitude of the pre-recorded marks.

bit 7 shall be set to ONE to specify in-groove recording.

The absolute value of the signal amplitude is given as a number n between -15 and -33 such that

$$n = -50(I_{sm} / I_{top})$$

where I_{sm} is the signal from the Sector Mark in Channel 1 and I_{top} is the signal from an unrecorded, ungrooved area in the User Zone.

bits 6 to 0 shall express this number n . Bit 6 shall be set to ONE to indicate that this number is negative and expressed by bits 5 to 0 in TWO's complement. Recording is high-to-low.

Byte 5

This byte shall specify the capacity of the ODC in Gbytes (with one significant digit to the right of the decimal mark) times 10. For this International Standard, this byte shall be set to (34) representing a capacity of 5,2 Gbytes.

Byte 6

This byte shall specify in binary notation a number n representing 20 times the maximum read power expressed in milliwatts which is permitted for reading the SFP Zone at a rotational frequency of 50 Hz and a wavelength of 685 nm. This number n shall be between 30 and 40.

Byte 7

The setting of this byte shall specify:

0010 0000 Type R/W

0000 0000 Type O-ROM

1010 0000 Type P-ROM

0001 0001 Type WO

0110 0000 Type DOW

1110 0000 Type P-DOW

0001 0011 Type WO-DOW

Other settings of this byte are prohibited by this International Standard (see also annex W).

Byte 8

This byte shall specify the next most significant byte of the logical track number in which the Outer Control Track SFP Zone starts. It shall be set to (FA) or (F9) or (F9) representing the next MSB of track number -1 530/-1 765/-1 656.

Byte 9

This byte shall specify the least significant byte of the logical track number in which the Outer Control Track SFP Zone starts. It shall be set to (06) or (1B) or (88) representing the LSB of track number -1 530/-1 765/-1 656.

Byte 10

This byte shall specify the next most significant byte of the logical track number in which the Inner Control Track SFP Zone starts. It shall be set to (CA) or (23) or (FE) representing the next MSB of Logical Track Number 183 014/140 145/130 795.

Byte 11

This byte shall specify the least significant byte of the logical track number in which the Inner Control Track SFP Zone starts. It shall be set to (E6) or (71) or (EB) representing the LSB of Logical Track Number 183 014/140 145/130 795.

Byte 12

This byte shall specify the track pitch in micrometers times 100. It shall be set to (55) representing a track pitch of 0,85 μm .

Byte 13

This byte shall be set to (FF) and shall be ignored in interchange.

Byte 14

This byte shall specify the most significant byte of the Logical Track Number in which the Outer SFP Zone starts. It shall be set to (FF) or (FF) or (FF) representing the MSB of Logical Track Number. - 1 530/-1 765/-1 656

Byte 15

This byte shall specify the most significant byte of the logical track number in which the Inner Control Track SFP Zone starts. It shall be set to (02) or (02) or (01) representing the MSB of Logical Track Number 183 014/140 145/130 795.

Bytes 16 and 17

The contents of these bytes are not specified by this International Standard and shall be ignored in interchange.

17.3.2.1.5 CRC

The eight bits of the CRC shall be computed over the Sector Number field and the Data field of the PEP sector.

The generator polynomial shall be

$$G(x) = x^8 + x^4 + x^3 + x^2 + 1$$

The residual polynomial $R(x)$ shall be

$$R(x) = \left(\sum_{i=144}^{i=151} \bar{a}_i x^i + \sum_{i=0}^{i=143} a_i x^i \right) x^8 \text{ mod } G(x)$$

where a_i denotes a bit of the input data and \bar{a}_i an inverted bit. The highest order bit of the sector number field is a_{151} .

The eight bits c_k of the CRC are defined by

$$R(x) = \sum_{k=0}^{k=7} c_k x^k$$

where c_7 is recorded as the highest order bit of the CRC byte of the PEP sector.

17.3.2.2 Summary of the format of the Data field of a sector

Table 5 - Format of the Data field of a sector of the PEP Zone

Byte \ Bit	7	6	5	4	3	2	1	0
0	Format	Logical ZCAV			0	Modulation code		
1	0	ECC			0	Number of user bytes		
2	Number of sectors in each logical track							
3	Baseline reflectance at 685 nm							
4	0	Amplitude and polarity of pre-formatted data						
5	ODC Capacity							
6	Maximum read power for the SFP Zone at 50 Hz and 685 nm							
7	Disk Type							
8	Start Track of Outer SFP Zone, next MSB of Logical Track Number							
9	Start Track of Outer SFP Zone, LSB of Logical Track Number							
10	Start Track of Inner SFP Zone, next MSB of Logical Track Number							
11	Start Track of Inner SFP Zone, LSB of Logical Track Number							
12	Track pitch							
13	(FF)							
14	Start track of Outer SFP Zone, MSB of Logical Track Number							
15	Start track of Inner SFP Zone, MSB of Logical Track Number							
16	Not Specified by this International Standard							
17	Not Specified by this International Standard							

17.4 Control Track SFP Zones

The two Control Track SFP Zones shall be pre-recorded in the sector format specified in clause 15. The pre-recorded data marks shall satisfy the requirements for the signals specified in clause 23.

Each sector of the SFP Zones (see 17.2.5) shall include 512 bytes of information numbered 0 to 511;

- a duplicate of the PEP information (18 bytes),
- media information (362 bytes),
- system information (132 bytes),

In the case of 1 024-byte sectors these first 512 bytes shall be followed by 512 (FF)-bytes. In the case of 2 048-byte sectors these first 512 bytes shall be followed by 1 536 bytes set to (FF).

17.4.1 Duplicate of the PEP information

Bytes 0 to 17 shall be identical with the 18 bytes of the Data field of a sector of the PEP Zone (see 17.3.2.1.4).

17.4.2 Media information

Bytes 18 to 47 shall specify the conditions for

Wavelength $L_1 = 685$ nm;

Baseline Reflectance R_1 ;

and Rotational Frequency $N_1 = 50$ Hz.

For the value of N one set of write power for the 4T mark is given: it contains three values for the inner, middle and outer radius.

All values specified in bytes 18 to 47 shall be such that the requirements of 11.5 and of clauses 25, 26, 27 and 28 are met (see table 6).

Byte 18

This byte shall specify the wavelength L_1 , in nanometres, as a number n between 0 and 255 such that

$$n = 1/5 L_1$$

This byte shall be set to $n = 137$ for ODCs according to this International Standard.

Byte 19

This byte shall specify the baseline reflectance R_1 (see 11.5.5) at wavelength L_1 as a number n such that

$$n = 100 R_1$$

Byte 20

This byte shall specify the rotational frequency N_1 , in hertz, as a number n such that

$$n = N_1$$

This byte shall be set to $n = 50$ for ODCs according to this International Standard.

Byte 21

This byte shall specify the maximum read power P_1 in milliwatts, for the User Zone as a number n between 30 and 40 such that

$$n = 20 P_1$$

Bytes 22 to 24

These bytes are not used and shall be set to (FF).

The following bytes 25 to 27 shall specify the write power P_w for 4T marks in milliwatts indicated by the manufacturer of the disk (see 25.3.3). P_w is expressed as a number n between 0 and 255 such that

$$n = 5P_w$$

Byte 25

This byte shall specify P_w for

$$r = 30 \text{ mm}$$

Byte 26

This byte shall specify P_w for

$$r = 45 \text{ mm}$$

Byte 27

This byte shall specify P_w for

$$r = 60 \text{ mm}$$

The following bytes 28 to 30 shall specify the thermal build-up offset E_{th} or E_{th2} (for media Types DOW, P-DOW, and WO-DOW) in percent of the time period T of one Channel bit indicated by the manufacturer of the disk (see 27.5). E_{th} or E_{th2} shall be expressed as a number n between 0 and 255 such that

$$n = 2 E_{th} \text{ or } E_{th2}$$

Byte 28

This byte shall specify E_{th} or E_{th2} for

$$r = 30 \text{ mm}$$

Byte 29

This byte shall be set to (FF)

Byte 30

This byte shall be set to (FF)

Byte 31

This byte shall specify the thermal build-up offset E_{th1} at $r=30$ mm for media types DOW, P-DOW and WO-DOW only in percent of the time period T of one Channel bit indicated by the manufacturer of the disk (see 27.5). Otherwise this byte shall be set to (FF). E_{th1} shall be expressed as a number n between 0 and 255 such that n

$$n = 2 E_{th1}$$

Byte 32 to 43

These bytes are not used and shall be set to (FF)

Byte 44

This byte shall be set to (00)

The following bytes 45 to 47 shall specify the d.c. erase power P_e in milliwatts indicated by the manufacturer of the disk (see clause 28). P_e shall be expressed as a number n between 0 and 255 such that

$$n = 5 P_e$$

Byte 45

This byte shall specify P_e for

$$r = 30 \text{ mm}$$

Byte 46

This byte shall specify P_e for

$$r = 45 \text{ mm}$$

Byte 47

This byte shall specify P_e for

$$r = 60 \text{ mm}$$

Byte 48 to Byte 363

These bytes are not used by this International Standard and shall be set to (FF)

Byte 364

This byte shall specify the polarity of the figure of merit (see 26.1). It shall be set to (01) to mean that the polarity is negative (the direction of Kerr rotation due to the written mark is counterclock-wise).

Byte 365

This byte shall specify the figure of merit F as a number n (see 26.1), such that

$$n = 10000 F$$

Bytes 366 to 379

These bytes shall be set to (FF).

17.4.3 System Information

Bytes 380 to 386 are mandatory. Bytes 384 to 386 shall specify in binary notation the Logical Track Number of the last logical track of the User Zone. The total number of logical tracks in this zone equals the Logical Track Number of the last logical track of the User Zone increased by 1. For disks with 2 048-byte sectors, the Logical Track Number of the last logical track of the User Zone shall be 182 507. For disks with 1 024-byte sectors, the Logical Track Number of the last logical track of the User Zone shall be 138 914. For disks with 512-byte sectors, the Logical Track Number of the last logical track of the User Zone shall be 130 111.

Bytes 380 to 383: Reserved

These bytes shall be set to (FF).

Byte 384

This byte shall be set to (02) for 2 048-byte sectors, (02) for 1 024-byte sectors and (01) for 512-byte sectors, indicating the most significant byte of the number of the last logical track of the User Zone.

Byte 385

This byte shall be set to (C8) for 2 048-byte sectors, (1E) for 1 024-byte sectors and (FC) for 512-byte sectors, indicating the next most significant byte of the number of the last logical track of the User Zone.

Bytes 386

This byte shall be set to (EB) for 2 048-byte sectors, (A2) for 1 024-byte sectors and (3F) for 512-byte sectors, indicating the least significant byte of the number of the last logical track of the User Zone.

Bytes 387 to 399: Reserved

These bytes shall be set to (FF).

Bytes 400 to 445/466/459: Control bytes for partially embossed disks

This information is required for Types P-ROM and P-DOW and contains parameter values for bytes 0 to 45/66/59 of the DDS. The value of Byte 3 of the DDS may be chosen during initialization and need not agree with SFP Byte 403. These control bytes shall be defined by the manufacturer at the time the disk is manufactured. Bytes 414 to 421, which represent addresses of the PDL and SDL, shall be set to (FF).

For Types R/W, DOW, O-ROM, WO and WO-DOW these bytes shall be set to (FF).

Bytes 446/467/460 to 479: Reserved.

These bytes shall be set to (FF).

Bytes 480 to 511: Unspecified data

The contents of these bytes are not specified in this International Standard. They may contain an identification of the manufacturer. They shall be ignored in interchange.

Bytes 512 to 1 023/2 047: Reserved

These bytes shall be set to (FF).

Table 6 - Summary of media information

Category	Mandatory	Optional or (FF)	Mandatory (FF)
Media Parameter	0-12, 14, 15		13
Unspecified		16-17	
L_1 & R_1	18-19		
N_1 Values	20-21, 25-31, 44-47		22-24, 32-43
Not used			48 to 363
Figure of Merit	364-365		
Reserved			366-383
Last track number	384-386		
Reserved			387-399
DDS information or (FF)	400-413, 422-445/466/459 for Types P-ROM and P-DOW		400-445/466/459 for Types R/W, DOW O-ROM, WO and WO-DOW 414-421 for Types P-ROM and P-DOW
Reserved			446/467/460-479
Unspecified		480-511	
1024-byte sectors			512-1 023
2 048-byte sectors			512-2 047

18 Layout of the User Zone**18.1 General description of the User Zone**

The User Zone data capacity per side is 2,616 Gbytes for disks with 2 048-byte sectors, 2,418 Gbytes for disks with 1 024-byte sectors and 2,065 Gbytes for disks with 512-byte sectors. The spare sectors and the non-usable sectors are included in the above figures.

The location and size of the User Zone are specified in clause 17.

18.2 Divisions of the User Zone

The User Zone shall include four Defect Management Areas (DMA), two at the beginning of the zone and two at the end. The area between the two sets of DMAs is called the User Area.

The entire User Zone shall also be divided into bands as a result of the ZCAV organization of the disk.

Each of these bands shall contain the same number of physical tracks. Each such band is divided into logical tracks which have the same number of sectors. The number of logical tracks per band decreases from band to band moving from the outer radius to the inner radius.

When the sectors contain 2 048 user bytes, the User Zone shall be divided into 24 bands numbered 0 to 23 as shown in table 7.

When the sectors contain 1 024 user bytes, the User Zone shall be divided into 45 bands numbered 0 to 44 as shown in table 8.

When the sectors contain 512 bytes of user data, the User Zone shall be divided into 38 bands numbered 0 to 37 as shown in table 9.

The hierarchy is thus:

For 2 048-byte sector disks:	7 sectors	= 1 logical track
	4 994 to 10 215 logical tracks	= 1 band
	1 589 physical tracks	= 1 band
	24 bands	= the User Zone
For 1 024-byte sector disks:	17 sectors	= 1 logical track
	2 009 to 4 165 logical tracks	= 1 band
	833 physical tracks	= 1 band
	45 bands	= the User Zone
For 512-byte sector disks:	31 sectors	= 1 logical track
	2 240 to 4 608 logical tracks	= 1 band
	992 physical tracks	= 1 band
	38 bands	= the User Zone

18.3 User Area

The Data fields in the User Area are intended for recording of user data.

The User Area shall consist of:

- a Rewritable Zone, or
- an Embossed Zone, or
- an Embossed Zone and a Rewritable zone, or
- a Write Once Zone.

The User Area shall begin with track 6 and end with track 182 481/138 893/130 090. However, at the boundaries between bands, it shall not include the last 40/30/30 tracks of a band, and it shall not include the first 20/15/15 tracks of the next band.

There shall be 600/450/228 spare logical tracks in the User Area.

In addition, the User Area shall be partitioned into groups of bands. This International Standard describes one partitioning where each group resides in one band, i.e. there is a total of 24/45/38 groups.

Type R/W, DOW, P-ROM, P-DOW, O-ROM, WO and WO-DOW disks shall be partitioned according to alternative one. See 18.6.2, 18.7.2, and 18.8.2.

Table 7 - 2 048-byte sector disks: 24 groups

Band No.	Sectors per physical track	Tracks per band	Start track	Data start	Spares start	Buffer start	Test start	Buffer start
0	45	10 215	0	6	10 150	10 175	10 188	10 195
1	44	9 988	10 215	10 235	20 138	20 163	20 176	20 183
2	43	9 761	20 203	20 223	29 899	29 924	29 937	29 944
3	42	9 534	29 964	29 984	39 433	39 458	39 471	39 478
4	41	9 307	39 498	39 518	48 740	48 765	48 778	48 785
5	40	9 080	48 805	48 825	57 820	57 845	57 858	57 865
6	39	8 853	57 885	57 905	66 673	66 698	66 711	66 718
7	38	8 626	66 738	66 758	75 299	75 324	75 337	75 344
8	37	8 399	75 364	75 384	83 698	83 723	83 736	83 743
9	36	8 172	83 763	83 783	91 870	91 895	91 908	91 915
10	35	7 945	91 935	91 955	99 815	99 840	99 853	99 860
11	34	7 718	99 880	99 900	107 533	107 558	107 571	107 578
12	33	7 491	107 598	107 618	115 024	115 049	115 062	115 069
13	32	7 264	115 089	115 109	122 288	122 313	122 326	122 333
14	31	7 037	122 353	122 373	129 325	129 350	129 363	129 370
15	30	6 810	129 390	129 410	136 135	136 160	136 173	136 180
16	29	6 583	136 200	136 220	142 718	142 743	142 756	142 763
17	28	6 356	142 783	142 803	149 074	149 099	149 112	149 119
18	27	6 129	149 139	149 159	155 203	155 228	155 241	155 248
19	26	5 902	155 268	155 288	161 105	161 130	161 143	161 150
20	25	5 675	161 170	161 190	166 780	166 805	166 818	166 825
21	24	5 448	166 845	166 865	172 228	172 253	172 266	172 273
22	23	5 221	172 293	172 313	177 449	177 474	177 487	177 494
23	22	4 994	177 514	177 534	182 457	182 488	182 501	N/A

Table 8 - 1 024-byte sector disks: 45 groups

Band No.	Sectors per physical track	Tracks per band	Start Track	Data Start	Spares Start	Buffer Start	Test Start	Buffer Start
0	85	4 165	0	6	4 125	4 135	4 145	4 150
1	84	4 116	4 165	4 180	8 241	8 251	8 261	8 266
2	83	4 067	8 281	8 296	12 308	12 318	12 328	12 333
3	82	4 018	12 348	12 363	16 326	16 336	16 346	16 351
4	81	3 969	16 366	16 381	20 295	20 305	20 315	20 320
5	80	3 920	20 335	20 350	24 215	24 225	24 235	24 240
6	79	3 871	24 255	24 270	28 086	28 096	28 106	28 111
7	78	3 822	28 126	28 141	31 908	31 918	31 928	31 933
8	77	3 773	31 948	31 963	35 681	35 691	35 701	35 706
9	76	3 724	35 721	35 736	39 405	39 415	39 425	39 430
10	75	3 675	39 445	39 460	43 080	43 090	43 100	43 105
11	74	3 626	43 120	43 135	46 706	46 716	46 726	46 731
12	73	3 577	46 746	46 761	50 283	50 293	50 303	50 308
13	72	3 528	50 323	50 338	53 811	53 821	53 831	53 836
14	71	3 479	53 851	53 866	57 290	57 300	57 310	57 315
15	70	3 430	57 330	57 345	60 720	60 730	60 740	60 745
16	69	3 381	60 760	60 775	64 101	64 111	64 121	64 126
17	68	3 332	64 141	64 156	67 433	67 443	67 453	67 458
18	67	3 283	67 473	67 488	70 716	70 726	70 736	70 741
19	66	3 234	70 756	70 771	73 950	73 960	73 970	73 975
20	65	3 185	73 990	74 005	77 135	77 145	77 155	77 160
21	64	3 136	77 175	77 190	80 271	80 281	80 291	80 296
22	63	3 087	80 311	80 326	83 358	83 368	83 378	83 383
23	62	3 038	83 398	83 413	86 396	86 406	86 416	86 421
24	61	2 989	86 436	86 451	89 385	89 395	89 405	89 410
25	60	2 940	89 425	89 440	92 325	92 335	92 345	92 350
26	59	2 891	92 365	92 380	95 216	95 226	95 236	95 241
27	58	2 842	95 256	95 271	98 058	98 068	98 078	98 083
28	57	2 793	98 098	98 113	100 851	100 861	100 871	100 876
29	56	2 744	100 891	100 906	103 595	103 605	103 615	103 620

Table 8 (continued) - 1 024-byte sector disks: 45 groups

Band No.	Sectors per physical track	Tracks per band	Start Track	Data Start	Spares Start	Buffer Start	Test Start	Buffer Start
30	55	2 695	103 635	103 650	106 290	106 300	106 310	106 315
31	54	2 646	106 330	106 345	108 936	108 946	108 956	108 961
32	53	2 597	108 976	108 991	111 533	111 543	111 553	111 558
33	52	2 548	111 573	111 588	114 081	114 091	114 101	114 106
34	51	2 499	114 121	114 136	116 580	116 590	116 600	116 605
35	50	2 450	116 620	116 635	119 030	119 040	119 050	119 055
36	49	2 401	119 070	119 085	121 431	121 441	121 451	121 456
37	48	2 352	121 471	121 486	123 783	123 793	123 803	123 808
38	47	2 303	123 823	123 838	126 086	126 096	126 106	126 111
39	46	2 254	126 126	126 141	128 340	128 350	128 360	128 365
40	45	2 205	128 380	128 395	130 545	130 555	130 565	130 570
41	44	2 156	130 585	130 600	132 701	132 711	132 721	132 726
42	43	2 107	132 741	132 756	134 808	134 818	134 828	134 833
43	42	2 058	134 848	134 863	136 866	136 876	136 886	136 891
44	41	2 009	136 906	136 921	138 884	138 900	138 910	N/A

Table 9 - 512-byte sector disks: 38 groups

Band No.	Sectors per physical track	Tracks per band	Start Track	Data Start	Spares Start	Buffer Start	Test Start	Buffer Start
0	144	4 608	0	6	4 572	4 578	4 588	4 593
1	142	4 544	4 608	4 623	9 116	9 122	9 132	9 137
2	140	4 480	9 152	9 167	13 596	13 602	13 612	13 617
3	138	4 416	13 632	13 647	18 012	18 018	18 028	18 033
4	136	4 352	18 048	18 063	22 364	22 370	22 380	22 385
5	134	4 288	22 400	22 415	26 652	26 658	26 668	26 673
6	132	4 224	26 688	26 703	30 876	30 882	30 892	30 897
7	130	4 160	30 912	30 927	35 036	35 042	35 052	35 057
8	128	4 096	35 072	35 087	39 132	39 138	39 148	39 153
9	126	4 032	39 168	39 183	43 164	43 170	43 180	43 185
10	124	3 968	43 200	43 215	47 132	47 138	47 148	47 153
11	122	3 904	47 168	47 183	51 036	51 042	51 052	51 057
12	120	3 840	51 072	51 087	54 876	54 882	54 892	54 897
13	118	3 776	54 912	54 927	58 652	58 658	58 668	58 673
14	116	3 712	58 688	58 703	62 364	62 370	62 380	62 385
15	114	3 648	62 400	62 415	66 012	66 018	66 028	66 033
16	112	3 584	66 048	66 063	69 596	69 602	69 612	69 617
17	110	3 520	69 632	69 647	73 116	73 122	73 132	73 137
18	108	3 456	73 152	73 167	76 572	76 578	76 588	76 593
19	106	3 392	76 608	76 623	79 964	79 970	79 980	79 985
20	104	3 328	80 000	80 015	83 292	83 298	83 308	83 313
21	102	3 264	83 328	83 343	86 556	86 562	86 572	86 577
22	100	3 200	86 592	86 607	89 756	89 762	89 772	89 777
23	98	3 136	89 792	89 807	92 892	92 898	92 908	92 913
24	96	3 072	92 928	92 943	95 964	95 970	95 980	95 985
25	94	3 008	96 000	96 015	98 972	98 978	98 988	98 993
26	92	2 944	99 008	99 023	101 916	101 922	101 932	101 937
27	90	2 880	101 952	101 967	104 796	104 802	104 812	104 817
28	88	2 816	104 832	104 847	107 612	107 618	107 628	107 633
29	86	2 752	107 648	107 663	110 364	110 370	110 380	110 385
30	84	2 688	110 400	110 415	113 052	113 058	113 068	113 073

Table 9 (continued) - 512-byte sector disks: 38 groups

Band No.	Sectors per physical track	Tracks per band	Start Track	Data Start	Spares Start	Buffer Start	Test Start	Buffer Start
31	82	2 624	113 088	113 103	115 676	115 682	115 692	115 697
32	80	2 560	115 712	115 727	118 236	118 242	118 252	118 257
33	78	2 496	118 272	118 287	120 732	120 738	120 748	120 753
34	76	2 432	120 768	120 783	123 164	123 170	123 180	123 185
35	74	2 368	123 200	123 215	125 532	125 538	125 548	125 553
36	72	2 304	125 568	125 583	127 836	127 842	127 852	127 857
37	70	2 240	127 872	127 887	130 085	130 097	130 107	NA

18.4 Defect Management Areas (DMAs)

The four Defect Management Areas contain information on the structure of the User Area and on the defect management. The locations of the DMAs are shown in tables 7, 8 and 9.

Each DMA shall have a length of 21 sectors for 2 048-byte sectors, 51 sectors for 1 024-byte sectors and 93 sectors for 512-byte sectors. The addresses of the first sector of each DMA is given by table 10.

Table 10 - Location of the DMAs

DMA Number	2 048-byte sectors		1 024-byte sectors		512-byte sectors	
	Track Number	Sector Number	Track Number	Sector Number	Track Number	Sector Number
DMA1	0	0	0	0	0	0
DMA2	3	0	3	0	3	0
DMA3	182 482	0	138 894	0	130 091	0
DMA4	182 485	0	138 897	0	130 094	0

For Types R/W, DOW, P-ROM, P-DOW, WO and WO-DOW the unused sector that lies after DMA2 and the unused sector that lies after DMA4, are reserved for future standardization.

Each DMA shall contain a Disk Definition Structure, a Primary Defect List (PDL) and a Secondary Defect List (SDL). The contents of the four PDLs shall be identical and the contents of the SDLs shall be identical. The only differences between the four DDSs shall be the pointers to each associated PDL and SDL.

After initialization, each DMA shall have the following contents:

- the first sector shall contain the DDS;
- the second sector shall be the first sector of the PDL for Types R/W, DOW, P-ROM, P-DOW, WO and WO-DOW;
- the SDL shall begin in the first sector following the PDL for Types R/W, DOW, P-ROM, P-DOW, WO and WO-DOW.

The lengths of the PDL and SDL are determined by the number of entries in them. The contents of the remaining sectors of the DMAs after the SDL are not specified for Types R/W, DOW, P-ROM, P-DOW, WO and WO-DOW and shall be ignored during interchange.

The start address of a PDL and that of the SDL within each DDS shall reference the PDL and the SDL in the same DMA.

For Type O-ROM except for the DDS sectors, the Data fields of all sectors in the DMAs shall be set to (FF).

18.5 Disk Definition Structure (DDS)

The DDS shall consist of a table with a length of one sector. It specifies the method of initialization of the disk, the division of the User Area into groups, the kind of data sectors within each group, and the start addresses of the PDL and SDL. The DDS shall be recorded in the first sector of each DMA at the end of initialization of the disk. On Type O-ROM disks, the DDS shall be embossed.

For Type P-ROM and P-DOW the values of some of the DDS parameters are specified by the manufacturer and recorded in the control SFP Zones.

Tables 11, 12 and 13 summarize the information that shall be recorded in each of the four DDSs.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999

Table 11 - Byte assignment of the Disk Definition Structure (2 048-byte sector)

Byte No.	Content	Settings			
		Mandatory R/W DOW	WO WO-DOW	O-ROM	P-ROM P-DOW
0	DDS Identifier	(0A)	(05)	(0A)	(0A)
1	DDS Identifier	(0A)	(05)	(0A)	(0A)
2	Reserved	(00)	(00)	(00)	(00)
3	Fully Embossed Disk Certified Disk Not Certified	n.a. (01) (02)	n.a. (01) (02)	(00) n.a. n.a.	n.a. (01) (02)
4	Number of Groups MSB	(00)	(00)	(00)	(00)
5	Number of Groups LSB	(18)	(18)	(18)	(18)
6	Reserved	(00)	(00)	(00)	(00)
7	Reserved	(00)	(00)	(00)	(00)
8	Reserved	(00)	(00)	(00)	(00)
9	Reserved	(00)	(00)	(00)	(00)
10	Reserved	(00)	(00)	(00)	(00)
11	Reserved	(00)	(00)	(00)	(00)
12	Reserved	(00)	(00)	(00)	(00)
13	Reserved	(00)	(00)	(00)	(00)
14	Start of PDL, Track MSB	-	-	(FF)	-
15	Start of PDL, Track	-	-	(FF)	-
16	Start of PDL, Track LSB	-	-	(FF)	-
17	Start of PDL, Sector Number	-	-	(FF)	-
18	Start of SDL, Track MSB	-	-	(FF)	-
19	Start of SDL, Track	-	-	(FF)	-
20	Start of SDL, Track LSB	-	-	(FF)	-
21	Start of SDL, Sector Number	-	-	(FF)	-
22	Band 0 Type	(01)	(04)	(02)	(01)
23	Band 1 Type	(01)	(04)	(02)	(01) or (02)
	:	:	:	:	:
44	Band 22 Type	(01)	(04)	(02)	(01) or (02)
45	Band 23 Type	(01)	(04)	(02)	(01) or (02)
46 to 2047		(00)	(00)	(00)	(00)

In the above table, the symbol (-) means that the appropriate value is to be entered in the DDS, and n.a. means "not applicable".

Table 12 - Byte assignment of the Disk Definition Structure (1 024-byte sector)

Byte No.	Content	Settings			
		Mandatory R/W DOW	WO WO-DOW	O-ROM	P-ROM P-DOW
0	DDS Identifier	(0A)	(05)	(0A)	(0A)
1	DDS Identifier	(0A)	(05)	(0A)	(0A)
2	Reserved	(00)	(00)	(00)	(00)
3	Fully Embossed Disk Certified Disk Not Certified	n.a. (01) (02)	n.a. (01) (02)	(00) n.a. n.a.	n.a. (01) (02)
4	Number of Groups MSB	(00)	(00)	(00)	(00)
5	Number of Groups LSB	(2D)	(2D)	(2D)	(2D)
6	Reserved	(00)	(00)	(00)	(00)
7	Reserved	(00)	(00)	(00)	(00)
8	Reserved	(00)	(00)	(00)	(00)
9	Reserved	(00)	(00)	(00)	(00)
10	Reserved	(00)	(00)	(00)	(00)
11	Reserved	(00)	(00)	(00)	(00)
12	Reserved	(00)	(00)	(00)	(00)
13	Reserved	(00)	(00)	(00)	(00)
14	Start of PDL, Track MSB	-	-	(FF)	-
15	Start of PDL, Track	-	-	(FF)	-
16	Start of PDL, Track LSB	-	-	(FF)	-
17	Start of PDL, Sector Number	-	-	(FF)	-
18	Start of SDL, Track MSB	-	-	(FF)	-
19	Start of SDL, Track	-	-	(FF)	-
20	Start of SDL, Track LSB	-	-	(FF)	-
21	Start of SDL, Sector Number	-	-	(FF)	-
22	Band 0 Type	(01)	(04)	(02)	(01)
23	Band 1 Type	(01)	(04)	(02)	(01) or (02)
	:	:	:	:	:
65	Band 43 Type	(01)	(04)	(02)	(01) or (02)
66	Band 44 Type	(01)	(04)	(02)	(01) or (02)
67 to 1023		(00)	(00)	(00)	(00)

In the above table, the symbol (-) means that the appropriate value is to be entered in the DDS, and n.a. means "not applicable".

Table 13 - Byte assignment of the Disk Definition Structure (512-byte sector)

Byte No.	Content	Settings			
		Mandatory R/W DOW	WO WO-DOW	O-ROM	P-ROM P-DOW
0	DDS Identifier	(0A)	(05)	(0A)	(0A)
1	DDS Identifier	(0A)	(05)	(0A)	(0A)
2	Reserved	(00)	(00)	(00)	(00)
3	Fully Embossed	n.a.	n.a.	(00)	n.a.
	Disk Certified	(01)	(01)	n.a.	(01)
	Disk Not Certified	(02)	(02)	n.a.	(02)
4	Number of Groups MSB	(00)	(00)	(00)	(00)
5	Number of Groups LSB	(26)	(26)	(26)	(26)
6	Reserved	(00)	(00)	(00)	(00)
7	Reserved	(00)	(00)	(00)	(00)
8	Reserved	(00)	(00)	(00)	(00)
9	Reserved	(00)	(00)	(00)	(00)
10	Reserved	(00)	(00)	(00)	(00)
11	Reserved	(00)	(00)	(00)	(00)
12	Reserved	(00)	(00)	(00)	(00)
13	Reserved	(00)	(00)	(00)	(00)
14	Start of PDL, Track MSB	-	-	(FF)	-
15	Start of PDL, Track	-	-	(FF)	-
16	Start of PDL, Track LSB	-	-	(FF)	-
17	Start of PDL, Sector Number	-	-	(FF)	-
18	Start of SDL, Track MSB	-	-	(FF)	-
19	Start of SDL, Track	-	-	(FF)	-
20	Start of SDL, Track LSB	-	-	(FF)	-
21	Start of SDL, Sector Number	-	-	(FF)	-
22	Band 0 Type	(01)	(04)	(02)	(01)
23	Band 1 Type	(01)	(04)	(02)	(01) or (02)
		:	:	:	:
58	Band 36 Type	(01)	(04)	(02)	(01) or (02)
59	Band 37 Type	(01)	(04)	(02)	(01) or (02)
60 to 511		(00)	(00)	(00)	(00)

In the above table, the symbol (-) means that the appropriate value is to be entered in the DDS, and n.a. means "not applicable".

18.6 Rewritable Zone

Types R/W, DOW, P-DOW and P-ROM disks shall have a Rewritable Zone. The Rewritable Zone is intended for the user to write data into. The Data field of all sectors in this zone shall not contain any embossed data.

18.6.1 Location

For Types R/W and DOW the Rewritable Zone shall extend from sector 0 of track 6 to the last sector of track 182 481/138 893/130 090.

For Types P-ROM and P-DOW the Rewritable Zone shall extend from sector 0 of track 6 to the last sector of the last track of the Band preceding the first Band of the Embossed Zone.

18.6.2 Partitioning

During initialization of the disk, the User Zone shall be partitioned into 24/45/38 consecutive groups (see tables 11, 12 and 13). Each group shall comprise tracks of data sectors followed by tracks of spare sectors.

18.7 Embossed Zone

Types P-ROM, P-DOW and O-ROM shall have an Embossed Zone. It shall contain data embossed by the manufacturer of the disk. The layout of all sectors in this zone shall be as specified in clause 15.

18.7.1 Location

For Types P-ROM and P-DOW the Embossed Zone shall start at sector 0 of the Data Start track (tables 7, 8 and 9) of the Band which follows the rewritable zone. The last track of the Embossed Zone on Types P-ROM and P-DOW shall be track 182 481/138 893/130 090.

For Type O-ROM the Embossed Zone shall start at sector 0 of track 6 and end at the last sector of track 182 481/138 893/130 090.

18.7.2 Partitioning

Type O-ROM shall be partitioned into 24/45/38 groups.

Types P-ROM and P-DOW shall be partitioned into 24/45/38 groups. The rewritable zone shall start in group 0. Both the Rewritable Zone and the Embossed Zone shall have been partitioned into consecutive groups constructed from the bands.

In the Embossed Zone, each group shall comprise data sectors and parity sectors. Both the data sector and the parity sector areas of all groups shall start at sector 0.

Each group shall comprise full tracks of data sectors followed by full tracks of spare sectors or parity sectors as shown in tables 7, 8 and 9.

For Types P-ROM, P-DOW, and O-ROM there may be a number of tracks remaining after the parity sector areas in each group. These remaining tracks shall be located after the track that contains the final parity sector. The Data field of any unused sector including Buffer tracks and Test tracks within the Embossed Zone shall have all user data bytes set to (FF), except tracks 182 482 to 182 487 for 2 048-byte sectors, 138 894 to 138 899 for 1 024-byte sectors, or 130 091 to 130 096 for 512-byte sectors of Types P-ROM and P-DOW the Data Fields of which, as well as the VFO₃ fields, shall contain no embossed data.

18.7.3 Parity sectors

The embossed parity sectors provide an error correction system for embossed data over the user data bytes and SWF bytes 2 049 to 2 056 or 1 025 to 1 032 or 513 to 520 of each sector in addition to the ECC. They allow the drive to correct one sector on a track that cannot be corrected by the ECC, assuring a high data integrity. If more than one sector on a track cannot be corrected by ECC, then it is not possible to recover any of these defective sectors by the use of parity sectors.

The Data field of parity sectors contain 2 056/1 032/520 parity bytes (PB), calculated as an Exclusive OR (⊕) over the user data bytes and SWF bytes 2 049 to 2 056 or 1 025 to 1 032 or 513 to 520 (DB), of the data sectors on one track of the group.

The algorithm shall be

$$PB_{t,n} = DB_{t,0,n} \oplus DB_{t,1,n} \oplus \dots \oplus DB_{t,j,n}$$

where

$$1 \leq t \leq m \text{ \{Number of Embossed data tracks\}}$$

$$j = 6 \text{ or } 16 \text{ or } 30$$

$$1 \leq n \leq 2\,056 \text{ or } 1\,032 \text{ or } 520$$

$PB_{T,n}$ is byte A_n of Parity Sector T , and $DB_{t,j,n}$ is byte A_n of sector j on track t of the group. A_n is defined in annex F. The parity bytes are calculated over the user data bytes and SWF bytes 2 049 to 2 056 or 1 025 to 1 032 or 513 to 520, excluding the Resync bytes. The CRC, ECC, and Resync bytes as defined in annex F shall be required with each parity sector.

The parity sectors for each track of the group shall be stored consecutively in the sectors allocated to them in each Band, starting with the first sector. The first parity sector of a Band is associated with the first track of the data sectors of the same Band, the second parity sector is associated with the second track of the data sectors, and so on until all tracks with data sectors have an associated Parity Sector. The contents of the Data field of the unused parity sectors shall be set to (FF) and shall contain data complying with the layout as given in annex F.

18.8 Write Once Zone

Types WO and WO-ROM shall contain a Write Once Zone. The Write Once Zone is intended for the user to write data into. The Data field of all sectors in this zone shall not contain any embossed data.

18.8.1 Location

The Write Once Zone shall extend from sector 0 of track 6 to the last sector of track 182 481/138 893 /130 090. Every band of these disks shall be recorded in bytes 22 to 45/66/59 of the DDS as being Write Once.

18.8.2 Partitioning

During initialization of the disk, the Write Once Zone shall be partitioned into 24/45/38 consecutive groups. Each band shall comprise full tracks of data sectors followed by full tracks of spare sectors.

19 Defect Management in the Rewritable and Write Once Zones

Defective sectors on the disk shall be replaced by good sectors according to the defect management scheme described below. Each side of the disk shall be initialized before use. This International Standard allows media initialization with or without certification. Defective sectors found during certification are handled by a Sector Slipping Algorithm. Defective sectors found after initialization are handled by a Linear Replacement Algorithm. The total number of defective sectors on a side of the disk, replaced by both algorithms, shall not be greater than 4 095/4 095/4 095.

19.1 Initialization of the disk

During initialization of the disk, the four DMAs are recorded prior to the first use of the disk. The User Area is divided into Bands, each containing data sectors and spare sectors. Media initialization can include a certification of the rewritable Bands and Write Once Bands, whereby defective sectors are identified and skipped.

For Types WO and WO-DOW disks only a single initialization is allowed. Once the DMAs are recorded, it indicates that the disk is initialized and that no further initialization is permitted. All sectors in the write once zone of Type WO shall be in the erased state at the end of initialization. For Type WO-DOW, the state of the sectors in the write once zone is indifferent due to the direct overwrite capability.

All DDS parameters shall be recorded in the four DDS sectors. The PDL and SDL shall be recorded in the four DMAs. The content of the PDLs and SDLs are shown in tables 14 and 15.

19.2 Certification

If the disk is certified, the certification shall be applied to all sectors of rewritable Bands in the User Area. The method of certification is not stated by this International Standard. It may involve erasing, writing, and reading of sectors. Defective sectors found during certification shall be handled by the Slipping Algorithm (see 19.2.1) or, where applicable, by the Linear Replacement Algorithm (see 19.2.2). Defective sectors shall not be used for reading or writing. Guidelines for replacing defective sectors are given in annex U.

19.2.1 Slipping Algorithm

The Slipping Algorithm shall be applied individually to each and every band on the disk if certification is performed.

A defective data sector found during certification shall be replaced by the first good sector following the defective sector, and so causes a slip of one sector towards the end of the band. The last data sectors will slip into the spare sector area. The address of the defective sector is written in the PDL. If no defective sectors are found during certification, an empty PDL shall be recorded.

The addresses of spare sectors, beyond the last data sector slipped into the spare area (if any), which are found to be defective during certification shall be recorded in the PDL. Thus, the number of available spare sectors is diminished accordingly.

If the spare sector area of a band becomes exhausted during certification, the defective sector shall be handled by the Linear Replacement Algorithm. This process involves assigning a replacement sector from the spare area of another band and cannot be accomplished until the other band has been certified. This is due to the fact that the next available spare sector is not known until its group is certified, i.e. the Slipping Algorithm has been applied.

19.2.2 Linear Replacement Algorithm

The Linear Replacement Algorithm is used to handle defective sectors found after certification. It is also used during certification in the event of the spare area of a Band becoming exhausted.

The defective sector shall be replaced by the first available spare sector of the Band. If a replacement sector is found to be defective, it shall be replaced by the next available spare sector in that band. The addresses of the defective sector and the replacement sector shall be recorded in the SDL.

If there are no spare sectors left in the Band, the defective sector shall be replaced by the first available spare sector of another Band.

The addresses of sectors already recorded in the PDL shall not be recorded in the SDL.

If a replacement sector listed in the SDL is later found to be defective, it shall be dealt with by making a new entry in the SDL indicating a replacement sector for that defective sector.

19.3 Disks not certified

The Linear Replacement Algorithm is also used to handle sectors found defective on disks which have not been certified.

The defective sector shall be replaced by the first available spare sector of the Band. If there are no spare sectors left in the Band, the defective data and spare sector shall be replaced by the first available spare sector of another Band. The addresses of the defective sector and the replacement sector shall be recorded in the SDL. If a replacement sector is found to be defective, it shall be replaced by the next available spare sector in that Band.

If a replacement sector listed in the SDL is later found to be defective, it shall be dealt with by making a new entry in the SDL indicating a replacement sector for that defective sector.

19.4 Write procedure

When writing or reading data in the sectors of a Band, all defective sectors listed in the PDL shall be skipped and the data shall be written in the next data sector according to the Slipping Algorithm. If a sector to be written is listed in the SDL, the data shall be written in the spare sector pointed to by the SDL, according to the Linear Replacement Algorithm.

For Type WO after initialization, all sectors in the User Area shall be in the erased state. Erasing of sectors in the User Area after initialization is not permitted. For Type WO-DOW, the state of the sectors in the User Area is indifferent due to the direct overwrite capability, and erasing after initialization is not allowed.

Before writing a sector in the User Area of a Types WO and WO-DOW, it shall be determined whether or not the sector has been written. If the sector has been written, a write operation is not permitted. During write operations, sectors shall always be recorded with CRC and ECC, and the 8 SWF bytes as specified by this International Standard. See also annex Y for guidelines for the use of Types WO and WO-DOW.

19.5 Primary Defect List (PDL)

The PDL shall consist of bytes specifying

- the length of the PDL,
- the sector addresses of defective sectors, identified at initialization, in ascending order of track and sector addresses.

Table 14 shows the PDL byte layout. All remaining bytes of the last sector in which the Primary Defect List is recorded, shall be set to (FF). If no defective sectors are detected, then the first defective sector address is set to (FF) and bytes specifying the number of entries are set to (00).

During initialization, a PDL shall be recorded; this PDL may be empty.

Table 14 - Primary Defect List

Byte No.	Description
0	(00) PDL Identifier
1	(01) PDL Identifier
2	Number of entries MSB (each entry is 4 bytes long)
3	Number of entries LSB (If bytes 2 and 3 are (00), byte 3 is the end of the PDL)
4	Address of the first defective sector (track number MSB)
5	Address of the first defective sector (track number)
6	Address of the first defective sector (track number LSB)
7	Address of the first defective sector (sector number)
.	.
.	.
.	.
n-3	Address of the ((n-3)/4th) defective sector (track number MSB)
n-2	Address of the ((n-3)/4th) defective sector (track number)
n-1	Address of the ((n-3)/4th) defective sector (track number LSB)
n	Address of the ((n-3)/4th) defective sector (sector number)

19.6 Secondary Defect List (SDL)

The SDL is used to record the addresses of data and spare sectors which have become defective after initialization and those of their respective replacements. Eight bytes are used for each entry. The first 4 bytes specify the address of the defective sector and the next 4 bytes specify the address of the replacement sector.

The SDL shall consist of bytes identifying the SDL, specifying the length of the SDL, and of a list containing the addresses of defective sectors and those of their replacement sectors. The addresses of the data and spare defective sectors shall be in ascending order. Table 15 shows the SDL layout. All remaining bytes of the last sector in which the SDL is recorded shall be set to (FF). An empty SDL shall consist of bytes 0 to 3 as shown in table 15; bytes 2 and 3 shall be set to (00).

Table 15 - Secondary Defect List

Byte No.	Description
0	(00) SDL Identifier
1	(02) SDL Identifier
2	Number of addresses in the SDL, MSB (each entry is 8 bytes long)
3	Number of addresses in the SDL, LSB (If bytes 2 and 3 are set to (00), byte 3 is the end of the SDL)
4	Address of the first defective sector (track number, MSB)
5	Address of the first defective sector (track number)
6	Address of the first defective sector (track number, LSB)
7	Address of the first defective sector (sector number)
8	Address of the first replacement sector (track number, MSB)
9	Address of the first replacement sector (track number)
10	Address of the first replacement sector (track number, LSB)
11	Address of the first replacement sector (sector number)
.	.
.	.
.	.
$n-7$	Address of the last defective sector (track number, MSB)
$n-6$	Address of the last defective sector (track number)
$n-5$	Address of the last defective sector (track number, LSB)
$n-4$	Address of the last defective sector (sector number)
$n-3$	Address of the last replacement sector (track number, MSB)
$n-2$	Address of the last replacement sector (track number)
$n-1$	Address of the last replacement sector (track number, LSB)
n	Address of the last replacement sector (sector number)

Section 4 - Characteristics of embossed information

20 Method of testing

The format of the embossed information on the disk is defined in clauses 13 to 18. Clauses 21 to 24 specify the requirements for the signals from grooves, Headers, embossed data, and Control Track PEP marks, as obtained when using the Reference Drive specified in clause 9.

Clauses 21 to 24 specify the average quality of the embossed information over the sector recorded according to the sector format defined in clause 15 and 16. Local deviations from the specified values, called defects, can cause tracking errors, erroneous Headers, or errors in the Data fields. These errors are covered in section 6.

20.1 Environment

All signals specified in clauses 21 to 24 shall be within their specified ranges with the cartridge in any environment in the range of allowed operating environments defined in 8.1.2.

20.2 Use of the Reference Drive

All signals specified in clauses 21 to 24 shall be measured in the indicated channels of the Reference Drive. The drive shall have the following characteristics for the purpose of these tests.

20.2.1 Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to f). The disk shall rotate as specified in 9.5.

20.2.2 Read power

The read power is the optical power incident at the entrance surface, used when reading, and is specified as follows for the stated zones (see clause 17):

a) PEP Zone

The read power shall not exceed the value specified in 17.3.

b) SFP Zone

The read power shall be in the range given in byte 6 of the PEP Zone (see 17.3.2.1.4). The test read power shall be 1,5 mW.

c) User zone

The read power shall be in the range given in byte 21 of the SFP Zone (see 17.4.2). The test read power shall be 1,5 mW.

20.2.3 Read channels

The drive shall have a read Channel, in which the total amount of light in the exit pupil of the objective lens is measured. This Channel shall have the implementation as given by Channel 1 in 9.1.

20.2.4 Tracking

During the measurement of the signals, the focus of the optical beam shall have an axial deviation of not more than

$$e_{\max}(\text{axial}) = 0,7 \mu\text{m}$$

from the recording layer, and it shall have a radial deviation of not more than

$$e_{\max}(\text{radial}) = 0,09 \mu\text{m}$$

from the centre of a track.

20.3 Definition of signals

Figure 25 shows the signals specified in clauses 21 to 24.

All signals are linearly related to currents through a photodiode detector, and are therefore linearly related to the optical power falling on the detector.

I_1 and I_2 are the outputs of the two halves of the split photodiode detector in the Tracking Channel (see 9.1 and figure 25a).

Channel 1 is the sum of the two photo detectors in the optical system (see 9.1) as processed by the bottom-hold circuit and low pass filters described in annex P. I_{IG} and I_{OL} indicate the maximum and minimum signals of Channel 1, respectively, when the beam crosses the tracks in grooved areas without embossed recording fields. $I_{bh\max}$ and $I_{bh\min}$ indicate the maximum and minimum signals of the lower envelope of Channel 1, respectively, when the beam crosses the tracks in areas containing embossed Headers and embossed recording fields. (see figure 25b).

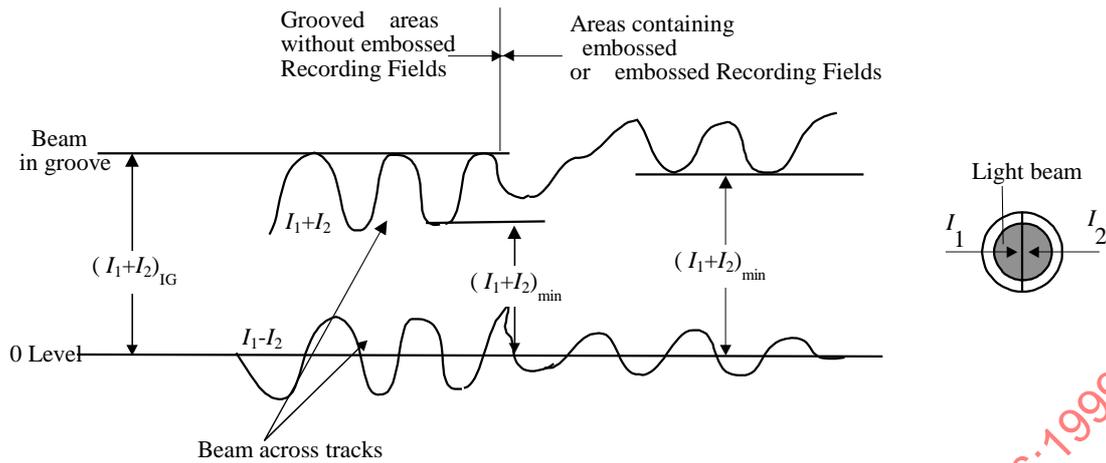


Figure 25a - Signals from grooves in the Tracking Channel

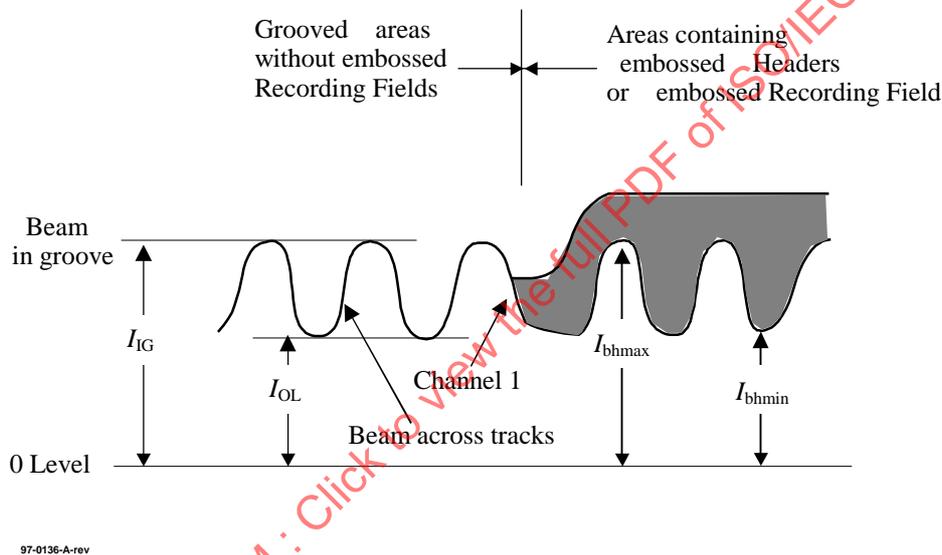


Figure 25b - Signals from grooves in Channel 1

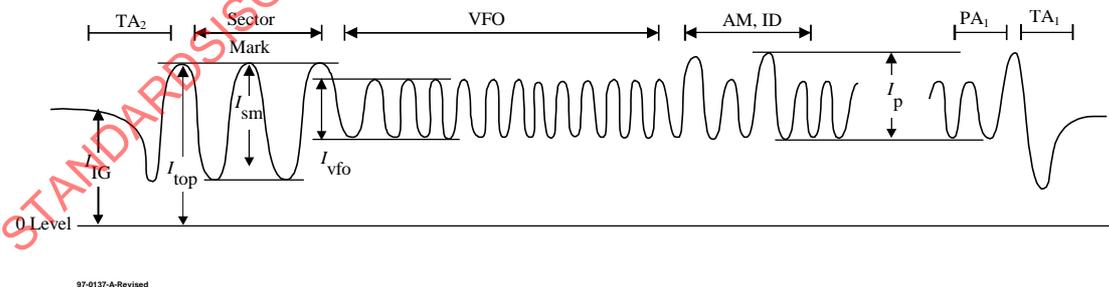


Figure 25c - Signals from Headers in Channel 1

Figure 25 - Illustration of the various parameters for read characteristics

21 Signal from grooves

The signals $(I_1 + I_2)$ and $(I_1 - I_2)$ shall be filtered using a 5th order Bessel filter with a cut off frequency of 1,0 MHz such that frequencies above 1,0 MHz are attenuated thereby eliminating the effect of modulation due to embossed marks.

21.1 Cross-track signal

The cross-track signal is the sinusoidal sum signal Channel 1 in the Read Channel, when the focus of the optical beam crosses the tracks. The signal can be used by the drive to locate the centre of the tracks. The peak-to-peak value of the cross-track signal shall meet the following requirements when measured according to annex P:

- a) The peak-to-peak value of the upper envelope of the cross-track signal in areas containing embossed Headers and embossed Recording fields:

$$0,10 \leq \frac{I_{bh \max} - I_{bh \min}}{I_{bh \max}} \leq 0,30$$

Over the whole disk this ratio shall not vary by more than 3 dB in areas containing embossed Headers and embossed Recording fields.

- b) The peak-to-peak value of the cross-track signal in grooved areas in the Formatted Zone without embossed Recording fields:

$$0,10 \leq (I_{IG} - I_{OL})/I_{IG} \leq 0,30$$

Over the whole disk this ratio shall not vary by more than 3 dB in areas without embossed Recording fields.

21.2 Push-pull signal

The push-pull signal is the sinusoidal difference signal ($I_1 - I_2$) in the Tracking Channel, when the focus of the optical beam crosses the tracks. The signal can be used by the drive for radial tracking. The peak-to-peak value of the push-pull signal shall meet the following requirements

- a) in areas containing embossed Headers and embossed Recording fields:

$$0,10 \leq (I_1 - I_2)_{pp} / (I_1 + I_2)_{IG} \leq 0,30$$

- b) in grooved areas in the Formatted Zone without embossed Recording fields:

$$0,25 \leq (I_1 - I_2)_{pp} / (I_1 + I_2)_{IG} \leq 0,60$$

where $(I_1 - I_2)_{pp}$ is the peak-to-peak amplitude of the differential output of the two halves of the split photodiode detector in the Tracking Channel, and $(I_1 + I_2)_{IG}$ is the signal measured in-groove.

21.3 Divided push-pull signal

The first term of the divided push-pull signal is the peak-to-peak amplitude derived from the instantaneous level of the differential output ($I_1 - I_2$) from the split photodiode detector when the light beam crosses the unrecorded or embossed recording fields of grooved tracks divided by the instantaneous level of the sum output ($I_1 + I_2$) from the split photodiode detector when the light beam crosses these areas.

The second term of the divided push-pull signal is the ratio of the minimum peak-to-peak amplitude derived from the instantaneous level of the differential output ($I_1 - I_2$) divided by the instantaneous level of the sum output ($I_1 + I_2$) from the split photodiode detector when the light beam crosses embossed Recording fields of grooved tracks to maximum peak-to-peak amplitude derived from the instantaneous level of the differential output ($I_1 - I_2$) divided by the instantaneous level of the sum output ($I_1 + I_2$) from the split photodiode detector when the light beam crosses the pre-formatted data area of grooved tracks.

The split photodiode detector separator shall be parallel to the projected track axis. In this measurement, the I_1 and I_2 signals shall be provided by the split photodiode detector. The tracking servo shall be operating in open-loop mode during this measurement.

The first term shall meet the following requirements in areas containing embossed Headers and embossed Recording fields:

$$0,12 \leq [(I_1 - I_2)/(I_1 + I_2)]_{pp} \leq 0,40$$

The first term shall meet the following requirements in grooved areas without embossed data fields:

$$0,35 \leq [(I_1 - I_2)/(I_1 + I_2)]_{pp} \leq 0,70$$

The second term shall satisfy the following requirements in areas containing embossed Headers and embossed Recording fields:

$$[(I_1 - I_2)/(I_1 + I_2)]_{ppmin} / [(I_1 - I_2)/(I_1 + I_2)]_{ppmax} \geq 0,70$$

The second term shall satisfy the following requirements in areas without embossed Recording fields:

$$[(I_1 - I_2)/(I_1 + I_2)]_{ppmin} / [(I_1 - I_2)/(I_1 + I_2)]_{ppmax} \geq 0,70$$

21.4 Phase depth

The phase depth of the grooves equals

$$\frac{n \times d}{\lambda} \times 360$$

where:

n is the index of refraction of the substrate

d is the groove depth

λ is the wavelength

The phase depth shall be less than 180°.

21.5 Track location

The tracks are located at those places on the disk where $(I_1 - I_2)$ equals zero and $(I_1 + I_2)$ has its maximum value.

22 Signals from Headers

The signal obtained from the embossed Headers shall be measured in Channel 1 of the Reference Drive.

The signal from an embossed mark in the recording layer is defined as the peak-to-peak value of the modulation of the signal in Channel 1 caused by the mark when the beam follows a recorded track (see figure 25c).

22.1 Sector Mark Signals

I_{top} is the peak level of the Sector Mark and shall meet the following requirement

$$0,15 \leq I_{top} \leq 0,30$$

The signal I_{sm} from the Sector Mark shall meet the requirement

$$0,30 \leq I_{sm}/I_{top} \leq 0,65$$

22.2 VFO signals

The signal I_{vfo} from the marks in the VFO₁ and VFO₂ fields shall meet the requirement

$$0,08 \leq I_{vfo}/I_{top} \leq 0,25$$

In addition, the condition

$$\frac{I_{\text{vfo}}}{I_{\text{pmax}}} \geq 0,20$$

shall be satisfied within each sector, where I_{pmax} is the signal with maximum amplitude in that sector from embossed mark signals of I_{p} defined in 22.3 and I_{vfo} is the peak-to-peak amplitude of the read signal from the VFO area.

22.3 Address Mark, ID and PA signals

The signal I_{p} from the marks in these fields shall meet the requirements

$$0,08 \leq I_{\text{p}} / I_{\text{top}} \leq 0,65$$

$$\frac{I_{\text{pmin}}}{I_{\text{pmax}}} \geq 0,20$$

The second requirement applies over any Header. I_{pmin} and I_{pmax} are the signals with minimum and maximum amplitude in those fields.

22.4 Timing jitter

The header signal shall be read and detected using the read Channel circuit defined in annex H under the conditions specified in 20.2.2. The timing jitter $Jt(H)$ shall be measured according to the procedure in annex J and shall meet the following requirements:

$$Jt(H) \leq 0,10 T$$

where T is the Channel clock period, $Jt(H)$ is the standard deviation (sigma) of the length in time of the leading-to-leading and trailing-to-trailing edges for each nT period. The ideal length corresponds to n Channel bit times T . Jt is illustrated in figure J.1.

All the time interval samples detected from the Header signals on the recording layer shall satisfy the condition of $Jt(H)$.

22.5 Asymmetry

Asymmetry is the deviation between the centre levels of the signals which give maximum and minimum amplitudes I_{pmax} and I_{pmin} in Address Mark, ID and PA fields (see annex Q) and shall be in the range of $\pm 0,15$.

23 Signals from embossed Recording fields

23.1 Signal amplitude

If the disk has an Embossed Zone, the Recording fields of all sectors in this zone shall contain embossed marks. The signals from these marks shall be measured in Channel 1 (see 9.1). Acceptable defects of the marks are specified in section 6. The signal from all embossed Recording fields is defined as the peak-to-peak value of the modulation of the signal.

The signal I_{p} from marks in the Recording fields of the Embossed Zone shall meet the following requirements:

$$0,08 \leq I_{\text{p}} / I_{\text{top}} \leq 0,65$$

$$\frac{I_{\text{pmin}}}{I_{\text{pmax}}} \geq 0,20$$

The last requirement applies over Recording fields. I_{pmin} and I_{pmax} are the signals with minimum and maximum amplitude in the Recording field of a sector.

23.2 Asymmetry

Asymmetry is the deviation between the centre levels of the signals which give maximum and minimum amplitudes I_{pmax} and I_{pmin} in embossed Recording fields (see annex Q) and shall be in the range of $\pm 0,15$.

23.3 Timing Jitter

The embossed data signal shall be read and detected using the read Channel circuit defined in annex H under the conditions specified in 20.2.2. The timing jitter Jt_d shall be measured according to the procedure in annex J and shall meet the following requirements:

$$Jt_d \leq 0,10 T$$

where T is the Channel clock period, Jt_d is the standard deviation (sigma) of the length in time of the leading-to-leading and trailing-to-trailing edges for each nT period. Jt is illustrated in Annex J, figure J.1.

All the time interval samples detected from the embossed data signals on the recording layer shall satisfy the former conditions of Jt_d .

23.4 Byte Errors


The embossed data in a sector as read in Channel 1 shall not contain any byte errors that cannot be corrected by the error correction defined in 29.2.7.

24 Signals from Control Track PEP marks

The density of tracks and the shape of marks in the PEP Zone shall be such that the cross-track loss meets the requirement

$$\frac{I_{m \max}}{I_{m \min}} \leq 2,0$$

The signal I is obtained from Channel 1 (see 9.1). The signal I_m is the maximum amplitude in a group of three successive marks. $I_{m \max}$ is the maximum value and $I_{m \min}$ is the minimum value of I_m obtained over one physical track of the PEP Zone. $I_{m \max}$ shall be greater than $0,2 I_o$, where I_o is the signal obtained from Channel 1 in an unrecorded ungrooved area. The effect of defects shall be ignored.

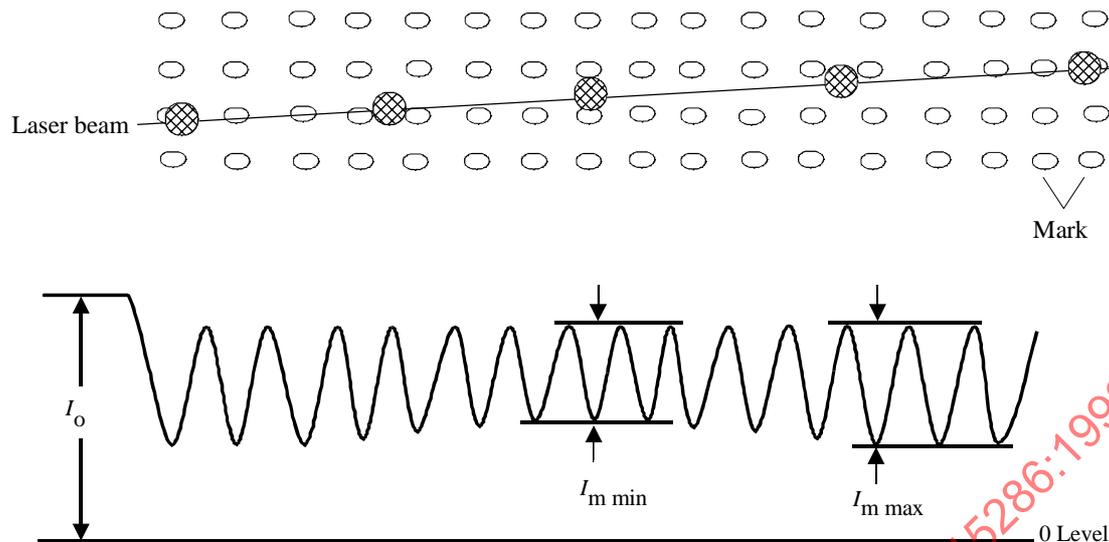

94-0135-A

Figure 26 - Path of the laser beam when crossing tracks and the resulting PEP signals

Section 5 - Characteristics of the recording layer

25 Method of testing

Clauses 26 to 28 describe a series of tests to assess the magneto-optical properties of the Recording layer, as used for writing and erasing data. The tests shall be performed only in the Recording field of the sectors in the Rewritable Zone. If there is no Rewritable Zone for user recording, clauses 27 to 29 shall not apply. The write, read and erase operations necessary for the tests shall be made on the same Reference Drive.

Clauses 26 to 28 specify only the average quality of the recording layer. Local deviations from the specified values, called defects, can cause write or erase problems. These defects are covered in section 6.

25.1 Environment

All signals in clauses 26 to 28 shall be within their specified ranges with the cartridge in any environment in the range of allowed operating environments defined in 8.1.2 except where otherwise noted.

25.2 Reference Drive

The write and erase tests described in clauses 26 to 28 shall be measured in Channel 2 of the Reference Drive. The drive shall have the following characteristics for the purpose of these tests.

25.2.1 Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to f). The disk shall rotate as specified in 9.5.

25.2.2 Read power

The optical power incident on the entrance surface of the disk and used for reading the information shall be in the range specified in 20.2.2.

25.2.3 Read Channel

The Reference Drive shall have a Read Channel which can detect magneto-optical marks in the recording layer. This Channel shall have an implementation equivalent to that given by Channel 2 in 9.3.

The edge positions in time shall be measured for testing purposes by a threshold detection method. The threshold value is referenced to the centre of the peak-to-peak envelope of the readback signal. The positive peak and negative peak signals of the envelope circuit (see annex M) shall each contain a single pole filter with a -3 dB roll-off point at 50 kHz.

25.2.4 Tracking

During the measurement of the signals, the focus of the optical beam shall follow the tracks as specified in 20.2.4.

25.2.5 Signal detection for testing purposes

The signal from the Read Channel is not equalized before detection. The signal shall be rolled off with a 3-pole Butterworth filter with a cut-off frequency of half the Channel clock frequency of the band being tested. All read testing is performed at the rotational speed of 50 Hz.

Nominally the threshold value shall be zero if the laser power calibration is perfect and there are no parameter variations. However, in some measurements the threshold value may have to be adjusted to minimize the effects of mark size changes due to parameter variations during writing.

25.3 Write conditions

25.3.1 Write pulse and power

For Types R/W, P-ROM and WO marks are recorded on the disk by pulses of optical power superimposed onto a specified bias power P_b of 1,0 mW \pm 0,1 mW (see annex K) at the test rotational frequency. For Types DOW, P-DOW, and WO-DOW marks are recorded on the disk by pulses of optical power P_w and a specified bias power $P_e \pm 5\%$ at the test rotational frequency. This bias power functions as the erase power for previously written data.

The pulse shape for the purpose of testing will be a nominally rectangular pulse as shown in annex K for types R/W, P-ROM and WO with duration T_p and power P_w . For Types DOW, P-DOW and WO-DOW the pulse shape shall be nominally rectangular on a bias power P_b and with cooling gaps as shown in annex K with duration T_p and power P_w .

T_p is the full width, half maximum duration of the light pulse. T_p shall be measured by a high speed photo detector at the output of the laser. T_p shall be 15 ns \pm 0,15 ns with a 10% to 90% rise and fall time of less than 3 ns.

The measurement of laser power shall be done in pulsed operation by averaging, for example one pulse every 50 ns, using a spherical radiometer. The averaging method of measuring the laser power will minimize the accumulation of pulse width and pulse amplitude tolerances.

The value of P_w and P_e used in any media tests shall be the one measured for that particular piece of media using the method in 25.3.3. Values within 5 % of P_w and P_e that were measured by the media manufacturer when using a pulse width of T_p at radii 30 mm, 45 mm, and 60 mm on their typical media shall be recorded in the SFP zone.

2T, 4T and 8T marks shall be used in all media tests. The 2T mark shall be formed with a single T_p ns pulse that starts at the beginning of a channel clock period. The 4T and 8T marks are formed with two and four identical T_p ns pulses respectively, each starting at the beginning of a channel clock period, and spaced exactly two channel clock periods apart. All pulses shall have the same power P_w and P_e and duration T_p .

25.3.2 Write magnetic field

The requirements of all tests shall be met for all magnetic field intensities, at the recording layer during recording, in the range from 16 000 A/m to 32 000 A/m except where otherwise noted.

The write magnetic fields for all tests, pointing in the north to south direction, shall be within 15° from the normal to the Disk Reference Plane P, in the direction of the incident beam, i.e. from the entrance surface to the recording layer.

25.3.3 Pulse power determination

The following procedure shall be used by the media manufacturer to measure the value of the 4T pulse power P_W that is recorded in the SFP zone.

Erase and write several tracks and 30 mm, 45 mm and 60 mm radii of the disk under test by repeatedly writing the following test pattern:

Run Length:	2T	6T	4T	6T
Mark or Space:	M	S	M	S

The recording shall be done at a media temperature of $25^\circ\text{C} \pm 1^\circ\text{C}$, a magnetic field intensity of 24 000 A/m $\pm 5\%$ and at the test rotational speed.

Read and detect the readback signal with the detection method given in 25.2.5. Adjust focus for maximum readback signal amplitude using the 2T mark and set the threshold at 50 % of the peak-to-peak signal amplitude for this test. Vary the focus $\pm 0,25\ \mu\text{m}$ and check the output for best E_{th} .

Measure the average distance between edges, namely L_2 , L_4 and L_6 for the 2T, 4T and 6T runs respectively, using a TIA repeated for 30 mm, 45 mm, and 60 mm radii. Averaging shall be done using 10^5 independent time interval samples on several tracks at each radial location. Note that the 6T distribution on the TIA will in general be bimodal. The amount of bimodality depends on the thermal properties of the media. The value of L_6 is the mean of this bimodal distribution.

Adjust P_W power so that L_6 is as close to 6T as possible. Since the length of L_6 can be minimized at two points, the P_W power recorded in the SFP zone shall be at a point where the L_6 is decreasing in length as the write power is increased.

25.3.4 Media power sensitivity

The pulse power P_W is the upper bound of the power required to form 4T marks as a function of pulse duration T_p . P_W is given by the reciprocity relationship

$$P_W = C \left(\frac{1}{T_p} + \frac{1}{\sqrt{T_p}} \right) \text{mW}$$

The following formula shall be used by the media manufacturer to measure the value of the media power sensitivity C using the T_p and P_w data from 25.3.3 (see also annex Z):

$$C = P_w \times \frac{T_p \times \sqrt{T_p}}{T_p + \sqrt{T_p}}$$

The value for C shall be less than 40 at 30 mm, 45 mm, and 60 mm radii for Types R/W, P-ROM and WO. The value of C shall be less than 50 at 30 mm, 45 mm, and 60 mm radii for Types DOW, P-DOW and WO-DOW.

25.4 Erase conditions

Marks are erased from the disk by a constant optical power in the presence of a magnetic field.

25.4.1 Erase power

The erase power is the continuous optical power required for any given track at the entrance surface to erase marks written according to 25.3 to a specified level (see clause 28).

The continuous erase power level is recorded in the SFP zone for 30 mm, 45 mm, and 60 mm radii at the test rotational speed (see 17.4.2). For radii other than 30 mm, 45 mm, and 60 mm the values shall be linearly interpolated from the above.

The actual erase power shall be equal to the interpolated values $\pm 5\%$.

The continuous erase power shall never exceed 10 mW.

25.4.2 Erase magnetic field

The requirements of all tests on Types R/W, P-ROM, and WO shall be met for all magnetic field intensities at the recording layer during erasing in the range from 16 000 A/m to 32 000 A/m.

The erase magnetic field, pointing in the North to South direction, shall be within 15° from the normal to the Disk Reference Plane P, in the direction of the reflected beam, i.e. from the recording layer to the entrance surface.

The requirements for all tests on Types DOW, P-DOW, and WO-DOW shall be met for all write magnetic fields in the range from 16 000 A/m to 32 000 A/m.

25.5 Definition of signals

The signals in Channel 2 are linearly related to the difference between the currents through the photodiode detectors K_1 and K_2 , and are therefore linearly related to the optical power falling on the detectors (see 9.1).

26 Magneto-optical characteristics

26.1 Figure of merit for magneto-optical signal

The figure of merit F is expressed as the product of R , $\sin \theta$ and $\cos 2\beta$, where R is the reflectance expressed as a decimal fraction, θ is the Kerr rotation angle and β is the ellipticity of the reflected beam. The polarity of the figure of merit is defined to be negative for a written mark in an Fe-rich Fe-Tb alloy layer and with the write magnetic field in the direction specified in 25.3.2. In this case the direction of Kerr rotation is counterclockwise as viewed from the source of the beam.

The polarity and the value of the figure of merit shall be specified in bytes 364 and 365 of the SFP Zone (see 17.4.2). This nominal value shall be:

$$0,0025 < |F| < 0,0052$$

The measurement of the actual value F_m shall be made according to annex L. This actual value F_m shall be within 12% of the nominal value.

26.2 Imbalance of magneto-optical signal

The imbalance of the magneto-optical signal is the ratio of the peak-to-peak signal amplitude of the channel 2 in a sector after erased divided by the same signal written with the 2T pattern as described in 25.3.

The measurement is made in the Data field of a sector after being passed through a high pass filter of -3 dB rolloff at 1kHz and the equalizer defined in annex M.

The phase retarder in the optical system shall be in the neutral position (see 9.1). Imbalance can be caused by birefringence of the disk.

The imbalance shall not exceed 0,2 throughout the environment operating range.

The effect of headers through the filters must be removed by a technique such as gating or sample-and-hold of the signal.

27 Write characteristics


If there is no Rewritable Zone for user recording, clauses 27 to 29 shall not apply.

27.1 Resolution

I_L is the peak-to-peak value of the signal obtained in Channel 2 (see 9.2) from 8T marks and 8T spaces written under any of the conditions given in 25.3, the longest interval allowed by the RLL(1,7) code for each zone, and read under the conditions specified in 20.2.2 c).

I_H is the peak-to-peak value of the signal obtained in Channel 2 from 2T marks and 2T spaces written under the conditions given in 25.3, the lowest interval allowed by the RLL(1,7) code for each zone $\pm 0,1$ MHz, and read under the condition specified in 20.2.2 c).

The resolution I_H/I_L (see figure 27) shall not be less than 0,20 within any sector. It shall not vary by more than $\pm 0,1$ over a track.

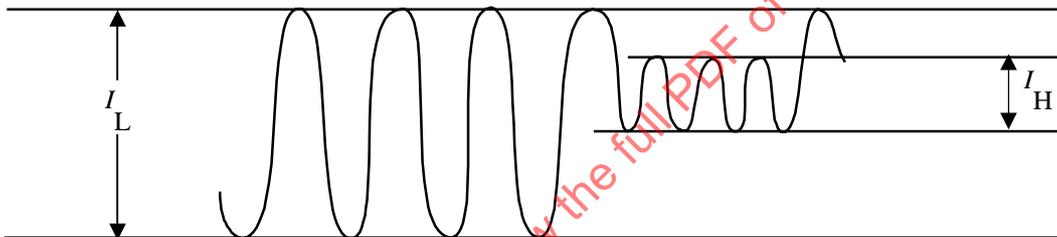

97-0128-A

Figure 27 - Definition of I_L and I_H

27.2 Narrow-band signal-to-noise ratio (NBSNR)

The narrow-band signal-to-noise ratio is the ratio of the signal level to the noise level of a specified pattern, measured in a 30 kHz bandwidth. It shall be determined as follows.

Write a series of 2T marks followed by 2T spaces in the Recording field of a series of sectors at a frequency f_0 of the highest frequency allowed by the RLL(1,7) code for each zone $\pm 0,1$ MHz. The write conditions shall be as specified in 25.3.1.

Read the Recording fields in Channel 2 with the Read Channel under the conditions specified in 25.2 using a spectrum analyzer with a bandwidth of 30 kHz. Measure the amplitudes of the signal and the noise at the frequency f_0 as indicated in figure 28. The measurements shall be corrected for the effect of the Header fields and for any instrumentation error in order to obtain the value for the Recording field only.

The narrow- band signal-to-noise ratio is

$$20 \log_{10} \frac{\text{signal level}}{\text{noise level}}$$

The narrow band signal-to-noise ratio shall be greater than 45 dB for all tracks in any sector in the Rewritable Zone for all allowed values of the write magnetic field and for all phase differences between -15° and $+15^\circ$ in the optical system as defined in 9.1.

Note - It is permitted to use a spectrum analyzer with a bandwidth of 3 kHz and to convert the measured value to that for a 30 kHz value.

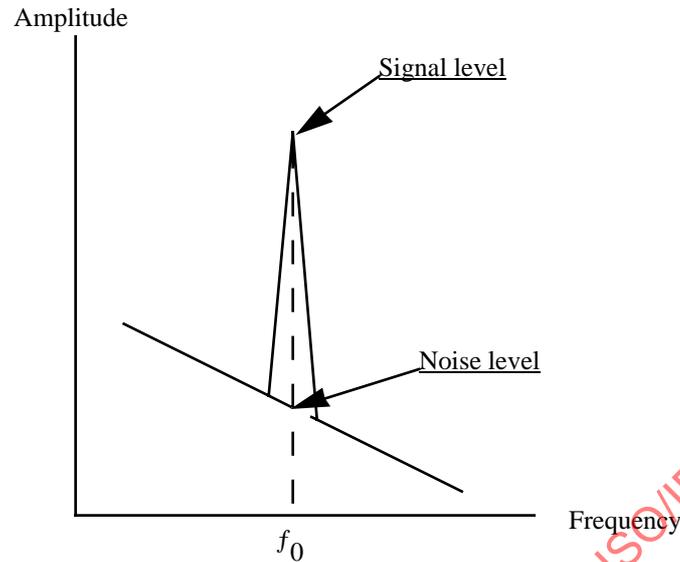


Figure 28 - Amplitude versus frequency for the magneto-optical signal

27.3 Cross-talk ratio

The cross-talk ratio definition and measurement procedure describe the entities to be measured in terms of physical tracks. These physical tracks can consist of one or more logical tracks (see 13). The number of logical tracks involved in the measurement must be adjusted for the Band in which the measurement is made.

27.3.1 Rewritable track test method

For rewritable tracks the test on cross-talk shall be carried out on any group of five adjacent unrecorded physical tracks, designated $(n-2)$, $(n-1)$, n , $(n+1)$, $(n+2)$, in the Rewritable Zone. Erase the recording field of each of the sectors in these tracks.

Write a series of 2T marks followed by 2T spaces at a frequency f_1 for each zone $\pm 0,1$ MHz in the Recording field of the sectors in track n . The write conditions shall be as specified in 25.3.

Read the Recording fields of the sectors in the tracks $(n-1)$, n and $(n+1)$ under the conditions specified in 25.2.2 and 25.2.3.

The cross-talk from a track n to track $(n-1)$ and to track $(n+1)$ shall be lower than -26 dB.

27.4 Timing Jitter

The timing jitter can be obtained from the TIA data in 25.3.3 with the equalizer defined in annex M. Measure the length in time of the leading-to-leading and trailing-to-trailing edges of the detected data from the 2T mark (L_2) followed by 6T space (L_6), and 6T space (L_6) followed by 2T mark (L_2) with TIA. The measurements shall be made using 10^5 independent time interval samples on several tracks at each radial location.

The value of timing jitter (due to the media) shall be less than 10 % of the time period T of one channel bit for 30 mm, 45 mm and 60 mm radii.

27.5 Media thermal interaction

The following formulas shall be used by the media manufacturer to measure the value of the media thermal interaction that is recorded in the SFP zone. The formulas use the L_2 , L_4 and L_6 measurement data from 23.3.3.

First calculate the effective channel clock period T of the measurements:

$$T = \frac{L_2 + L_4 + 2 \times L_6}{18}$$

This T shall be checked to make sure that it has the correct value for the band in which the recording is done.

Calculate and record the thermal interaction error E_{th} at $r = 30$ mm for Types R/W, P-ROM and WO, or E_{th2} for Types DOW, P-DOW and WO-DOW using the following formula:

$$E_{th} \text{ or } E_{th2} = \frac{(L_4 - L_2 - 2 \times T)}{T} \times 100\% \text{ of } T$$

The value for E_{th} or E_{th2} shall be less than 27% of the channel clock period T at $r=30$ mm.

For Types DOW, P-DOW and WO-DOW an additional thermal interaction error is determined at $r = 30$ mm only. This thermal interaction error E_{th1} is measured identically to E_{th2} as described in 25.3.1 to 25.3.3 and this clause with the exception of the cooling gaps (i.e. the write pulses are fully surrounded by the bias power P_b).

The value for E_{th1} shall be less than 45 % of the Channel clock period T at $r=30$ mm.

28 Erase power determination

This procedure shall be used by the media manufacturer to determine the erase powers that are recorded in the SFP zone. The erase power is the continuous power level for the given radius and rotational speed that is sufficient to erase the current track without erasing the adjacent track.

For Types R/W, P-ROM and WO the conditions for the erase power measurement are that the media temperature is $25 \text{ }^\circ\text{C} \pm 1 \text{ }^\circ\text{C}$, and the magnetic field intensities at the recording layer has a value of $24\ 000 \text{ A/m} \pm 1\ 200 \text{ A/m}$ at the test rotational speed.

For Types R/W, P-ROM, and WO erase four adjacent tracks n , $n+1$, $n+2$, and $n+3$ in the User Zone with a relatively high erase power. Write a $2T$ tone on track $n+1$ and a $4T$ tone on track $n+2$ under the conditions given in 25.3.1. Erase track $n+1$ with the erase power to be tested. Measure the signal amplitude on both tracks $n+1$ and $n+2$ with a spectrum analyzer.

Perform this test sequence with an initial low erase test power and increase the erase test power by $0,5 \text{ mW}$ each time the test is repeated. Plot the track $n+1$ and track $n+2$ signal amplitudes as a function of the erase test power. Choose the erase power to be half way between the erase power where the track $n+2$ signal amplitude drops by 3 dB and the power where the track $n+1$ signal amplitude first reaches the media limited noise floor.

For Types DOW, P-DOW and WO-DOW the procedure is:

- Erase three consecutive tracks using an estimated erase power P_e ;
- Write an $8T$ mark and $8T$ space tone on the centre track of the three tracks using T_p ns pulses, an estimated power value of P_w and a continuous bias power of 3 mW . The four pulses used to write the $8T$ mark are spaced $2T$ apart from leading edge to leading edge;
- Detect the written $8T$ mark/space tone with a threshold (slice level) detector where the threshold is set at the middle value of the $8T$ mark peak to peak signal amplitude;

- d) Adjust P_W until the detected mark and space lengths are exactly 8T by repeating steps a) to d) iteratively. A separate erase using the estimated erase power is required for each iteration;
- e) Erase the now optimal 8T mark/space tone starting with a low value of erase power and increasing its value until the read back signal is 40 dB below its original level. Before each erase, rewrite the track with the power P_W determined in step d), after a separate erase with the estimated power as in step a);
- f) Repeat the erasure steps a) to e) until a repeatable value of erase power is obtained within $\pm 0,1$ mW. If a repeatable value of this accuracy cannot be obtained, several consecutive values should be averaged to obtain a suitable estimate within this tolerance.

Section 6 - Characteristics of user data

29 Method of testing

Clauses 30 and 31 describe a series of measurements to test conformance of the user data on the disk with this International Standard. It checks the legibility of both embossed and user-written data. The data is assumed to be arbitrary. The user-written data may have been written by any drive in any environment. The read tests shall be performed on the Reference Drive.

Whereas clauses 20 to 28 disregard defects, clauses 30 and 31 include them as unavoidable deterioration of the read signals. The gravity of a defect is determined by the correctability of the ensuing errors by the Error Detection and Correction circuit in the read Channel defined below. The requirements in clauses 30 and 31 define a minimum quality of the data, necessary for data interchange.

29.1 Environment

All signals specified in clauses 30 and 31 shall be within their specified ranges with the cartridge in any environment in the range of allowed operating environments defined in 8.1.2. It is recommended that before testing the entrance surface of the optical disk shall be cleaned according to the instructions of the manufacturer of the disk.

29.2 Reference Drive

All signals specified in clauses 30 and 31 shall be measured in the indicated channels of the Reference Drive. The drive shall have the following characteristics for the purpose of these tests:

29.2.1 Optics and mechanics

The focused optical beam shall have the properties specified in 9.2 a) to f). The disk shall rotate as specified in 9.5.

29.2.2 Read power

The optical power incident on the entrance surface of the disk (used for reading the information) shall be in the range specified in 20.2.2.

29.2.3 Read Channel

The read amplifiers after the photodiode detectors in Channels 1 and 2 shall be as specified in 9.3.

29.2.4 Mark Quality

The signals from both read amplifiers shall be converted from analog to binary with an edge detector as defined in annex H. The output signals from Channels 1 and 2 shall be filtered with the specified equalization and low-pass filter, and compared with their threshold levels of the comparator which shall be between 0,35 and 0,65 for the threshold fractional values. The threshold levels shall be adjusted to minimize the maximum offset (or bias) of the mark and space intervals from their desired (or true) values of 2T, 3T 7T, 8T. The output signals from the comparator are converted to binary signals with the edge detector. (See also annex M).

The timing jitter in this section is defined as the standard deviation of the separately measured time intervals of leading-to-leading and trailing-to-trailing edges excluding outlying observations by defects, using a time interval analyzer with the output signals from the edge detector of the marks and spaces in a sector. Therefore, independent interval samples for this measurement are limited by the number of marks and spaces in a sector. The timing jitters shall be expressed as a percentage of Channel bit time T.

The converter for Channel 1 shall operate correctly for analog signals from embossed marks with amplitudes as determined by clauses 22 and 23.

The converter for Channel 2 shall operate correctly for analog signals from user-written marks with an amplitude as determined by clauses 26 and 27.

29.2.5 Channel bit clock

The signals from the analog-to-binary converters shall be virtually locked to the Channel bit clock/clocks which provides/provide the Channel bit windows of 0,70 T effective width for timing the leading and/or trailing edges of the binary signals. Channel bit clock/clocks shall be adjusted in order to minimize the accumulated value/values of the timing errors of the leading to leading, leading to trailing, trailing to leading, and trailing to trailing edges from the Channel bit clock/clocks.

29.2.6 Binary-to-digital converters

The binary signals shall be correctly converted to the data bytes with the binary-to-digital converters based on the sector format and the recording code defined in clauses 15 and 16.

29.2.7 Error correction

Correction of errors in the data bytes shall be carried out by an error detection and correction system based on the definition in F.2 and F.3 of annex F. There shall be an additional correction system for the embossed data, based on the parity sectors as defined in 18.7.3.

29.2.8 Tracking

During measurement of the signals, the focus of the optical beam shall follow the tracks as specified in 20.2.4.

30 Minimum quality of a sector

This clause specifies the minimum quality of the Header and Recording field of a sector as required for interchange of the data contained in that sector. The quality shall be measured on the Reference Drive specified in 29.2.

A byte error occurs when one or more bits in a byte have a wrong setting, as detected by ECC and/or CRC circuits.

30.1 Headers

30.1.1 Sector Mark

At least three of the five long marks of the Sector Mark shall have the timing specified in 15.2 and the signals shall have the amplitude specified in 22.1.

30.1.2 ID fields

At least one of the two ID fields in a Header read in Channel 1 shall not have any byte errors, as checked by the CRC in the field.

30.2 User-written data

30.2.1 Recording field

If a flag field is recorded, it shall start at 60 ± 6 Channel bits from the end of the pre-formatted header. If an ALPC field is recorded it shall start at 144 ± 6 Channel bits from the end of the pre-formatted header. When the VFO₃ field is recorded, it shall start at 216 ± 6 Channel bits from the end of the pre-formatted header.

The recording marks in a sector shall start at 216 ± 6 Channel bits from the end of the pre-formatted header and shall end at 252 ± 48 Channel bits for 512-byte sectors, 276 ± 84 Channel bits for 1 024-byte sectors from the end of the sector and 264 ± 84 Channel bits for 2 048-byte sectors from the end of the sector.

30.2.2 Byte errors

The user-written data in a sector as read in Channel 2 shall not contain any byte errors that cannot be corrected by the error correction defined in 29.2.7.

30.2.3 Asymmetry

The asymmetry of the user written marks is the deviation between the centre levels of the signal which give maximum and minimum amplitudes I_L and I_H in a sector as read in Channel 2 (see annex Q) and shall be in the range of $\pm 0,15$.

30.2.4 Timing jitter

The user-written marks in a sector as read in Channel 2 shall have timing jitters due to the media less than 10 % of the time period T of one Channel bit.

31 Data interchange requirements

A disk offered for interchange of data shall comply with the following requirements (see also annex N).

31.1 Tracking

The focus of the optical beam shall not jump tracks unintentionally.

31.2 User-written data

Any sector written in the Rewritable Zone that does not comply with 30.2 shall have been replaced according to the rules of the defect management as defined in clause 19.

31.3 Embossed data

Any sector in the Embossed Zone that does not comply with clause 22 shall be correctable by the error correction based on the Parity sectors as defined in 18.7.3.

31.4 Quality of disk

The quality of the disk is reflected in the number of replaced sectors in the Rewritable Zone. This International Standard allows a maximum number of replaced sectors per side (see clause 19).

Annex A

(normative)

Air cleanliness class 100 000

The classification of air cleanliness is based on a particle count with a maximum allowable number of specified minimum sized particles per unit volume, and on a statistical average particle size distribution.

A.1 Definition


The particle count shall not exceed a total of 3 500 000 particles per cubic metre of a size 0,5 μm and larger.

The statistical average particle size distribution is given in figure A.1. Class 100 000 means that 3 500 000 particles per cubic metre of a size of 0,5 μm and larger are allowed, but only 25 000 particles per cubic metre of a size of 5,0 μm and larger.

It shall be recognized that single sample distribution may deviate from this curve because of local or temporary conditions. Counts below 350 000 particles per cubic metre are unreliable except when a large number of a samplings is taken.

A.2 Test method

For particles of size in the range of 0,5 μm to 5,0 μm , equipment employing light-scattering principles shall be used. The air in the controlled environment is sampled at a known flow rate. Particles contained in the sampled air are passed through an illuminated sensing zone in the optical chamber of the instrument. Light scattered by individual particles is received by a photo detector which converts the light pulses into electrical current pulses. An electronic system relates the pulse height to particle size and counts the pulses such that the number of particles in relation to particle size is registered or displayed.

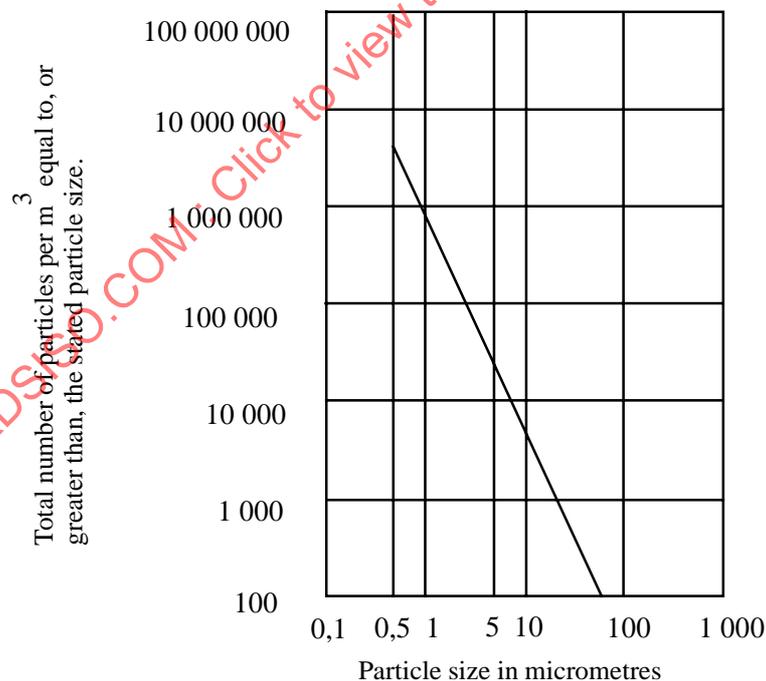

94-109-B


Figure A.1 - Particle size distribution curve

Annex B

(normative)

Edge distortion test

- B.1** The distortion test checks if the case is free from unacceptable distortion and protrusions along its edges. The test is made by causing the cartridge to pass through the vertical slot of a gauge while applying a specified force in addition to the gravitational pull.
- B.2** The gauge shall be made of a suitable material, e.g. of chrome-plated carbon steel. The inner surfaces shall be polished to a surface finish of 5 µm peak-to-peak.
- B.3** The dimensions shall be as follows (see figure B.1):
- $A = 155,0 \text{ mm}$
 - $B = 136,0 \text{ mm} \pm 0,1 \text{ mm}$
 - $C = 10,0 \text{ mm} \pm 0,1 \text{ mm}$
 - $D = 11,40 \text{ mm} \pm 0,01 \text{ mm}$
 - $E = 11,60 \text{ mm min.}$
- B.4** When the cartridge is inserted vertically into the gauge, a vertical downward force F of 2,7 N maximum, applied to the centre of the top edge of the cartridge, shall cause the cartridge to pass through the gauge.

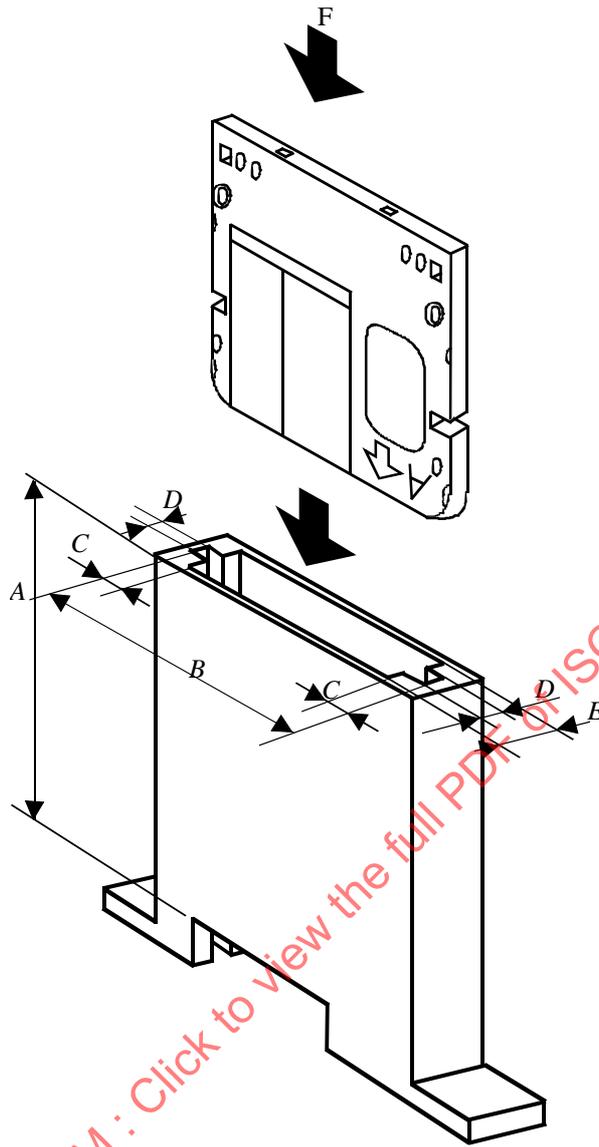

95-0144-A
Figure B.1 - Distortion gauge

Annex C

(normative)

Compliance test

- C.1** The compliance test checks the flatness and flexibility of the case by forcing the four reference surfaces of the cartridge into a plane.
- C.2** The location of the four reference surfaces S1, S2, S3 and S4 is defined in clause 10.5.4 and figure 5.
- C.3** The test gauge consists of a base plate on which four posts P1, P2, P3 and P4 are fixed so as to correspond to the surfaces S1, S2, S3 and S4 respectively (see figure C.1). The dimensions are as follows (see figure C.2):

Posts P1 and P2

$$D_a = 6,50 \text{ mm} \pm 0,01 \text{ mm}$$

$$D_b = 4,00 \text{ mm} \begin{matrix} + 0,00 \text{ mm} \\ - 0,02 \text{ mm} \end{matrix}$$

$$H_a = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$H_b = 2,0 \text{ mm max.}$$

Posts P3 and P4


$$D_c = 5,50 \text{ mm} \pm 0,01 \text{ mm}$$

After assembly, the upper annular surfaces of the four posts shall lie between two horizontal planes spaced 0,01 mm apart.

- C.4** The cartridge shall be placed with its reference surfaces onto the posts of the horizontal gauge. A vertical down force F of 0,4N shall be exerted on the cartridge opposite each of the four posts.


C.5 Requirements

Under the conditions of C.4, any three of the four surfaces S1 to S4 shall be in contact with the annular surface of respective posts. Any gap between the remaining surface S and the annular surface of its post shall not exceed 0,1 mm.

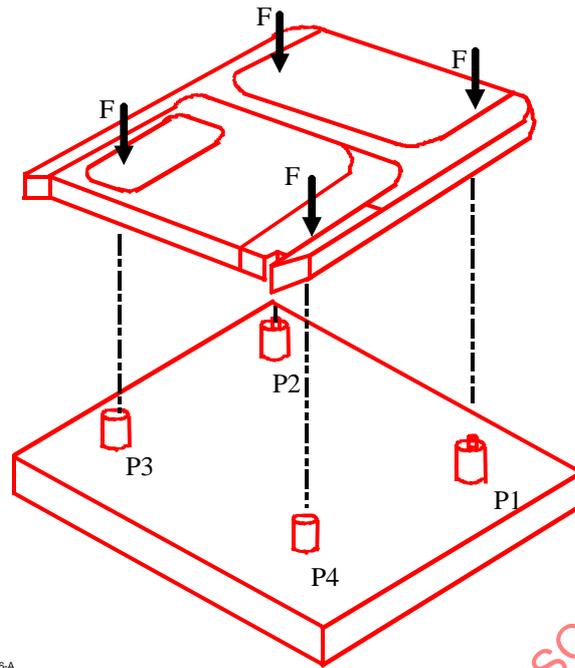

95-0056-A

Figure C.1 - Compliance gauge

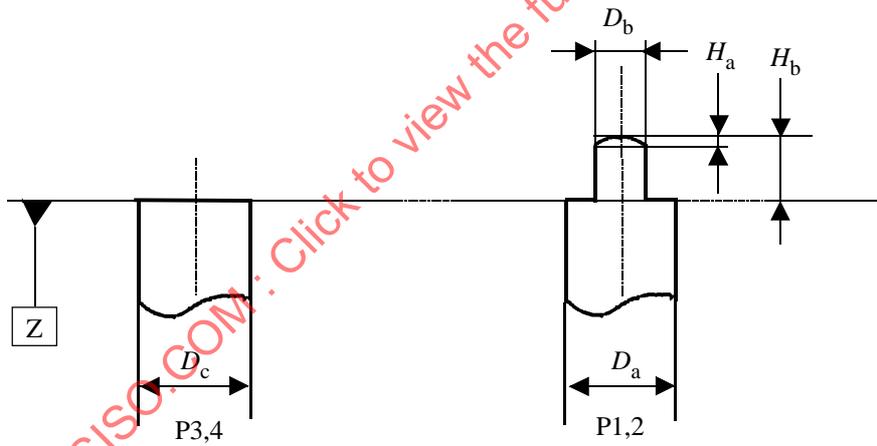

95-0057-A

Figure C.2 - Detail of posts

Annex D

(normative)

Test method for measuring the adsorbent force of the hub

D.1 The purpose of this test is to determine the magnetic characteristic of the magnetizable material of the hub.

D.2 Dimensions

The test device (see figure D.1) consists of a spacer, a magnet, a back yoke and a centre shaft. The dimensions of test device are as follows:

$$D_d = 8,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$D_e = 20,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$D_f = 19,0 \text{ mm max.}$$

$$+ 0,0 \text{ mm}$$

$$D_g = 3,9 \text{ mm}$$

$$- 0,1 \text{ mm}$$

$$H_c = 0,40 \text{ mm} \pm 0,01 \text{ mm}$$

$$H_d = 1,2 \text{ mm (typical, to be adjusted to meet the force requirement of D.4)}$$

D.3 Material

The material of the test device shall be :

Magnet	: Any magnetizable material, typically Sm-Co
Back yoke	: Any suitable magnetizable material
Spacer	: Non-magnetizable material or air gap
Centre shaft	: Non-magnetizable material

D.4 Characteristics of the magnet with back yoke

Number of poles : 4 (typical)

Maximum energy product (BH_{\max}) : $175 \text{ kJ/m}^3 \pm 16 \text{ kJ/m}^3$

The characteristics of the magnet with back yoke shall be adjusted so that with a pure nickel plate of the following dimensions (see figure D.2), and the adsorbent force of this plate at the point of $H_c = 0,4 \text{ mm}$ when spaced from the magnet surface shall be $9,5 \text{ N} \pm 0,6 \text{ N}$.


$$D_h = 7,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$D_j = 22,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$H_e = 2,0 \text{ mm} \pm 0,05 \text{ mm}$$


D.5 Test condition for temperature

These conditions shall be as specified in 8.1.1.

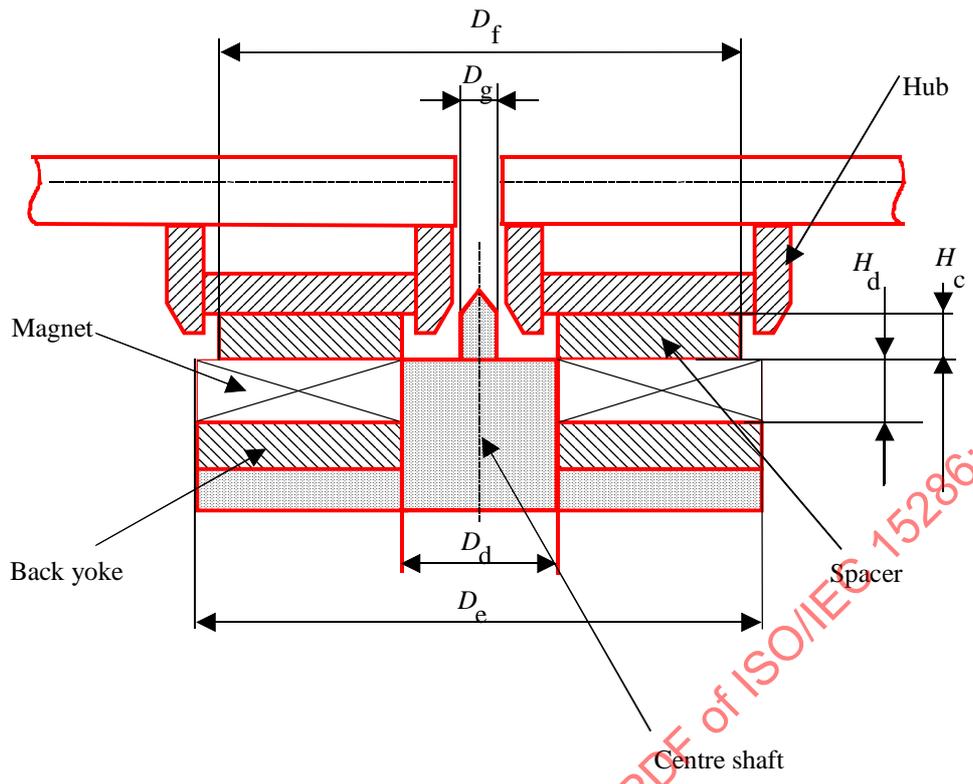

94-0084-A

Figure D.1 - Test device for the clamping characteristic of the hub

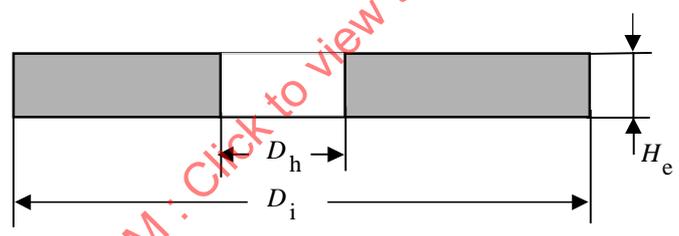

94-0009-A rev

Figure D.2 - Calibration plate of the test device

Annex E

(normative)

CRC for ID fields

The sixteen bits of the CRC shall be computed over the first three bytes of the ID field. The generator polynomial shall be

$$G(x) = x^{16} + x^{12} + x^5 + 1$$

The residual polynomial shall be

$$R(x) = \left(\sum_{i=8}^{i=23} a_i x^i + \sum_{i=0}^{i=7} \bar{a}_i x^i \right) x^{16} \bmod G(x)$$

and a_i denotes a bit of the first three bytes and \bar{a}_i an inverted bit. The highest order bit of the first byte is a_{23} .

The sixteen bits c_k of the CRC are defined by

$$R(x) = \sum_{k=0}^{k=15} c_k x^k$$

where c_{15} is recorded as the highest order bit of the fourth byte in the ID field.

Annex F (normative)

Interleave, CRC, ECC, Resync for the data field

F.1 Interleave

F.1.1 Interleave for 2 048-byte sectors

The different bytes shall be designated as follows.

D_n	are user data bytes
SWF_m	are SWF bytes (see 15.12.3)
C_k	are CRC check bytes
$E_{s,t}$	are ECC check bytes

These bytes shall be ordered in a sequence A_n in the order in which they shall be recorded on the disk. The order of n of D_n is the same as that in which they are input from the interface. Depending on the value of n , these elements are:

$$\text{for } 1 \leq n \leq 2\,048 : A_n = D_n$$

$$\text{for } 2\,049 \leq n \leq 2\,056 : A_n = SWF_m$$

$$\text{for } 2\,057 \leq n \leq 2\,060 : A_n = C_k$$

$$\text{for } 2\,061 \leq n \leq 2\,380 : A_n = E_{s,t}$$

where:

$$m = n - 2\,048$$

$$k = n - 2\,056$$

$$s = [(n - 2\,061) \bmod 20] + 1$$

$$t = \text{int} \left[\frac{n - 2\,061}{20} \right] + 1$$

The notation $\text{int}[x]$ denotes the largest integer not greater than x .

The first three parts of A_n are 20-way interleaved by mapping them onto a two-dimensional matrix B_{ij} with 103 rows and 20 columns. Thus

$$\text{for } 1 \leq n \leq 2\,060 : B_{ij} = A_n$$

where:

$$i = 102 - \text{int}[(n-1)/20]$$

$$j = (n - 1) \bmod 20$$

F.1.2 Interleave for 1 024-byte sectors

For 1 024-byte sectors, the notations shall be specified in F.1.1. In addition, four (FF) bytes are shown as (FF). Depending on the number n , these elements are:

$$\text{for } 1 \leq n \leq 1\ 024 : A_n = D_n$$

$$\text{for } 1025 \leq n \leq 1032 : A_n = \text{SWF}_m$$

$$\text{for } 1033 \leq n \leq 1036 : A_n = (\text{FF})$$

$$\text{for } 1037 \leq n \leq 1040 : A_n = C_k$$

$$\text{for } 1041 \leq n \leq 1200 : A_n = E_{s,t}$$

where:

$$m = n - 1\ 024$$

$$k = n - 1\ 036$$

$$s = [(n - 1\ 041) \bmod 10] + 1$$

$$t = \text{int} \left[\frac{n - 1\ 041}{10} \right] + 1$$

The notation $\text{int}[x]$ denotes the largest integer not greater than x .

The first three parts of A_n are 10-way interleaved by mapping them onto a two-dimensional matrix B_{ij} with 104 rows and 10 columns. Thus

$$\text{for } 1 \leq n \leq 1\ 040 : B_{ij} = A_n$$

where:

$$i = 103 - \text{int} \left[\frac{n - 1}{10} \right]$$

$$j = (n - 1) \bmod 10$$

F.1.3 Interleave for 512-byte sectors

For 512-byte sectors, the notations shall be as specified in F.1.1. In addition the six (FF) bytes are shown as (FF). Depending on the number n , these elements are:

$$\text{for } 1 \leq n \leq 512 : A_n = D_n$$

$$\text{for } 513 \leq n \leq 520 : A_n = \text{SWF}_m$$

$$\text{for } 521 \leq n \leq 526 : A_n = (\text{FF})$$

$$\text{for } 527 \leq n \leq 530 : A_n = C_k$$

$$\text{for } 531 \leq n \leq 610 : A_n = E_{s,t}$$

where:

$$\begin{aligned}
 m &= n - 512 \\
 k &= n - 526 \\
 s &= [(n - 531) \bmod 5] + 1 \\
 t &= \text{int} \left[\frac{n - 531}{5} \right] + 1
 \end{aligned}$$

The first four parts of A_n are 5-way interleaved by mapping them onto a two-dimensional matrix B_{ij} with 106 rows and 5 columns. Thus:

$$\text{for } 1 \leq n \leq 530 \quad B_{ij} = A_n$$

where:

$$\begin{aligned}
 i &= 105 - \text{int} \left[\frac{n - 1}{5} \right] \\
 j &= (n - 1) \bmod 5
 \end{aligned}$$

F.2 CRC

F.2.1 General

The CRC and the ECC shall be computed over the Galois field based on the primitive polynomial

$$G_p(x) = x^8 + x^5 + x^3 + x^2 + 1$$

The generator polynomial for the CRC bytes shall be

$$G_C(x) = \prod_{i=136}^{i=139} (x + \alpha^i)$$

where the element $\alpha^i = (\beta^i)^{88}$, with β being a primitive root of $G_p(x)$. The value of the n -th bit in a byte is the coefficient of the n -th power of β where $0 \leq n \leq 7$, when β is expressed on a polynomial basis.

The contents of the four check bytes C_k of the CRC are defined by the residual polynomial

$$R_C(x) = I_C(x)x^4 \bmod G_C(x)$$

$$R_C(x) = \sum_{k=1}^{k=4} C_k x^{4-k}$$

The last equation specifies the storage locations for the coefficients of the polynomial.

F.2.2 CRC for 2 048-byte sectors

The four check bytes of the CRC shall be computed over the user data and the SWF bytes as specified in F.2.1.

The information polynomial shall be

$$I_C(x) = \left[\sum_{i=1}^{i=102} \left(\sum_{j=0}^{j=19} (B_{i,j}) x^i \right) \right] + \sum_{j=0}^{j=15} (B_{0,j}) x^0$$

F.2.3 CRC for 1 024-byte sectors

The four check bytes of the CRC shall be computed over the user data, the SWF bytes and the four (FF) bytes as specified in F.2.1..

The information polynomial shall be

$$I_C(x) = \left[\sum_{i=1}^{i=103} \left(\sum_{j=0}^{j=9} (B_{i,j}) x^i \right) \right] + \sum_{j=0}^{j=5} (B_{0,j}) x^0$$

F.2.4 CRC for 512-byte sectors

The four check bytes of the CRC shall be computed over the user data, the SWF bytes and the six (FF) bytes as specified in F.2.1. The information polynomial shall be

$$I_C(x) = \left[\sum_{i=1}^{i=105} \left(\sum_{j=0}^{j=4} (B_{i,j}) x^i \right) \right] + (B_{0,0}) x^0$$

F.3 ECC

The primitive polynomial $G_p(x)$ and the elements α^i and β shall be as specified in F.2.1. The generator polynomial for the check bytes of the ECC shall be

$$G_E(x) = \prod_{i=120}^{i=135} (x + \alpha^i)$$

This polynomial is self-reciprocal. This property can be used to reduce the hardware size. The initial setting of the ECC register shall be all ZEROS. The bits of the computed check bytes shall be inverted before they are encoded into Channel bits.

F.3.1 ECC for 2 048-byte sectors

The 160 check bytes of the ECC shall be computed over the user bytes, the SWF bytes and the CRC bytes. The corresponding 10 information polynomials shall be:

$$I_{E_j}(x) = \sum_{i=0}^{i=102} (B_{i,j}) x^i$$

where $0 \leq j \leq 19$.

The contents of the 16 check bytes $E_{s,t}$ for each polynomial $I_{E_j}(x)$ are defined by the residual polynomial

$$R_{E_j}(x) = I_{E_j}(x)x^{16} \bmod G_E(x)$$

$$R_{E_j}(x) = \sum_{t=1}^{t=16} E_{j+1,t} x^{16-t}$$

The last equation specifies the storage locations for the coefficients of the polynomials.

F.3.2 ECC for 1 024-byte sectors

The 160 check bytes of the ECC shall be computed over the user bytes, the SWF bytes, the four (FF) bytes and the CRC bytes. The corresponding 10 information polynomials shall be:

$$I_{E_j}(x) = \sum_{i=0}^{i=103} (B_{i,j}) x^i$$

where $0 \leq j \leq 9$.

The calculation of the 16 check bytes for each of the information polynomials $I_{E_j}(x)$ shall be carried out as specified in F.3.1.

F.3.3 ECC for 512-byte sectors

The 80 check bytes of the ECC shall be computed over the user data bytes, the SWF bytes, the six (FF) bytes and the CRC bytes. The corresponding 5 information polynomials shall be:

$$I_{E_j}(x) = \sum_{i=0}^{i=105} (B_{i,j}) x^i$$

where $0 \leq j \leq 4$.

The calculation of the 16 check bytes for each of the information polynomials $I_{E_j}(x)$ shall be carried out as specified in F.3.1.

F.4 Resync

The Resync fields (see annex G) shall be inserted in the Data field to prevent loss of synchronization and to limit the propagation of errors in the user data. They are numbered consecutively and shall contain one of the following pattern of Channel bits.

0X0 100 000 001 000 000 100 00Y

0X0 100 000 001 000 000 101 00Y

Where X and Y are set to ZERO or ONE based on the preceding or following data patterns.

For 2 048-byte sectors, a field RS_n shall be inserted between bytes A_{40n} and A_{40n+1},

where $1 \leq n \leq 59$.

For 1 024-byte sectors, a field RS_n shall be inserted between bytes A_{30n} and A_{30n+1},

where $1 \leq n \leq 39$.

For 512-byte sectors, a field RS_n shall be inserted between bytes A_{15n} and A_{15n+1},

where $1 \leq n \leq 40$.

F.5 Recording sequence for the Data field

The elements of the Data field shall be recorded on the disk according to sequence A_n immediately following the Sync bytes and with the Resync bytes inserted as specified in F.4.

Figures F.1, F.2 and F.3 show in matrix form the arrangement of these elements. The sequence of recording is from top-to-bottom and left-to-right.

SB	designates a Sync byte
D	designates a user byte
RS	designates a Resync byte
P	designates a SWF byte
C	designates a check byte for CRC
E	designates a check byte for ECC
(FF)	designates a (FF) byte

For 2 048-byte sectors (figure F.1) the first 103 rows contain in columns 0 to 19 the user bytes, the SWF bytes and the CRC check bytes. The next 16 rows contain only the ECC check bytes.

For 1 024-byte sectors (figure F.2) the first 104 rows contain in columns 0 to 9 the user bytes, the SWF bytes, the four (FF) bytes and the CRC check bytes. The next 16 rows contain only the ECC check bytes.

For 512-byte sectors (figure F.3) the first 106 rows contain in columns 0 to 4 the user bytes, the SWF bytes, the six (FF) bytes and the CRC check bytes. The next 16 rows contain only the ECC check bytes.

Column No. j		0	1	2	3	7	8	9	15	16	17	18	19	Row No. i					
SB1	SB2	SB3	SB4	D1	D2	D3	D4		D8	D9	D10		D16	D17	D18	D19	D20	102	
				D21	D22	D23	D24		D28	D29	D30		D36	D37	D38	D39	D40	101	
	RS1	RS1		D41	D42	D43	D44		D48	D49	D50		D56	D57	D58	D59	D60	100	
				D61	D62	D63	D64		D68	D69	D70		D76	D77	D78	D79	D80	99	
	RS2	RS2		D81	D82	D83	D84		D88	D89	D90		D96	D97	D98	D99	D100	98	
				D101	D102	D103	D104		D108	D109	D110		D116	D117	D118	D119	D120	97	
	RS3	RS3		D121	D122	D123	D124		D128	D129	D130		D136	D137	D138	D139	D140	96	
103 rows																			
		RS49	RS49	D196	D196	D196	D196		D1968	D1969	D1970		D1976	D1977	D1978	D1979	D1980	4	
				D198	D198	D198	D198		D1988	D1989	D1990		D1996	D1997	D1998	D1999	D2000	3	
		RS50	RS50	D200	D200	D200	D200		D2008	D2009	D2010		D2016	D2017	D2018	D2019	D2020	2	
				D202	D202	D202	D202		D2028	D2029	D2030		D2036	D2037	D2038	D2039	D2040	1	
		RS51	RS51	D204	D204	D204	D204		D2048	SWF1	SWF2		SWF8	C1	C2	C3	C4	0	
				E1,1	E2,1	E3,1	E4,1		E8,1	E9,1	E10,1		E16,1	E17,1	E18,1	E19,1	E20,1	-1	
		RS52	RS52	E1,2	E2,2	E3,2	E4,2		E8,2	E9,2	E10,2		E16,2	E17,2	E18,2	E19,2	E20,2	-2	
				E1,3	E2,3	E3,3	E4,3		E8,3	E9,3	E10,3		E16,3	E17,3	E18,3	E19,3	E20,3	-3	
16 rows				E1,13	E2,13	E3,13	E4,13		E8,13	E9,13	E10,13		E16,13	E17,13	E18,13	E19,13	E20,13	-13	
		RS58	RS58	E1,14	E2,14	E3,14	E4,14		E8,14	E9,14	E10,14		E16,14	E17,14	E18,14	E19,14	E20,14	-14	
				E1,15	E2,15	E3,15	E4,15		E8,15	E9,15	E10,15		E16,15	E17,15	E18,15	E19,15	E20,15	-15	
		RS59	RS59	E1,16	E2,16	E3,16	E4,16		E8,16	E9,16	E10,16		E16,16	E17,16	E18,16	E19,16	E20,16	-16	

Figure F.1 – Data configuration, 2 048-byte sectors, ECC with interleave

Column No.j ----->				0	1	2	3	4	5	6	7	8	9	Row No.i
SB1	SB2	SB3	SB4	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	103
				D11	D12	D13	D14	D15	D16	D17	D18	D19	D20	102
				D21	D22	D23	D24	D25	D26	D27	D28	D29	D30	101
	RS1	RS1		D31	D32	D33	D34	D35	D36	D37	D38	D39	D40	100
				D41	D42	D43	D44	D45	D46	D47	D48	D49	D50	99
				D51	D52	D53	D54	D55	D56	D57	D58	D59	D60	98
	RS2	RS2		D61	D62	D63	D64	D65	D66	D67	D68	D69	D70	97
104 rows														
				D971	D972	D973	D974	D975	D976	D977	D978	D979	D980	6
				D981	D982	D983	D984	D985	D986	D987	D988	D989	D990	5
	RS33	RS33		D991	D992	D993	D994	D995	D996	D997	D998	D999	D1000	4
				D1001	D1002	D1003	D1004	D1005	D1006	D1007	D1008	D1009	D1010	3
				D1011	D1012	D1013	D1014	D1015	D1016	D1017	D1018	D1019	D1020	2
	RS34	RS34		D1021	D1022	D1023	D1024	SWF1	SWF2	SWF3	SWF4	SWF5	SWF6	1
				SWF7	SWF8	(FF)	(FF)	(FF)	(FF)	C1	C2	C3	C4	0
				E1,1	E2,1	E3,1	E4,1	E5,1	E6,1	E7,1	E8,1	E9,1	E10,1	-1
	RS35	RS35		E1,2	E2,2	E3,2	E4,2	E5,2	E6,2	E7,2	E8,2	E9,2	E10,2	-2
				E1,3	E2,3	E3,3	E4,3	E5,3	E6,3	E7,3	E8,3	E9,3	E10,3	-3
16 rows														
	RS39	RS39		E1,14	E2,14	E3,14	E4,14	E5,14	E6,14	E7,14	E8,14	E9,14	E10,14	-14
				E1,15	E2,15	E3,15	E4,15	E5,15	E6,15	E7,15	E8,15	E9,15	E10,15	-15
				E1,16	E2,16	E3,16	E4,16	E5,16	E6,16	E7,16	E8,16	E9,16	E10,16	-16

Figure F.2 - Data field configuration, 1024-byte sectors, ECC with 10-way interleave

Column No. j ----->							Row No. i		
		0	1	2	3	4			
SB1	SB2	SB3	SB4	D1	D2	D3	D4	D5	105
				D6	D7	D8	D9	D10	104
				D11	D12	D13	D14	D15	103
	RS1	RS1		D16	D17	D18	D19	D20	102
				D21	D22	D23	D24	D25	101
				D26	D27	D25	D29	D30	100
	RS2	RS2		D31	D32	D33	D35	D35	99
106 rows									
				D506	D507	D508	D509	D510	4
				D511	D512	SWF1	SWF2	SWF3	3
				SWF4	SWF5	SWF6	SWF7	SWF8	2
				(FF)	(FF)	(FF)	(FF)	(FF)	1
	RS35	RS35		(FF)	C1	C2	C3	C4	0
<hr/>									
				E1,1	E2,1	E3,1	E4,1	E5,1	-1
				E1,2	E2,2	E3,2	E4,2	E5,2	-2
	RS36	RS36		E1,3	E2,3	E3,3	E4,3	E5,3	-3
16 rows									
				E1,13	E2,13	E3,13	E4,13	E5,13	-13
				E1,14	E2,14	E3,14	E4,14	E5,14	-14
	RS40	RS40		E1,15	E2,15	E3,15	E4,15	E5,15	-15
				E1,16	E2,16	E3,16	E4,16	E5,16	-16

Figure F.3 - Data field configuration, 512-byte sectors, ECC with 5-way interleave

Annex G (normative)

Determination of Resync pattern

DSV (Digital Sum Value) is used in the descriptions that follow. Other acronyms include PLL (Phase Lock Loop), PPM (Pulse Position Modulation) and PWM (Pulse Width Modulation).

G.1 Conditions of Resync pattern

The Resync pattern shall have the following characteristics to satisfy its required function:

1. The Resync pattern is an irregular Channel bit pattern of seven consecutive ZERO bits and a ONE bit followed by six consecutive ZERO bits that does not occur in the (1,7) modulation code.
2. The irregularity of Resync pattern is detectable using either only leading edges or only trailing edges when dual PLL is used.
3. The number of ONES in Resync pattern is switchable from an odd number to an even number or vice versa for minimizing the d.c. level fluctuation of the data pattern in the Data field of a sector.
4. The length of the Resync pattern shall be 24 Channel bits.

G.2 Resync pattern

Selection of one of the two Resync patterns shown below shall be made in order to minimize the d.c. level fluctuation.

The selection criteria are described in G.5.

	Data 1	Resync area	Data 2

	Resync pattern		

Resync 1	0x0	100000001000000100	00y
Resync 2	0x0	100000001000000101	00y

where x = ZERO or ONE
y = ZERO or ONE

G.3 Generation algorithm of resync pattern

PREVIOUS Data 1		Resync Area						NEXT Data 2		
Data bits X1 X2	Channel bits	00 0x0	assumed data bits Resync Pattern				01 00y	Data bits X3 X4		
00	0 001	010	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
00	1 001	010	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
01	0 001	010	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
01	1 010	000	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
10	0 101	010	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
10	1 - - -		does not occur							
11	0 010	000	100	000	001	000	000	100	001	0x
			0					0	000	1x
			1					1	001	0x
			1					0	000	1x
11	1 - - -		does not occur							

where z = ZERO for Resync 1
z = ONE for Resync 2

Note 1: x_1 and x_2 are encoded assuming the following information bits are ZERO ZERO

Note 2: The values of these information bits are the assumed value for encoding.


Note 3: This Channel bit was inverted after encoding in order to generate the irregular pattern

Note 4: The value of the last three bits of the Resync area is determined by:

- 1) the previous Channel bit assumed to be ZERO
- 2) the two information bits (assumed to be ZERO ONE);
- 3) the state of Data 2 information bit X_3 per the (1,7) encode table 3.

G.4 Minimization of d.c. level

The criteria for selecting either Resync pattern 1 or Resync pattern 2 in order to minimize the d.c. level fluctuation is based on the Channel bits of the Data area, and 0x0, 00y in the Resync area.

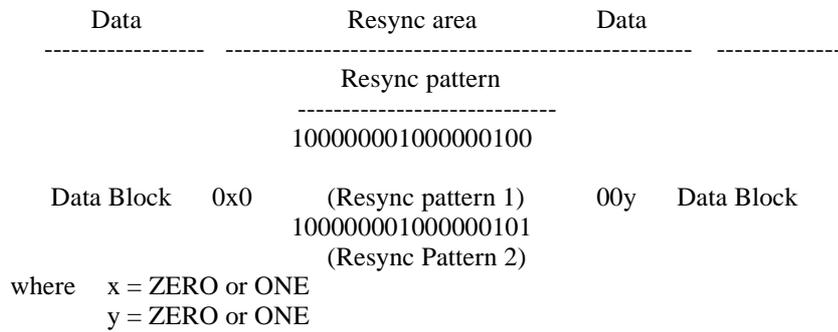

The decision is made to select either Resync pattern 1 or Resync pattern 2 according to the procedure described in G.5.

G.5 Determination of Resync pattern


The Resync pattern to be used shall be determined by the following procedure.

1. Convert the Channel bits described in PPM data into PWM data in order to simplify handling.

For example, if the PPM data is
... 0010100010010 ...
the PWM data shall be
... 0011000011100 ...

The DSV calculation shall be defined in terms of PWM data such that ZERO = -1 and ONE = +1. (see Example below)

Example of calculation of Block DSV_m and Resync DSV_m

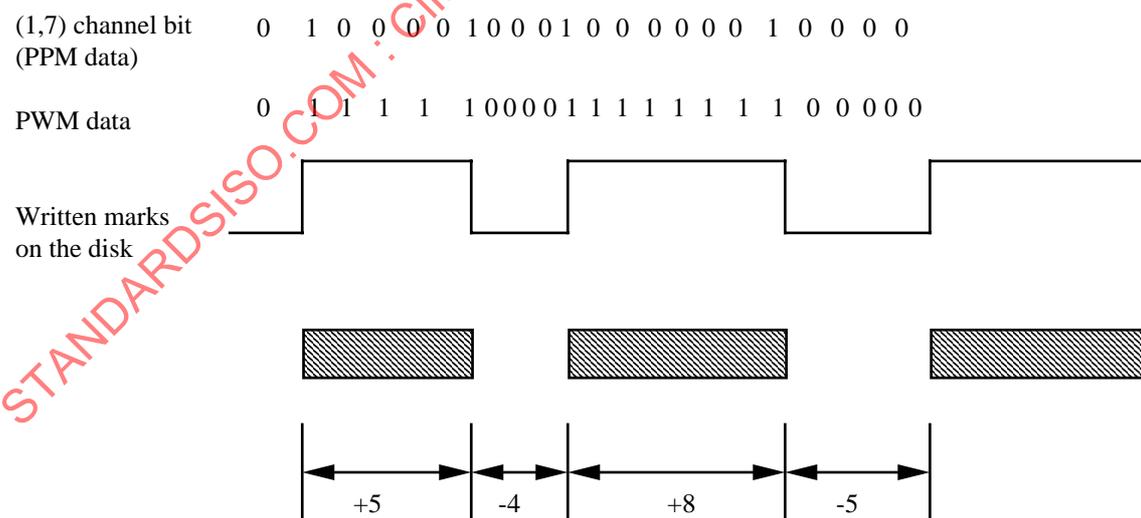

DSV_m is calculated as
DSV_m = (+5 - 4 + 8 - 5 ...)

2. The Resync area shall be divided into two parts (RS || INV), where both parts are concatenated as follows:

RS = 0x010000000100000010 in PPM data
 INV = 000y(INV1) or 100y(INV2) in PPM data .

3. The user data field shall be concatenated as

$$\text{VFO}_3 \parallel \text{SYNC} \parallel \text{B}_0 \parallel \text{RS}_1 \parallel \text{INV1 (or INV2)} \parallel \text{B}_1 \parallel \text{RS}_2 \parallel \dots$$

$$\dots \parallel \text{INV1 (or INV2)} \parallel \text{B}_m \parallel \text{RS}_{m+1} \parallel \dots \dots \parallel \text{INV1 (or INV2)} \parallel \text{B}_N$$

where

$m = 1$ to N
 $N = 59$ in the 2 048-byte sector,
 39 in the 1 024-byte sector, and
 40 in the 512-byte sector.

(See figure G.1)

4. The DSV(z) function shall be defined such that the argument (z), which is a PPM data stream, shall result in the PWM DSV sum based on the last PWM state of the PWM data preceding the data in the (z) argument.

5. INV1 or INV2 shall be selected in step m using the following algorithm:

$$P_0 = \text{DSV}(\text{VFO}_3 \parallel \text{SYNC} \parallel \text{B}_0 \parallel \text{RS}_1)$$

$$P_m = P_{m-1} + \text{DSV}(\text{INV1} \parallel \text{B}_m \parallel \text{RS}_{m+1}) \text{ or}$$

$$P_m = P_{m-1} + \text{DSV}(\text{INV2} \parallel \text{B}_m \parallel \text{RS})$$


Select INV1 or INV2 to minimize $|P_m|$.

$$P_N = P_{N-1} + \text{DSV}(\text{INV1} \parallel \text{B}_N)$$


$$P_N = P_{N-1} + \text{DSV}(\text{INV2} \parallel \text{B}_N)$$

Select INV1 or INV2 to minimize $|P_N|$.

This procedure shall be repeated from $m = 1$ to N , where $N = 59$ in 2 048-byte sector, $N = 39$ in 1 024-byte sector and $N = 40$ in 512-byte sector. If $|P_m|$ is the same for Resync pattern 1 and Resync pattern 2, Resync pattern 1 shall be selected.

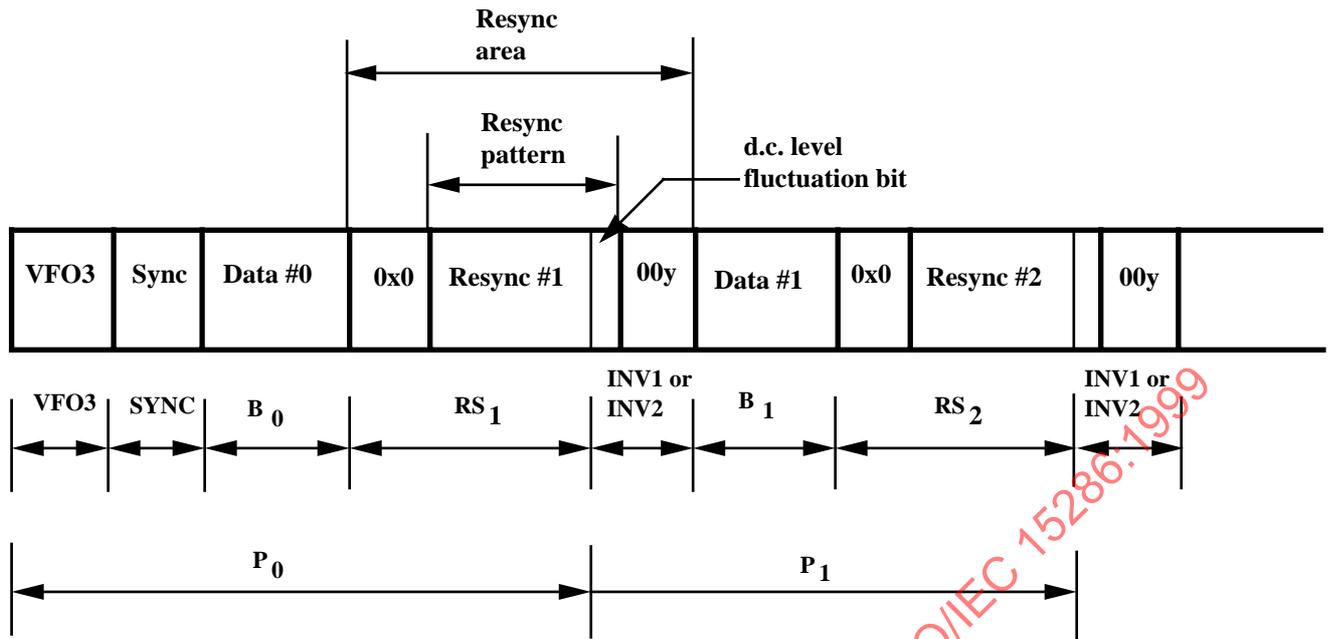

continued

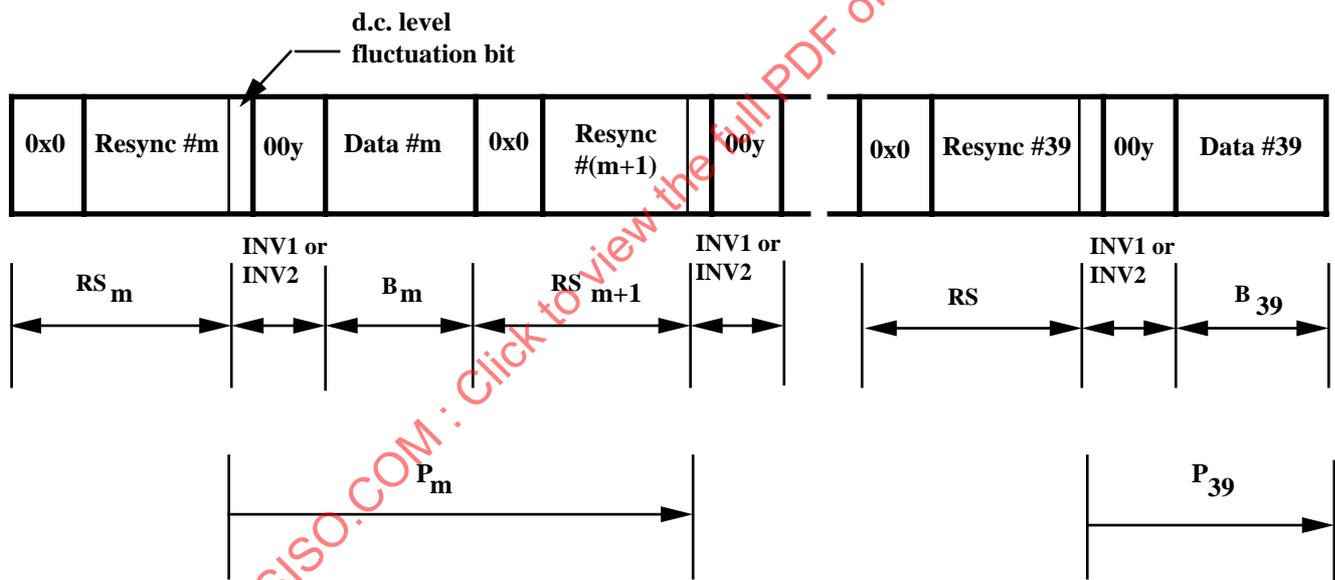

Note: The above figure is for 1024-byte sector.
 Note: Each P₀, P₁,...P₃₉ represents the total DSV from VFO3.


Figure G.1 — Example of Resync byte

Annex H

(normative)

Read Channel for measuring jitter

Jitter shall be measured by using the following read Channel.

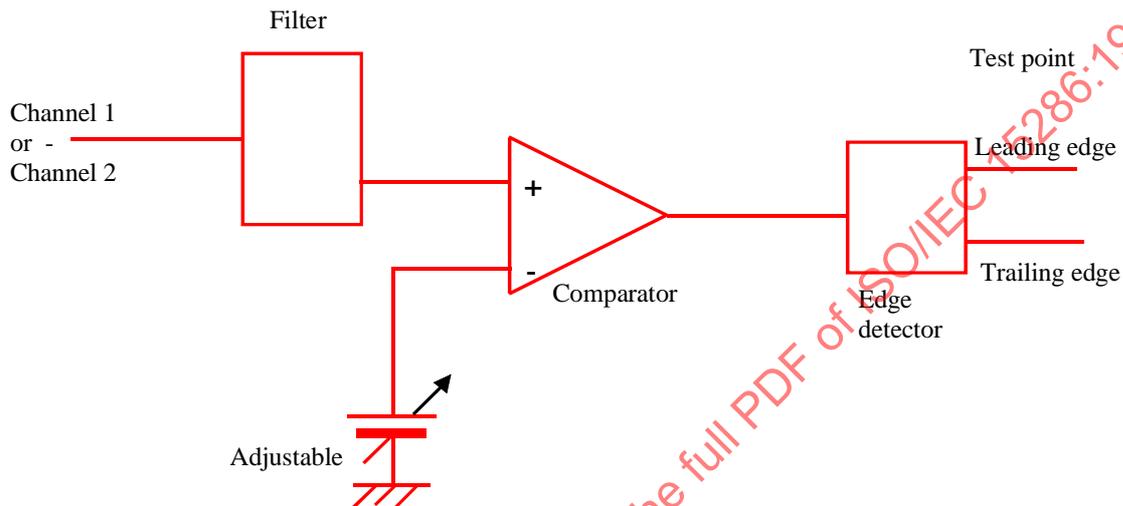

95-0058-A

Input signal:

Channel 1, for embossed marks

Channel 2, for user written marks

Filter specifications:

- 1) Equalizer: See annex M.
- 2) Filter type: 5th Bessel function
- 3) Low pass filter: Cut-off frequency = one half the channel clock frequency of the band being tested

Annex J

(normative)

Timing jitter measuring procedure

The timing jitter of leading-to-leading or trailing-to-trailing edges shall be measured using the following procedures.


- 1). Set the threshold level of the detector circuit such that the 2T mark and 2T space of the VFO is exactly 2 Channel bit times T long.
- 2). Hold the threshold level, and detect the signal edges.
- 3). Measure the lengths in time of the leading-to-leading and trailing-to-trailing edges using a Time Interval Analyzer.
- 4). Acquire 10^5 independent time interval samples excluding the data from defective areas.
- 5). Calculate the standard deviation J_t of the timing jitter distribution; the difference between the measured length of leading-to-leading or trailing-to-trailing edges and the mean value of corresponding mark or space length L_n shall be taken as samples.

where J_t is shown in figure J.1.

The lengths leading-to-leading or trailing-to-trailing edges shall be separately examined, and the specifications should be satisfied even in the worst case.

In case of header signal evaluation, the threshold level shall be set using VFO₁ and the time interval samples shall be measured using the AM to PA fields.

In case of embossed data signal evaluation, the threshold level shall be set using VFO₃ and the time interval samples shall be measured using the Sync and Data field in the user data area, including all time interval samples from user data SWF, CRC, ECC, and Resync.

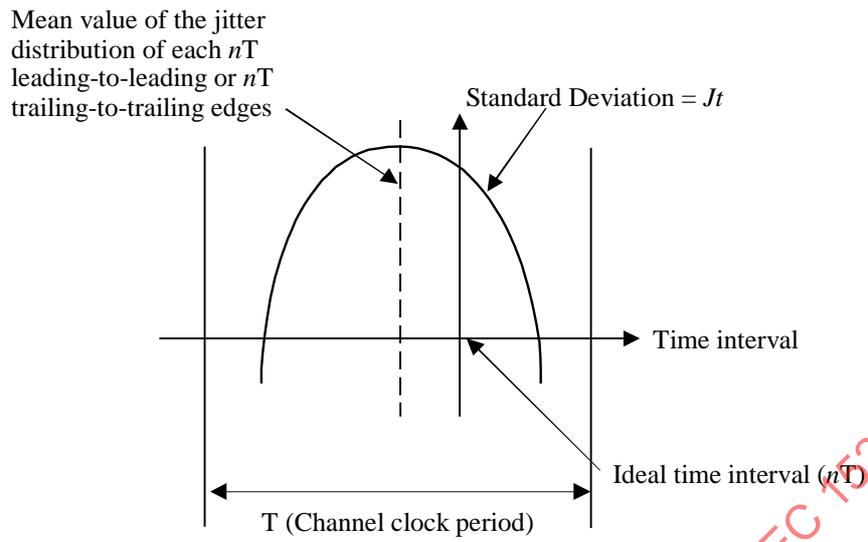

97-0129-A-Revised

Figure J.1 - Measured distribution of timing jitter

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15286:1999