

---

---

**Information technology — Relayed  
Multicast Control Protocol (RMCP) —  
Framework**

*Technologies de l'information — Protocole de multidiffusion relayé  
(RMCP) — Cadre général*

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 16512-1:2016

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 16512-1:2016



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2016

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

This second edition cancels and replaces first edition of ISO/IEC 16512-1:2005 which has been technically revised.

ISO/IEC 16512-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in collaboration with ITU-T. The identical text is published as ITU-T X.603 (03/2012).

ISO/IEC 16512 consists of the following parts, under the general title *Information technology — Relayed multicast protocol*:

- Part 1: Framework
- Part 2: Specification for simplex group applications

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 16512-1:2016

## CONTENTS

|  | <i>Page</i> |
|--|-------------|
| 1 Scope .....  | 1           |
| 2 Normative references.....  | 1           |
| 3 Definitions .....  | 1           |
| 3.1 Terms defined elsewhere.....                                       | 1           |
| 3.2 Terms defined in this Recommendation   International Standard..... | 1           |
| 4 Abbreviations .....  | 2           |
| 5 Conventions .....  | 2           |
| 6 Framework of RMCP .....  | 2           |
| 6.1 Introduction .....   | 2           |
| 6.2 Basic concept of RMCP .....  | 3           |
| 6.3 RMCP data delivery model.....                                      | 5           |
| 6.4 Security consideration in RMCP.....                                | 8           |
| 7 RMCP functions .....   | 8           |
| 7.1 Session initiation .....   | 8           |
| 7.2 Session subscription and join .....                                | 9           |
| 7.3 Session leave .....  | 9           |
| 7.4 Session termination .....  | 9           |
| 7.5 Session maintenance .....  | 9           |
| 7.6 Session monitoring.....  | 9           |
| 8 Messages .....   | 10          |
| 8.1 Basic message structure .....                                      | 10          |
| 8.2 Control format.....  | 10          |
| 8.3 Sub-control format .....   | 10          |
| Bibliography .....   | 12          |

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 16512-1:2016

## Introduction

This Recommendation | International Standard specifies the relayed multicast protocol (RMCP) used for realizing relayed multicast. Relayed multicast, also known as an overlay multicast or an application-layer multicast, is a data-delivery scheme for group communications applications over an IP-based network environment. RMCP employs intermediate multicast agents for relaying application data from one or more senders to many receivers.

The design of RMCP has been motivated from the following observations:

In the marketplace, diverse group applications and services have been provisioned commercially all over the world. Some of the examples include Internet TV, remote education, real-time media streaming applications, live broadcasting of special events such as the Victoria's Secret Fashion Show, stock-tickers, etc.

At present, most of the group applications mentioned above use a replicated IP unicast method to realize group services. As a result, those applications have scalability problems due to the limitation in supporting a number of simultaneous users. In terms of a business model, it would mean less revenue or profit.

IP multicast has been known as an effective transport technology for providing group communication services. Nevertheless, the IP multicast has not been deployed widely over the Internet due to several reasons, including the following:

- high deployment cost along with an uncertainty of return-on-investment (ROI)
- IP multicast alone cannot support all kinds of group applications.

Network services such as group file transfer or network games, need a reliable multicast transport mechanism. However, even current reliable multicast transport mechanisms still have unresolved problems including scalability, flow control, congestion control, etc. Until an appropriate multicast transport mechanism is laid down, group communication applications requiring reliable data transfer will continue to depend on the server-based replicated unicast method.

Although IP multicast is not deployed globally, various local networks have already been equipped with IP multicast capability. For example, Ethernet-based LANs and private networks, such as corporate and campus networks, substantially provide the multicast transport capability within their local subnet or administrative domains.

Recognizing these observations, there is a crucial need to develop an alternative group delivery scheme. RMCP is one such scheme to realize group delivery over the IP-based network. RMCP utilizes existing unicast, multicast, and/or multicast tunnelling schemes. In addition, RMCP is designed in separate forms to support any kind of group service type. RMCP is expected to provide a substantial solution for group services over the IP-based network.

**INTERNATIONAL STANDARD  
ITU-T RECOMMENDATION**

**Information technology – Relayed multicast protocol: Framework**

**1 Scope**

Relayed multicast protocol (RMCP) is a protocol which is used to realize a relayed multicast data transport scheme. Different from the conventional IP multicast, RMCP can configure a relayed multicast path that multicast traffic flows by using intermediate end-hosts. RMCP can be applied to the current unicast based IP network where IP multicast is not fully deployed.

This Recommendation | International Standard addresses the basic concepts needed to specify RMCP for relayed multicast. It defines the related terminology and proposes a framework for the future development of subsequent protocols. The framework covers network topology including network entities and the relationship among them, service scenarios, basic operations, and message format.

**2 Normative references**

None.

**3 Definitions**

**3.1 Terms defined elsewhere**

None.

**3.2 Terms defined in this Recommendation | International Standard**

For the purpose of this Recommendation | International Standard the following definitions apply:

**3.2.1 child multicast agent (CMA):** A next downstream multicast agent (MA) in the relayed multicast protocol (RMCP) data delivery path.

**3.2.2 IP multicast:** Realizes a multicast scheme in the IP network with the help of multicast-enabled IP routers.

**3.2.3 multicast:** A data delivery scheme where the same data unit is transmitted from a single source to multiple destinations in a single invocation of service.

**3.2.4 multicast agent (MA):** An intermediate node which relays group application data.

**3.2.5 N-plex:** Wherein anyone can send something, and, if someone does so, all others may receive it.

**3.2.6 parent multicast agent (PMA):** A next upstream multicast agent (MA) in the relayed multicast protocol (RMCP) data delivery path.

**3.2.7 relayed multicast:** A multicast data delivery scheme that can be used in unicast environments.

**3.2.8 receiver multicast agent (RMA):** A multicast agent (MA) other than sender multicast agent (SMA).

**3.2.9 relayed multicast protocol (RMCP):** A protocol to realize the relayed multicast scheme using end hosts.

**3.2.10 relayed multicast protocol (RMCP) session:** A set of multicast agents (MAs) which configures the data delivery path using RMCP.

**3.2.11 session identification (SID):** Corresponds to group name and identifies relayed multicast protocol (RMCP) session uniquely.

**3.2.12 session manager (SM):** A relayed multicast protocol (RMCP) entity that is responsible for the overall RMCP operations.

**3.2.13 sender multicast agent (SMA):** A multicast agent (MA) attached to a sender in the same system or local network.

**3.2.14 simplex:** Wherein only one sender is send-only and all others are receive-only.

## 4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

|       |                                |
|-------|--------------------------------|
| CMA   | Child Multicast Agent          |
| IPC   | Inter-Process Communication    |
| IPIP  | IP in IP encapsulation         |
| MA    | Multicast Agent                |
| PMA   | Parent Multicast Agent         |
| RMA   | Receiver Multicast Agent       |
| RMCP  | Relayed Multicast Protocol     |
| RMT   | Reliable Multicast Transport   |
| SID   | Session ID                     |
| SM    | Session Manager                |
| SMA   | Sender Multicast Agent         |
| T/TCP | TCP extensions to Transactions |
| TCP   | Transmission Control Protocol  |
| TP    | Transport Protocol             |
| UDP   | User Datagram Protocol         |

## 5 Conventions

None.

## 6 Framework of RMCP

### 6.1 Introduction

Relayed multicast protocol (RMCP) is an application-level multicast protocol. It constructs and manages a relayed multicast network to support the group communication services over the current unicast-based IP network. After a series of RMCP control connections are established, a multicast data delivery path is constructed by using multiple multicast agents (MAs). Along the delivery path, real-time or reliable data transport channels are inter-connected between upstream and downstream MAs. Only after the data delivery path and data channel are established, group communication applications can work as in the native IP multicast network.

RMCP aims to support various kinds of group-based applications and services. Table 1 categorizes the group communication services with types of communications and characteristics of data delivery.


**Table 1 – Considerable group communication services**

| Characteristics<br>Type of communications | Real-time data                                   | Reliable data   |
|---|--|---|
| Simplex                                   | Internet live TV,<br>Internet live banner        | Stock-ticker, file dissemination,<br>software live update                       |
| N-plex                                    | Videoconference,<br>inter-domain multicast proxy | Distributed virtual environment,<br>network game, data mirroring and<br>caching |

**6.2 Basic concept of RMCP**

Each RMCP session configures relayed multicast data delivery model with the following entities as shown in Figure 1:

- a) One session manager (SM);
- b) Sender multicast agent (SMA) per sender application;
- c) One or more receiver multicast agents (RMAs);
- d) Group communication applications sending or receiving group data.

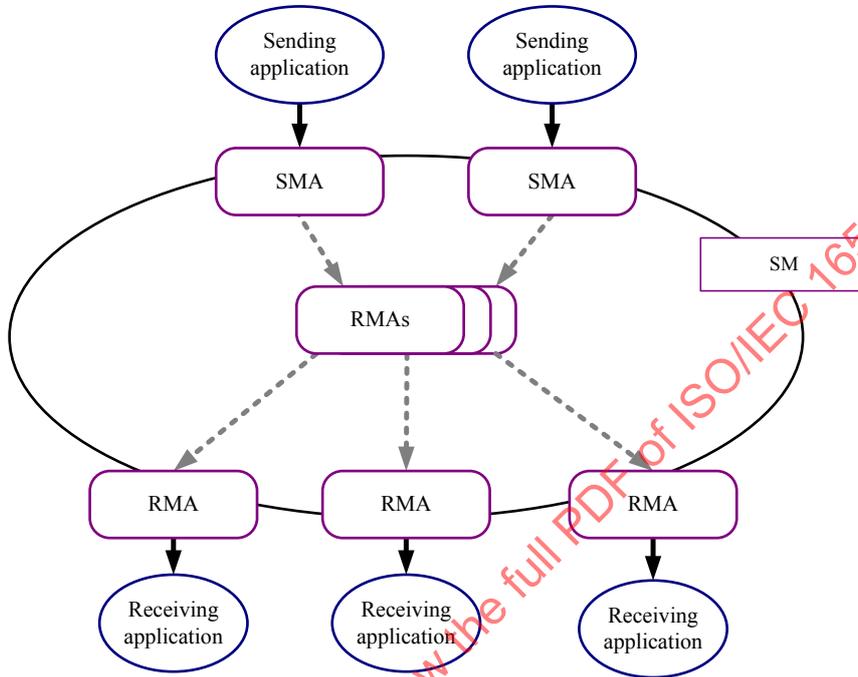

**Figure 1 – RMCP entities**

The SM is involved in session configuration and maintenance. A single SM can handle one or multiple sessions, simultaneously. Since the SM does not participate in data delivery, it has RMCP control module only. Figure 2 shows the protocol stack of SM.

|   |
|---|
| RMCP control module                     |
| Transport protocol for message delivery |
| IP (unicast)                            |

**Figure 2 – Protocol stack of SM**

A session manager (SM) can provide the following functionalities:

- a) Session initiation;
- b) Session termination;
- c) Session membership management;
- d) Session status monitoring and management.

The MA, which covers both SMA and RMA, constructs a relayed multicast data delivery path and forwards data along the constructed path from SMA to RMA(s). An MA consists of an RMCP control module and a data module. The main function of the control module is to establish a relayed data delivery path, and the data module is to deliver data along the constructed delivery path. Figure 3 shows the protocol stacks of the MA.

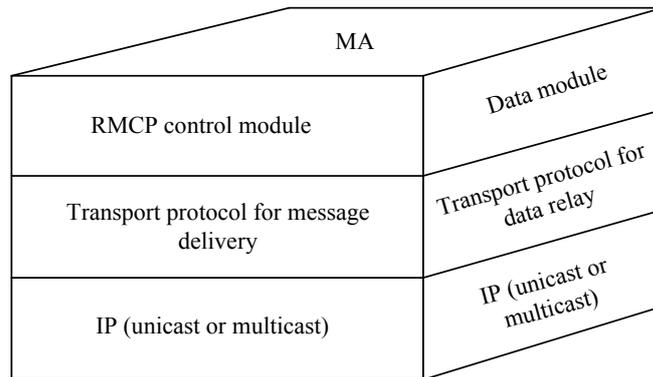


Figure 3 – Protocol stack of the MA

The RMCP control module exchanges RMCP messages with RMCP control modules in other RMCP entities. It performs the following functions:

- a) Session join;
- b) Session leave;
- c) Session maintenance;
- d) Session status report.

The message flows among RMCP control modules are shown in Figure 4. As shown in the figure, an MA can be implemented in the same system with the application or in the same local network such as Ethernet-LAN. To deliver the RMCP messages, any type of reliable transport protocols can be used such as TCP. The RMCP control module can also use multicast transport protocols for delivering RMCP messages in the multicast network. In this case, the User Datagram Protocol (UDP) can be used as a transport protocol.

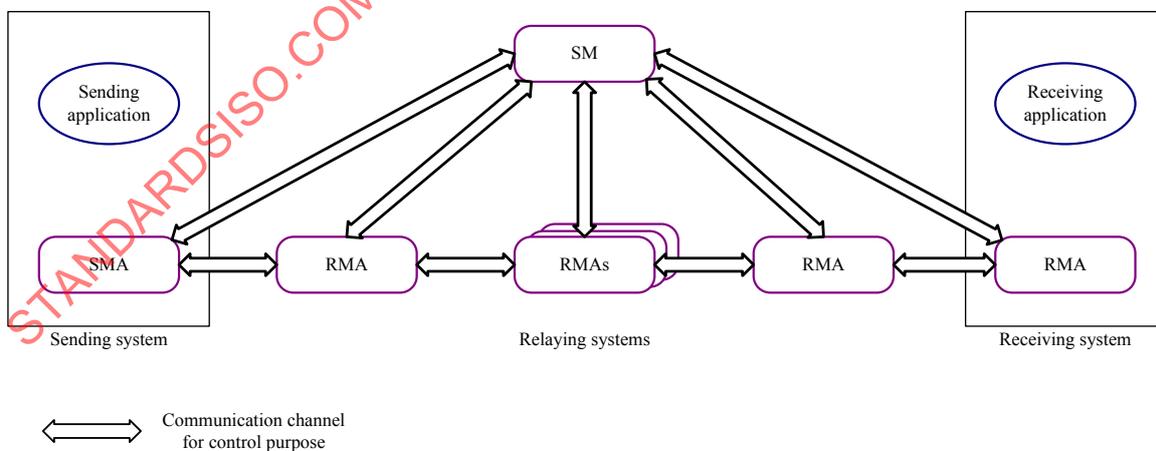


Figure 4 – RMCP control model

The data module relays data along the relayed multicast data delivery path constructed by the RMCP control module as shown in Figure 5. The relayed multicast data delivery path consists of one or more senders, a single SMA per sender, one or more RMAs and receivers. Any kind of transport protocols can be used to transport data.

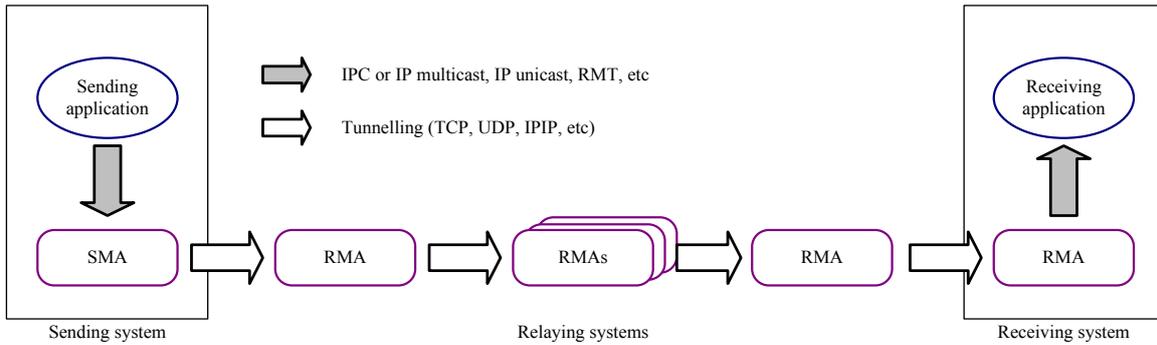


Figure 5 – RMCP data transport model

According to the direction of relaying data, an MA can act as an SMA or as an RMA. When acting as an RMA, the MA receives data from its parent multicast agent (PMA) and forwards the data to its child multicast agent(s) (CMA(s)) and data receiver(s), i.e., receiving application(s). SMA receives data from the data sender, i.e., sending application, and forwards the data to its CMA(s). The number of SMAs depends on the number of data senders.

### 6.3 RMCP data delivery model

RMCP can support both simplex service, where there is one sender in each session, and N-plex service, where multiple senders can be in each session.

#### 6.3.1 Simplex delivery model for real-time services

Simplex real-time broadcasting services such as Internet live TV and software banner require a real-time data delivery path from one sender to multiple receivers. The most optimized data delivery path would be a per-source relayed multicast tree where a unidirectional real-time channel is established. Figure 6 shows one of the possible relayed multicast trees configured by the RMCP for simplex real-time applications.

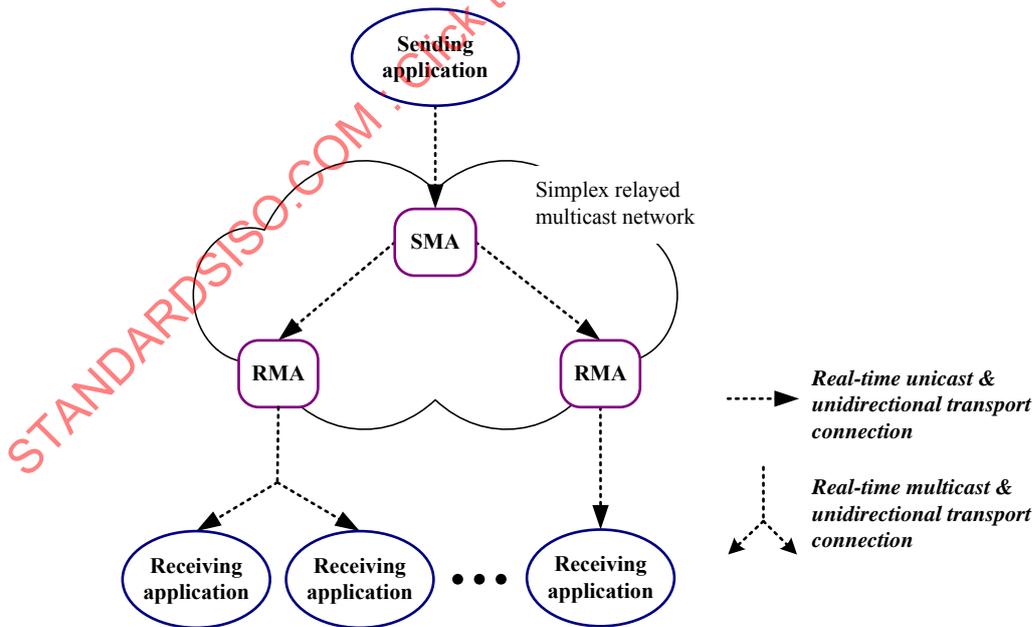


Figure 6 – Simplex real-time data delivery model

6.3.2 Simplex delivery model for reliable services

Simplex dissemination applications such as stock-ticker, file dissemination, and software updater require a reliable data delivery path from one sender to multiple receivers. The most optimized data delivery path here would also be a per-source relayed multicast tree where a unidirectional reliable channel is constructed to deliver data reliably. For reliable delivery, RMCP can use reliable transport protocol such as TCP, and can provide own reliable delivery scheme. Figure 7 shows one of the possible relayed multicast trees configured by RMCP for simplex reliable applications.

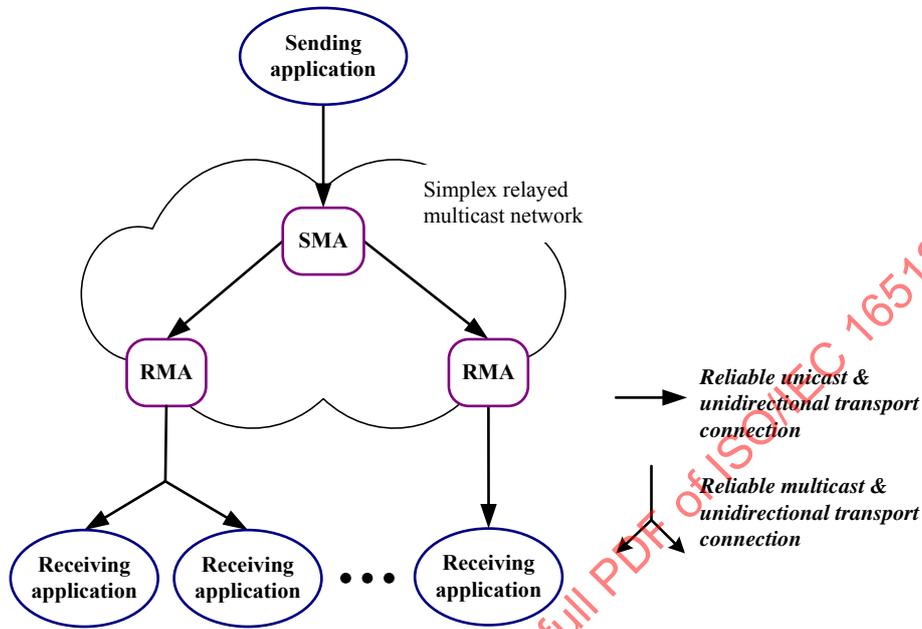


Figure 7 – Simplex reliable data delivery model

6.3.3 N-plex delivery model for real-time services

N-plex real-time interactive applications such as videoconference and inter-domain multicast proxy require a real-time data delivery path from multiple senders to multiple receivers. Figure 8 shows one of the possible relayed multicast data delivery paths configured by the RMCP for N-plex real-time group communications applications.

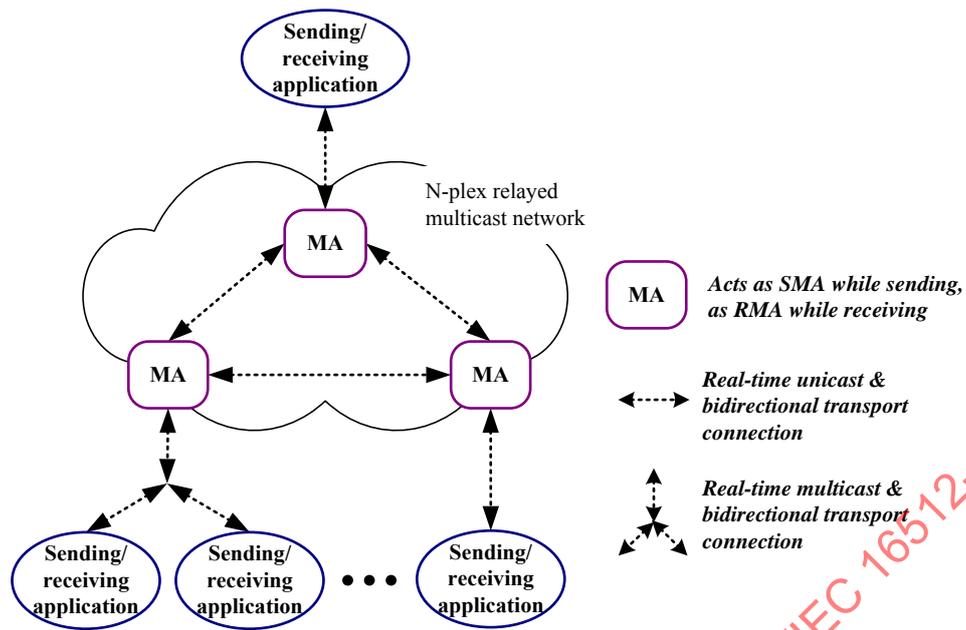


Figure 8 – N-plex real-time data delivery model

6.3.4 N-plex delivery model for reliable services

N-plex distributed applications such as distributed virtual environment, network games, data mirroring, and caching requires reliable data delivery path from multiple senders to multiple receivers. Figure 9 shows a possible relayed multicast data delivery path configured by RMCP for N-plex reliable group communication applications.

STANDARDSISO.COM : Click to view the PDF of ISO/IEC 16512-1:2016

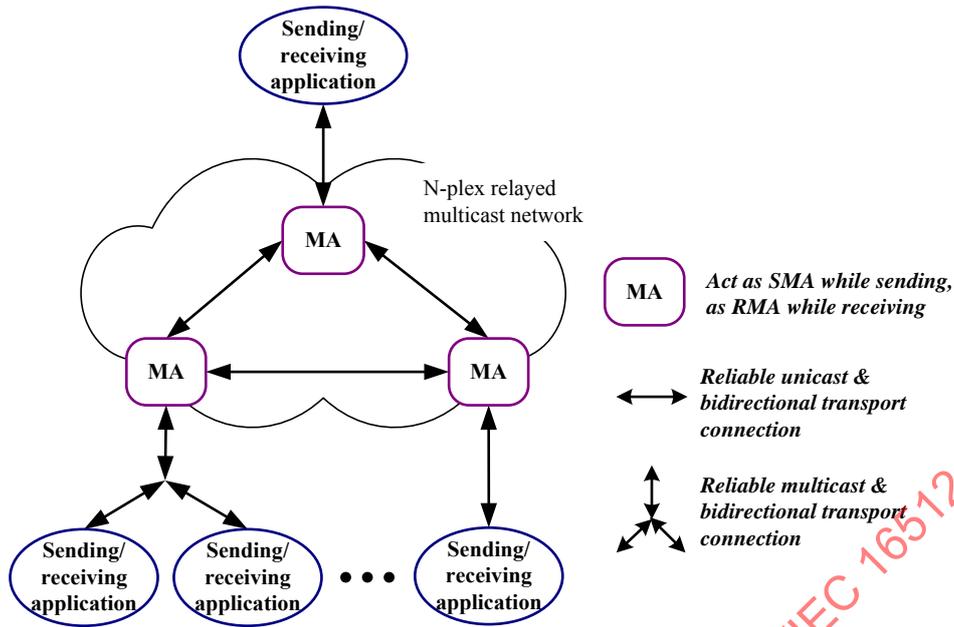


Figure 9 – N-plex reliable data delivery model

6.4 Security consideration in RMCP

For providing RMCP-based services in the Internet, the RMCP does not consider security as mandatory. If it is needed to provide secure RMCP-based services, it is recommended to add security features to the RMCP entities to interact with the pre-deployed trust server for secure communications among the RMCP entities. Figure 10 shows the relationship between secure RMCP and basic RMCP.

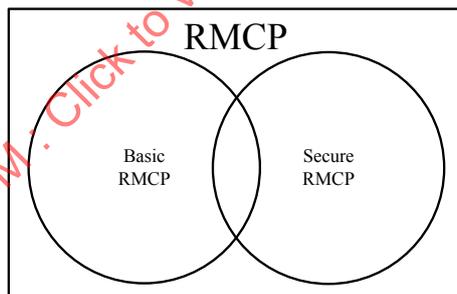


Figure 10 – Relationship between basic RMCP and secure RMCP

Figure 10 implies that subsequent protocols may have security features with own functions and also that secure RMCP can use some functions of basic RMCP.

7 RMCP functions

7.1 Session initiation

The SM initiates a new session upon receiving a session initiation request from the SMA. The SM allocates a SID for each new session. The SID corresponds to the group name that identifies the session. The SM has the information about the constructed sessions. The information may include characteristics of media, session, authentication, etc.

## 7.2 Session subscription and join

In order to receive service, RMA communicates with SM to subscribe to the session. After successful session subscription, RMA joins the session by interacting with other RMAs which are participating in the RMCP session. Detailed descriptions for session subscription and join are as follows.

Each MA contacts the SM by sending a subscription request. The location of the SM has been already notified to each MA. The SM is recommended to respond to the subscription request to indicate whether the requester is qualified to subscribe to the session. If the MA's subscription request is successful, SM sends a list of PMA candidates that the requesting MA can join. SM does not assign a specific MA to the requesting MA as a PMA. The MA voluntarily chooses the most adequate PMA. The criteria for selecting PMA may be different according to the requesting MA; however, MA would want to select the best PMA in terms of performance and expenses. If the SM does not respond or rejects the session subscription request, the MA cannot subscribe to the RMCP session.

The RMA with successful subscription can send a relay request to its PMA candidate. The relay request includes information such as IP address and port number of the MA for data channel and preferred data channel type. If the PMA candidate approves the relay request, it answers with a successful relay response and sets the requesting MA as its CMA. PMA establishes a data channel with the requester by invoking its data module with the requested data channel.

If the PMA candidate rejects the relay request, it replies with the reason for rejection. The RMA will need to find another PMA candidate or it will have to quit RMCP session join. After successful join with the PMA, the MA will be receiving multicast data from the PMA through the data module. This session join procedure pertains to RMA only. SMA will not need to join the RMCP session.

## 7.3 Session leave

When an MA wants to leave the session, it needs to notify its PMA, CMA(s), and SM of its departure.

## 7.4 Session termination

An RMCP session can be terminated as needed or abruptly due to an SMA failure.

## 7.5 Session maintenance

After a data channel has been established successfully, the relay request and response will be periodically exchanged between the two MAs. This procedure is needed for detection of MA failure and for data delivery path maintenance. If a PMA detects that one of its CMAs has failed, the PMA will stop sending multicast data to the pertaining CMA. If the CMA detects failure of its PMA, the CMA searches for another PMA to join.

The topology of the relayed multicast data delivery path changes constantly due to the join and leave of MAs, MA failure, or problem in the data channel. These changes can cause partition or loop in the data delivery path. Therefore, it is necessary for each MA to maintain the data delivery path.

If an MA finds a PMA candidate that can provide better service quality compared with its current PMA, the MA changes its PMA.

The maintenance function of relayed multicast data delivery path consists of the following:

- a) Loop detection and avoidance;
- b) Network partition detection and recovery;
- c) Parent switching.

## 7.6 Session monitoring

Session monitoring is used for SM to monitor session status such as membership dynamics and QoS perceived by MAs. The status reports are exchanged between MA and SM. The SM requests a specific MA to report its status and the pertaining MA should report the result to the SM.

The RMCP session monitoring function consists of the following:

- a) Reporting the status of the data channel: data throughput, etc.;
- b) RMCP membership information gathering;
- c) Relayed multicast data delivery path topology information gathering.

## 8 Messages

### 8.1 Basic message structure

RMCP messages are used to initialize and manage both RMCP session and the relayed multicast data delivery path. They are encapsulated in transport segments, as shown in Figure 11.

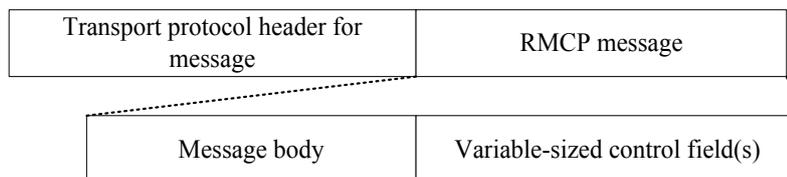


Figure 11 – Encapsulation of the RMCP message

Data from the data sender is encapsulated as shown in Figure 12. Multicast data delivered, is not part of the RMCP message. The multicast data are encapsulated when delivered from/to MA, thus, original data is retained during transport.





Figure 12 – Encapsulation of original data

### 8.2 Control format

RMCP message can include a control field(s), if needed. It is concatenated at the end of the RMCP message.

Figure 13 shows the RMCP control format. The meaning and value of each field is as follows:



NOTE – The digit in parentheses in each field indicates the length of the field in bits.

Figure 13 – RMCP control format

- a) *Control type* – This field denotes the type of the control;
- b) *Length* – This field denotes the total length in bytes of the control including any sub-control(s). This field can be reserved, in which case it is set to zero, according to the type of control;
- c) *Value* – The content of this field is defined for each control denoted in the Control type field.

#### 8.2.1 Control types and values

Each RMCP message can include the predefined control(s) at its disposal.

### 8.3 Sub-control format

In order to specify detailed control information, the RMCP control can have one or more sub-controls in its value field. The format of sub-control and its preceding control are shown in Figure 14. The meaning and value of each field of the sub-control is as follows: