

---

---

**Information technology — Radio  
frequency identification device  
performance test methods —  
Part 3:  
Test methods for tag performance**

*Technologies de l'information — Méthodes d'essai des performances  
du dispositif d'identification par radiofréquence —*

*Partie 3: Méthodes d'essai des performances du tag*

STANDARDSISO.COM : Click to view the PDF of ISO/IEC 18046-3:2012

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 18046-3:2012



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	v
Introduction.....	vi
<b>1</b> <b>Scope</b> .....	<b>1</b>
<b>2</b> <b>Normative references</b> .....	<b>1</b>
<b>3</b> <b>Terms and definitions</b> .....	<b>2</b>
<b>4</b> <b>Symbols and abbreviated terms</b> .....	<b>2</b>
<b>5</b> <b>Conditions applicable to the test methods</b> .....	<b>2</b>
5.1 <b>Number of tags to be tested</b> .....	<b>2</b>
5.2 <b>Test environment</b> .....	<b>3</b>
5.3 <b>RF environment</b> .....	<b>3</b>
5.4 <b>Pre-conditioning</b> .....	<b>3</b>
5.5 <b>Default tolerance</b> .....	<b>3</b>
5.6 <b>Total measurement uncertainty</b> .....	<b>3</b>
5.7 <b>Test result reporting</b> .....	<b>3</b>
5.8 <b>Test mounting material</b> .....	<b>3</b>
5.9 <b>Test communication parameters</b> .....	<b>3</b>
5.10 <b>Test equipment limits</b> .....	<b>4</b>
5.11 <b>Human exposure to EMF</b> .....	<b>4</b>
<b>6</b> <b>Setup of test equipment for tag test</b> .....	<b>4</b>
6.1 <b>Test apparatus and test circuits for ISO/IEC 18000-2 tags</b> .....	<b>4</b>
6.2 <b>Test apparatus and test circuits for ISO/IEC 18000-3 tags</b> .....	<b>4</b>
6.3 <b>Test apparatus and test circuits for ISO/IEC 18000-6 tags</b> .....	<b>4</b>
6.4 <b>Test apparatus and test circuits for ISO/IEC 18000-7 tags</b> .....	<b>5</b>
<b>7</b> <b>Functional tests for inductive tags as defined in ISO/IEC 18000-2 and ISO/IEC 18000-3 and ISO/IEC 18000-6</b> .....	<b>6</b>
7.1 <b>Identification magnetic field threshold (<math>H_{\text{THR Identification}}</math>)</b> .....	<b>6</b>
7.2 <b>Reading magnetic field threshold (<math>H_{\text{THR Read}}</math>)</b> .....	<b>8</b>
7.3 <b>Writing magnetic field threshold (<math>H_{\text{THR Write}}</math>)</b> .....	<b>10</b>
7.4 <b>Maximum operating magnetic field (<math>H_{\text{max}}</math>)</b> .....	<b>12</b>
7.5 <b>Survival magnetic field (<math>H_{\text{Survival}}</math>)</b> .....	<b>13</b>
7.6 <b>Load modulation (<math>L_m</math>)</b> .....	<b>14</b>
<b>8</b> <b>Functional tests for propagative tags as defined in ISO/IEC 18000-6</b> .....	<b>17</b>
8.1 <b>Identification electromagnetic field threshold (<math>E_{\text{THR Identification}}</math>) and frequency peak(s)</b> .....	<b>17</b>
8.2 <b>Reading electromagnetic field threshold (<math>E_{\text{THR Read}}</math>)</b> .....	<b>18</b>
8.3 <b>Writing electromagnetic field threshold (<math>E_{\text{THR Write}}</math>)</b> .....	<b>20</b>
8.4 <b>Sensitivity degradation (<math>S_{\text{Degradation}}</math>)</b> .....	<b>21</b>
8.5 <b>Maximum operating electromagnetic field (<math>E_{\text{max}}</math>)</b> .....	<b>23</b>
8.6 <b>Survival electromagnetic field (<math>E_{\text{Survival}}</math>)</b> .....	<b>24</b>
8.7 <b>Delta radar cross section (<math>\Delta\text{RCS}</math>)</b> .....	<b>26</b>
8.8 <b>Interference rejection (<math>I_{\text{Rejection}}</math>)</b> .....	<b>27</b>
8.9 <b>Maximum identification fade rate (<math>E_{\text{Fade Identification}}</math>)</b> .....	<b>29</b>
8.10 <b>Maximum write fade rate (<math>E_{\text{Fade Write}}</math>)</b> .....	<b>30</b>
<b>9</b> <b>Functional tests for 433,920 MHz propagative tags as defined in ISO/IEC 18000-7</b> .....	<b>31</b>
9.1 <b>Identification electromagnetic field threshold (<math>E_{\text{THR Identification}}</math>) and frequency tolerance</b> .....	<b>31</b>
9.2 <b>Reading electromagnetic field threshold (<math>E_{\text{THR Read}}</math>) and frequency tolerance</b> .....	<b>33</b>
9.3 <b>Writing electromagnetic field threshold (<math>E_{\text{THR Write}}</math>)</b> .....	<b>35</b>
9.4 <b>Sensitivity Directivity (<math>S_{\text{Directivity}}</math>)</b> .....	<b>36</b>

9.5 Interference rejection ( $I_{\text{Rejection}}$ ) .....39

9.6 Maximum operating electromagnetic field ( $E_{\text{max}}$ ) .....42

9.7 Survival electromagnetic field ( $E_{\text{Survival}}$ ) .....43

Annex A (informative) Resonant frequency and Q factor measurement for inductive tag .....46

Annex B (normative) Test apparatus modification for ISO/IEC 18000-3 compliant tags for field strengths > 5 A/m.....49

Annex C (normative) Test apparatus modification for ISO/IEC 18000-6 compliant tags.....50

Annex D (informative) Inventory command for all parts of ISO/IEC 18000 .....52

Bibliography.....53

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 18046-3:2012

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

ISO/IEC 18046-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

This second edition cancels and replaces the first edition (ISO/IEC 18046-3:2007) which has been technically revised.

ISO/IEC 18046 consists of the following parts, under the general title *Information technology — Radio frequency identification device performance test methods*:

- *Part 1: Test methods for system performance*
- *Part 2: Test methods for interrogator performance*
- *Part 3: Test methods for tag performance*

## Introduction

RFID technology has broad applicability to the Automatic Identification and Data Capture (AIDC) industry in item management. As a wireless communication technique based on Radio Frequency technology the applications cover multiple levels of the industrial, commercial and retail supply chains. These may include:

- Freight containers
- Returnable Transport Items (RTI)
- Transport units
- Product packaging
- Product tagging

Performance tests define test methods that deliver results that allow the comparison of different RFID systems, interrogator and tags in order to select among them for use in a particular application.

The performance characteristics of devices (tags and interrogation equipment) may vary drastically due to application factors as well as the particular RFID air interface (frequency, modulation, protocol, etc.) being supported. Of key concern is the matching of the various performance characteristics to the user application. Additionally, in an open environment users of such technology demand multiple sources for these devices from technology providers. A key challenge is a method of evaluating the differences between various technology providers' products in a consistent and equitable manner.

This International Standard provides a framework for meeting the above noted concern and challenges. To this end, clear definitions of performance as relate to user application of RFID technology in the supply chain are provided. Based on such application-based definitions test methods are defined with attention to the test parameters required for a consistent evaluation of RFID devices.

Of particular significance, these tests are defined for RFID devices having one antenna. It is common practice to have products with both single and multiple antennas to define an RFID transaction zone sufficient for the application. The defined methods can easily be extended from equipment with a single antenna to apply to equipment with multiple antennas, in order to evaluate performance under conditions more closely matching those of a particular application.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of patents.

The ISO and IEC take no position concerning the evidence, validity and scope of these patent rights.

The holder of this patent right has assured the ISO and IEC that he is prepared to grant a free license to an unrestricted number of applicants on a worldwide, non-discriminatory basis and under other reasonable terms and conditions to make, use, and sell RFID reader antenna design / patterns for implementations of this ISO/IEC International Standard, which is related to testing. In this respect, the statements of the holder of this patent right are registered with the ISO and IEC. Information may be obtained from the following company.

Contact details	Patent number	Affected subclause(s) in this part of ISO/IEC 18046
Impinj inc 701 N. 34 <sup>th</sup> Street, Suite 300 Seattle, WA 98103 Tel: 206/517-5300 Fax: 206/517-5262	Patent pending	6.3.2, 7.1.2.3, 7.3.2.3, 7.4.2.1, 7.5.2.1, 7.6.2.3

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

The latest information on IP that may be applicable to this part of ISO/IEC 18046 can be found at [www.iso.org/patents](http://www.iso.org/patents).

[STANDARDSISO.COM](http://STANDARDSISO.COM) : Click to view the full PDF of ISO/IEC 18046-3:2012

# Information technology — Radio frequency identification device performance test methods —

## Part 3: Test methods for tag performance

### 1 Scope

This International Standard defines test methods for performance characteristics of RFID tags for item management, and specifies the general requirements and test requirements for tags which are applicable to the selection of the devices for an application. The summary of the test reports form a unified tag datasheet. It does not apply to testing in relation to regulatory or similar requirements.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 18000-1, *Information technology — Radio-frequency identification for item management — Part 1: Reference architecture and definition of parameters to be standardized*

ISO/IEC 18000-2, *Information technology — Radio-frequency identification for item management — Part 2: Parameters for air interface communications below 135 kHz*

ISO/IEC 18000-3, *Information technology — Radio-frequency identification for item management — Part 3: Parameters for air interface communications at 13,56 MHz*

ISO/IEC 18000-6, *Information technology — Radio-frequency identification for item management — Part 6: Parameters for air interface communications at 860 MHz to 960 MHz*

ISO/IEC 18000-7, *Information technology — Radio-frequency identification for item management — Part 7: Parameters for active air interface communications at 433 MHz*

ISO/IEC 18047-2, *Information technology — Radio frequency identification device conformance test methods — Part 2: Test methods for air interface communications below 135 kHz*

ISO/IEC TR 18047-3, *Information technology — Radio frequency identification device conformance test methods — Part 3: Test methods for air interface communications at 13,56 MHz*

ISO/IEC TR 18047-4, *Information technology — Radio frequency identification device conformance test methods — Part 4: Test methods for air interface communications at 2,45 GHz*

ISO/IEC TR 18047-6, *Information technology — Radio frequency identification device conformance test methods — Part 6: Test methods for air interface communications at 860 MHz - 960 MHz*

ISO/IEC TR 18047-7, *Information technology — Radio frequency identification device conformance test methods — Part 7: Test methods for air interface communications at 433 MHz*

ISO/IEC 19762 (all parts), *Information technology — Automatic identification and data capture (AIDC) techniques — Harmonized vocabulary*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions found in ISO/IEC 19762 apply.

### 4 Symbols and abbreviated terms

$H_{\text{THR Identification}}$	Identification magnetic field threshold
$H_{\text{THR Read}}$	Reading magnetic field threshold
$H_{\text{THR Write}}$	Writing magnetic field threshold
$H_{\text{max}}$	Maximum operating magnetic field
$H_{\text{Survival}}$	Survival magnetic field
$L_m$	Load Modulation
$E_{\text{THR Identification}}$	Identification electromagnetic field threshold
$E_{\text{THR Read}}$	Reading electromagnetic field threshold
$E_{\text{THR Write}}$	Writing electromagnetic field threshold
$S_{\text{Degradation}}$	Sensitivity degradation
$E_{\text{max}}$	Maximum operating electromagnetic field
$E_{\text{Survival}}$	Survival electromagnetic field
$\Delta\text{RCS}$	Delta radar cross section
$I_{\text{Rejection}}$	Interference rejection
$G$	Antenna gain
$D$	Distance between the tag and the antenna
$\text{MPE}$	Maximum Permissible human Exposure
$\text{SAR}$	Specific Absorption Rate

### 5 Conditions applicable to the test methods

#### 5.1 Number of tags to be tested

Unless otherwise specified, testing shall be performed on 30 randomly chosen tags among a population of 1000 functional tags.

## 5.2 Test environment

Unless otherwise specified, testing shall take place in air environment of temperature  $23\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$  ( $73\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$ ) and of relative humidity 40 % to 60 %.

## 5.3 RF environment

The tests shall be performed in a known RF environment.

For measurements of propagative UHF tags (ISO/IEC 18000-6) an anechoic chamber is the recommended test environment.

For measurement of inductive tags at frequencies below 30 MHz a typical laboratory environment is sufficient, where consideration is given to minimize the impact of electromagnetic sources that may influence the results.

## 5.4 Pre-conditioning

Where pre-conditioning is required by the test method, the identification tags to be tested shall be conditioned to the test environment for a period of 24 hours before testing.

## 5.5 Default tolerance

Unless otherwise specified, a default tolerance of  $\pm 5\%$  shall be applied to the quantity values given to specify the characteristics of the test equipment (e.g. linear dimensions) and the test method procedures (e.g. test equipment adjustments).

## 5.6 Total measurement uncertainty

The total measurement uncertainty for each quantity determined by these test methods shall be stated in the test report.

NOTE Basic information is given in ISO/IEC Guide 98-3:2008.

## 5.7 Test result reporting

Each test result shall be reported with the number of samples, minimum value, maximum value, mean value and standard deviation.

For measurement curves additionally to the curves on minimum value, maximum value, mean value and standard deviation, the individual curves of 5 randomly selected measured devices shall be shown in a figure as well.

## 5.8 Test mounting material

For UHF tags, the tests may be performed with or without applied mounting material. When the mounting material is defined by the tag manufacturer, the tests shall be performed with the specified mounting material and in the free air.

If the dielectric parameter or other critical parameters of material are known they should be notified in the test report.

## 5.9 Test communication parameters

All the tests can be done for various communication parameters (forward and return link). The tests conditions must be recorded in the test report.

## 5.10 Test equipment limits

Test equipment for survivability field maximum level shall be able to handle the maximum level declared by the product vendor. It shall be ensured that the test equipment is not limiting the performance measurement.

## 5.11 Human exposure to EMF

High magnetic or electromagnetic field strength may exceed the limits of maximum permissible human exposure to EMF, which should be considered accordingly. FCC guidelines for MPE and SAR or EC 1999/519/CE are examples for relevant documents.

## 6 Setup of test equipment for tag test

### 6.1 Test apparatus and test circuits for ISO/IEC 18000-2 tags

This clause defines the test apparatus and test circuits for verifying the operation of a tag according to the base standard ISO/IEC 18000-2. The test set-ups used shall be as described in ISO/IEC 18047-2.

### 6.2 Test apparatus and test circuits for ISO/IEC 18000-3 tags

This clause defines the test apparatus and test circuits for verifying the operation of a tag according to the base standard ISO/IEC 18000-3. The test set-ups used shall be as described in ISO/IEC 18047-3.

As the test apparatus described in ISO/IEC 18047-3 is only designed for a magnetic field strength up to 5 A/m the test set-ups as described in Annex B shall be used for magnetic field strength >5 A/m.

### 6.3 Test apparatus and test circuits for ISO/IEC 18000-6 tags

#### 6.3.1 Propagative UHF tags measurement

This clause defines the test apparatus and test circuits for verifying the operation of a tag according to the base standard ISO/IEC 18000-6. The test set-up used for measurement of propagative UHF tags shall be described in ISO/IEC 18047-6.

##### 6.3.1.1 Antenna polarization

For propagative UHF tests, a linear or circular polarized antenna shall be used, except when testing tags that have more than one antenna or for sensitivity degradation measurements, in which case a circular polarized antenna shall be used. The circularly polarized antenna shall have an axial ratio that is less than 1 dB over the frequency and orientation ranges of the testing.

### 6.3.1.2 Test set-up for interference rejection measurement of propagative UHF tags

Figure 1 and Figure 2 show the test set-up arrangements for interference rejection measurement:

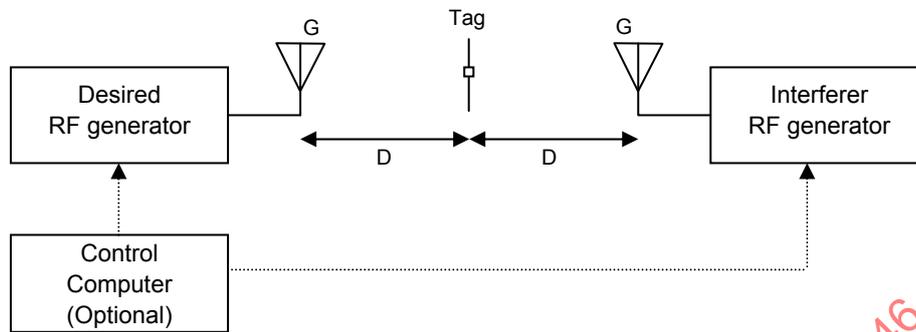


Figure 1 — Test set-up for interference rejection measurement

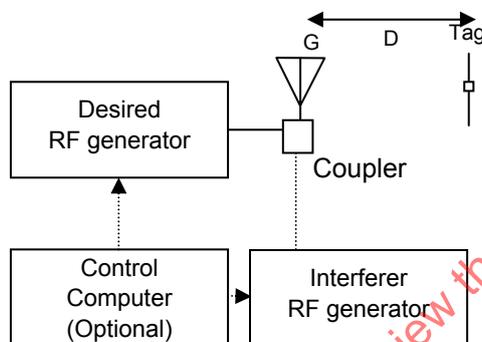


Figure 2 — Test set-up for interference rejection measurement

For this test, the tag under test shall be placed at the same distance  $D$  from the two RF generators and oriented for optimum field strength reception. The distance  $D$  shall be 0,8 – 1,1 m.

NOTE The distance of 0,8 – 1,1 m covers all values for  $3\lambda$  for the frequencies from 860-960 MHz.

The antennas shall have the same gain with a VSWR <1:2.

### 6.3.2 Inductive UHF tags measurement

This clause defines the test apparatus and test circuits for verifying the operation of a tag according to the base standard, ISO/IEC 18000-6. The test set-up used for measurement of inductive UHF tags is shown in Annex C.

### 6.4 Test apparatus and test circuits for ISO/IEC 18000-7 tags

This clause defines the test apparatus and test circuits for verifying the operation of a tag according to the base standard, ISO/IEC 18000-7. The test set-ups used shall be as described in ISO/IEC 18047-7.

## 7 Functional tests for inductive tags as defined in ISO/IEC 18000-2 and ISO/IEC 18000-3 and ISO/IEC 18000-6

### 7.1 Identification magnetic field threshold ( $H_{\text{THR Identification}}$ )

#### 7.1.1 Purpose

The purpose of this test is to determine the threshold level of magnetic field strength required for tag identification. As the tag needs energy to operate, it has to be supplied by the magnetic field. The identification magnetic field threshold,  $H_{\text{THR Identification}}$ , is the minimum field strength allowing tag identification.

#### 7.1.2 Test procedure

At a fixed frequency as allowed by the regulation, the magnetic field strength of the generating field shall be varied from zero until modulation of the tag is detected and the tag is identified.

##### 7.1.2.1 ISO/IEC 18000-2 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Identification magnetic field threshold,  $H_{\text{THR Identification}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 125 kHz or 134,2 kHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) An inventory command shall be continuously sent with the code generator and the amplitude shall be increased after each inventory command until the complete UUI can be measured with the Helmholtz equipment coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-2. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement  $U_{\text{RHTA}}$ .

The measurements shall be performed on all tags.  $H_{\text{THR Identification}}$  shall be the highest value of all measured magnetic field strength  $H$  for the individual tags.

##### 7.1.2.2 ISO/IEC 18000-3 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Identification magnetic field threshold,  $H_{\text{THR Identification}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 13,56 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.

- 4) An inventory command shall be continuously sent with the code generator and the amplitude shall be increased after each inventory command until the complete Ull can be measured with the sense coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-3. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment and the calibration coil shall be inserted in the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement made on the calibration coil.

The measurements shall be performed on all tags.  $H_{\text{THR Identification}}$  shall be the highest value of all measured magnetic field strength  $H$  for the individual tags.

### 7.1.2.3 ISO/IEC 18000-6 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Identification magnetic field threshold,  $H_{\text{THR Identification}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency (860 MHz to 960 MHz in 5 MHz steps, with additional tests at 866 MHz, 915 MHz, and 953 MHz).
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the equipment test.
- 4) An inventory command shall be continuously sent with the code generator and the amplitude shall be increased after each inventory command until the complete Ull can be measured with the test antenna.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment and the calibration coil shall be inserted in the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement made on the calibration coil.

The measurements shall be performed on all tags. The  $H_{\text{THR Identification}}$  value is the highest magnetic field strength of all measurements.

### 7.1.3 Test report

The test report shall give the measured identification magnetic field threshold  $H_{\text{THR Identification}}$ , the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 1.

**Table 1 — Parameters that shall be recorded for this measurement**

<b>Test: Identification magnetic field threshold (<math>H_{THR \text{ Identification}}</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Full command code: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
$H_{THR \text{ Identification}}$	xx,xx mA/m	

**7.2 Reading magnetic field threshold ( $H_{THR \text{ Read}}$ )**

**7.2.1 Purpose**

The purpose of this test is to determine the threshold level of magnetic field strength that allows a tag reading. In order to successfully read tag data, the command need to be transmitted correctly and enough energy (flux density) shall be available to read the tag. The reading magnetic field threshold,  $H_{THR \text{ Read}}$ , is the minimum magnetic field strength allowing tag reading.

**7.2.2 Test procedure**

At a fixed frequency the magnetic field strength of the generating field has to be varied from zero until a reading of block user memory is possible. The reading shall be performed on the first and the last block memory address with a read single block command. Beforehand, all blocks of the user memory shall be filled with data having the same number of 1 and 0 uniformly distributed. (i.e. by using the binary digits represented by the byte sequence 5A hex, 3C hex, 0F hex and F0 hex throughout the memory for a four bytes memory block).

**7.2.2.1 ISO/IEC 18000-2 compliant tag**

The selection of system parameters shall be done in order to challenge the tag energy supply.

Reading magnetic field threshold,  $H_{THR \text{ Read}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 125 kHz or 134,2 kHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A read single block command shall be continuously sent to the first block address with the code generator and the amplitude shall be increased after each read single block command until the complete tag response can be measured with the Helmholtz equipment coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-2. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment.
- 7) The magnetic field strength H for the individual tag shall be calculated by use of the measurement  $U_{RHTA}$  as defined in ISO/IEC 18047-2.
- 8) Repeat steps 3) to 7) with the read single block command sent to the last block address.

The measurements shall be performed on all tags.  $H_{THR\ Read}$  shall be the highest value of all measured magnetic field strength H for the individual tags.

**7.2.2.2 ISO/IEC 18000-3 compliant tag**

The selection of system parameters shall be done in order to challenge the tag energy supply.

Reading magnetic field threshold,  $H_{THR\ Read}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 13,56 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A read single block command shall be continuously sent to the first block address with the code generator and the amplitude shall be increased after each read single block command until the complete tag response can be measured with the sense coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-3. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment and the calibration coil shall be inserted in the test equipment.
- 7) The magnetic field strength H for the individual tag shall be calculated by use of the measurement made on the calibration coil.
- 8) The steps 3) to 7) shall be repeated with the read single block command sent to the last block address.

The measurements shall be performed on all tags.  $H_{THR\ Read}$  shall be the highest value of all measured magnetic field strength H for the individual tags.

**7.2.3 Test report**

The test report shall give the measured reading magnetic field threshold  $H_{THR\ Read}$ , the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 2.

**Table 2 — Parameters that shall be recorded for this measurement**

<b>Test: Reading magnetic field threshold (<math>H_{THR\ Read}</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Modulation index:%	Data rate: kbps	Data coding:
Block number:		
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
Data block size: bytes	Data read:	
<b>Test Results</b>		
$H_{THR\ Read}$	xx,xx mA/m	

### 7.3 Writing magnetic field threshold ( $H_{\text{THR Write}}$ )

#### 7.3.1 Purpose

The purpose of this test is to determine the threshold level of magnetic field strength that allows tag writing. In order to successfully write data into the tag, the data shall be transmitted correctly and enough energy (flux density) shall be available during the memory access. The writing magnetic field threshold,  $H_{\text{THR Write}}$ , is the minimum magnetic field strength allowing writing into the tag.

#### 7.3.2 Test procedure

At a fixed frequency the magnetic field strength of the generating field has to be varied from zero until a writing of block user memory is possible. The writing shall be performed on the first and the last block memory address with a write single block command. The data shall have the same number of 1 and 0 uniformly distributed and its size equal to the block size. (i.e by using the binary digits represented by the byte sequence 5A hex, 3C hex, 0F hex and F0 hex throughout the memory for a four bytes memory block).

##### 7.3.2.1 ISO/IEC 18000-2 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Writing magnetic field threshold,  $H_{\text{THR Write}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 125 kHz or 134,2 kHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A write single block command shall be continuously sent to the first block address with the code generator and the amplitude shall be increased after each write single block command until the complete tag response can be measured with the Helmholtz equipment coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-2. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement  $U_{\text{RH TA}}$ .
- 8) The steps 3) to 7) shall be repeated with the write single block command sent to the last block address.

The measurements shall be performed on all tags.  $H_{\text{THR Write}}$  shall be the highest value of all measured magnetic field strength  $H$  for the individual tags.

##### 7.3.2.2 ISO/IEC 18000-3 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Writing magnetic field threshold,  $H_{\text{THR Write}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 13,56 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.

- 3) The tag shall be inserted in the test equipment.
- 4) A write single block command shall be continuously sent to the first block address with the code generator and the amplitude shall be increased after each write single block command until the complete tag response can be measured with the sense coils.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-3. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment and the calibration coil shall be inserted in the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement made on the calibration coil.
- 8) The steps 3) to 7) shall be repeated with the write single block command sent to the last block address.

The measurements shall be performed on all tags.  $H_{\text{THR Write}}$  shall be the highest value of all measured magnetic field strength  $H$  for the individual tags.

### 7.3.2.3 ISO/IEC 18000-6 compliant tag

The selection of system parameters shall be done in order to challenge the tag energy supply.

Writing magnetic field threshold,  $H_{\text{THR Write}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency (860 MHz to 960 MHz in 5 MHz steps, with additional tests at 866 MHz, 915 MHz, and 953 MHz).
- 2) The waveform generator amplitude shall be set to a value below the identification magnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the equipment test.
- 4) A write command shall be continuously sent to the first writeable word of U11 memory with the code generator and the amplitude shall be increased after each write command until the complete U11 can be written.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The tag shall be removed from the test equipment and the calibration coil shall be inserted in the test equipment.
- 7) The magnetic field strength  $H$  for the individual tag shall be calculated by use of the measurement made on the calibration coil.

The measurements shall be performed on all tags. The  $H_{\text{THR Write}}$  value is the highest magnetic field strength of all measurements.

### 7.3.3 Test report

The test report shall give the measured writing magnetic field threshold  $H_{\text{THR Write}}$ , the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 3.

**Table 3 — Parameters that shall be recorded for this measurement**

<b>Test: Writing magnetic field threshold (<math>H_{THR\ Write}</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Block number:	Data block size: bytes	Data written:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
$H_{THR\ Write}$	xx,xx mA/m	

**7.4 Maximum operating magnetic field ( $H_{max}$ )**

**7.4.1 Purpose**

The purpose of this test is to determine the maximum magnetic field  $H_{max}$  allowing the tag identification.

**7.4.2 Test procedure**

At a fixed frequency the magnetic field strength of the generating field has to be increased from identification magnetic field threshold ( $H_{THR\ Identification}$ ) until an identification of the tag is not possible. The maximum operating magnetic field strength ( $H_{max}$ ) is the maximum magnetic field allowing tag identification.

As this test may be destructive a different lot of samples shall be used.

**7.4.2.1 ISO/IEC 18000-2 and ISO/IEC 18000-3 and ISO 18000-6 compliant tag**

Maximum operating magnetic field,  $H_{max}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency according the relevant standard, of 125 kHz; 134,2 kHz; 13,56 MHz; or 860 MHz to 960 MHz in 5vMHz steps, with additional tests at 866 MHz, 915 MHz, and 953 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR\ Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) The tag shall be left under the magnetic field strength during 30 seconds.
- 5) An inventory or query command shall be sent with the code generator to check if the tag can return its response. The data transfer shall be verified by comparison with ISO/IEC protocol standard.
- 6) The waveform amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR\ Identification}$ ), and the tag shall be left under this magnetic field strength for 5 seconds.
- 7) The magnetic field strength shall be increased.
- 8) The steps 4) to 8) shall be repeated until the tag does not send a valid response, then note the magnetic field strength  $H$  for the individual tag as the value with the last valid response.

The measurements shall be performed on 10 tags.  $H_{max}$  shall be the lowest value of all measured magnetic field strength  $H$  for the individual tags.

### 7.4.3 Test report

The test report shall give the measured maximum operating magnetic field  $H_{max}$ , the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 4.

**Table 4 — Parameters that shall be recorded for this measurement**

<b>Test: Maximum magnetic operating field(<math>H_{max}</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
$H_{max}$	xx,xx A/m	

## 7.5 Survival magnetic field ( $H_{Survival}$ )

### 7.5.1 Purpose

The purpose of this test is to determine the maximum magnetic field ( $H_{Survival}$ ) value at which the tag stops operating when exposed to this high value, even if the operating magnetic field is reduced to a value in the range between  $H_{THR Identification}$  and  $H_{max}$  afterwards.

### 7.5.2 Test procedure

At a fixed frequency the magnetic field strength of the generating field has to be increased from identification magnetic field threshold ( $H_{THR Identification}$ ) until the tag destruction. The survival magnetic field ( $H_{Survival}$ ) is the maximum magnetic field before tag destruction.

As this test is destructive a different lot samples shall be used.

#### 7.5.2.1 ISO/IEC 18000-2, ISO/IEC 18000-3 and ISO/IEC 18000-6 compliant tag

Survival magnetic field,  $H_{Survival}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency, at the relevant standard, of 125 kHz, 134,2 kHz; 13.56 MHz; or 860 MHz to 960 MHz in 5 MHz steps, with additional tests at 866 MHz, 915 MHz, and 953 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) The tag shall be left under the magnetic field during 30 seconds.
- 5) The waveform amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR Identification}$ ).
- 6) An inventory command shall be sent with the code generator to check if the tag can return its response. The data transfer shall be verified by comparison with ISO/IEC protocol standard.
- 7) The tag shall be left under this magnetic field for 5 seconds.

- 8) The magnetic field strength shall be increased.
- 9) The steps 4) to 8) shall be repeated until the tag does not send a valid response, then note the magnetic field strength  $H$  for the individual tag as the value with the last valid response.

The measurements shall be performed on 10 tags.  $H_{Survival}$  shall be the lowest value of all measured magnetic field strength  $H$  for the individual tags.

**7.5.3 Test report**

The test report shall give the measured maximum operating magnetic field  $H_{Survival}$ , the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 5.

**Table 5 — Parameters that shall be recorded for this measurement**

<b>Test: Survival magnetic field (<math>H_{SURVIVAL}</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
$H_{Survival}$	xx,xx A/m	

**7.6 Load modulation ( $L_m$ )**

**7.6.1 Purpose**

The purpose of this test is to determine the amplitude of the load modulation signal within the operating magnetic field range.

**7.6.2 Test procedure**

At a fixed frequency the magnetic field strength of the generating field has to be increased from identification magnetic field threshold ( $H_{THR Identification}$ ) to maximum operating magnetic field ( $H_{max}$ ) with a step size of 1 A/m for ISO/IEC 18000-2 compliant tags and with a regular step of 0,5 A/m for ISO/IEC 18000-3 compliant tags, and with a regular step of 0,1 A/m for ISO/IEC 18000-6 compliant tags. The tag load modulation shall be calculated according to the load modulation conformance measurement for the steps of magnetic field strength.

**7.6.2.1 ISO/IEC 18000-2 compliant tag**

Load modulation signal measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 125 kHz or 134,2 kHz.
- 2) The waveform amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) An inventory command shall be sent with the code generator.

- 5) The load modulation for the individual tag shall be calculated by use of the measurement made with the test equipment according the conformance procedure of ISO/IEC 18047-2.
- 6) The magnetic field strength shall be increased to the next value and the load modulation measurement for the individual tag shall be calculated for each magnetic field strength step until maximum operating field ( $H_{max}$ ).

For each magnetic field strength steps, the load modulation  $L_m$  shall be the lowest value of all load modulation calculated for the individual tags.

#### 7.6.2.2 ISO/IEC 18000-3 compliant tag

Load modulation signal measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 13,56 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification magnetic field threshold ( $H_{THR Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) An inventory command shall be sent with the code generator.
- 5) The load modulation for the individual tag shall be calculated by use of the measurement made with the test equipment according to the conformance procedure of ISO/IEC 18047-3.
- 6) The magnetic field strength shall be increased to the next value and the load modulation measurement for the individual tag shall be calculated for each magnetic field strength step until maximum operating field ( $H_{max}$ ).

For each magnetic field strength steps, the load modulation  $L_m$  shall be the lowest value of all load modulation calculated for the individual tags.

#### 7.6.2.3 ISO/IEC 18000-6 compliant tag

Load modulation signal measurement procedure:

- 1) The waveform generator shall be set to the operating frequency (860 MHz to 960 MHz in 5 MHz steps, with additional tests at 866 MHz, 915 MHz, and 953 MHz).
- 2) The waveform generator amplitude shall be set to the value of the identification magnetic field threshold ( $H_{THR Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) An inventory command shall be sent with code generator.
- 5) The load modulation for the individual tag shall be calculated by use of the measurement made with the test antenna.
- 6) The magnetic field strength shall be increased to the next value and the load modulation measurement for the individual tag shall be calculated for each magnetic field strength step until maximum operating field ( $H_{max}$ ).

For each magnetic field strength steps, the load modulation  $L_m$  shall be the lowest value of all load modulation calculated for the individual tags

7.6.3 Test report

The test report shall give the tag load modulation signal values (upper and lower sidebands) from identification magnetic field threshold ( $H_{THR \text{ Identification}}$ ) to the maximum operating magnetic field ( $H_{max}$ ), the environmental conditions and communication parameters. All these parameters shall be recorded according to the example in Table 6.

Table 6 — Parameters that shall be recorded for this measurement

<b>Test: Load modulation (<math>L_m</math>)</b>		
Temperature:	Humidity:	
Tag Protocol:	Tag ULL:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
Data block size: bytes	Data read:	
<b>Test Results</b>		
<b>Load modulation values for upper sideband :</b>		
$L_m \text{ UPPER @ } H_{THR \text{ Identification}}$	xx,xx mV	
$L_m \text{ UPPER @ } xx \text{ mA/m}$	xx,xx mV	
<b>Load modulation values for lower sideband :</b>		
$L_m \text{ LOWER @ } H_{THR \text{ Identification}}$	xx,xx mV	
$L_m \text{ LOWER @ } xx \text{ mA/m}$	xx,xx mV	
...	...	
<b>Load modulation curve (optional) :</b>		

## 8 Functional tests for propagative tags as defined in ISO/IEC 18000-6

### 8.1 Identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) and frequency peak(s)

#### 8.1.1 Purpose

The purpose of this test is to determine the electromagnetic field threshold level required for tag identification. As the tag needs energy to operate, it has to be supplied by the electromagnetic field. The identification electromagnetic field threshold,  $E_{\text{THR Identification}}$ , is the minimum electromagnetic field allowing tag identification.

#### 8.1.2 Test procedure

For the ISO/IEC 18000-6 frequency band from 860 to 960 MHz, the electromagnetic field strength of the generating field has to be varied from zero until modulation of the tag is detected and the tag responds. This test shall be done with a frequency step of 5 MHz from 860 MHz to 960 MHz and also for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz).

The selection of system parameters shall be done in order to challenge the tag energy supply.

Identification electromagnetic field threshold,  $E_{\text{THR identification}}$ , and frequency peak measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 860 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification electromagnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A command shall be continuously sent with the code generator and the amplitude shall be increased after each command until the complete tag response can be measured.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The electromagnetic field strength  $E$  for the individual tag shall be calculated by use of the waveform generator amplitude.
- 7) The steps 1) to 6) shall be repeated by increasing the frequency to the next frequency step and for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz).

If the starting amplitude of the waveform generator is set above the identification electromagnetic field threshold, then, in next steps, it shall be decreased or increased until Identification electromagnetic field threshold,  $E_{\text{THR identification}}$  is found, such that a complete tag response can be received at  $E_{\text{THR identification}}$  and no or incomplete tag response can be received at  $E_{\text{THR identification}} - 0,1 \text{ dB}$ .

The measurements shall be performed on all tags.  $E_{\text{THR Identification}}$  shall be the highest value of all measured electromagnetic field strength  $E$  for the individual tags.

#### 8.1.3 Test report

The test report shall give for the full band of ISO/IEC 18000-6 from 860 to 960 MHz, and for the three test frequencies defined in ISO/IEC 18047-6,  $E_{\text{THR Identification}}$  versus frequency curves, the frequency peak(s) and the  $-3 \text{ dB}$  bandwidth for each peak plus the environmental conditions and communication parameters. All parameters shall be recorded according to the example in Table 7.

NOTE The frequency peak is the frequency that corresponds to the minimum of  $E_{\text{THR Identification}}$ .

Table 7 — Parameters that shall be recorded for this measurement

<b>Test: Identification electromagnetic field threshold (<math>E_{THR\ Identification}</math>) and frequency peak(s)</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
<b>Frequency</b>	<b>-3 db BW</b>	<b><math>E_{THR\ Identification}</math></b>
xxx MHz	xx MHz	xx,xx V/m
...	...	...
<b><math>E_{THR\ Identification}</math> versus frequency curve:</b>		

**8.2 Reading electromagnetic field threshold ( $E_{THR\ Read}$ )**

**8.2.1 Purpose**

The purpose of this test is to determine the threshold level of electromagnetic field that allows a tag reading. In order to successfully read tag data, the command shall be transmitted correctly and enough energy shall be available to read the tag. The reading electromagnetic field threshold,  $E_{THR\ Read}$ , is the minimum electromagnetic field allowing tag reading.

**8.2.2 Test procedure**

For each tag frequency peak and for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the electromagnetic field of the generating field has to be varied from zero until a reading of the memory is possible; the reading shall be performed on the first and the last memory address with a read command. Beforehand, the memory shall be filled with data having the same number of 1 and 0 uniformly distributed. (i.e. by using the binary digits represented by the byte sequence 5A hex, 3C hex, 0F hex and F0 hex throughout the memory for a four bytes memory block).

For this test the memory shall be the user memory, or in case not available any other memory that is not the UUI memory.

The selection of system parameters shall be done in order to challenge the tag energy supply.

Reading electromagnetic field threshold,  $E_{THR\ Read}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification electromagnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A read single block shall be continuously sent with the code generator to the first address memory command and the amplitude shall be increased after each read single block command until the complete tag response can be measured.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The electromagnetic field strength E for the individual tag shall be calculated by use of the waveform generator amplitude.
- 7) The steps 3) to 6) shall be repeated with the read single block command sent to the last block address.
- 8) The steps 1) to 7) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

If the starting amplitude of the waveform generator is set above the Reading electromagnetic field threshold, then, in next steps, it shall be decreased or increased until Reading electromagnetic field threshold,  $E_{THR\ Read}$  is found, such that a complete tag response can be received at  $E_{THR\ Read}$  and no or incomplete tag response can be received at  $E_{THR\ Read} - 0,1\text{ dB}$ .

The measurements shall be performed on all tags.  $E_{THR\ Read}$  shall be the highest value of all measured electromagnetic field strength E for the individual tags.

### 8.2.3 Test report

The test report shall give the measured reading electromagnetic field threshold  $E_{THR\ Read}$  for each frequency peak and for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), plus the environmental conditions and communication parameters. All these parameters shall be recorded according to the example in Table 8.

**Table 8 — Parameters that shall be recorded for this measurement**

<b>Test: Reading electromagnetic field threshold (<math>E_{THR\ Read}</math>)</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
Data Block size: bytes	Data read : 0x	
<b>Test Results</b>		
<b>Frequency</b>	<b><math>E_{THR\ Read}</math></b>	
<b>xxx MHz</b>	<b>xx,xx V/m</b>	
...	...	

### 8.3 Writing electromagnetic field threshold ( $E_{\text{THR Write}}$ )

#### 8.3.1 Purpose

The purpose of this test is to determine the threshold level of electromagnetic field that allows a tag write operation. In order to successfully write data into the tag, the data shall be transmitted correctly and enough energy shall be available during the memory access. The writing electromagnetic field threshold ( $E_{\text{THR Write}}$ ) is the minimum electromagnetic field allowing tag write operation.

#### 8.3.2 Test procedure

For each tag frequency peak and for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the electromagnetic field of the generating field has to be varied from zero until a writing of block user memory is possible. The writing shall be performed on the first and the last block memory address with a write single block command. The data shall have the same number of 1 and 0 uniformly distributed and its size equal to the block size.

For this test the memory shall be the user memory, or in case not available any other memory that is not write protected.

The selection of system parameters shall be done in order to challenge the tag energy supply.

Writing electromagnetic field threshold,  $E_{\text{THR Write}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification electromagnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment.
- 4) A write single block to the first address memory command shall be continuously sent with the code generator and the amplitude shall be increased after each write single block command until the complete tag response can be measured.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The electromagnetic field strength  $E$  for the individual tag shall be calculated by use of the waveform generator amplitude.
- 7) The steps 3) to 6) shall be repeated with the write single block command sent to the last block address.
- 8) The steps 1) to 7) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

If the starting amplitude of the waveform generator is set above the Writing electromagnetic field threshold, then, in next steps, it shall be decreased or increased until Writing electromagnetic field threshold,  $E_{\text{THR Read}}$  is found, such that a complete tag response can be received at  $E_{\text{THR Write}}$  and no or incomplete tag response can be received at  $E_{\text{THR Write}} - 0,1 \text{ dB}$ .

The measurements shall be performed on all tags.  $E_{\text{THR Write}}$  shall be the highest value of all measured electromagnetic field strength  $E$  for the individual tags.

### 8.3.3 Test report

The test report shall give the measured writing electromagnetic field threshold  $E_{\text{THR Write}}$  for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), plus the written data and the size of one single block, the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 9.

**Table 9 — Parameters that shall be recorded for this measurement**

Test: Writing electromagnetic field threshold ( $E_{\text{THR Write}}$ )		
Mounting Material:		
Temperature :	Humidity:	
Tag Protocol:	Tag Ull:	
Forward Link		
Modulation index: %	Data rate: kbps	Data coding:
Command:0x		
Return Link		
Data rate: kbps	Data coding:	
Data Block size: bytes	Data wrote : 0x	
Test Results		
Frequency	$E_{\text{THR Write}}$	
xxx MHz	xx,xx V/m	
...	...	

## 8.4 Sensitivity degradation ( $S_{\text{Degradation}}$ )

### 8.4.1 Purpose

The purpose of this test is to determine the sensitivity degradation (directivity) of the tag in various orientations (azimuth and elevation).

### 8.4.2 Test procedure

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the electromagnetic field strength of the generated field has to be varied from zero until modulation of the tag is detected and the tag responds.

Sensitivity degradation,  $S_{\text{Degradation}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to a value below the identification electromagnetic field threshold. This amplitude is typically zero.
- 3) The tag shall be inserted in the test equipment at the reference point in optimal orientation. Furthermore, flat tags shall be placed with the flat side facing the measurement antenna. The optimal (reference) orientation shall be the orientation of maximum sensitivity.
- 4) A command shall be continuously sent with the code generator and the amplitude shall be increased after each command until the complete tag response can be measured.
- 5) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with higher amplitude.
- 6) The electromagnetic field strength  $E$  for the individual tag shall be calculated by use of the waveform generator amplitude.

- 7) The steps 3) to 6) shall be repeated for the tag azimuth orientations and the tag elevation orientations (see Figure 3 and Figure 4) with 15° step size over 90° (0°, 15°, 30°, ...90°).
- 8) The steps 1) to 7) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

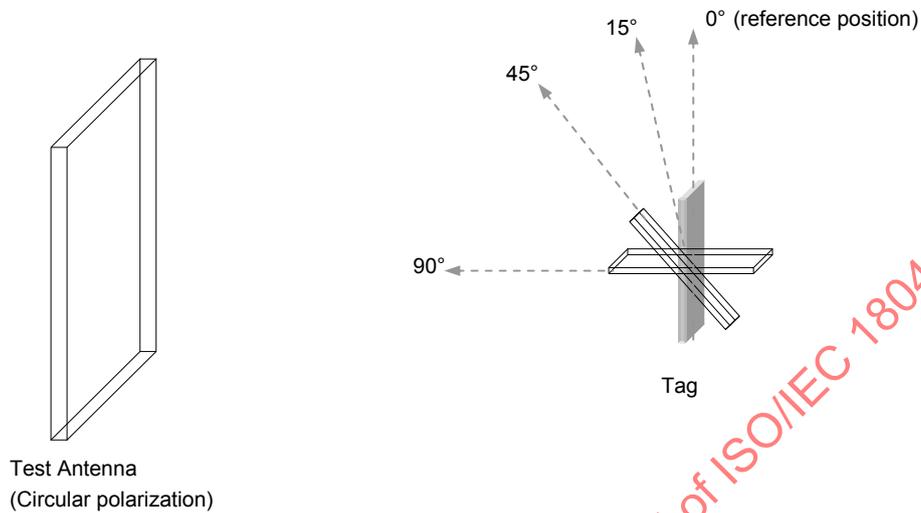


Figure 3 — Elevation tag orientations (Front view)

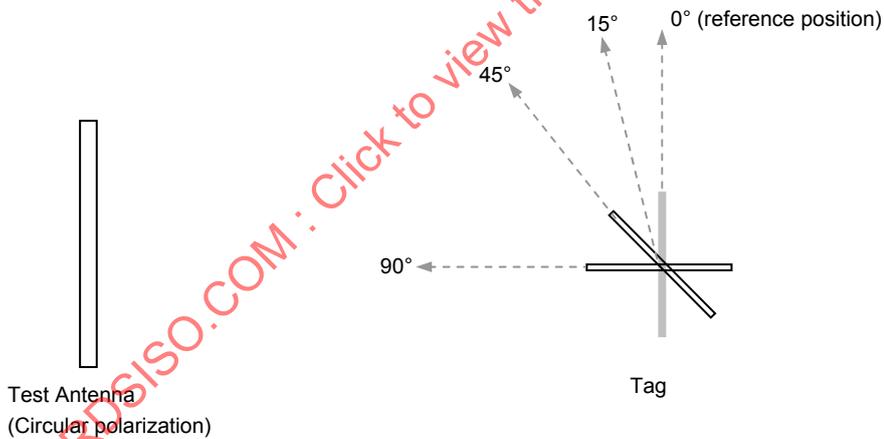


Figure 4 — Azimuth tag orientations (top view)

If the starting amplitude of the waveform generator is set above the identification electromagnetic field threshold, then, in next steps, it shall be decreased or increased until an electromagnetic field threshold, E is found, such that a complete tag response can be received at E and no or incomplete tag response can be received at E – 0,1 dB.

The measurements shall be performed on 10 tags. For each orientation step, the electromagnetic field strength threshold value is the highest value of all measured electromagnetic field strength E for the individual tags.

**8.4.3 Test report**

The test report shall give electromagnetic field strength threshold value and curves (E versus Azimuth and E versus Elevation) for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), plus the environmental conditions and communication parameters. All these parameters shall be recorded according to the example in Table 10.

**Table 10 — Parameters that shall be recorded for this measurement**

<b>Test: Sensitivity degradation</b> ( $S_{\text{Degradation}}$ )				
Mounting Material:				
Temperature:		Humidity:		
Tag Protocol:		Tag Ull:		
<b>Forward Link</b>				
Modulation index:%		Data rate: kbps		Data coding:
Command:0x				
<b>Return Link</b>				
Data rate: kbps		Data coding:		
<b>Test Results</b>				
<b>1<sup>st</sup> Frequency: xxx MHz</b>				
<b>E vs. Azimuth</b>	<b>-45°: xx,xx V/m</b>	<b>+45°: xx,xx V/m</b>	<b>-90°: xx,xx V/m</b>	<b>+90°: xx,xx V/m</b>
<b>E vs. Elevation</b>	<b>-45°: xx,xx V/m</b>	<b>+45°: xx,xx V/m</b>	<b>-90°: xx,xx V/m</b>	<b>+90°: xx,xx V/m</b>
<b>2nd Frequency : xxx MHz</b>				
...				
<b>E<sub>THR</sub> versus Azimuth curve:</b>		<b>E<sub>THR</sub> versus Elevation curve:</b>		
<p style="text-align: center;">Ethr vs Azimuth</p>		<p style="text-align: center;">Ethr vs Elevation</p>		

**8.5 Maximum operating electromagnetic field ( $E_{\text{max}}$ )**

**8.5.1 Purpose**

The purpose of this test is to determine the maximum electromagnetic field  $E_{\text{max}}$  allowing the tag identification.

**8.5.2 Test procedure**

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the generating electromagnetic field strength has to be increased from identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) until an identification of the tag is not possible. The maximum operating electromagnetic field ( $E_{\text{max}}$ ) is the maximum electromagnetic field allowing tag identification.

Maximum operating electromagnetic field,  $E_{\text{max}}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) The tag shall be left under the magnetic field strength during 30 seconds.

- 5) A command shall be continuously sent with the code generator and the amplitude shall be increased after each command until the complete Ull can be measured.
- 6) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with a higher amplitude.
- 7) The waveform amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{THR Identification}$ ), and the tag shall be left under this magnetic field strength for 5 seconds.
- 8) The electromagnetic field strength shall be increased.
- 9) The steps 4) to 8) shall be repeated until the tag can't return its response, then note the electromagnetic field strength  $E$  for the individual tag.

The measurements shall be performed on 10 tags.  $E_{max}$  shall be the lowest value of all measured electromagnetic field strength  $E$  for the individual tags.

The measurements shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

**8.5.3 Test report**

The test report shall give the measured maximum operating electromagnetic field  $E_{max}$  for each frequency peak, the environmental conditions and communication parameters. All these parameters shall be recorded according to the example in Table 11.

**Table 11 — Parameters that shall be recorded for this measurement**

<b>Test: Maximum operating electromagnetic field (<math>E_{max}</math>)</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
<b>Frequency</b>	<b><math>E_{max}</math></b>	
xxx MHz	xx,xx V/m	
...	...	

**8.6 Survival electromagnetic field ( $E_{Survival}$ )**

**8.6.1 Purpose**

The purpose of this test is to determine the maximum electromagnetic field ( $E_{Survival}$ ) value at which the tag stops operating when exposed to this high value, even if the operating electromagnetic field is reduced to a value in the range between  $E_{THR Identification}$  and  $E_{max}$ .

**8.6.2 Test procedure**

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the electromagnetic field of the generating field has to be increased from identification electromagnetic field threshold ( $E_{THR Identification}$ ) until the tag destruction. The survival electromagnetic field ( $E_{Survival}$ ) is the maximum electromagnetic field before tag destruction.

Survival operating electromagnetic field,  $E_{Survival}$ , measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{THR Identification}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) The tag shall be left under the electromagnetic field strength during 30 seconds.
- 5) The waveform amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{THR Identification}$ ).
- 6) A command shall be continuously sent with the code generator and the amplitude shall be increased after each command until the complete UII can be measured.
- 7) The data transfer shall be verified by comparison with ISO/IEC 18000-6. In case the tag response is wrong, then step 4) shall be repeated with a higher amplitude.
- 8) The tag shall be left under this electromagnetic field for 5 seconds.
- 9) The electromagnetic field strength shall be increased.
- 10) The steps 4) to 9) shall be repeated until the tag can't return its response, then note the electromagnetic field strength  $E$  for the individual tag, record the previous value.

The measurements shall be performed on 10 tags.  $E_{Survival}$  shall be the lowest value of all measured electromagnetic field strength  $E$  for the individual tags.

The measurements shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

**8.6.3 Test report**

The test report shall give the measured maximum operating electromagnetic field  $E_{Survival}$  for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the environmental conditions and communication parameters. All parameters shall be recorded according to the example in Table 12.

**Table 12 — Parameters that shall be recorded for this measurement**

<b>Test: Survival electromagnetic field (<math>E_{Survival}</math>)</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UII:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
<b>Frequency</b>	<b><math>E_{Survival}</math></b>	
<b>xxx MHz</b>	<b>xx,xx V/m</b>	
...	...	

## 8.7 Delta radar cross section ( $\Delta$ RCS)

### 8.7.1 Purpose

The purpose of this test is to determine the delta radar cross section and the angle information during the tag backscattering for different electromagnetic field strength. The angle information,  $\Delta\phi$ , is the phase difference between a tag modulated state and an un-modulated state.

### 8.7.2 Test procedure

For each tag frequency peak and for the three test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the electromagnetic field of the generating field has to be increased from identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) to the maximum operating electromagnetic field ( $E_{\text{MAX}}$ ) with a regular step such that there is a minimum of 10 points of delta radar cross section and angle information,  $\Delta\phi$ , measurements. The delta radar cross section and the angle information shall be calculated according to the ISO/IEC 18047-6 conformance measurement.

Delta radar cross section,  $\Delta$ RCS, and angle information,  $\Delta\phi$ , measurement procedure:



- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ).
- 3) The tag shall be inserted in the test equipment.
- 4) A command shall be continuously sent with the code.
- 5) The delta radar cross section and angle information shall be measured according to the ISO/IEC 18047-6 procedure that is applicable for the Type of the DUT (e.g. Type A.).
- 6) The electromagnetic field strength  $E$  shall be increased until maximum operating electromagnetic field ( $E_{\text{MAX}}$ ) and the measurements of delta radar cross section and angle information shall be performed for each electromagnetic field strength step.
- 7) The steps 1) to 6) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

The measurements shall be performed on 10 tags. The  $\Delta$ RCS value and angle information,  $\Delta\phi$ , shall be the lowest value of all individual tags measurements.

### 8.7.3 Test report

The test report shall give the  $\Delta$ RCS curve and the angle information curve versus electromagnetic field from identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) to the maximum operating electromagnetic field ( $E_{\text{MAX}}$ ), the environment conditions and communication parameters. These parameters shall be recorded according to the example in Table 13.

Table 13 — Parameters that shall be recorded for this measurement
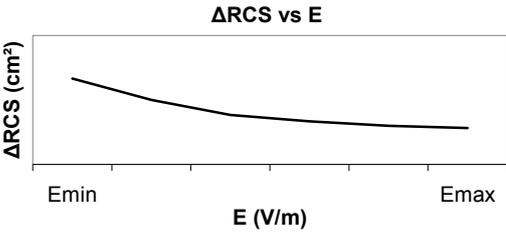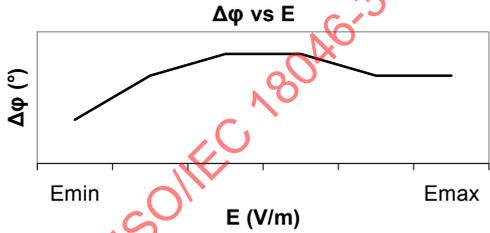
<b>Test: Delta radar cross section (<math>\Delta</math>RCS) &amp; angle information</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UII:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
Frequency : xx MHz		
 <p style="text-align: center;"><math>\Delta</math>RCS vs E</p>	 <p style="text-align: center;"><math>\Delta\phi</math> vs E</p>	

## 8.8 Interference rejection ( $I_{\text{Rejection}}$ )

### 8.8.1 Purpose

The purpose of this test is to determine the interference rejection ability of the tag.

### 8.8.2 Test procedure

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the interferer electromagnetic field has to be increased relative to the desired electromagnetic field until the tag can no longer demodulate the desired generator command. For this test, the test set-up described in sub clause 6.3.1 is used.

#### 8.8.2.1 Continuous wave (CW) interference rejection:

- 1) The desired generator shall be set to the required operating frequency of 866 MHz.
- 2) The desired generator waveform amplitude shall be set to the value of identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ).
- 3) The interferer generator shall be set to the operating frequency of 866 MHz +/-0 Hz frequency offset.
- 4) The interferer generator amplitude shall be set to a value below identification magnetic field threshold, which is typically zero.
- 5) The tag shall be inserted in the test equipment.
- 6) The interferer generator amplitude shall emit a CW signal at increasing amplitude until the tag can no longer demodulate the desired generator command.
- 7) The interferer electromagnetic field strength E shall be calculated by use of the interferer generator amplitude.

- 8) The steps 3) to 7) shall be repeated for the interferer frequency offsets +/- 200, +/- 400, +/- 500, +/- 600, +/- 800 +/- 1000 kHz and +/- 1200 kHz.
- 9) The steps 1) to 8) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

**8.8.2.2 Modulated interference rejection:**

- 1) The desired generator shall be set to the required operating frequency of 866 MHz.
- 2) The desired generator waveform amplitude shall be set to 6 dB above the value of identification electromagnetic field threshold ( $E_{THR Identification}$ ).
- 3) The interferer generator shall be set to the operating frequency of 866 MHz +/-0 Hz frequency offset.
- 4) The interferer generator amplitude shall be set to a value below identification magnetic field threshold, which is typically zero.
- 5) The tag shall be inserted in the test equipment.
- 6) The interferer generator amplitude shall send an appropriate command at increasing or decreasing amplitude in 0,25 dB steps until the tag replies to exactly 50% of the desired generator command at the given amplitude level.
- 7) The interferer electromagnetic field strength E shall be calculated by use of the interferer generator amplitude.
- 8) The steps 3) to 7) shall be repeated for the interferer frequency offset +/- 200, +/- 400, +/- 500, +/- 600, +/- 800, +/- 1000 kHz and +/- 1200 kHz.
- 9) The steps 1) to 8) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

The measurements shall be performed on all tags. The interferer electromagnetic field strength value shall be the lowest value of all measured interferer electromagnetic field strength E for the individual tags.

**8.8.3 Test report**

The test report shall give the interferer electromagnetic field strength for each frequency offset for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), plus the environment conditions and communication parameters. All these parameters shall be recorded according to the example in Table 14.

**Table 14 — Parameters that shall be recorded for this measurement**

<b>Test: Interference rejection (<math>I_{REJECTION}</math>)</b>													
Mounting Material:													
Temperature:						Humidity:							
Tag Protocol:						Tag UUI:							
<b>Forward Link</b>													
Modulation index: %				Data rate: kbps				Data coding:					
Command: 0x													
<b>Return Link</b>													
Data rate: kbps						Data coding:							
<b>Test Results</b>													
<b>Interferer frequency Offset (kHz)</b>	<b>0</b>	<b>200</b>	<b>+200</b>	<b>-400</b>	<b>+400</b>	<b>-600</b>	<b>+600</b>	<b>-800</b>	<b>+800</b>	<b>-1000</b>	<b>+1000</b>	<b>-1200</b>	<b>+1200</b>
<b>Frequency: xxx MHz</b>													
CW interference rejection													
Modulated interference rejection													


## 8.9 Maximum identification fade rate ( $E_{\text{Fade Identification}}$ )

### 8.9.1 Purpose

The purpose of this test is to determine the maximum electromagnetic-field fade rate that a tag can tolerate during identification.

### 8.9.2 Test procedure

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), modulate the electromagnetic field strength (i.e. amplitude modulate the field envelope) at each frequency step, with an increasing triangle wave modulation rate, until the tag stops responding (see Figure 5).

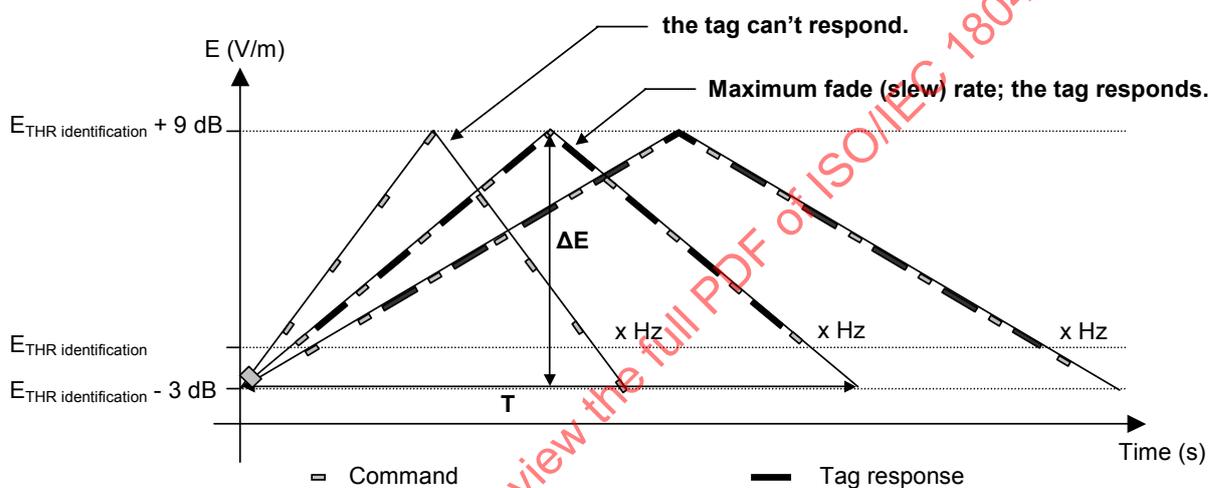

$$\text{Fade rate (V/m.s)} = \frac{\Delta E}{T/2} = 2 \cdot \Delta E \cdot F$$

With :

- $\Delta E$  : Electromagnetic field variation in V/m
- $T$  : Period Time in seconds
- $F$  : Frequency in Hz

Figure 5 — Fade rate measurement

Identification fade-rate measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to be 3 dB above the tag's minimum electromagnetic field identification threshold and the maximum waveform generator amplitude shall be set to 9 dB above the tag's minimum electromagnetic field identification threshold.
- 3) The tag shall be inserted in the test equipment.
- 4) The waveform generator shall be set to send an appropriate command, so that the tag repeatedly returns its Ull. The data transfer shall be verified by comparison with ISO/IEC 18000-6. The amplitude envelope shall be modulated, as described in step (2), using triangle-wave modulation, from 0 Hz to the frequency at which the tag stops responding. The triangle-wave modulation frequency shall be recorded.
- 5) The electromagnetic field fade (slew) rate  $E$  shall be calculated by use of triangle-wave envelope's frequency.

- 6) The steps 4) to 5) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

The measurements shall be performed on all tags.  $E_{\text{Fade Identification}}$  value shall be the lowest value of all measured electromagnetic field fade rate E for the individual tags.

**8.9.3 Test report**

The test report shall give for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the  $E_{\text{Fade Identification}}$  versus frequency, the environmental conditions, and communication parameters. All these parameters shall be recorded according to the example in Table 15.

**Table 15 — Parameters that shall be recorded for this measurement**

<b>Test: Maximum identification fade rate (<math>E_{\text{Fade Identification}}</math>)</b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
<b>Test Results</b>		
<b>Frequency</b>	<b>Triangle wave modulation frequency</b>	<b><math>E_{\text{Fade Identification}}</math></b>
xxx MHz	xx Hz	xx,xx V/ m.s
...	...	...

**8.10 Maximum write fade rate ( $E_{\text{Fade Write}}$ )**

**8.10.1 Purpose**

The purpose of this test is to determine the maximum electromagnetic-field fade rate that a tag can tolerate during writing.

**8.10.2 Test procedure**

For each tag frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz) modulate the electromagnetic field strength (i.e. amplitude modulate the field envelope) at each frequency step, with an increasing triangle wave modulation rate, until the tag stops writing (see Figure 5).

Write fade-rate measurement procedure:

- 1) The waveform generator shall be set to the required operating frequency of 866 MHz.
- 2) The waveform generator amplitude shall be set to be 3 dB above the tag’s minimum electromagnetic field identification threshold and the maximum waveform generator amplitude shall be set to 9 dB above the tag’s minimum electromagnetic field identification threshold.
- 3) The tag shall be inserted in the test equipment.
- 4) The waveform generator shall be set to send an appropriate command, so the tag repeatedly writes its memory and returns a valid indicator that the writing was successful. The data transfer shall be verified by comparison with ISO/IEC 18000-6. Modulate the command amplitude envelope, as

described in step (2), using triangle-wave modulation, from 0 Hz to the frequency at which the tag stops writing correctly. The triangle-wave modulation frequency shall be recorded.

- 5) The electromagnetic field fade (slew) rate  $E$  shall be calculated by use of triangle-wave envelope's frequency.
- 6) The steps 4) to 5) shall be repeated for the three test frequencies 915 MHz, 953 MHz and for each frequency peak.

The measurements shall be performed on all tags.  $E_{\text{Fade Write}}$  value shall be the lowest value of all measured electromagnetic field fade rate  $E$  for the individual tags.

### 8.10.3 Test report

The test report shall give for each frequency peak and for the four test frequencies defined in ISO/IEC 18047-6 (866 MHz; 915 MHz; 953 MHz), the  $E_{\text{Fade Write}}$  versus frequency, the environmental conditions, and communication parameters. All these parameters shall be recorded according to the example in Table 16.

**Table 16 — Parameters that shall be recorded for this measurement**

Test: Maximum identification fade rate ( $E_{\text{Fade Write}}$ )		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Modulation index: %	Data rate: kbps	Data coding:
Command: 0x		
<b>Return Link</b>		
Data rate: kbps	Data coding:	
Data Block size: bytes	Data write : 0x	
Test Results		
Frequency	Triangle wave modulation frequency	$E_{\text{Fade Write}}$
xxx MHz	xx Hz	xx,xx V/ m.s
...	...	...

## 9 Functional tests for 433,920 MHz propagative tags as defined in ISO/IEC 18000-7

### 9.1 Identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) and frequency tolerance

#### 9.1.1 Purpose

This test determines the electromagnetic field threshold level required for tag identification when using an ISO/IEC 18000-7 reader functioning in Master-Slave mode (Interrogator Talks First or ITF).

The identification electromagnetic field threshold,  $E_{\text{THR Identification}}$ , is the minimum electromagnetic field that allows a tag to be identified.

#### 9.1.2 Test procedure

The specification for ISO/IEC 18000-7 tags and readers specifies an operating frequency of 433,920 MHz ( $\pm 20\text{ppm}$ ), which is approximately  $\pm 8,7$  kHz. Since both the reader and the tag may be shifted by 20ppm, and potentially in opposite directions, the system must function within  $\pm 40\text{ppm}$  (approximately 17,4 kHz) of the

nominal centre frequency. For convenience in setting up the signal generator, use a centre frequency low of 433,900 MHz, nominal of 433,920 MHz, and a high of 433,940 MHz for the following tests.

Identification electromagnetic field threshold,  $E_{THR \text{ identification}}$ , measurement procedure:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages.

Tests should be run using a known reference antenna attached to the signal source and receiver.

Recommended test distance between the tag's location and the reference antenna should be 2 meters, minimum, with 3 meters preferred.

- 2) Set a signal source to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable over a 100 dB range in 10 dB steps, with at least 10 dBm available as the maximum output.

As a modulator for this signal source, use a code generator certified to properly generate relevant command sequences and timing.

The generator should be set up so that the following conditions exist when modulated:

Symbol LOW =  $f_c + 50$  kHz (433,970 when centred at 433,920 MHz)

Symbol HIGH =  $f_c - 50$  kHz (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal.
- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Collect command as defined in ISO/IEC 18000-7. Adjust the signal source until the tag under test responds reliably.
- 7) Record data for the tag when mounted vertically, then when horizontally polarized.
- 8) Repeat steps 6) and 7) after increasing the centre frequency to 433,940 MHz.
- 8) Repeat steps 6) and 7) after decreasing the centre frequency to 433,900 MHz.
- 9) Perform the measurements in steps 6) and 7) on all tags. The  $E_{THR \text{ Identification}}$  value is the greatest electromagnetic field strength noted out of all measurements.

NOTE If one tag is clearly lower in sensitivity than all others—requires more signal before it will respond—it should be removed from the tests and replaced with another tag.

### 9.1.3 Test report

The test report provides data recorded for the system's lower, nominal, and upper tolerance limits. The environmental conditions and communication parameters shall be recorded according to the example in Table 17.

Table 17 — Parameters recorded for  $E_{\text{THR Identification}}$  measurement

Test: Identification electromagnetic field threshold ( $E_{\text{THR Identification}}$ ) at centre frequency and +/-40ppm		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag Ull:	
<b>Forward Link</b>		
Deviation (kHz):	Data Rate: kbps	Data Coding:
Command: Wakeup followed by Collect command		
<b>Return Link</b>		
Data Rate: kbps	Data Coding:	
<b>Test Results</b>		
<b>Centre Frequency</b>	<b>fc – 40ppm</b>	<b>fc +40ppm</b>
xxx MHz	xxx MHz	xxx MHz
$E_{\text{THR Identification}}$ : xx,xx dBuV/m	$E_{\text{THR Identification}}$ : xx,xx dBuV/m	$E_{\text{THR Identification}}$ : xx,xx dBuV/m
ID:	ID:	ID:

## 9.2 Reading electromagnetic field threshold ( $E_{\text{THR Read}}$ ) and frequency tolerance

### 9.2.1 Purpose

This test determines the electromagnetic field threshold level that allows a tag reading. To successfully read tag data, transmit the command correctly, with enough energy available to read the tag. The reading electromagnetic field threshold,  $E_{\text{THR Read}}$ , is the minimum electromagnetic field that allows tag reading.

### 9.2.2 Test procedure

Run the tests at 433,920 MHz, nominal, then at 433,900 MHz (-40ppm) and 433,940 MHz (+40ppm). Set the signal source's electromagnetic field below the level that allows a tag to respond to a command, then increase the field to a level where it is possible to read the tag's ID and memory contents.

For this test, use user memory or, if this is not available, any other memory that is not the Ull memory.

The specification for ISO/IEC 18000-7 tags and readers specifies an operating frequency of 433,920 MHz ( $\pm 20\text{ppm}$ ), which is approximately  $\pm 8,7$  kHz. Since both the reader and the tag may be shifted by 20ppm and potentially in opposite directions, the system must function within  $\pm 40\text{ppm}$  (approximately 17,4 kHz) of the nominal centre frequency.

For convenience in setting up the signal source, use a low frequency of 433,900 MHz, nominal centre frequency of 433,920 MHz, and a high frequency of 433,940 MHz for the following tests.

Reading electromagnetic field threshold,  $E_{\text{THR Read}}$ , measurement procedure:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages.

Tests should be run using a known reference antenna attached to the signal source and receiver.

Recommended test distance between the tag's location and the reference antenna should be 2 meters, minimum, with 3 meters preferred.

- 2) Set a signal source to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable over a 100 dB range in 10 dB steps, with at least 10 dBm available as the maximum output.

Use a code generator certified to properly generate relevant command sequences and timing as a modulator for this signal source.

The generator should be set up so the following conditions exist when modulated:

Symbol LOW =  $f_c + 50 \text{ kHz}$  (433,970 MHz when centred at 433,920 MHz)  
 Symbol HIGH =  $f_c - 50 \text{ kHz}$  (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal.
- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Collect With Data command as defined in 18000-7. Adjust the signal source until the tag under test responds reliably.
- 7) Record the data for the tag when mounted vertically, then when horizontally polarized.
- 8) Repeat steps 6) and 7) after increasing the centre frequency to 433,940 MHz.
- 9) Repeat steps 6) and 7) after decreasing the centre frequency to 433,900 MHz.
- 10) Measure all tags. The  $E_{\text{THR Read}}$  value is the greatest electromagnetic field strength noted out of all measurements.

NOTE If one tag is clearly lower in sensitivity than all others—requires more signal before it will respond—it should be removed from the tests and replaced with another tag.

9.2.3 Test report

The test report provides data recorded for the system’s lower, nominal, and upper tolerance limits. Record the environmental conditions and communication parameters according to the example in Table 18.

Table 18 — Parameters recorded for  $E_{\text{THR Read}}$  measurement

<b>Test: Reading electromagnetic field threshold (<math>E_{\text{THR Read}}</math>) at centre frequency and <math>\pm 40\text{ppm}</math></b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Deviation (kHz):	Data Rate: kbps	Data Coding:
Command: Wakeup followed by Collect With Data command		
<b>Return Link</b>		
Data Rate: kbps	Data Coding:	
<b>Test Results</b>		
<b>Centre Frequency</b>	<b><math>f_c - 40\text{ppm}</math></b>	<b><math>f_c + 40\text{ppm}</math></b>
xxx MHz	xxx MHz	xxx MHz
$E_{\text{THR Read}}$ : xx,xx dBuV/m	$E_{\text{THR Read}}$ : xx,xx dBuV/m	$E_{\text{THR Read}}$ : xx,xx dBuV/m
ID & Data:	ID & Data:	ID & Data:

### 9.3 Writing electromagnetic field threshold ( $E_{\text{THR Write}}$ )

#### 9.3.1 Purpose

This test determines the electromagnetic field threshold level that allows a tag write operation. To successfully write data into the tag, transmit the data correctly, with enough energy available during the memory access. The writing electromagnetic field threshold ( $E_{\text{THR Write}}$ ) is the minimum electromagnetic field allowing a tag write operation.

#### 9.3.2 Test procedure

Run tests at 433,920 MHz, nominal, and at 433,900 MHz (-40ppm) and 433,940 MHz (+40ppm). Set the signal source's electromagnetic field below the level that allows a tag to respond to a command to a level where it is possible to write the tag's memory.

For this test, use user memory or, if this is not available, any other memory that is not the Ull memory.

Writing electromagnetic field threshold,  $E_{\text{THR Write}}$ , measurement procedure:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages.

Tests should be run using a known reference antenna attached to the signal source and receiver.

Recommended test distance between the tag's location and the reference antenna should be 2 meters, minimum, with 3 meters preferred.

- 2) Set a signal source to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable over a 100 dB range in 10 dB steps, with at least 10 dBm available as the maximum output.

As a modulator for this signal source, use a code generator certified to properly generate relevant command sequences and timing.

The generator should be set up so the following conditions exist when modulated:

Symbol LOW =  $f_c + 50$  kHz (433,970 MHz when centred at 433,920 MHz)  
 Symbol HIGH =  $f_c - 50$  kHz (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal.
- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Write command as defined in ISO/IEC 18000-7. Adjust the signal source until the tag under test responds reliably.
- 7) Record the data for the tag when mounted vertically, then when horizontally polarized.
- 8) Repeat steps 6) and 7) after increasing the centre frequency to 433,940 MHz.

- 9) Repeat steps 6) and 7) after decreasing the centre frequency to 433,900 MHz.
- 10) Measure all tags. The  $E_{THR\ Write}$  value is the greatest electromagnetic field strength noted out of all measurements.

NOTE If one tag is clearly lower in sensitivity than all others—requires more signal before it will respond—it should be removed from the tests and replaced with another tag.

**9.3.3 Test report**

The test report provides data recorded for the system’s lower, nominal, and upper tolerance limits. Record the environmental conditions and communication parameters according to the example in Table 19.

**Table 19 — Parameters recorded for  $E_{THR\ Write}$  measurement**

<b>Test: Writing electromagnetic field threshold (<math>E_{THR\ Write}</math>) at centre frequency and <math>\pm 40\text{ppm}</math></b>		
Mounting Material:		
Temperature:	Humidity:	
Tag Protocol:	Tag UUI:	
<b>Forward Link</b>		
Deviation (kHz):	Data Rate: kbps	Data Coding:
Command: Wakeup followed by Write command		
<b>Return Link</b>		
Data Rate: kbps	Data Coding:	
<b>Test Results</b>		
<b>Centre Frequency</b>	<b>fc – 40ppm</b>	<b>fc +40ppm</b>
<b>xxx MHz</b>	<b>xxx MHz</b>	<b>xxx MHz</b>
$E_{THR\ Write}$ xx,xx dBuV/m	$E_{THR\ Write}$ xx,xx dBuV/m	$E_{THR\ Write}$ xx,xx dBuV/m

**9.4 Sensitivity Directivity ( $S_{Directivity}$ )**

**9.4.1 Purpose**

This test determines the tag’s sensitivity to various orientations, such as azimuth and elevation (see Figure 6). This, of course, is a determination of the directivity of the tag. Determine the directivity under all conditions for which the tag is designed. This may include the tag being mounted on a metal surface (a reflector of 20 x 20 inches being representative) or on a non-metallic object, such as a cardboard box or wooden post.

**9.4.2 Test procedure**

Run tests at 433,920 MHz, nominal. Set the signal source’s electromagnetic field below the level that allows a tag to respond to a Wakeup/Collect command, then raise the field to a level where the tag responds reliably to a Wakeup/Collect command.

Rotate the tag in 15-degree increments. Record the level that is then required for a reliable Wakeup/Collect command to get reliable responses from the tag at 0, 15, 30, 45, 60, 75, 90, 105, 120, 135, 150, 165, 180, 195, 210, 225, 240, 255, 270, 285, 300, 315, 330, and 345 degrees. However, if the tag is mounted on a metal plate, only 0–90 and 315–345 degree levels need to be taken.

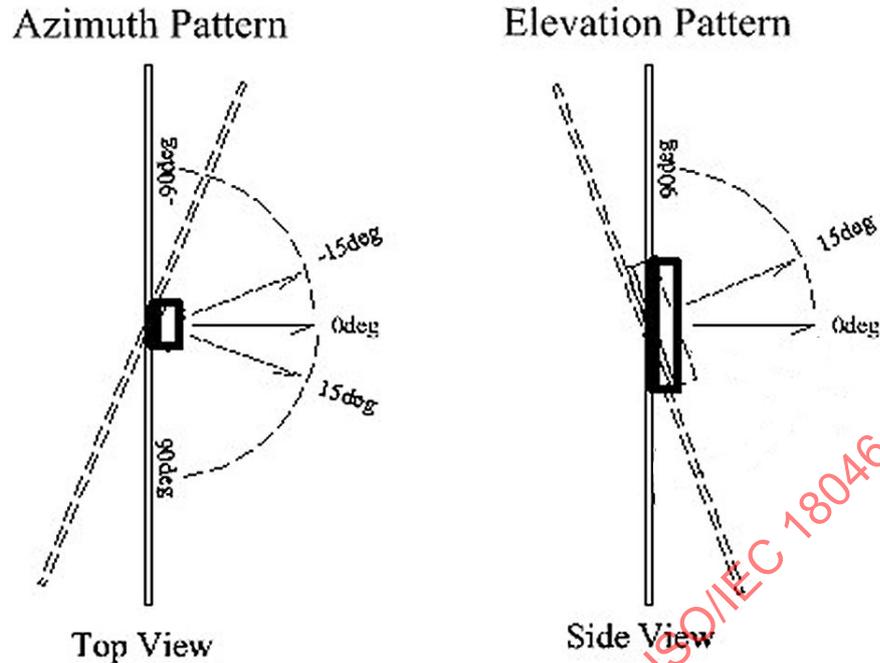


Figure 6 — Azimuth and elevation pattern

Sensitivity Directivity,  $S_{\text{Directivity}}$ , measurement procedure:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages. This is particularly important when measuring tag patterns since any reflections will distort the pattern measurement.

Tests should be run using a known reference antenna attached to the signal source and receiver.

Recommended test distance between the tag's location and the reference antenna should be 2 meters, minimum, with 3 meters preferred.

- 2) Set a signal source to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable over a 100 dB range in 10 dB steps, with at least 10 dBm available as the maximum output.

Use a code generator certified to properly generate relevant command sequences and timing as a modulator for this signal source.

The generator should be set up so the following conditions exist when modulated:

Symbol LOW =  $f_c + 50$  kHz (433,970 MHz when centred at 433,920 MHz)  
 Symbol HIGH =  $f_c - 50$  kHz (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal. If mounted on a metal sheet, only  $\pm 90$  degrees from zero reference between tag and reader needs to be evaluated.

- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated. If used in this manner, take a full 360-degree pattern.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Collect command as defined in ISO/IEC 18000-7. Adjust the signal source until the tag under test responds reliably.
- 7) Record the data for the tag when mounted vertically, then when horizontally polarized.
- 8) Repeat steps 6) and 7), rotating the azimuth by 15 degrees until data has been taken for 0, 15, 30, 45, 60, 75, 90, 105, 120, 135, 150, 165, 180, 195, 210, 225, 240, 255, 270, 285, 300, 315, 330, and 345 degrees, while elevation remains at 0 degrees.

NOTE a metal mounting plate has been used to mount the tag, measurements can be restricted to 0–90 then 270–345 degrees, since radiation between 105–255 degrees will be blocked by the metal mounting surface.

- 9) Repeat steps 6) and 7), rotating the elevation by 15 degrees until data has been taken for 0, 15, 30, 45, 60, 75, 90, while azimuth remains at 0 degrees.
- 10) Measure all tags. The  $S_{Directivity}$  value is the greatest electromagnetic field strength noted out of all measurements.

9.4.3 Test report

The test report gives for each angle the  $S_{Directivity}$  values and curves (E versus azimuth and E versus elevation), plus all environmental conditions and communication parameters. Record all these parameters according to the example in Table 20.

Table 20 — Parameters recorded for  $S_{Directivity}$  measurement

<b>Test: Sensitivity directivity (<math>S_{Directivity}</math>)</b>						
Mounting Material:						
Temperature:			Humidity:			
Tag Protocol:			Tag ULL:			
<b>Forward Link</b>						
Modulation Index: %		Data Rate: kbps		Data Coding:		
Command: 0x						
<b>Return Link</b>						
Data Rate: kbps			Data Coding:			
<b>Test Results</b>						
<b><math>E_{(dBuV/m)}</math> vs. Azimuth</b>	-15°:	-30°:	-45°:	-60°:	-75°:	-90°:
<b><math>E_{(dBuV/m)}</math> vs. Azimuth</b>	15°:	30°:	45°:	60°:	75°:	90°:
<b><math>E_{(dBuV/m)}</math> vs. Elevation</b>	15°:	30°:	45°:	60°:	75°:	90°:
<b><math>S_{Directivity}</math> versus Azimuth curve:</b>				<b><math>S_{Directivity}</math> versus Elevation curve:</b>		

## 9.5 Interference rejection ( $I_{\text{Rejection}}$ )

### 9.5.1 Purpose

This test determines the interference rejection ability of the tag.

### 9.5.2 Test procedure

A tag is placed in the test setup, and the signal source's level is set to 3 dB above  $E_{\text{THR Read}}$  so that the tag is responding to all Wake Up plus Collect commands with its ID.

A second, unmodulated signal source at 433,920 MHz is set to a level 20 dB below the  $E_{\text{THR Read}}$  level, then the level is increased until the tag no longer responds to the Wake Up plus Collect commands. This is considered the tag's On Channel  $I_{\text{Rejection}}$  level. This is repeated for the 1<sup>st</sup> adjacent channel ( $\pm 250$  kHz) and 2<sup>nd</sup> adjacent channel ( $\pm 500$  kHz).

#### 9.5.2.1 Unmodulated interference rejection:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages.

Tests should be run using two identical reference antennas attached to two signal sources, with one antenna also connected to a receiver.

Recommended test distance between the tag's location and the source antennas should be 2 meters, minimum, with 3 meters preferred. The two antennas should be equal in gain and separated from each other by at least one wavelength to reduce interactions between them.

- 2) Set a signal source to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable to the  $E_{\text{THR Read}}$  level plus 3 dB.

Use a code generator certified to properly generate relevant command sequences and timing as a modulator for this signal source.

The generator should be set up so the following conditions exist when modulated:

Symbol LOW =  $f_c + 50$  kHz (433,970 MHz when centred at 433,920 MHz)  
 Symbol HIGH =  $f_c - 50$  kHz (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal.
- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Collect command as defined in ISO/IEC 18000-7. Adjust the signal source until the tag under test responds reliably ( $E_{\text{THR Read}}$ ), then increase the signal by 3 dB.
- 7) Adjust the second unmodulated signal source to 433,920 MHz. Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.

- 8) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's Co-Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 9) Adjust the second unmodulated signal source to 433,920 MHz + 250 kHz (434,170 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 10) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's upper 1<sup>st</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 11) Adjust the second unmodulated signal source to 433,920 MHz – 250 kHz (433,670 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 12) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's lower 1<sup>st</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 13) Adjust the second unmodulated signal source to 433,920 MHz + 500 kHz (434,420 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 14) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's upper 2<sup>nd</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 15) Adjust the second unmodulated signal source to 433,920 MHz – 500 kHz (433,470 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 16) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's lower 2<sup>nd</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.

#### 9.5.2.2 Modulated interference rejection:

- 1) Set up all test equipment in an anechoic chamber or some other fully characterized and controlled location free from interference sources and propagation influences, such as significant signal reflections, absorptions, or blockages.

Tests should be run using two identical reference antennas attached to two signal sources, with one antenna also connected to a receiver.

Recommended test distance between the tag's location and the source antennas should be 2 meters, minimum, with 3 meters preferred. The two antennas should be equal in gain and separated from each other by at least one wavelength to reduce interactions between them.

- 2) Set signal source 1 to transmit FSK with a 433,920 MHz centre frequency, using FSK modulation at  $\pm 50$  kHz with waveforms and timings as specified in ISO/IEC 18000-7. The signal source's output level must be adjustable to the  $E_{\text{THR Read}}$  level plus 3 dB.

Use a code generator certified to properly generate relevant command sequences and timing as a modulator for this signal source.

The generator should be set up so the following conditions exist when modulated:

Symbol LOW =  $f_c + 50$  kHz (433,970 MHz when centred at 433,920 MHz)  
 Symbol HIGH =  $f_c - 50$  kHz (433,870 MHz when centred at 433,920 MHz)

- 3) Use an FSK receiver and decoder to receive, decode, and send tag responses to appropriate monitoring software so tag responses can be evaluated. Synchronize the decoder with the code generator so all protocol timing can be maintained within correct relationships.
- 4) Mount the tag being evaluated on a minimum 20 x 20 inch metal sheet reflector for this test, attached in the mounting configuration specified for the specific tag model being evaluated. Orient the tag so its main response is facing the source signal.
- 5) Alternatively, depending on expected tag usage, the tag can be placed on a non-metallic mounting plate or pole, or attached in the mounting configuration specified for the tag model being evaluated.
- 6) Adjust the signal source for minimum output, then send a Wakeup Header command followed immediately by a Collect command as defined in ISO/IEC 18000-7. Adjust the signal source until the tag under test responds reliably ( $E_{\text{THR Read}}$ ), then increase the signal by 3 dB.
- 7) Adjust the second modulated signal source to 433,920 MHz. Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 8) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's Co-Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 9) Adjust the second modulated signal source to 433,920 MHz + 250 kHz (434,170 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 10) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's upper 1<sup>st</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 11) Adjust the second modulated signal source to 433,920 MHz – 250 kHz (433,670 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 12) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's lower 1<sup>st</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 13) Adjust the second modulated signal source to 433,920 MHz + 500 kHz (434,420 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 14) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's upper 2<sup>nd</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.
- 15) Adjust the second modulated signal source to 433,920 MHz – 500 kHz (433,470 MHz). Set the level to 20 dB below the  $E_{\text{THR Read}}$  level set in step 6.
- 16) Adjust the second generator to the level at which the tag no longer responds to the Wake Up plus Collect commands from the 1<sup>st</sup> generator. This is considered the tag's lower 2<sup>nd</sup> Adjacent Channel  $I_{\text{Rejection}}$  level. Record this value in Table 21 below.

Measure all tags. The interferer electromagnetic field value recorded is the smallest one of all measurements done.

### 9.5.3 Test report

The test report provides data for On Channel, 1<sup>st</sup> Adjacent Channel ( $\pm 250$  kHz), and 2<sup>nd</sup> Adjacent ( $\pm 500$  kHz) channels, plus all environmental conditions and communication parameters. Record all these parameters according to the example in Table 21.