



ISO/IEC 30141

Edition 2.0 2024-08

INTERNATIONAL STANDARD



Internet of things (IoT) – Reference architecture

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30141:2024



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2024 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

STANDARDSISO.COM : Click to view the full text of ISO/IEC 30141:2024



ISO/IEC 30141

Edition 2.0 2024-08

INTERNATIONAL STANDARD



Internet of things (IoT) – Reference architecture

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.020

ISBN 978-2-8322-9193-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
0.1 General.....	7
0.2 About Internet of Things (IoT)	7
0.3 IoT sources of information.....	7
0.4 General principles of a reference architecture.....	8
1 Scope.....	9
2 Normative references	9
3 Terms and definitions	9
4 Abbreviated terms	9
5 IoT RA context.....	10
5.1 Overview.....	10
5.2 Stakeholders and concerns.....	11
6 IoT RA viewpoints and views	12
6.1 Overview.....	12
6.2 Foundational IoT viewpoint and views	13
6.2.1 Foundational IoT viewpoint.....	13
6.2.2 Foundational IoT view.....	13
6.3 Business viewpoint and view.....	19
6.3.1 Business viewpoint	19
6.3.2 Business view.....	19
6.4 Usage viewpoint and view.....	21
6.4.1 Usage viewpoint	21
6.4.2 Usage view.....	21
6.5 Functional viewpoint and view.....	22
6.5.1 Functional viewpoint.....	22
6.5.2 Functional view.....	23
6.6 Trustworthiness viewpoint and view	25
6.6.1 Trustworthiness viewpoint.....	25
6.6.2 Trustworthiness view	26
6.7 Construction viewpoint and views	29
6.7.1 Construction viewpoint.....	29
6.7.2 Construction view	31
6.7.3 IoT component pattern.....	32
Annex A (normative) Additional IoT construction patterns	38
A.1 General.....	38
A.2 Reference Architecture Model Industrie 4.0 (RAMI 4.0) pattern.....	38
A.3 Dynamic IoT system pattern.....	40
A.4 IoT enterprise system pattern.....	43
A.5 IoT enterprise networking pattern.....	45
A.6 IoT enterprise usage pattern	47
Annex B (informative) Guidance on the use of ISO/IEC/IEEE 42010:2022.....	53
B.1 Overview.....	53
B.2 Systems and architectures	53
B.3 Elements in ISO/IEC/IEEE 42010:2022 used in ISO/IEC 30141 IoT reference architecture description.....	53

B.3.1	Overview	53
B.3.2	Stakeholders, perspective, and concerns	54
B.4	Viewpoints, model kinds, legends, correspondences, and correspondence methods	55
B.5	Views and models	55
B.6	Correspondences	55
Annex C (informative)	Characteristics for IoT systems in particular contexts	56
C.1	Common characteristics	56
C.1.1	Legacy support	56
C.1.2	Network connectivity	56
C.1.3	Unique identification	56
C.1.4	Well-defined components	57
C.1.5	Auto-configuration	57
C.1.6	Content-awareness	57
C.1.7	Context-awareness	57
C.1.8	Discoverability	57
C.1.9	Manageability	58
C.1.10	Network management and operation	58
C.1.11	Real-time capability	58
C.1.12	Self-description	59
C.1.13	Service subscription	59
C.2	Characteristics related to trustworthiness	59
C.2.1	Data characteristics – volume, velocity, veracity, variability, and variety	59
C.2.2	Protection of personally identifiable information (PII)	60
C.2.3	Flexibility	60
Bibliography	61
Figure 1	– Using the IoT RA standard	8
Figure 2	– Relationship between IoT component, IoT system and IoT environment	14
Figure 3	– Example of IoT environment	16
Figure 4	– External facing functions	21
Figure 5	– Internal model of abstract function classes	23
Figure 6	– Legend used in the trustworthiness view	26
Figure 7	– IoT architecture construction view	31
Figure 8	– Capabilities of an IoT component	32
Figure A.1	– RAMI 4.0	39
Figure A.2	– DSC components	41
Figure A.3	– Message flow in DSC	42
Figure A.4	– Home smart air cleaning service	42
Figure A.5	– Example system deployment model	43
Figure A.6	– Networking model	45
Figure A.7	– Roles present when the system is in use	48
Figure A.8	– IoT service provider subroles and activities	48
Figure A.9	– IoT service developer subroles and activities	49
Figure A.10	– IoT subroles and activities	50
Figure A.11	– Activities of device and application development	50

Figure A.12 – Using device data for security-related analytics and operations. 51

Figure B.1 – Conceptual model of an architecture description 54

Table 1 – List of viewpoints, stakeholders, and concerns 11

Table 2 – Foundational IoT viewpoint..... 13

Table 3 – Business viewpoint..... 19

Table 4 – Usage viewpoint..... 21

Table 5 – Functional viewpoint..... 23

Table 6 – Trustworthiness viewpoint 26

Table 7 – Construction viewpoint 30

Table 8 – Construction pattern legend 30

Table 9 – IoT component pattern 32

Table 10 – Additional information on IoT component capabilities 33

Table 11 – Key capability transformations..... 35

Table 12 – IoT system pattern..... 36

Table A.1 – RAMI 4.0 pattern..... 38

Table A.2 – Dynamic IoT system pattern..... 40

Table A.3 – IoT enterprise system pattern..... 43

Table A.4 – IoT enterprise networking system..... 45

Table A.5 – IoT enterprise usage pattern 47

Table A.6 – Overview of activities and roles..... 51

Table A.7 – Overview of enterprise activities and roles 52

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30141:2024

INTERNET OF THINGS (IoT) – REFERENCE ARCHITECTURE

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
- 3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this document.
- 7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
- 8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
- 9) IEC and ISO draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC and ISO take no position concerning the evidence, validity, or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC and ISO had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch> and www.iso.org/patents. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 30141 has been prepared by subcommittee 41: Internet of Things and Digital Twin, of ISO/IEC joint technical committee 1: Information technology. It is an International Standard.

This second edition cancels and replaces the first edition published in 2018. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) conformance with ISO/IEC/IEEE 42010:2022;
- b) improved usability;
- c) implementation pattern support.

The text of this International Standard is based on the following documents:

Draft	Report on voting
JTC1-SC41/417/FDIS	JTC1-SC41/431/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, and the ISO/IEC Directives, JTC 1 Supplement available at www.iec.ch/members_experts/refdocs and www.iso.org/directives.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30141:2024

INTRODUCTION

0.1 General

This document is the second edition of the Internet of Things reference architecture (IoT RA). This document is in conformance with ISO/IEC/IEEE 42010:2022 requirements on architecture descriptions that are described in Annex B except for aspects, perspectives, decisions and rationale.

The IoT RA addresses systems that:

- use technology for sensing and operating on physical world entities;
- have components that interact through a digital network.

The IoT RA deals with related issues, like trustworthiness functions regarding both the physical and digital worlds.

This document can be used as a generic normative part of IoT domain-specific reference architectures (DSRAs). IoT DSRAs are in conformance with ISO/IEC/IEEE 42010:2022 requirements on architecture descriptions and enable consistency and alignment with other reference architectures within ISO/IEC JTC 1.

0.2 About Internet of Things (IoT)

IoT has broad implications in industry and society today and is likely to continue to have an impact on many aspects of our lives for many years to come. Various IoT applications and services have adopted IoT techniques to provide capabilities that were not possible earlier. IoT is one of the most dynamic areas of information and communication technologies.

Fundamental to IoT are devices that interact with the physical world. Sensors collect the information about the physical world, while actuators can act upon the physical world. These field devices are connected to the digital world through network connections. Both sensors and actuators can be in many forms such as thermometers, accelerometers, video cameras, microphones, relays, heaters or industrial equipment for manufacturing or process control.

IoT is the base for new business models or offerings and new working methods in industry and in the public sector. IoT is an essential enabler for other computing areas such as digital twins, artificial intelligence, cloud computing, big data, data analysis and more. Many application areas called "smart xxx" such as smart grid, smart cities, and even smart cars use IoT as an important technology capability.

IoT can be combined with other technologies to address complex requirements. For example, IoT can leverage cloud computing, including private cloud, public cloud, hybrid cloud, and multi-cloud, for resource provisioning and management. IoT can benefit from machine learning and big data for the analysis of sensor data to enable rapid decisions for improved control and efficiency. IoT with distributed ledger technology can ensure traceability in applications. IoT can take advantage of edge computing to distribute computing resources near the convergence of information technology and operational technology, where they are needed most. The IoT area continues to grow rapidly, and new IoT application areas continue to be found and invented. This document can serve these new technology and application areas.

0.3 IoT sources of information

For a given application field and purpose, the many IoT standards, guidelines, and initiatives in existence today work well on their own and are used by various IoT stakeholders. As a result, heterogeneity is a prominent aspect of IoT. However, support for the combination and interaction of these heterogeneous resources to enable interoperability and convergence between IoT standards and guidelines is necessary.

Stakeholder decisions about both a foundation for long-term investments and durable protection of current cornerstones is more difficult because of uncertainty about resource compatibility.

This document serves as a foundation for creating interoperability and alignment between IoT initiatives. The aim of this document is to bring different views together.

0.4 General principles of a reference architecture

This document is positioned as a reference architecture for IoT systems. It utilizes the terms, definitions, and relationships for best practices in architecture descriptions as outlined in ISO/IEC/IEEE 42010:2022 to:

- establish vocabulary, principles, guidance; and
- provide a description of IoT principles, capabilities, and interactions with the physical and digital worlds.

One of the primary purposes of the IoT RA is to support architects that want to design architectures or reference architectures for IoT systems. Normative parts of the IoT RA can then be included in an architecture closer to the realization of IoT systems.

Figure 1 shows how this document has been specified and how it will be used.

- This document conforms to ISO/IEC/IEEE 42010:2022 requirements for architecture descriptions [1]¹ and uses guidelines from the "Best practices and guidelines for RA standards" standing document [2].
- Users of this document apply it to specify an IoT architecture that guides the implementation of an IoT system.

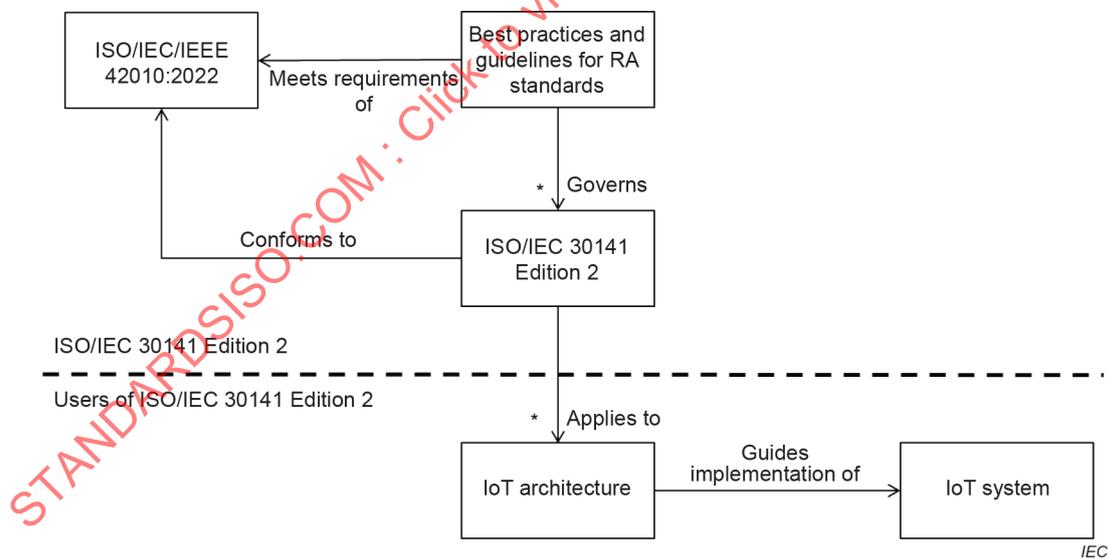


Figure 1 – Using the IoT RA standard

¹ Numbers in square brackets refer to the Bibliography.

INTERNET OF THINGS (IoT) – REFERENCE ARCHITECTURE

1 Scope

This document specifies an Internet of Things (IoT) reference architecture (IoT RA). The IoT RA is a generalization of existing practice including the distinguishing characteristics of IoT systems and other fundamental characteristics exhibited by IoT systems. The IoT RA addresses stakeholder concerns related to the business value of IoT systems. The IoT RA also addresses the interactions between the IoT system, the users, and the physical environment. Implementation of IoT systems is also addressed in this document. Among the characteristics specified in the IoT RA are abstract functions within IoT systems and a variety of structures that are used to construct IoT systems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 20924, *Internet of Things (IoT) and digital twin – Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 20924 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org>

4 Abbreviated terms

AI	artificial intelligence
API	application programming interface
ASD	application and service domain
BSS	business support systems
CM	conceptual model
CPS	cyber physical system
CPO	chief privacy officer
DPO	data protection officer
DSC	dynamic service composition
DSRA	domain specific reference architecture
ETL	extract, transform, load
HMI	human machine interface
HTTP	Hypertext Transfer Protocol
ICT	information and communication technologies

IoT	Internet of Things
IT	information technology
LAN	local area network
LoB	line of business
OMD	operation and management domain
OSS	operational support systems
OT	operational technology
PED	physical entity domain
PII	personally identifiable information
RA	reference architecture
RAID	resource access and interchange domain
SCD	sensing and controlling domain

5 IoT RA context

5.1 Overview

This document specifies a reference architecture for the Internet of Things using the ISO/IEC/IEEE 42010:2022 requirements for architecture descriptions. While this document is intended to be used in many situations and by many different stakeholders, the focus is on the needs of architecture developers of an IoT system description, their perspectives, concerns, and the architecture views they most likely encounter. In particular, it focuses on those involved in creating a specific IoT reference or solution architecture that depends on IoT.

This document is interesting and educational for anyone with interest in IoT. However, the document is of special interest for those people looking to:

- harmonize standards or reference architectures of other IT and OT domains with this generic IoT RA;
- develop either IoT software, or IoT hardware, or both;
- provide services involving IoT;
- procure or implement IoT systems;
- integrate IoT with other IT technology.

For all the interests mentioned above, applying parts of this document to develop or implement IoT domain-specific architecture (DSRA) is a useful approach. These descriptions can be either standalone or integrated with other IoT related architecture descriptions.

Further, depending on the interest, different sections of the document have more relevancy. While some parts provide an overview, some parts provide more information regarding different aspects of IoT.

This document can also be used as normative reference in a DSRA. The document can then serve as a base for the IoT part of that DSRA, leaving application concerns, use cases and so forth to the DSRA. The DSRA can specify how the IoT RA is intended to be used for the specific domain. A DSRA can also specify conformance to parts of this document.

This document conforms to ISO/IEC/IEEE 42010:2022 requirements on architecture descriptions [1], which is described in Annex B. This ensures that the IoT RA aligns with other RAs that conform to ISO/IEC/IEEE 42010:2022 requirements on architecture descriptions. The IoT RA is intended to be used with one or more architecture description frameworks (in accordance with ISO/IEC/IEEE 42010:2022) to create an architecture description for a system of interest.

ISO/IEC/IEEE 42010:2022 provides terms, definitions, and relationships for best practices in architecture descriptions of the architecture of a system of interest. Consequently, all conforming architecture descriptions can be interpreted in a consistent way. Conformance to ISO/IEC/IEEE 42010:2022 requirements for architecture descriptions makes this document a vital part of a cohesive family of standards, including those standards dealing with interoperability.

5.2 Stakeholders and concerns

Table 1 shows a list of viewpoints, stakeholders, and concerns.

Table 1 – List of viewpoints, stakeholders, and concerns

Viewpoint	Stakeholders	Concerns
Foundational IoT viewpoint	<ul style="list-style-type: none"> – Architect – Project manager – Programme manager – Standards expert – People concerned with the fundamentals of IoT – Domain experts – Business manager – System owner 	<p>What is IoT?</p> <p>What are the essential characteristics of IoT systems?</p> <p>What is new (and different) about the concept of IoT?</p> <p>Is a given system or component an IoT system or component?</p> <p>What are the implications of the concept of IoT?</p>
Business viewpoint	<ul style="list-style-type: none"> – Business manager – System owner – Architect 	<p>How to leverage the various capabilities of an IoT system to provide value for a business?</p> <p>How to use IoT for innovative new business models?</p> <p>How do characteristics of an IoT system influence business and system owner?</p>
Usage viewpoint	<ul style="list-style-type: none"> – System architect – Project manager 	<p>How do users (both human and digital) interact with the IoT system?</p> <p>How does the IoT system interact with the physical entity of interest?</p>
Functional viewpoint	<ul style="list-style-type: none"> – Architect – Project manager – Programme manager – IoT standards expert – Business manager – System owner 	<p>What are the types of abstract functions that need to be implemented in an IoT system?</p>
Trustworthiness viewpoint	<ul style="list-style-type: none"> – System architect – Security engineer – Security manager – Privacy manager – Project manager – Business manager 	<p>How to design an IoT system with a level of confidence that meets trustworthiness goals.</p> <p>How to assure the implemented system meets design goals.</p>
Construction viewpoint	<ul style="list-style-type: none"> – System architect – Project manager – System designer 	<p>What types of design are useful when creating an IoT system to meet a given set of requirements?</p> <p>What types of design are useful when creating an IoT component to meet a given set of requirements?</p>

6 IoT RA viewpoints and views

6.1 Overview

The essence of an architecture description lies in the architecture views that it provides. Each view is governed by a corresponding viewpoint. The developers and professional practitioners who are charged with elaboration of the architecture description can adopt the architecture views provided in this document. The different architecture views result from modelling and narrative descriptive activities of the architecting effort.

An architecture viewpoint states relevant information focusing on a particular topic. This information is a collection of concerns, often expressed in use cases, stakeholders provide about the constructed artefacts that they believe are important to the topic. Viewpoints specify the architecture view or views it governs. The architecture viewpoint also identifies modelling or narrative paradigms for generating the architecture view or views.

This document specifies six architecture views and their governing viewpoints:

- an IoT foundational viewpoint in 6.2;
- a business viewpoint in 6.3;
- a usage viewpoint in 6.4;
- a functional viewpoint in 6.5;
- a trustworthiness viewpoint in 6.6;
- a construction viewpoint in 6.7.

Subclause 6.2 presents the foundational IoT viewpoint and the corresponding view which frames the concerns related to the essential characteristics of IoT. The viewpoint addresses concerns related to the fundamental aspects of IoT by specifying the foundational building blocks of IoT enabled systems as architecture views. These views represent the different concepts related to IoT (for example: principles, devices, and connectivity).

Subclause 6.3 presents the business viewpoint and the corresponding view.

Subclause 6.4 presents the usage viewpoint and the corresponding view.

Subclause 6.5 presents the functional viewpoint and the corresponding functional views that describe the IoT reference architecture from the perspective of key functions. The viewpoint addresses concerns related to the fundamental functional aspects of IoT by specifying the foundational building blocks of IoT enabled systems as architecture views. These views represent the functional capabilities of IoT related data, management, communication, interfaces, etc.

Subclause 6.6 presents the trustworthiness viewpoint and provides means for implementing a trust model to consider when creating an IoT product or solution.

Subclause 6.7 presents the construction viewpoint and the corresponding construction views that describe the IoT reference architecture from the perspective of implementation architectures. The viewpoint addresses concerns related to the fundamental implementation aspects of IoT by specifying the different patterns as architecture views. Examples of patterns described in this document include the IoT component capability, the RAMI4.0, the IoT user, the IoT enterprise system, the enterprise networking, and the IoT enterprise usage patterns.

6.2 Foundational IoT viewpoint and views

6.2.1 Foundational IoT viewpoint

The foundational IoT viewpoint is essential to the IoT domain. It frames multiple concerns of several stakeholders, described below. The foundational IoT viewpoint is described in Table 2.

Table 2 – Foundational IoT viewpoint

Viewpoint name		Foundational IoT
Overview		Framing of the concerns related to the essential characteristics of IoT
Known typical stakeholders		<ul style="list-style-type: none"> – Architect – Project manager – Programme manager – Standards expert – People concerned with the fundamentals of IoT – Domain experts – Business managers – System owners
Concerns		<ul style="list-style-type: none"> – What is IoT? – What are the essential characteristics of IoT systems? – What is new (and different) about the concept of IoT? – Is a given system or component an IoT system or component? – What are the implications of the concept of IoT?
Viewpoint specification	Model kinds	Interoperability model Component model
	Legends	The foundational IoT view provides text defining the essential characteristics of IoT, text describing the concepts and relationships between an IoT component, IoT system, and IoT environment.
	View methods	NA
	Correspondence methods	NA
	References	NA

6.2.2 Foundational IoT view

6.2.2.1 Description of IoT systems

ISO/IEC 20924 [3] defines IoT as an "infrastructure of interconnected entities, people, systems and information resources together with services which processes and reacts to information from the physical world and virtual world".

In practical terms, this IoT definition can be distilled down to two essential characteristics of IoT systems.

- a) An IoT system is composed of components connected through a many-to-many digital network. The network capabilities can be based on different options such as using a many-to-many relationship or others and using approaches such as TCP/IP or alternatives.
- b) At least one of those system components interacts with the physical world through either sensing or actuating.

The interaction with the physical world includes:

- Sensing: a sensing capability (provided by a sensor) offers ability to provide observations of an aspect of the physical world as measurement data. Information from sensor observations can be provided to other IoT components through the network interface of the component for processing and storage.

EXAMPLE 1 Temperature sensing (temperature measurement capability), computerized tomography (CT) scans (radiographic imaging), spatial sensing (accelerometers, gyroscopes), optical sensing, and audio sensing.

- Actuating: an actuating capability, provided by an actuator, offers the ability to change the physical world. Such change is based on information that is given as input to the component.


EXAMPLE 2 Heating coils (heating capability), electric shock delivery (cardiac pacing), electronic door locks (lock/unlock capability), unmanned aerial vehicle operation (remote control), servo motors (motion/movement capability), and robotic arms (complex motion/movement capability).

6.2.2.2 IoT system concepts

6.2.2.2.1 General

IoT can be broken down into three important concepts (Figure 2):

- the IoT environment (containing all the components, systems, and related infrastructure);
- the IoT system that provides benefit to the stakeholders;
- the IoT components that interact together to form the IoT system.

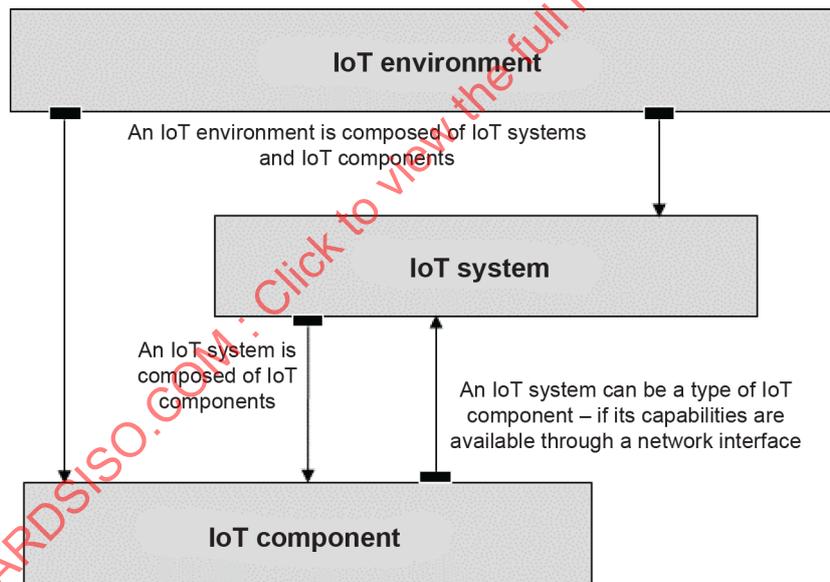

IEC

Figure 2 – Relationship between IoT component, IoT system and IoT environment

6.2.2.2.2 IoT components

IoT components are the basic building blocks of IoT systems. IoT components interact with other IoT components to form a system and achieve one or more goals. Each IoT component provides some function that is necessary within the system so it can achieve its goal or goals.

All IoT components have at least one network interface that provides the ability to participate in a many-to-many network. Nevertheless, a given IoT component does not need to communicate with more than one other IoT component in a given system (e.g. assigning and limiting communication between two static IPs). Most IoT components also have an application interface that provides the capacity for application-level interactions between IoT components.

Each IoT component offers one or more IoT capabilities for use by other IoT components. Network interfaces and sensing are two examples of IoT capabilities.

6.2.2.2.3 IoT systems

A system, which is a combination of interacting elements organized to achieve one or more stated purposes, is considered an IoT system when it is composed of networked IoT components. The IoT system also interacts with a physical entity of interest through a sensor or an actuator within the IoT components. IoT systems differ from conventional IT systems in their ability to directly interact with the physical world.

IoT systems range from the very simple, such as an Internet-enabled thermometer, to the extremely complex, such as a city management system, and everything in between. IoT components can be assembled into many different systems. Also, a single IoT component can have the ability to be part of more than one system at a time. An IoT system can also act as an IoT component within another IoT system, if it has a network interface that allows it to be used that way. An IoT system is not necessarily constructed in a particular manner.

The quality of "goodness" is how well requirements of stakeholders are met. Many of the characteristics of an IoT system have lower or higher importance depending on the specific use cases and therefore indirectly stakeholder concerns.

An IoT system is not required to meet specific security, privacy, reliability, cost, or functional requirements to be considered an IoT system. Even if these criteria are not met it does not stop being an IoT system. However, if the IoT system cannot meet the use case requirements, it might not be a "good" IoT system for a specific use case. In other words, "goodness" is purely in the eyes of the user.

6.2.2.2.4 IoT environments

A digital IoT environment includes:

- the set of IoT components available to be composed into IoT systems;
- the networks connecting the components;
- any associated services that provide the mechanisms for discovery, composition, and orchestration.

Although an IoT environment contains the IoT components that can be used to create IoT systems, it does not necessarily contain any functioning IoT systems. This can be the case if no IoT components have been instructed to interact as a system. The opposite is also true. An IoT environment can be used to create non-IoT systems (conventional IT systems) by excluding IoT components that have sensing or actuating capabilities. In its current state, the Internet can be considered an IoT environment.

For system owners and business managers, it is often relevant to consider the IoT environment as a part of the overall IT environment of an organization.

IoT systems can be components of other IoT systems. IoT systems can also be components of other IT systems. IT systems can be (and often are) components of IoT systems.

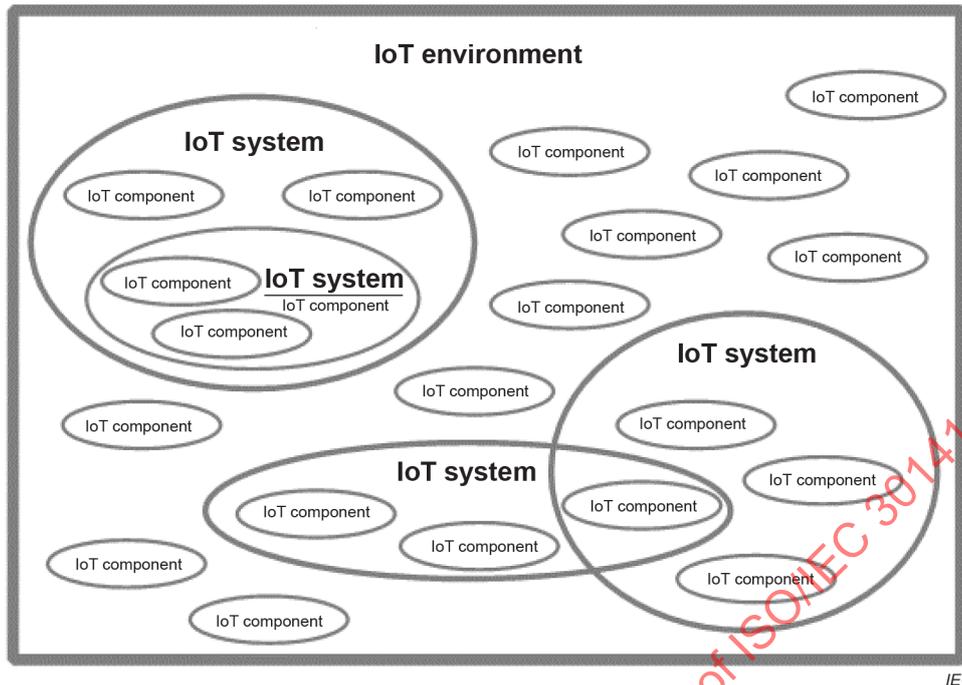


Figure 3 – Example of IoT environment

Figure 3 shows an example of IoT environment with systems, components, and system of systems.

IoT components that are not part of a specified IoT system are nonetheless interconnected in the IoT environment and can become part of an IoT system.

6.2.2.3 Emergent characteristics

6.2.2.3.1 General

The characteristics inherent to IoT are described in 6.2.2.3.2 to 6.2.2.3.10.

NOTE Other characteristics that can be useful to build IoT systems in particular contexts are listed in Annex C.

6.2.2.3.2 Composability

Composability is the ability to combine discrete IoT components into an IoT system to achieve a set of goals and objectives. Composability and interoperability might be important to avoid lock in effects to one or a few IoT suppliers. Especially in the fast-growing IoT area, this might be even more important to meet expected delivery agreements with customers. When the customer demands exceed production capacities, an organization might need to have back up plans for how to upgrade or replace failing equipment.

6.2.2.3.3 Functional and management capability separation

Separation of functional and management capabilities means that the functional interfaces and capabilities of an IoT component, such as an IoT device, are cleanly separated from the management interfaces and capabilities of that component.

It is often wanted to qualify in an early stage the different kinds of users that need to interact with different parts of the IoT system and how. Such qualification makes the separation need more precise and specific. Since the IoT system often consists of components that are widely dispersed geographically, this might be of extra concern regarding remote access. Furthermore, IoT equipment is often equipped with physical interfaces (possibility to interact with the device itself, hands on). Such interfaces might provide challenges if and when such equipment is exposed to the public or nonauthorized users. Furthermore, such devices might be installed in places or areas without possibility to monitor the devices and by whom they are accessed.

6.2.2.3.4 Heterogeneity

IoT is typically cross-system, cross-product, and cross-domain. This often requires interoperability between heterogeneous components and systems. The degree to which heterogeneity is considered is often a matter of the protocols and communication needed for a product at different stages of the lifetime of the IoT system. The degree of heterogeneity for components and physical entities often drives cost and it is important that it is balanced compared with the business needs.

6.2.2.3.5 Highly distributed systems

IoT environments are often built by highly distributed systems which, while being functionally integrated, consist of sub-systems that can be physically separated and remotely located from one another. As an example, IoT systems can span whole buildings, whole cities and even the globe. Data can be stored at the edge of the network, centrally, or both. Distribution can also apply to processing – some processing taking place centrally or in the edge of the network, in IoT gateways or within more capable types of sensors and actuators.

It is important to consider the degree of distribution for the IoT system since most IoT systems are highly distributed by nature. Measurements often need to be taken to ensure the distributed components of such an IoT system can be handled remotely. This is needed for the component to be maintained, debugged, and upgraded and so on. Also, a high distribution might put constraint on trustworthiness characteristics of the system.

6.2.2.3.6 Modularity

Modularity is about how components can be removed cleanly from a system and replaced with another module of similar size and with similar physical and logical interfaces.

The modularity for an IoT system does not differ from the wanted modularity of any IT system. Nevertheless, it might be worth considering that IoT is a fast-growing technology. This makes it even more important to be able to upgrade separate parts of the IoT system continually; thus, placing even higher demands on the wanted degree of modularity. Modularity is also closely related to the composability characteristics of the system.

6.2.2.3.7 Network communication

IoT systems make use of a broad variety of network types. These can be limited range, low power networks collectively termed proximity networks that form the local connections for IoT devices. They can also be wide area networks that connect the proximity networks to the Internet. Gateways can be employed to connect networks of different types, typically between the proximity networks and the wide area.

The choice of communication protocols and network technology might be crucial to the business case and the life span of the IoT system. The choice of network technology also relates to the wanted scalability capability and data capabilities of the IoT system. Most communication protocols and network technologies often have both strengths and limitations. For crucial IoT applications the data characteristics of the chosen network technology are important.

Especially before investing in large scale implementation of sensors, it might be important to consider if the chosen network connectivity will be appropriate for the lifetime of the sensors.

It can also be beneficial to aggregate or in other ways reduce the amount of data transferred through the network.

6.2.2.3.8 Scalability

Since the number of connected entities in an IoT system often grows very quickly, it is of utmost importance that an IoT system is built to scale and to be able to handle a very large number of IoT devices as well as massive amounts of incoming data.

Furthermore, it is important for the user interface of an IoT system to consider how to display and sort information about millions of IoT devices, their data, and their metadata. The same goes for displaying a large number of rules and similar additional information.

Business managers might also want to take into consideration that deploying millions of IoT devices often will be at a large cost. Thus, the time it takes to deploy each IoT device and the possibility to mass deploy many IoT devices at the same time will have a large impact on the overall cost over time for the IoT investment as such.

When there is a risk of high load in incoming data it can be desirable to provide a means to prioritize incoming critical application sensor data.

New IoT actors sometimes can be at a developing stage where they primarily are working with demonstration and test data. It can be wise to carry out load tests with new IoT systems where the entire system is forced to handle a very large number of sensors simultaneously, be it real sensors or simulated.

6.2.2.3.9 Shareability

Many IoT components are underutilized since a single system often uses only a fraction of the capabilities of a component. If functionality or outputs of components can be shared among multiple systems, resources can be used more efficiently.

Determining shareability possibilities is often a good way to boost business opportunities for IoT components. At the same time business managers and system owners must ensure that a specific IoT component also meets the regulatory requirements. Especially for such other usage that differs from the primary intended functionality of that component.

6.2.2.3.10 Accuracy

Accuracy is a characteristic of various elements in an IoT system: Sensors make measurements on properties of the physical world. Accuracy of these sensors is the closeness of agreement between the measured values and the actual values of those properties. The usage of the data produced by the measurement is often highly dependent on the level of accuracy of the sensors as well as those computational algorithms used to manage the data. Actuators operating on the physical world translate digital commands into actions. The accuracy of such actions is also dependent on the accuracy of the provided data and the actuator itself.

It is often important to carefully decide what accuracy is needed for a specific business purpose. Often higher accuracy comes with a higher cost. IoT systems often consist of many components. Because of this, the impact on costs of choosing a component with higher accuracy than needed can result in unnecessary higher overall costs for the IoT system.

One thing to consider regarding accuracy is to what extent the surrounding environment might influence the accuracy. For example, a sensor measuring distance might be influenced by the air temperature or the temperature of the sensors, losing accuracy in high temperatures.

6.3 Business viewpoint and view

6.3.1 Business viewpoint

Table 3 describes the business viewpoint.

Table 3 – Business viewpoint

Viewpoint name		Business
Overview		Frames the concerns to be addressed by the business views
Known typical stakeholders		<ul style="list-style-type: none"> – Business manager – System owner – Architect
Concerns		<ul style="list-style-type: none"> – How to leverage the various capabilities of an IoT system to provide value for a business? – How to use IoT for innovative new business models? – How do characteristics of an IoT system influence business and system owner?
Viewpoint specification	Model kinds	Business model Service blueprint
	Legends	The business view provides text explaining the business implications of the essential characteristics described in the foundational view.
	View methods	NA
	Correspondence methods	NA
	References	NA

6.3.2 Business view

6.3.2.1 Business relevance of IoT

The Internet of Things is profoundly changing the world, by fundamentally changing the way that business is performed, and the way that value is delivered to customers. IoT can generate large volumes of data to give new insights, support new business models and lay the foundation for the delivery of products as services. More than perhaps any other technology, IoT impacts the overall business operation of companies and organizations. It is vital that the IoT implementations created today will lay a strong foundation for years to come.

This subclause 6.3.2 describes, in a nontechnical manner, some of the business aspects when creating or procuring IoT solutions. It also describes how to harmonize other IoT standards and guidelines with this document to avoid isolation effects and costs in the long run.

Making adequate technical decisions for IoT investments is crucial for business success.

This document can be leveraged by IoT stakeholders worldwide as organizations design and develop or acquire IoT solutions and services. The aim of this document is to provide a solid ground for long term and long-lasting investments for IoT. Suppliers are also likely to improve their ability to take part in bids on public sector and large corporate investments in IoT by following the guidance in this document.

From a business perspective, IoT systems offer several implications that can impact business models, operations, and revenue streams. Some of the key implications are as follows.

- a) **New revenue streams:** IoT systems can enable businesses to create new revenue streams by offering value-added services such as remote monitoring, predictive maintenance, and real-time analytics. By leveraging data from IoT systems, businesses can offer insights and solutions that enhance the customer experience and generate additional revenue.
- b) **Operational efficiencies:** IoT systems can improve operational efficiency by optimizing processes, reducing downtime, and streamlining maintenance. For example, sensors can provide real-time data on the performance of equipment, enabling businesses to schedule maintenance and repairs proactively, reducing costs and downtime.
- c) **Improved decision-making:** IoT systems can provide businesses with real-time data and analytics, enabling better decision-making and more accurate forecasting. This can lead to better resource allocation, inventory management, and product development, among other benefits.
- d) **Enhanced customer experiences:** IoT systems can enable businesses to deliver personalized and context-aware services, improving customer experiences and loyalty. For example, IoT-enabled devices can automatically adjust settings based on user preferences, enhancing the overall user experience.
- e) **Disruption of existing business models:** IoT systems can disrupt existing business models, as they enable businesses to offer new products and services that were not previously possible. This can create new market opportunities and threaten the market positions of incumbents.
- f) **New partnerships and collaborations:** IoT systems can enable businesses to forge new partnerships and collaborations, as they require expertise in multiple areas such as hardware, software, networking, and data analytics. This can lead to new business opportunities and the creation of new ecosystems.

Overall, IoT systems offer significant implications for businesses. However, as the adoption and implementation of IoT systems can be complex and require significant investment in hardware, software, and personnel, businesses will typically evaluate the costs and benefits of IoT systems to determine whether they align with their strategic goals and objectives.

6.3.2.2 Business implications of IoT systems

Business managers and system owners are stakeholders in the IoT RA. They have various interests in the system of interest (represented as concerns). These concerns are addressed in the views of the reference architecture description. The business concerns can be relevant to anyone interested in business management or ownership aspects of IoT. They give aid and guidance to support:

- producing or acquiring IoT solutions and IoT services;
- integrating IoT with existing IT solutions;
- planning for the future of existing IoT products and services;
- reshaping business models to take advantage of IoT capabilities.

6.3.2.3 IoT RA and other IoT initiatives

There are many IoT standards, guidelines, and initiatives in existence today. For their given application field and purpose, most of these standards and guidelines work well on their own and are used by various IoT stakeholders. As a result, there is a diverse and heterogeneous IoT world today. Heterogeneity is an important aspect of IoT. Nevertheless, interoperability and convergence between IoT standards and guidelines are necessary to support the combination and interaction of these heterogeneous resources.

Uncertainty about resource compatibility makes it difficult for the stakeholder decisions about both a foundation for long-term investments and durable protection of current cornerstones.

This document serves as a foundation for creating interoperability and alignment between IoT initiatives. The aim of this document is to bring different views together.

6.4 Usage viewpoint and view

6.4.1 Usage viewpoint

Table 4 describes the usage viewpoint.

Table 4 – Usage viewpoint

Viewpoint name		Usage
Overview		Framing of the concerns to be addressed by the usage view
Known typical stakeholders		<ul style="list-style-type: none"> – System architect – Project manager – Programme manager
Concerns		<ul style="list-style-type: none"> – How do users (both human and digital) interact with the IoT system? – How does the IoT system interact with the physical entity of interest?
Viewpoint specification	Model kinds	Usage model Activity model Operational mode
	Legends	The view provides text describing both the interactions between the users and the IoT system and the interaction between the IoT system and the physical entity of interest.
	View methods	NA
	Correspondence methods	NA
	References	NA

6.4.2 Usage view

6.4.2.1 External interaction model

IoT systems interact with human users, other digital systems (including digital users), and the physical world. Users interact with the IoT system to gain new insights about or control over an entity of the physical world. Understanding what those interactions are is critical to designing IoT systems.

The external interaction model (Figure 4) addresses the interaction of the IoT system with users (both digital and human) and the IoT system's interaction with the physical world (through sensing and actuating):

- physical interaction;
- interfaces.

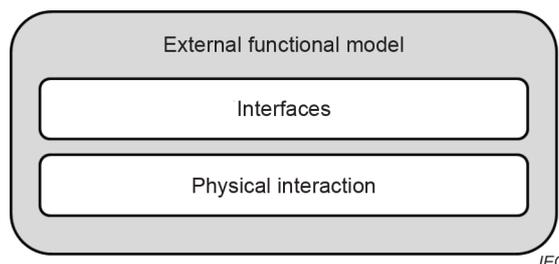


Figure 4 – External facing functions

The user interaction provides user access to the primary functions of the IoT system.

In this context, the primary function refers to the capabilities made available by the IoT system, including:

- a) services of various natures (application, operations, and management, brokering with other external resources including data, information, or services);
- b) data and information from sensors or controllers, including events and notifications;
- c) contextual business data;
- d) derived knowledge and information that is generated by applications and services in the IoT system such as intelligence created by analytic processes.

6.4.2.2 Physical interaction

The physical interaction consists of common functional groups for interacting with entities in the physical world through sensing and actuating. The implementation complexity depends on the infrastructure of the specific IoT system being implemented.

6.4.2.3 Sense functions

Sensing is the function that reads sensor data from sensors. Sensing implementation spans hardware, firmware, device drivers, and software elements. For example, an attention element to tell the sensor what is needed.

6.4.2.4 Actuate functions

Actuation is the function that writes data and control signals to an actuator to affect the actuation. Its implementation can span hardware, firmware, device drivers, and software elements. It is local in the sense that it closes loops (logically) close to sensors and actuators. These can still be physically co-located with other central resources if resilience and performance requirements can be met.

6.4.2.5 Interfaces (user interactions)

For machine users, there are interfaces through which the capabilities of the IoT system can be invoked over the network. These are application programming interfaces (APIs), and portal functions provide controlled ways of accessing IoT system functions, either by digital or human users. Digital users normally interact through APIs, and human users through access portals.

For human users, there are applications which offer user interfaces that enable interaction with capabilities of the IoT system. For human users, the user domain also contains the end user devices which support the applications.

The interfaces include:

- resource interfaces – for services – and their life cycle management.
- resource discovery, publishing, search, and querying.

6.5 Functional viewpoint and view

6.5.1 Functional viewpoint

Table 5 describes the functional viewpoint.

Table 5 – Functional viewpoint

Viewpoint name		Functional
Overview		The functional view provides an understanding of the types of logical functions found in IoT systems.
Known typical stakeholders		– System architect – Project manager
Concerns		– What are the types of abstract functions to be implemented in an IoT system?
Viewpoint specification	Model kinds	Function model Feature model Capability model
	Legends	The functional view provides text describing the three abstract categories of functions found in IoT systems: management, communication, and data.
	View methods	NA
	Correspondence methods	NA
	References	NA

6.5.2 Functional view

6.5.2.1 Internal functional model

Once the system interactions are captured, an understanding of what abstract functions are needed to design a system that can perform those interactions is needed. These abstract functions can then be instantiated using the appropriate construction patterns.

The internal functional model is a technology-agnostic set of functions that are found in an IoT system. Each box in the diagram represents a type of function that is found in an IoT system. Each type of function can be realized by one or more different implementations of system components, which are deployed to form a working system. It does not go to a detailed level, leaving flexibility for implementation covered in the implementation view. The functional view only addresses the types of abstract functions which are essential for every IoT system. It is up to the developer to decide how to build the functional components to implement these abstract function types. The functional model is composed of three basic function types: management, communication, and data (see Figure 5).

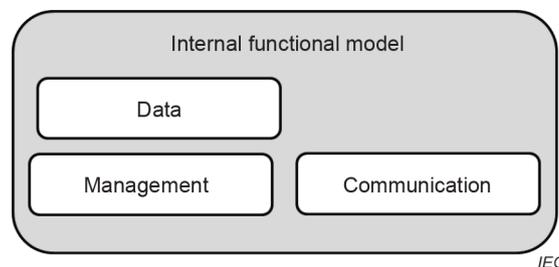


Figure 5 – Internal model of abstract function classes

6.5.2.2 Data function

The data function types can be broken down into three basic function types – control, management, and analysis. Control and analysis are both types of data processing, while data management focuses on how data relate to other data, systems, and the physical world.

6.5.2.3 Control functions

Control functions exist to control local state – in particular to issue commands to actuators based on input from sensors and other sources. It is common for control services to have real-time behaviour because of the need to control dynamic elements in the PED; both to ensure appropriate operation of the system and to ensure safety of operation.

6.5.2.4 Analysis functions

Analysis functions represent the functions implementing application and service logic that realizes specific business functionalities. Analysis covers analytic services, cognitive services, streaming data services, visualization services, business rules services, and application logic.

Analytics services: Gathered data (sensor data streams, other context data and internal system state) are processed to create insights. Analytic services can act on real-time events and historical data.

6.5.2.5 Data management functions

Data management functions include functions for operation on data which are collected by the IoT system. Those operations focus on how data relate to other data, systems, and physical world. Such operational functions include data transformation, filtering, cleansing, ETL (extract, transform, load), rules and notifications. The data management functions also contain data stores of various kinds including a device data store, analytics data store, and historical data store.

6.5.2.6 Management function

The management function types contain functions responsible for the overall management of IoT components, systems, and environments.

Management function includes functions for the operational management of the IoT system. Management function includes provisioning, monitoring, reporting, interaction between components, policy management, service automation, and service level management. Management function also includes service catalogues, device registries, device management. There is also a need for management functions for business aspects of the IoT system, including account management, subscription management, billing accounts.

Application support provides the execution infrastructure that the components deployed in the IoT environment can use to achieve, for example, scalability and configurability. It also provides the tools that are required by a service or application to do accounting and billing.

Business services help create business process flows, and orchestration of resources to create and manage services. The management function should consider cybersecurity in accordance with the guidance of the IEC 62443 series [4] and ISO 27000 [5].

IoT services can contain discovery functions which enable access to appropriate capabilities within the IoT system for external and internal users. Such resources are typically applications, services, and data, but can also include administration capabilities and business capabilities. Such management-related functions include:

- metadata management and usage;
- accessing and managing directories and repositories.

6.5.2.7 Communication function

IoT systems are composed of components that interact over many-to-many networks. These many-to-many networks provide the data transfer capability to move data from one component to (potentially) any other component. It is also the connection between components that enables those components to interact. The communication function can be broken down into three

categories: the data transfer function itself, the network interface functions, and the application interface functions.

The characteristics of this network have a drastic impact on the performance of the IoT system. Communication network types typically used for IoT systems are characterized as follows.

- Proximity networking: Proximity networking enables transmission of data from assets or devices on the edge to entities such as gateways. Gateways and similar entities can then process this data for further transmission, or for enacting controls, such as in edge or fog computing. This networking also enables the control of assets, by actuators or controllers. Proximity networking is often limited to the SCD, but in some occurrences, proximity network and access network are the same network.
- Access networking: This networking function enables the transfer of edge data to application logic or operations logic. It also enables the communication of control signals to interacting (sensing and actuating) entities. It is supportive of management and higher-level communication functions.
- Service networking: Service networks are enabling service-based deployment of IoT applications, for example using microservices and other shared services.
- User networking: This networking function gives both human and digital user entities access to and control of IoT systems. It also enables higher levels of integration between different IoT systems and with non-IoT systems by supporting user-facing entities.

6.5.2.8 Security function

Security functions in the IoT system ensure the confidentiality, availability, integrity, and authenticity of information. The IoT RA integrates security policies for IoT components as a key part of system design.

6.5.2.9 Resilience function

Resilience functions enable the IoT system to recover to the operational condition quickly following an incident. Resilience functions are closely related to autonomic computing capabilities of self-healing, self-configuring, self-organizing, and self-protecting.

6.5.2.10 Reliability function


Reliability functions ensure that the IoT system, or a component in the IoT system, can perform its required functions under stated conditions for a specified time.

6.6 Trustworthiness viewpoint and view

6.6.1 Trustworthiness viewpoint

Table 6 describes the trustworthiness viewpoint, taking into account ISO/IEC TS 30149 [6].

Table 6 – Trustworthiness viewpoint

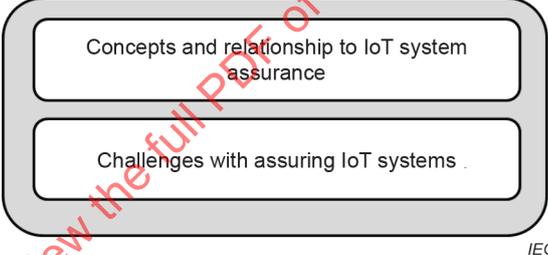Viewpoint name		Trustworthiness
Overview		Framing of the concerns related to trust, confidence, and assurance of an IoT system.
Known typical stakeholders		<ul style="list-style-type: none"> – System architect – Security engineer – Security manager – Privacy manager – Project manager – Business manager
Concerns		<ul style="list-style-type: none"> – How to design an IoT system with a level of confidence that meets trustworthiness goals. – How to assure the implemented system meets design goals.
Viewpoint specification	Model kinds	NA
	Legends	<p>The trustworthiness view provides text describing the concept of trustworthiness and its relationship to IoT system assurance and specific challenges associated with assuring IoT systems as shown in Figure 6.</p> <div style="text-align: center;">  </div> <p>Figure 6 – Legend used in the trustworthiness view</p>
	View methods	NA
	Correspondence methods	NA
	References	NA

6.6.2 Trustworthiness view

6.6.2.1 Concepts and relationship to IoT system assurance

Trustworthiness is an important concept in IoT systems because system failure has real-world consequences. This challenge is made more difficult by the separation of resource between information technology (IT) and operation technology (OT). When an IoT system is being designed and built, stakeholders need to know the system is trustworthy.

Trustworthiness and assurance are two related but distinct concepts. Trustworthiness refers to the quality of being reliable, honest, and dependable, while assurance refers to the measurable level of confidence that something will perform as expected or meet specific requirements.

In the context of system engineering, trustworthiness refers to the extent to which a system can be trusted to operate as expected and meet both functional and non-functional goals. Trustworthiness involves a range of factors, including reliability, security, resilience, safety, environmental impact, ethics, and others.

Assurance, on the other hand, refers to the measurable level of confidence that a system will perform as intended and meet specific requirements based on the trustworthiness goals. Assurance is achieved through various means, such as testing, validation, and certification, and is done both internally and through independent third-party organizations that evaluate and certify a system.

6.6.2.2 Challenges with assuring IoT systems

As IoT systems are complex systems, existing system engineering practices for system assurance and risk mitigation can be leveraged. An IoT system will exhibit the essential characteristics that are described in 6.2.2, the foundational view of this document. The implications of these characteristics on system trustworthiness for that system should be considered by the system architect. The many-to-many networking characteristic indicates that any component can connect to any other component, and any functionality can be put behind a network interface and used as an IoT component (including another IoT system). Therefore, the potential structure of IoT systems is limitless. This variation in architecture is addressed in this document within the construction view and the use of patterns.

The components in an IoT system are connected digitally instead of using nuts and bolts, and such systems can usually be built faster than a physical system. The system structure can even be changed during run time. This should be considered when designing IoT systems.

The IT characteristics of IoT systems, such as the nondeterministic nature and shared aspect of these systems, create challenges in assuring IoT systems. Unlike a physical device that is disassembled to access individual components, an IoT system's individual components are easy to access, and this ease of access presents unique security challenges.

The physical nature of IoT systems and the interaction of these systems with the physical world provide new challenges for assurance as compared to purely digital systems. Measurements and observations have uncertainties that do not exist in information systems. The actions performed by an IoT system, resulting in a change to the physical world, have tolerances that should be considered by the architect. IoT systems with actuators introduce the possibility of physically damaging equipment and facilities, and harming people. The nature of errors in digital systems creates new challenges for system architects, as the consequences of one single flipped bit can cause catastrophic failure in the physical world.

These challenges are exacerbated by the structure of enterprises and the typical organizational division between operational technology experts and information technology experts. This division creates specific challenges that are related to safety, security, privacy, reliability, and resilience.

6.6.2.3 Characteristics

6.6.2.3.1 Availability

Availability covers both the availability to functions and services within an IoT system or IoT environment as well as the continued access to vital data. Availability of a device is related both to its inherent properties of operating correctly over time and to the network connectivity of the device. Availability of data is the ability of the system to get the requested data from a system or component. Availability of services is related to the ability of the system to provide the requested service to users.

When an organization starts to use IoT as a base for decisions or automated actions, it becomes dependent on the technology. The organization will rely on the availability of data, devices and services delivered by the IoT system. It is important to understand what IoT data or services must be available and the consequences if they are not available.

6.6.2.3.2 Confidentiality

Confidentiality is the property that information is not made available or disclosed to unauthorized individuals, entities, or processes. In an IoT system, protection policies and mechanisms are responsible for prohibiting people or systems from accessing data or control messages when they are not authorized to do so.

IoT data often have one meaning and information classification for a given purpose. They can have another meaning in another context or when combined with other data, thus resulting in a higher wanted security classification. Also, a specific dataset might be harmless when accessed alone but harmful when combined with other data. Therefore, it is important to analyse what possible threats can be caused by various information breaches in the IoT environment, even for IoT data that are otherwise considered as simple.

6.6.2.3.3 Integrity

Integrity is accuracy and completeness applied to information within a system. Integrity is vital for IoT systems to ensure that the data used for decision-making processes in the system and executable software have not been altered by faulty or unauthorized devices, by malicious actors, or by environmental causes.

Not only can corrupt data cause malfunctions. Unauthorized manipulation of data can also compromise the trustworthiness and business brand of the organization; especially if such information is displayed in public or shared with other organizations. When IoT is used for new business models and new working methods, the business owner should consider the integrity risks. How to avoid them or detect them and what consequences any breaches might have on business and work progress.

6.6.2.3.4 Reliability

Reliability is a property of consistent, intended behaviour and results. An appropriate level of reliability is essential in diverse IoT system deployments and applications. Reliability can be highly critical in some applications, as for specific health-related applications, industrial manufacturing operations, and time-critical applications. The complexity of many IoT systems, often with many separate IoT components from various vendors, places even higher demands on addressing the overall IoT system reliability.

Business owners should bear in mind that all components in the IoT system make up the overall reliability. The weakest component might define the level of reliability of the whole system.

6.6.2.3.5 Resilience

Resilience is the ability of an IoT system or its components to adapt and continue to perform their required functions flexibly in the presence of faults and failures and other ad hoc changes without loss of operation and performance level. It is important for IoT systems to be designed for resilience, incorporating self-monitoring and self-healing techniques to improve the system resilience.

It is important to consider how the overall resilience of a product or larger IT, OT and IoT systems might be influenced by the level of resilience for specific IoT components. One important aspect to consider is if it is acceptable to lose collected data during a recovery phase. Otherwise, actions should be taken to preserve such data during recovery.

Another aspect to consider is what down time is acceptable and what actions to take to ensure an appropriate recovery time frame.

6.6.2.3.6 Safety

Safety is the state in which the risk of harm of the health of people, damage to property or the environment is limited to an acceptable level. Risk level is the probability of the occurrence of harm combined with the severity of that harm. Safety standards often must be considered in IoT systems including medical or health care, transport such as aviation and automotive applications, consumer products, buildings, environment monitoring, fire safety, national border safety, and radiation damage monitoring.

Even in contexts where compliance with safety standards is optional or voluntary rather than mandatory, proper consideration of safety factors is important. This can have significant impact on aspects such as continuity of operations, reduction of loss, prevention of injury or death, insurance premiums, torts and liability, and other issues.

6.6.2.3.7 Compliance

Compliance is conforming to rules, such as those defined by a law, a regulation, a standard or a policy. IoT systems, services, components, and applications can be deployed in circumstances which require adherence to a variety of laws, policies, or regulations.

Regulations of relevance to IoT systems can take many forms. These include regulations to assure interoperability, to mandate or constrain functionality or capability, to assess the ability of the IoT device or system to function in a certain usage context without causing damage, and to impose at least minimal balance between contribution to the collective good and self-interest on the part of system owners or operators. It is important to pay extra attention to compliance issues when using an IoT component for several purposes. The same is true when an IoT component is used for purposes other than the component has initially been produced and designed for. As provider of IoT technology it is often important to clearly state the compliance for all parts provided. Using IoT components lacking compliance assurance for an IoT system might cause legal breaches and can result in heavy penalties. It can also cause the IoT system to fail and put business, environment, people, and more at risk. Furthermore, such breaches might cause legal business controversies and insurance uncertainties.

NOTE Some more examples of IoT characteristics with relevance for trustworthiness and assurance can be found in Clause C.2.

6.7 Construction viewpoint and views

6.7.1 Construction viewpoint

Table 7 describes the construction viewpoint.

Table 7 – Construction viewpoint

Viewpoint name		Construction
Overview		What are the specific IoT system structures for addressing different requirements?
Known typical stakeholders		<ul style="list-style-type: none"> – Project manager – Programme manager – Standards expert – System owner – Business manager
Concerns		<ul style="list-style-type: none"> – What types of design are useful when creating an IoT system to meet a given set of requirements? – What types of design are useful when creating an IoT component to meet a given set of requirements?
Viewpoint specification	Model kinds	NA
	Legends	The construction view uses the construction pattern legend described in Table 8.
	View methods	Construction views are specified using the construction pattern.
	Correspondence methods	NA
	References	NA

Table 8 – Construction pattern legend

Information	Name	<p>Name of pattern</p> <p>The pattern's name conveys the essence of the pattern succinctly. A good name is vital because it will become part of the working vocabulary.</p>
	Related patterns	<p>Similar patterns, depending patterns.</p> <p>There can be similar patterns. The pattern can extend other patterns.</p>
Problem		<p>Description of problem which the pattern attempts to solve.</p> <p>A short statement that answers the question: What particular issue or problem does it address?</p>
Known Context	Specific context	<p>The particular context in which the pattern solves a problem.</p> <p>Where does the pattern apply? For example, the use of an enterprise-wide data model frequently makes sense in a problem context where distributed data management is a concern while the architecture for an air-to-air missile will not be an appropriate context for this pattern.</p>
	Related context	Other related context
Solution	Architecture models	<p>Architecture models for the pattern</p> <p>Text and diagrams necessary to understand the essential concepts and relationships for the pattern</p>
	Examples	<p>Scenarios/use cases where the pattern has been applied</p> <p>Useful patterns are motivated by known, previous usages</p> <p>Examples (and visual analogies) help explain the pattern</p>
	Rationale for the pattern	The rationale can be theoretical (e.g. the mathematical theory of rate monotonic scheduling) or practical (e.g. prior case studies in which the pattern was successfully employed)
	Guidance	<p>Provide useful information that assists an architect in using the pattern.</p> <p>Guidance can include:</p> <ul style="list-style-type: none"> – Description of characteristics – References to other documents (e.g. standards, regulations, white papers, ontologies) – Discussion on pain points, critical decisions, underlying requirements, trade-offs

6.7.2 Construction view

The construction view is used in order to construct an IoT architecture which is further constraining the IoT reference architecture through to the integration of specific construction patterns.

EXAMPLE 1 The RAMI 4.0 architecture [7] considered as a pattern is integrated to an IoT reference architecture to support the smart manufacturing domain. RAMI 4.0 is described in Annex A.

EXAMPLE 2 THE SGAM architecture pattern [8] considered as a pattern is integrated to an IoT reference architecture to support the smart grid domain.

EXAMPLE 3 An implementation architecture for industrial IoT can use the patterns library in [9].

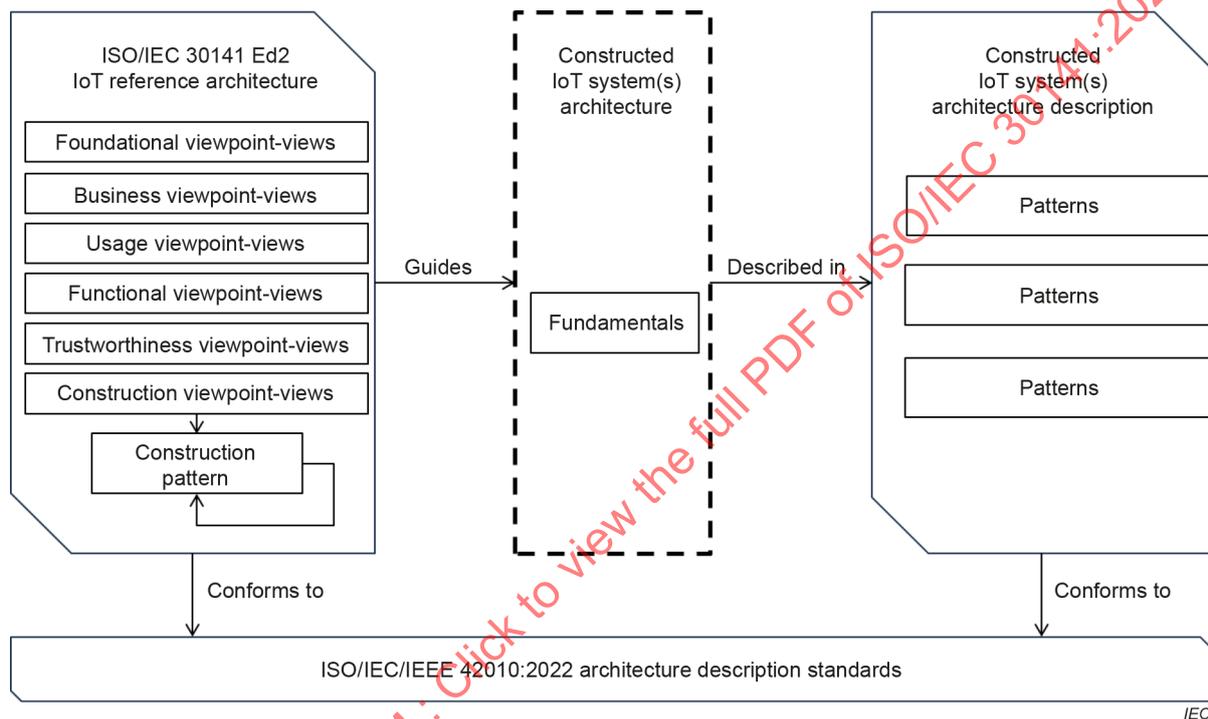


Figure 7 – IoT architecture construction view

Figure 7 shows the construction view:

- The left part provides a representation of viewpoints and views of this document, with the construction viewpoints and view which is based on the use of construction patterns.
- The right part provides a representation of the resulting viewpoints and views of the constructed IoT architecture: the business, usage, functional and trustworthiness viewpoints and views are extended and specialized with patterns.

The construction of an IoT architecture follows the following view method:

- The starting point are the views of this document.
- The views are extended or specialized through additional architecture models which further constrain the views of this document.
- The specification of the additional architecture models is based on patterns.
- Several reference architectures can also be combined by considering a reference architecture as a pattern [9].

EXAMPLE 4 The IoT reference architecture is extended to support digital twin capabilities by considering a digital twin reference architecture as a pattern.

6.7.3 IoT component pattern

The construction view method can involve the use of the IoT component pattern, described in Table 9.

Table 9 – IoT component pattern

Information	Name	IoT component
	Related patterns	-
Problem		Understanding the set of capabilities of a given IoT component is essential to being able to use the component in an IoT system with confidence. A simple definition of capability is "the quality of being able to perform a given function".
Known Context	Specific context	Many IoT components do not make all their content visible to others. Organizations acquiring, using, and administering them have little or no access to information about their internal workings, including the capabilities that they offer. For other IoT components, with detailed information about the internal workings, there are often no standardized mechanisms to expose, access, and configure capabilities.
	Related context	-
Solution	Architecture models	<p>The diagram that is shown in Figure 8 provides a model of the capabilities an IoT component can provide. In other words, each IoT component can be characterized by the set of capabilities it provides. A given IoT component can have more than one of any given capability type (sensors, network interfaces, actuators). This model can also be used to describe the set of components and relationships of a given IoT system or the capabilities of an IoT system.</p> <p style="text-align: right;">IEC</p>
	Examples	-
	Rationale for the pattern	Provides a refinement of IoT component categories of capabilities (transducer, data, interface, supporting, latent)

	Guidance	<p>The IoT capabilities can be grouped into several categories:</p> <ul style="list-style-type: none"> – Transducer capabilities interact with the physical world. These capabilities, prevalent in OT, serve as the boundary (edge) between the digital and physical environments. Transducer capabilities provide the ability for computing systems to interact directly with physical entities of interest. – Data capabilities are directly involved in providing functionality to the system. These capabilities—data storing, transferring, and processing—are commonly associated with conventional IT systems, and are critical to IoT systems. – Interface capabilities provide the component with the ability to interact with other IoT components (including people using a connected device to interact with the other system components). – Supporting capabilities are indirectly involved in providing functionality to the system, such as monitoring, management, security, or orchestration. – Latent capabilities are transducer, data, interface, or supporting capabilities that are not currently enabled and accessible outside the IoT component. These capabilities can potentially be enabled either by a trusted actor or a bad actor with malicious intent.
--	----------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Table 10 provides additional information about each capability category.

Table 10 – Additional information on IoT component capabilities

Transducer capabilities	<p>Actuating:</p> <p>An actuating capability, provided by an actuator, offers the ability to change the physical world. Such change is based on information that is given as input to the component.</p> <p>Errors can be introduced in the digital logic, the digital-to-analogue converter, the analogue electrical circuit, and the actuator transducer. There is a time delay between the input data arriving at the component and the change being made to the environment.</p> <p>Examples of actuating capabilities include heating coils (heating capability), electric shock delivery (cardiac pacing), electronic door locks (lock/unlock capability). Other examples are unmanned aerial vehicle operation (remote control), servo motors (motion/movement capability), and robotic arms (complex motion/movement capability).</p> <p>An important type of actuator is a black box control system that accepts a wanted outcome as an input and internally uses sensors, actuators, and processors to make the physical changes. Such a black box control system is considered an actuating capability in this model since the sensors and processors are not directly usable from outside the component.</p> <p>Sensing:</p> <p>A sensing capability (provided by a sensor) offers the ability to provide observations of an aspect of the physical world as measurement data. Information from sensor observations can be provided to other IoT components through the network interface of the component for processing and storage.</p> <p>Sensing is "read only". Any change to the physical state is a side effect. Measurement errors can be introduced by the physical environment between the physical system and the sensor transducer and in the sensor transducer itself. Measurement errors can also be introduced in the analogue electrical circuit, in the analogue-to-digital (A/D) converter, and in the digital logic of the sensor. There is also a time delay between the sensing and the data becoming available at the component output.</p> <p>Examples include temperature sensing (temperature measurement capability), computerized tomography (CT) scans (radiographic imaging), spatial sensing (accelerometers, gyroscopes), optical sensing, and audio sensing.</p>
-------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Data capabilities</p>	<p>Data storing:</p> <p>A data storing capability provides ability to store and retrieve data and information over time. The intent is to store data for use at some later time. Data persists for a finite period. Data can be published by the component or provided in response to an external request. There is a time delay between the input and output, that is between a data request and the data response.</p> <p>Examples of data storing capabilities include databases and data brokers. Data storing capabilities can also be any other type of component that stores input data for later use.</p> <p>Data transferring:</p> <p>A data transferring capability provides the ability to transmit data from one physical or logical location to another. The data transferring capability provides ability to provide information about the network without having to understand the specific network topology.</p> <p>The interactions of an IoT system with the physical world require the data transferring network to meet latency, reliability, and security requirements. Therefore, it is useful to be able to describe the network characteristics in this manner, so the capability is explicitly called out by the IoT general model.</p> <p>Examples of specific data transferring capabilities include data networks that are based on Ethernet, Wi-Fi, LTE, Foundation Fieldbus, Modbus and BACNet.</p> <p>Data processing:</p> <p>A data processing capability provides the ability to transform data based on an algorithm. The intent of processing is to transform input data and provide output data. There is a time delay between the input and output that should be accounted for. The transformation can be simple, with a single input variable, and a single output, or it can be complex with multiple inputs and outputs.</p> <p>Control algorithms are an important type of processing. Control algorithms take the output of sensors and actuators or pre-processors and provide an output that can be fed into an actuator or post-processor. These control algorithms are often used within negative feedback loops, but not always. A proportional-integral-derivative (PID) control algorithm is an example of such a control algorithm.</p> <p>Some examples of processing include data aggregation, binary (Yes/No) analysis, big data analytics, machine learning, and predictive analysis.</p>
--------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

STANDARDSISO.COM : Click to view the PDF of ISO/IEC 30141:2024

Interface capabilities	<p>Application interface:</p> <p>An application interface capability provides the ability for other IoT components (components, systems, etc.) to communicate with a given IoT component through an IoT component application. A widely used type of application interface is an application programming interface (API).</p> <p>Human user interface:</p> <p>A human user interface (UI) capability provides the ability for the component to communicate directly with people. Not all IoT components have a human UI capability (that is, a dedicated processing component). Any effect on the physical environment is a side effect of the interface (the purpose being information exchange). Such an effect is not considered to be sensing or actuating. Examples of human UI capabilities include keyboards, mice, microphones, cameras, scanners, monitors, touchscreens, touchpads, speakers, and haptic devices.</p> <p>Network interface:</p> <p>A network interface capability provides ability to interface with a digital communication network for communicating data from one component to another. Every IoT component has at least one network interface capability and can have more than one. While the network interface capability allows for a component to be connected to a communication network, it does not provide the communication (data transferring) capability. Some examples of network interface capabilities include Ethernet adapters, LTE radios, ZigBee radios, Fieldbus and Wi-Fi dongles.</p> <p>Supporting capabilities:</p> <p>Supporting capabilities provide additional functionality that supports the IoT system. Examples of supporting capabilities include time synchronization, data encryption, authentication, orchestration, and remote component management. Some IoT components can only provide a supporting capability such as orchestration and not offer any transducer or data capabilities.</p> <p>Latent capabilities:</p> <p>The latent capabilities are capabilities that the IoT component can potentially provide but are not currently enabled for access externally from the IoT component. For example, a component can have an empty USB port with nothing plugged into it. In that state, the USB port is considered a latent capability. It has the potential to be used at any time. If someone attaches something to it, that can enable any of the other capabilities. If someone plugs a Wi-Fi adapter into the USB port, the IoT component would then have an additional network interface capability. USB ports and other communication interfaces, such as serial, High-Definition Multimedia Interface (HDMI), Digital Visual Interface (DVI), DisplayPort, and External Serial Advanced Technology Attachment (eSATA), often change their state. They can then switch from being a latent capability to an active capability and back.</p>
<p>NOTE Any tradenames and trademarks in this table are examples of suitable products available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of these products.</p>	

To provide value or benefit to an IoT system, an IoT component can perform some type of transformation. Key capabilities and their respective transformations are listed in Table 11.

Table 11 – Key capability transformations

Capability type	Input type	Transform input	Transform output	Output type
Sensing	Physical energy	Property of physical system state	Representation of property of physical state	Digital data
Actuating	Digital data	Representation of wanted change in aspect of physical state	Changed property of physical system state	Physical energy
Data processing	Digital data	Set of information	New set of information	Digital data
Data storing	Digital data	Set of information	Set or subset of information available over time	Digital data
Data transferring	Digital data	Set of information	Same set of information available over distance	Digital data

The IoT system pattern is described in Table 12.

Table 12 – IoT system pattern

Information	Name	IoT system pattern
	Related patterns	IoT component pattern
Problem		
Known context	Specific context	The IoT system pattern applies to all IoT systems
	Related context	-
Solution	Architecture models	<p>Relationship between an IoT system and its components and environment.</p> <p style="text-align: right;">IEC</p> <p>IoT systems are composed of:</p> <ul style="list-style-type: none"> - one or more networking components - two or more additional components - one or more components must interact with the physical world through sensing or actuating. <p>IoT systems can provide the following service capabilities.</p> <p>Primary:</p> <ul style="list-style-type: none"> • physical observations and derived information based on those observations • control of physical entities <p>Secondary:</p> <ul style="list-style-type: none"> • data processing • data transferring • data storage <p>Interfaces</p> <ul style="list-style-type: none"> • network • human UI • application <p>Supplemental:</p> <ul style="list-style-type: none"> • security • orchestration • management

	<p>IoT system class diagram</p> <pre> classDiagram class Transducer class IoT_device class Digital_network class IoT_component class IoT_system Transducer -- IoT_device IoT_device -- IoT_system IoT_device -- Digital_network Digital_network -- IoT_system IoT_device -- IoT_component Digital_network -- IoT_component IoT_component -- IoT_system </pre> <p style="text-align: right;">IEC</p>
<p>Examples</p>	<p>A IoT-powered cycling app combines real-time data from sensors on the user's cell phone, including GPS, accelerometers, and heart rate monitors, with Internet connectivity to offer cyclists comprehensive ride tracking and performance analysis. The user's cell phone serves as both a display UI and a data collection device, while cloud servers store and process the data. The app provides cyclists with real-time feedback on metrics like speed and distance, tracks and maps their rides, and offers historical data for performance comparison. It also integrates with external data sources and enables social sharing, enhancing the overall cycling experience by improving performance and safety.</p> <p>A smart grid is a modernized and interconnected electrical grid system that harnesses IoT technologies to optimize electricity generation, distribution, and consumption. It deploys sensors and measurement devices across the grid infrastructure, connecting them through robust communication networks. These sensors continuously collect data on parameters like voltage, current, and power quality, enabling real-time monitoring and control from central control centres. Advanced data analytics processes this information, empowering grid operators to make informed decisions, predict equipment failures, and enhance energy distribution efficiency. IoT-enabled demand response programmes, distributed energy resources integration, automation for fault detection and grid resilience, and cybersecurity measures all contribute to the smart grid's efficiency, reliability, and sustainability.</p>
<p>Rationale for the pattern</p>	<p>This is the primitive pattern that all other IoT system patterns are based on.</p>
<p>Guidance</p>	<p>Guidance for IoT systems applies. Guidance for IoT devices applies. * Guidance for IoT networks applies.</p>

STANDARDSISO.COM: Click to Buy ISO/IEC 30141:2024

Annex A (normative)

Additional IoT construction patterns

A.1 General

This Annex A describes the following patterns:


- the Reference Architecture Model Industrie 4.0 (RAMI 4.0) pattern;
- the IoT user pattern;
- the dynamic IoT system pattern;
- the IoT enterprise system pattern;
- the IoT enterprise networking pattern, which uses the IoT enterprise system pattern;
- the IoT enterprise usage pattern.

A.2 Reference Architecture Model Industrie 4.0 (RAMI 4.0) pattern

The Reference Architecture Model Industrie 4.0 (RAMI 4.0) pattern is described in Table A.1.

Table A.1 – RAMI 4.0 pattern

Information	Name	RAMI 4.0 pattern
	Related patterns	-
Problem		<p>Reference Architecture Model Industrie 4.0 in accordance with IEC PAS 63088 [7].</p> <p>This model describes all needed information about any object with all aspects for mirroring that object from the physical world into the information world in a cubical way.</p> <p>The pattern allows mirroring an object from the physical world into the information world. Mirroring is done by a minimum set of characterizing aspects with sets of properties (data elements) in accordance with IEC 61360 [10].</p>
Known context	Specific context	<p>* Context:</p> <p>The pattern has been developed in the context of Industrie 4.0 / smart manufacturing but can also be an example for smart cities and other smart worlds.</p> <p>Typical scenarios:</p> <p>The basic scenario is the mirroring of an object from the physical world into the information world. Examples for the objects are ideas, patents, software, plans, services, processes and so forth in the IoTS (Internet of Things and Services).</p> <p>Typical problems addressed by the pattern:</p> <p>The pattern is the core component in the future smart worlds.</p>
	Related context	-
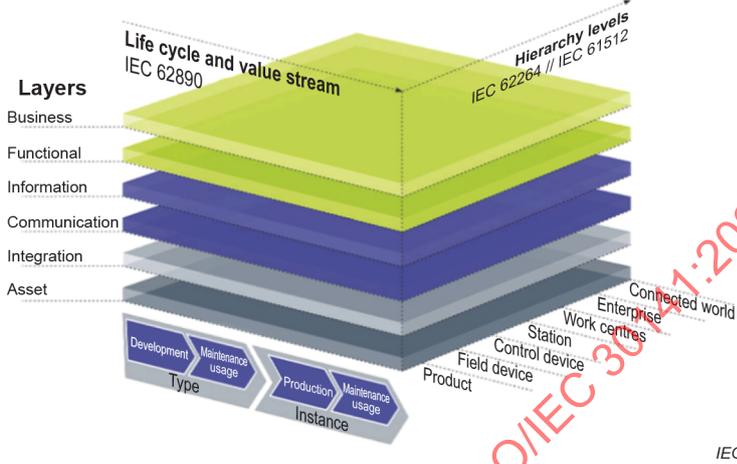
<p>Solution</p>	<p>Architecture models</p>	<p>Following is the Reference Architecture Model for Industrie 4.0 (RAMI4.0). The full RAMI 4.0 specification is included in IEC PAS 63088 [7].</p> <p>It shows all relevant information that is needed to represent an object in the information world.</p>  <p style="text-align: center;">Figure A.1 – RAMI 4.0</p> <p>Figure A.1 shows the RAMI 4.0 layers. In the smart world all relevant information of the information world is available in a computer readable format. The information includes a standardized name in a standardized binary format referring to the asset and its standardized properties. The information also includes standardized technical functions in accordance with IEC 61360 [10] and ISO 13584-42:2010 [11].</p> <p>Generic information of assets is available in the IEC Common Data Dictionary (IEC CDD).</p> <p>The shown layer architecture is structured into six aspects necessary to describe the properties of an asset in the information world. An example is shown here to describe a temperature sensor in accordance with RAMI4.0:</p> <ul style="list-style-type: none"> - The asset layer represents the physical environment of an asset, for example a temperature transmitter measuring a physical temperature (object in the physical world). <p>NOTE Simulation is a representation of the physical world in the integration layer.</p> <ul style="list-style-type: none"> - The physical information "temperature" is to be converted into a (binary) number in a specific format. Thus, the integration layer is the conversion layer from the physical world into the information world. - The (binary) value can be transferred to other assets too. For this purpose, the task is done by the communication layer. - Because an object always has a purpose, it has a technical function which is located in the functional layer accessing. It also had managing information that is reflected in the information layer. - Finally, the business layer reflects the fact that every object has financial, legal and delivery aspects like cost, regulation, contracts, and delivery time. They are expressed in the information world through standardized variables with a specific format. - Not all layers are filled in with information. One or more layers can also be empty and skipped.
<p>Examples</p>	<p>-</p>	
<p>Rationale for the pattern</p>		<p>Extend the IoT reference architecture to support smart manufacturing</p>
<p>Guidance</p>		<p>Pattern guidance:</p> <p>The pattern is used to characterize any object by function, time, and allocation to someone or something. The purpose is to mirror that information into the information world by coding it in accordance with IEC 61360 [10] and ISO 13584-42:2010 [11]. Standardized properties can be found in IEC 61360 [10] and with a wider scope in ECLASS [12].</p>


A.3 Dynamic IoT system pattern

The dynamic IoT system pattern is described in Table A.2.

Table A.2 – Dynamic IoT system pattern

Information	Name	Dynamic IoT system pattern
	Related patterns	-
Problem		Dynamic service composition is based on the capabilities that can be provided by an IoT device. Dynamic service composition can dynamically combine the capabilities of multiple components into one IoT system. Dynamic service composition is created by cooperation between IoT devices using artificial intelligence, context-awareness, and service profile.
Known context	Specific context	
	Related context	

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 30141:2024

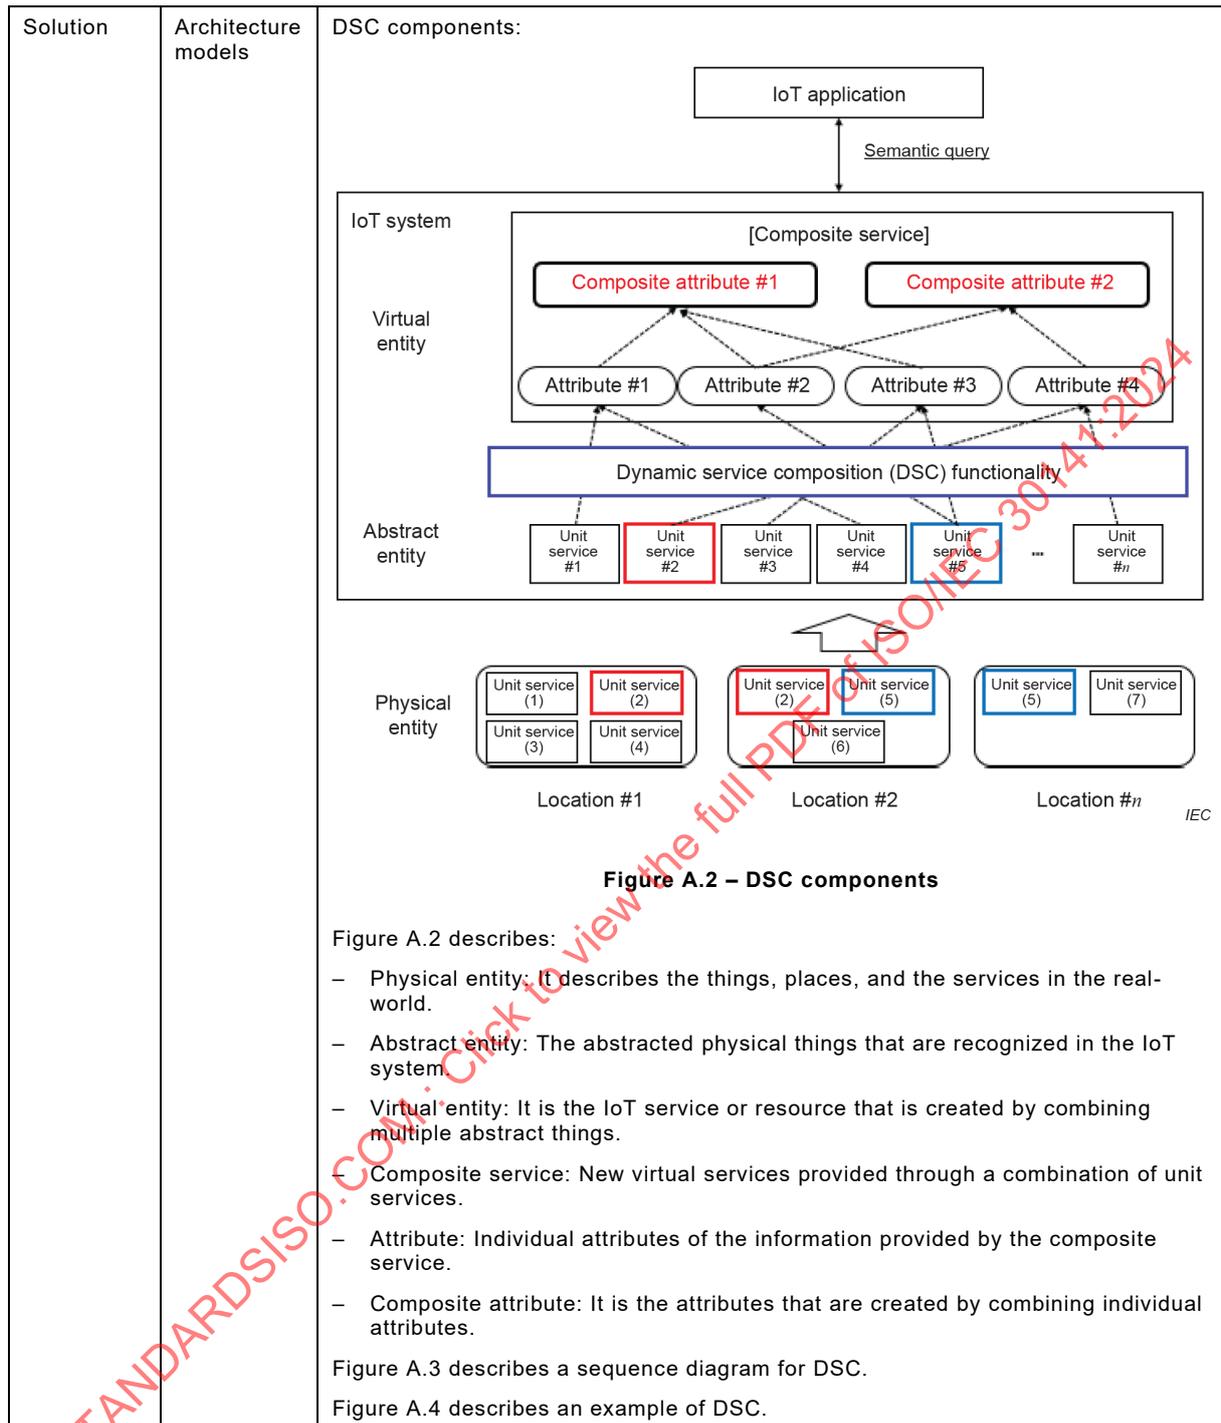


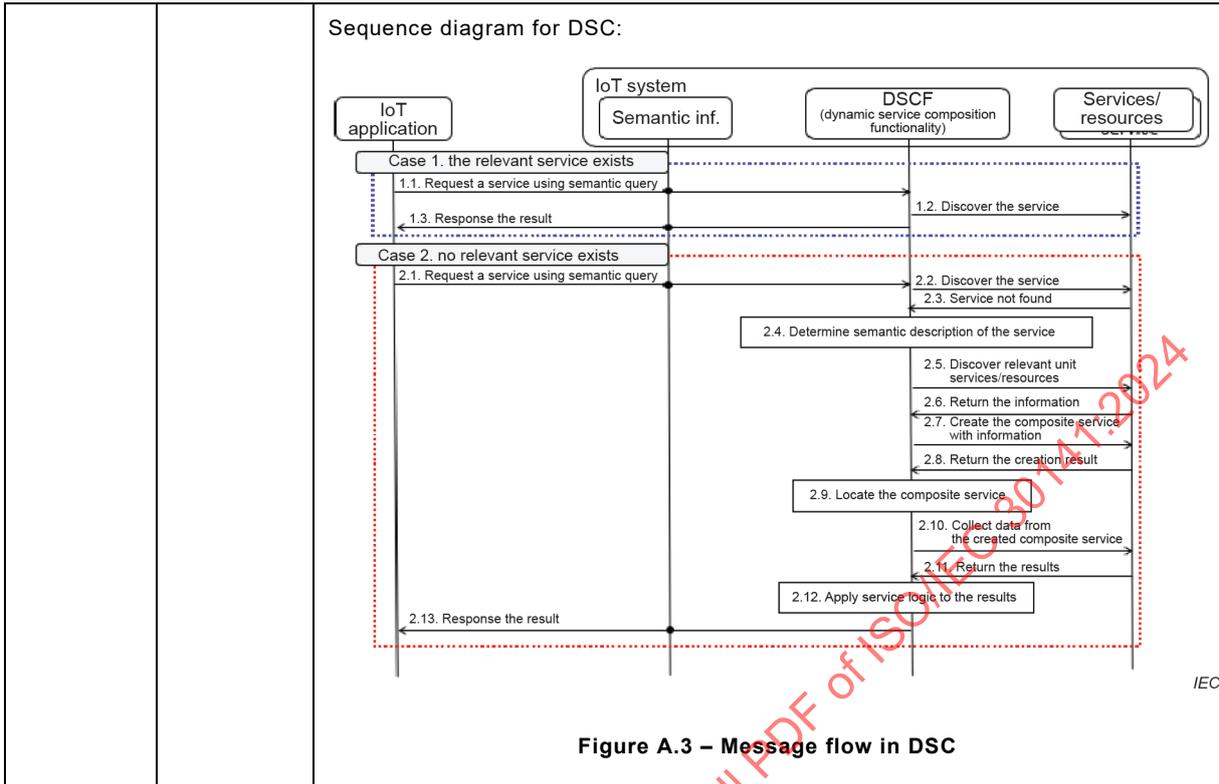


Figure A.3 – Message flow in DSC

Examples

Example of DSC:

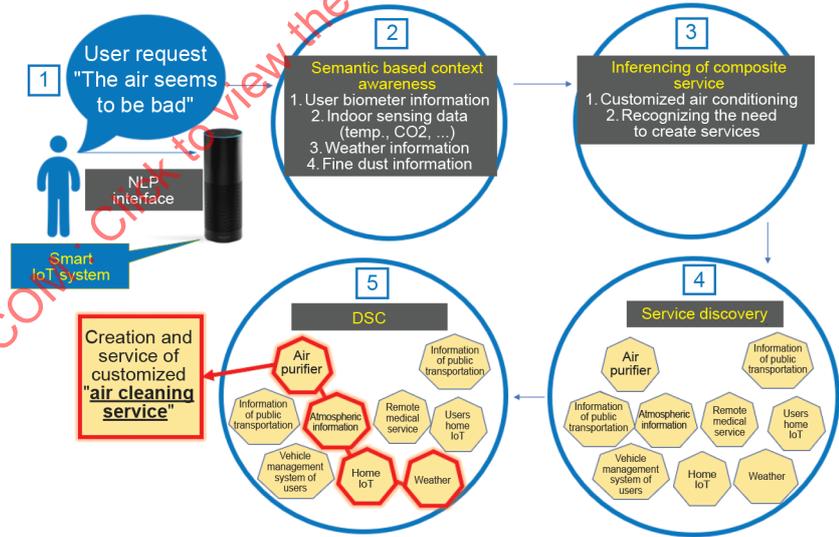

NLP natural language processing

Figure A.4 – Home smart air cleaning service

Rationale for the pattern

Benefits:
 DSC is convergence unit service. DSC dynamically connects different services through mutual cooperation between neighbouring devices that are based on unit services that can be provided by IoT devices.
 DSC is similar to CPS. However, CPS tends to focus on traditional static system design.

Guidance

A.4 IoT enterprise system pattern

The IoT enterprise system pattern is described in Table A.3.

Table A.3 – IoT enterprise system pattern

Information	Name	IoT enterprise system pattern
	Related patterns	The IoT enterprise system pattern is using the IoT enterprise taxonomy pattern
Problem		
Known Context	Specific context	
	Related context	
Solution	Architecture models	<p>The system deployment model describes the generic components including IoT devices, subsystems, and networks to form an IoT system. While the functional view describes an IoT system through its functional components, the system deployment model kind describes it through its implemented components. The IoT component capability model can be used to describe the system deployment. The system deployment view describes the following aspects:</p> <ul style="list-style-type: none"> – key components (subsystems, devices, networks) of an IoT system along with a technical description of the components and their capabilities; – the relationship between components, including the structure of an IoT system, the distribution of components, and the topology of the interconnectivity of the components. <p style="text-align: right;">IEC</p>
		<p style="text-align: center;">Figure A.5 – Example system deployment model</p> <p>In Figure A.5, enterprise system deployment is shown together with all the entities that are involved in each domain and the connections between them. The entities in each domain are general and optional, depending on specific applications. There are four different kinds of networks to connect the physical components in the six domains of an IoT system: proximity network, access network, services network, and user network.</p> <p>Physical systems and sub-systems in the physical entity domain (PED):</p> <p>The PED mainly consists of sensed physical objects and controlled physical objects, which are related to IoT applications and are of interest to users. A sensed physical object is a physical entity from which information is acquired by sensors. A controlled physical object is a physical entity which is subject to actions of actuators.</p> <p>Systems/sub-systems in the sensing and controlling domain (SCD):</p> <p>In the SCD, the entities consist primarily of sensors, actuators, and IoT gateways. Sensors sense properties of physical entities while actuators change properties of physical entities.</p> <p>Sensors acquire information about a property of a physical entity (physical, chemical, biological properties). Actuators change properties of entities. Both sensors and actuators can interact with physical entities independently or collaboratively.</p>

		<p>IoT gateways are devices which connect SCD with other domains. IoT gateways provide functions such as protocol conversion, address mapping, data processing, information fusion, certification, and equipment management. IoT gateways can be either independent equipment or integrated with other sensing and controlling devices. The IoT gateway can also perform security functions for constrained IoT devices using the gateway for connectivity to networks.</p> <p>The SCD might also contain local control systems which are used to run control services. That is, components for local management of IoT gateway capabilities in scenarios where the IoT gateway is expected to work with or without upstream connectivity.</p> <p>Systems/sub-systems in the application and service domain (ASD):</p> <p>The purpose of the ASD subsystem is to host the core functions. Core functions are services and applications that deliver the IoT system functionality to the users (human or digital).</p> <p>The ASD subsystem provides basic services. Basic services include computing services such as data access, data processing, data fusion, data storage, identity resolution. Basic services also cover geographic information service, user management, and inventory management.</p> <p>The ASD subsystem also hosts business services and applications that are built on the generic services. The ability to host applications is one of the services provided by the IoT systems.</p> <p>Systems/sub-systems in the operation and management domain (OMD):</p> <p>The OMD subsystem hosts components responsible for management of IoT devices and control of the operation of the IoT system. The purpose is to guarantee that the equipment and systems operate safely and reliably. Also, it monitors the system to ensure that relevant laws and regulations are not violated.</p> <p>The OMD contains the operational support system (OSS) and the business support system (BSS).</p> <p>The OSS is responsible for handling the overall operation of the IoT system. The OSS includes capabilities for monitoring and managing all entities of the IoT system over their complete life cycle. The OSS includes compliance systems which enable checking of the IoT system for compliance with laws, regulations, and enterprise policies.</p> <p>A business support system (BSS) is responsible for realization of the business aspects of the IoT system. The business functions include customer relationship management (CRM), subscription management, billing, and payment processing.</p> <p>Systems/sub-systems in the user domain (UD):</p> <p>The user domain contains both human users and digital users. Digital users are devices of some type, and they interact directly with other entities in the IoT system by network interfaces or application programming interfaces. Human users interact using a user device which contains some form of HMI.</p> <p>HMI subsystem contains the devices and supporting software that allow human users to interact with the IoT system. Depending on user role, different aspects of the system are presented for observation and control.</p> <p>Systems/sub-systems in the resource access and interchange domain (RAID):</p> <p>The RAID contains access management component and interchange subsystem.</p> <p>Access management component authenticates and authorizes external users of the IoT system wanting to access the capabilities of the IoT system. Reverse access management is also necessary, when the IoT system leverages information and capabilities that are provided by a partner IoT system.</p> <p>Interchange subsystem provides exposure of capabilities within the IoT system. Such capabilities include applications, data, and services in the ASD as well as administration and business capabilities in the OMD. The latter provide the basis for automation of setting up the trust relationships that provide the authorization data.</p>
	Examples	
	Rationale for the pattern	
	Guidance	

A.5 IoT enterprise networking pattern

The IoT enterprise networking system pattern is described in Table A.4.

Table A.4 – IoT enterprise networking system

Information	Name	IoT enterprise networking pattern
	Related patterns	The IoT enterprise networking pattern is using the IoT enterprise system pattern
Problem		
Known context	Specific context	
	Related context	
Solution	Architecture models	<p>Network systems overview:</p> <p>This section describes the principal communications networks which are involved in enterprise IoT systems and the entities with which they connect. The four principal communications networks are shown in Figure A.6.</p> <p>The diagram illustrates a multi-layered networking model. At the top is the 'User network' containing 'User' (with 'Devices' and 'Applications') and 'Peer IoT systems and non-IoT systems'. Below this is the 'Services network' with 'Operations and management Device registry', 'Applications and services' (with 'Applications', 'Services', and 'Data'), and 'Resource access and interchange'. The 'Access network' contains a 'Gateway' (with 'Services' and 'Data'). The 'Proximity network' includes 'Sensors' and 'Actuators' under 'Sensing and controlling'. At the base are 'Physical entities'. Bidirectional arrows indicate communication between adjacent layers, and dashed arrows show connections from the User network down to the Proximity network.</p> <p style="text-align: right;">IEC</p>
		<p>Figure A.6 – Networking model</p> <p>Interconnected networks provide communication connectivity, including data links. Data links can be point-to-point links in or between IoT systems, both interdomain and intradomain, and with other systems and organizations. The connected networks should maintain connectivity from one network to another. The key role of the networks is to support and provide communication and data exchange activities and interactions. The types of the activities and interactions between two entities, between two domains, or between two IoT systems determine their relationships between the entities, domains, and IoT systems. Although the interdomain communication networks are not designated as part of one of the six domains, these networks play a critical role in an IoT system. Depending on the infrastructure of IoT systems, the interdomain communication networks can be local area network, Internet, intranet, enterprise backbone network, or wide area network. Business-to-business (B2B) networks are also considered as interdomain communication networks.</p>

		<p>Proximity network:</p> <p>This network exists within the SCD. Its main task is to connect sensors and actuators to the IoT system. Proximity networks are typically local and limited in range. Proximity networks are necessary because sensors and actuators are low power or are in locations that make wide area connections (such as the Internet) difficult or impossible to provide.</p> <p>Proximity networks can use specialized protocols instead of generic protocols such as IP.</p> <p>It is possible that individual sensors and actuators have limited power and limited hardware capabilities. Because of this, simple, local, and low-power networks are needed to connect them to gateways. Gateways are more powerful and can in turn connect to access networks.</p> <p>Examples of proximity networks include IPv6 over Low-Power Wireless Personal Area Networks (6LoWPAN), ZigBee, and Wireless HART.</p> <p>Proximity networks can involve the use of an address translation capability to translate between their local addressing schemes and addressing schemes that are used on access networks.</p> <p>Access network:</p> <p>Access networks are typically wide area networks connecting devices in the SCD to the other domains – the ASD and the OMD. Access networks typically connect to gateways, but when sensors and actuators are more capable and with a limited connection situation, they can connect directly to access networks (dashed lines in Figure A.6).</p> <p>A range of technologies can be used in access networks. The technologies include wired connections (broadband, ADSL or fibre) and wireless connections including wireless LANs, and mobile (cellular) networks. The technologies also include low-power wide area networks, and satellite links (particularly for remote locations). Access networks typically use IP. Access networks can involve the use of a device registry. A device registry holds data about the IoT devices that are associated with the IoT system and how to communicate with them.</p> <p>Services network:</p> <p>The services network connects the applications and services in the ASD, the RAID and the OMD. Services networks are typically wired networks within data centres, running IP-based protocols. Services networks can include both Internet elements and also (private) intranet elements. It is typical for intranet networks to be used where the elements of the other domains exist within a single data centre. Where communication spans multiple data centres, various network technologies can be used, including both dedicated connections and Internet connections.</p> <p>User network:</p> <p>This network connects the user domain with the ASD and OMD. It also connects peer IoT systems and non-IoT systems with the RAID. This network is typically based on public Internet elements and uses IP. Such networks can use any of the technologies that are commonly used to carry Internet traffic, including both wired and wireless systems.</p> <p>Implementation of communication networks:</p> <p>Each of the principal communications networks can be implemented by a range of different network technologies. Which technology to use is dependent on the characteristics and requirements of the IoT system. IoT system implementations can use multiple instances of each of these networks to create complete solutions. The key to the interoperability among IoT systems is how data and information is correctly transferred from one type of network to another type of network. One communication network component that takes a vital role to glue the dissimilar communication networks is the gateways that are designed for IoT, that is IoT gateways. IoT communities are adapting the emerging communication networks that are designed for IoT applications: Still, accommodating legacy communication networks is also needed to promote the interoperability in IoT applications. Network topology is also an important aspect of the IoT systems. The potential IoT systems can use different network topologies to successfully support IoT functionality and capability. The representative network topologies are, for example, point-to-point (permanent or switched), bus (linear or distributed), star (extended or distributed). Network topologies can also be ring, mesh (fully connected or partially connected), ad hoc, and hybrid (combination of two or more of the topologies above).</p> <p>In Figure A.6, the user domain is shown spanning both the user network and the access network. Figure A.6 describes cases where user devices and their applications connect directly to the SCD. An example is when the user device is a smartphone which contains sensors.</p>
--	--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


	Examples	
	Rationale for the pattern	
	Guidance	
<p>NOTE Any tradenames and trademarks in this table are examples of suitable products available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of these products.</p>		

A.6 IoT enterprise usage pattern

The IoT enterprise usage pattern is described in Table A.5.

Table A.5 – IoT enterprise usage pattern

Information	Name	IoT enterprise usage pattern
	Related patterns	-
Problem		<p>The functional view shows the necessary functions and dependencies of the IoT system. The functional view also shows how the IoT system is developed, tested, operated, and used from a user perspective. This pattern addresses the following concepts:</p> <ul style="list-style-type: none"> – activities; – roles and subroles; – services and cross-cutting aspects.
Known context	Specific context	
	Related context	
Solution	Architecture models	<p>Description of the roles, subroles, and related activities:</p> <p>All IoT-related activities can be categorized into three user groups as listed below:</p> <ol style="list-style-type: none"> 1) IoT service provider. 2) IoT service developer. 3) IoT user. <p>Figure A.7 gives an overview of the three user groups (roles) and their subroles. Blue arrows show their interaction when the system is in use. Details about the roles and subroles are described below.</p>

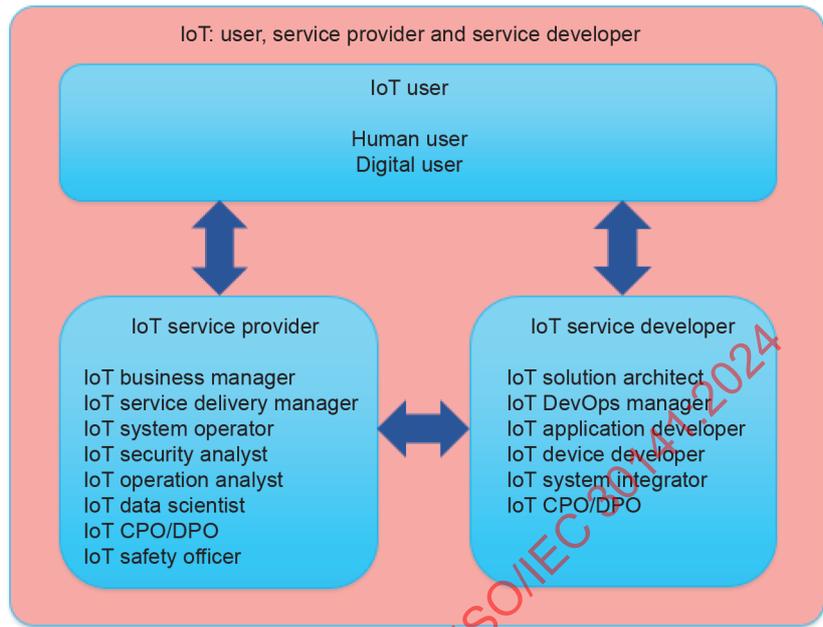


IEC

Figure A.7 – Roles present when the system is in use

IoT service provider role:

The role of service provider is to manage and to operate IoT services. IoT service providers can also provide network connectivity. Security of this connectivity must be addressed and maintained. Also, in cloud based IoT services, security management, multitenancy, tenant security, and separation must be managed at different layers. From the hardware up the stack to the application layers. These services are dependent on the type of service that is offered from the data centre (SaaS, PaaS, IaaS).

Figure A.8 shows the activities which relate to the subroles of IoT service provider.

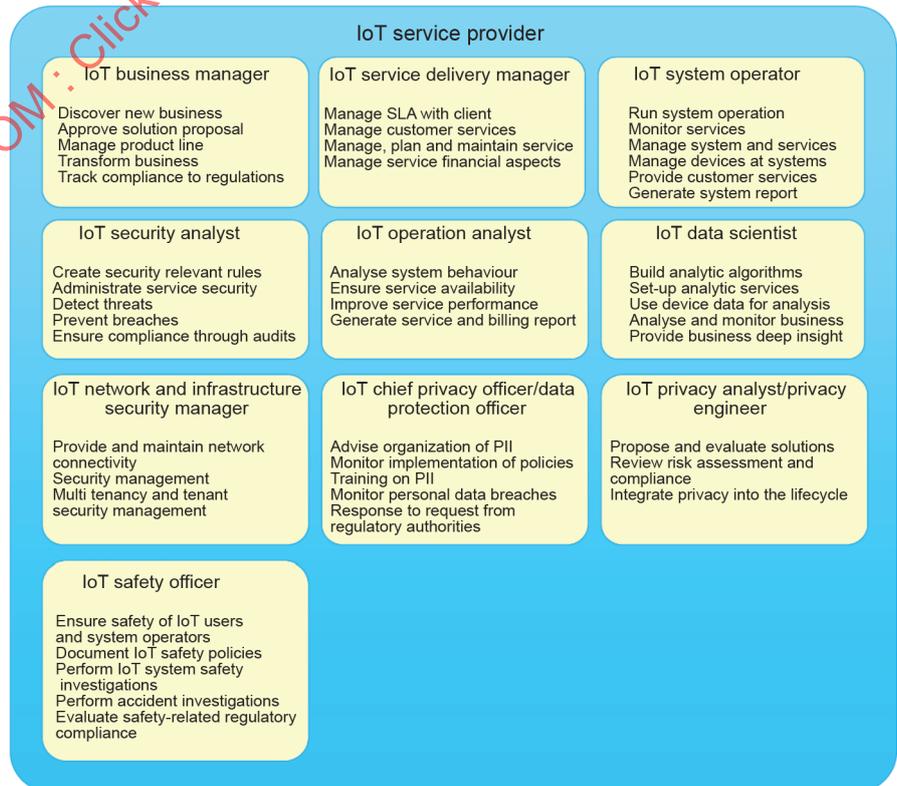

IEC

Figure A.8 – IoT service provider subroles and activities

		<p>IoT service developer:</p> <p>The roles of the IoT service developer include implementation, testing, and integration of IoT services with the IoT platform. Subroles of the IoT service developer are described as follows.</p> <p>An IoT solution architect proposes, proves, and deploys the IoT enabled platform to the LoB. An IoT solution architect also decides on integration strategies and architectures for the new IoT enabled platform, existing business systems, and devices in production.</p> <p>An IoT development operations manager sets up, configures, and operates the IoT enabled platform, relevant services. The IoT development operations manager also acts as a project manager by supporting IT services for LoB operations and development.</p> <p>An IoT application developer works in the LoB, in IT or with a third party, developing IoT industry applications for the LoB. The IoT application developer uses development operation capabilities to develop, deploy, and fix applications that integrate IoT devices, data, and services.</p> <p>An IoT device developer integrates hardware and software into devices and applications, developing and maintaining device firmware that securely connects devices to an IoT-enabled platform.</p> <p>An IoT system integrator tests and integrates IoT services with the IoT enabled platform.</p> <p>An IoT CPO or DPO has several duties like designing cutting-edge products and services that leverage big data while preserving privacy. The IoT CPO or DPO is also proposing and evaluating solutions (privacy-enhancing technologies) to mitigate privacy risks, conducting privacy-related risk assessments and compliance reviews. Furthermore, the IoT CPO or DPO is responding to incidents and integrating privacy into the software engineering life cycle phases.</p> <p>All IoT service developer subroles and their activities are shown in Figure A.9.</p> <div data-bbox="555 1066 1453 1458" style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p style="text-align: center;">IoT service developer</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; padding: 5px;"> <p style="text-align: center;">IoT solution architect</p> <p>Provide technical proposal Design architecture solutions Decide integration strategies Provide technical guidance during the implementation</p> </td> <td style="width: 33%; padding: 5px;"> <p style="text-align: center;">IoT devOps manager</p> <p>Set up and manage systems Manage service development Track project and financial aspect Manage service roll out Support service operation</p> </td> <td style="width: 33%; padding: 5px;"> <p style="text-align: center;">IoT application developer</p> <p>Develop applications Deploy services to the systems Integrate devices into systems</p> </td> </tr> <tr> <td style="padding: 5px;"> <p style="text-align: center;">IoT device developer</p> <p>Develop device and sensors Integrate SW and HW into devices Develop device application Integrate device into systems</p> </td> <td style="padding: 5px;"> <p style="text-align: center;">IoT system integrator</p> <p>Integrate services into systems Test end to end services</p> </td> <td style="padding: 5px;"> <p style="text-align: center;">IoT chief privacy officer/data privacy officer</p> <p>Privacy relevant activities during the propose, development, assessment and review phase Integrating privacy into software engineering lifecycle</p> </td> </tr> </table> <p style="text-align: right; font-size: small;">IEC</p> </div> <p style="text-align: center;">Figure A.9 – IoT service developer subroles and activities</p> <p>IoT user:</p> <p>The IoT user is the end user of IoT services and can be categorized into human users and digital users.</p> <p>Human users are individuals who use IoT services. Digital users are nonhuman users of the IoT system; they can include automation services that act on behalf of a human user.</p> <p>All IoT user subroles and their activities are shown in Figure A.10.</p>	<p style="text-align: center;">IoT solution architect</p> <p>Provide technical proposal Design architecture solutions Decide integration strategies Provide technical guidance during the implementation</p>	<p style="text-align: center;">IoT devOps manager</p> <p>Set up and manage systems Manage service development Track project and financial aspect Manage service roll out Support service operation</p>	<p style="text-align: center;">IoT application developer</p> <p>Develop applications Deploy services to the systems Integrate devices into systems</p>	<p style="text-align: center;">IoT device developer</p> <p>Develop device and sensors Integrate SW and HW into devices Develop device application Integrate device into systems</p>	<p style="text-align: center;">IoT system integrator</p> <p>Integrate services into systems Test end to end services</p>	<p style="text-align: center;">IoT chief privacy officer/data privacy officer</p> <p>Privacy relevant activities during the propose, development, assessment and review phase Integrating privacy into software engineering lifecycle</p>
<p style="text-align: center;">IoT solution architect</p> <p>Provide technical proposal Design architecture solutions Decide integration strategies Provide technical guidance during the implementation</p>	<p style="text-align: center;">IoT devOps manager</p> <p>Set up and manage systems Manage service development Track project and financial aspect Manage service roll out Support service operation</p>	<p style="text-align: center;">IoT application developer</p> <p>Develop applications Deploy services to the systems Integrate devices into systems</p>						
<p style="text-align: center;">IoT device developer</p> <p>Develop device and sensors Integrate SW and HW into devices Develop device application Integrate device into systems</p>	<p style="text-align: center;">IoT system integrator</p> <p>Integrate services into systems Test end to end services</p>	<p style="text-align: center;">IoT chief privacy officer/data privacy officer</p> <p>Privacy relevant activities during the propose, development, assessment and review phase Integrating privacy into software engineering lifecycle</p>						

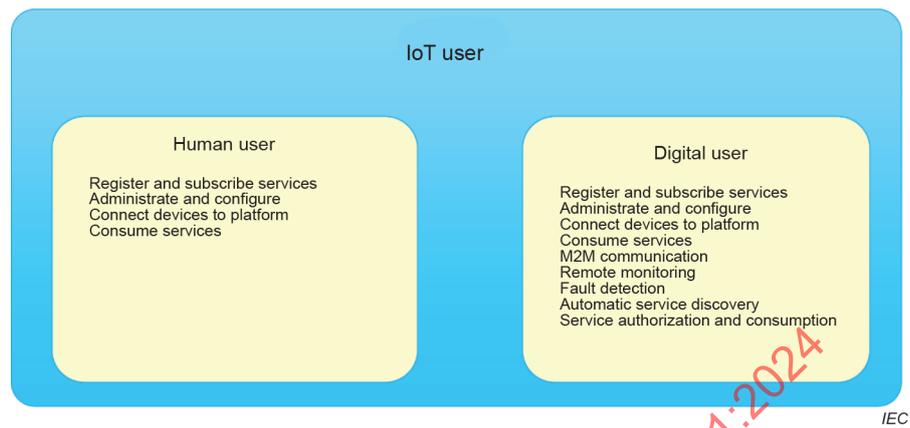


Figure A.10 – IoT subroles and activities

Mapping activities, roles and IoT systems in domains:

The usage view addresses the concerns of expected system usage.

Roles and activities involving IoT users to deliver functionality achievable with the fundamental system capabilities are represented by this view. Activities which create, implement, test, integrate, and operate IoT services in wanted systems can require interaction among individuals with different roles or skills (see Figure A.8).

Table A.6 and Table A.7 provide an overview of activities and their relevant roles.

Figure A.11 and Figure A.12 show some examples of using IoT systems from different activity perspectives.

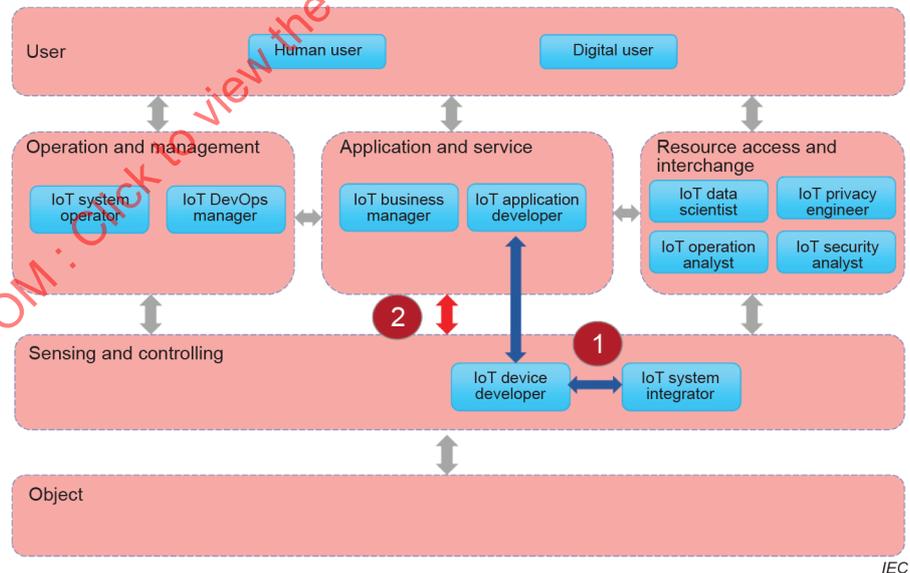


Figure A.11 – Activities of device and application development

Figure A.11 shows an example of activities and information exchange during device application development between device developers, system integrators, and application developers. An example of a specific user activity is connecting a new device to the IoT platform. The boxes in Figure A.11 represent the human users (in this case developers and operators) of IoT systems. The six domains of an IoT system are represented by boxes with dashed lines. For this activity:

- The device developer communicates with the system integrator during the implementation phase. They discuss API definitions and functional behaviour between the device and the IoT platform and agree to a specification.
- The application and device developers implement and test APIs and their functions that are related to the device and the IoT platform. At this stage, devices in the SCD are connected to IoT systems in the ASD and end-to-end functions can be tested.