
**Information technology — Open
systems interconnection —**

Part 7:

The Directory: Selected object classes

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020



STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by ITU-T as ITU-T X.521 (10/2019) and drafted in accordance with its editorial rules, in collaboration with Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

This ninth edition cancels and replaces the eighth edition (ISO/IEC 9594-7:2017), which has been technically revised.

A list of all parts in the ISO/IEC 9594 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020

CONTENTS

	<i>Page</i>
SECTION 1 – GENERAL	1
1 Scope	1
2 Normative references.....	1
2.1 Identical Recommendations International Standards	1
3 Definitions	2
3.1 Communication Model definitions.....	2
3.2 Directory Model definitions	2
4 Conventions	2
SECTION 2 – SELECTED OBJECT CLASSES	4
5 Definition of useful attribute sets	4
5.1 Telecommunication attribute set	4
5.2 Postal attribute set	4
5.3 Locale attribute set	4
5.4 Organizational attribute set	5
6 Definition of selected object classes.....	5
6.1 Country.....	5
6.2 Locality	5
6.3 Organization	5
6.4 Organizational Unit	5
6.5 Person.....	6
6.6 Organizational Person	6
6.7 Organizational Role.....	6
6.8 Group Of Names	6
6.9 Group Of Unique Names.....	7
6.10 Residential Person.....	7
6.11 Application Process.....	7
6.12 Application Entity	7
6.13 DSA.....	8
6.14 Device	8
6.15 Strong Authentication User.....	8
6.16 User Security Information.....	8
6.17 User Password.....	9
6.18 Certification Authority	9
6.19 Certification Authority-V2.....	9
6.20 DMD	9
6.21 OID Obj1.....	9
6.22 OID Obj2.....	10
6.23 OID ObjC.....	10
6.24 OID root	10
6.25 OID arc.....	10
6.26 URN ObjC.....	10
6.27 ISO Tag Information	10
6.28 ISO Tag Type.....	11
6.29 EPC Tag Information object class.....	11
6.30 EPC Tag Type Object Class.....	11
SECTION 3 – SELECTED NAME FORMS	12
7 Definition of selected name forms.....	12
7.1 Country name form	12
7.2 Locality name form	12
7.3 State Or Province name form	12
7.4 Organization name form.....	12

	<i>Page</i>
7.5 Organizational Unit name form.....	12
7.6 Person name form	13
7.7 Organizational Person name form.....	13
7.8 Organizational Role name form	13
7.9 Group Of Names name form.....	13
7.10 Residential Person name form.....	13
7.11 Application Process name form	13
7.12 Application Entity name form.....	13
7.13 DSA name form	14
7.14 Device name form.....	14
7.15 DMD name form	14
7.16 OIDC1 name form.....	14
7.17 OIDC2 name form.....	14
7.18 OIDC name form.....	14
7.19 URNC name form	14
7.20 OID root name form.....	15
7.21 OID arc name form	15
Annex A – Selected object classes and name forms in ASN.1	16
Annex B – Suggested name forms and Directory information tree (DIT) structures	24
B.1 Country.....	24
B.2 Organization.....	25
B.3 Locality	25
B.4 Organizational Unit	25
B.5 Organizational Person	26
B.6 Organizational Role.....	26
B.7 Group of Names	26
B.8 Residential Person.....	27
B.9 Application Entity	27
B.10 Device	27
B.11 Application Process.....	27
B.12 Alternative Structure Rule for Locality.....	27
Annex C – Amendments and corrigenda	29
Bibliography	30

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 9594-7:2020

Introduction

This Recommendation | International Standard, together with other Recommendations | International Standards, has been produced to facilitate the interconnection of information processing systems to provide directory services. A set of such systems, together with the directory information that they hold, can be viewed as an integrated whole, called the *Directory*. The information held by the Directory, collectively known as the Directory Information Base (DIB), is typically used to facilitate communication between, with or about objects such as application entities, people, terminals, and distribution lists.

The Directory plays a significant role in Open Systems Interconnection, whose aim is to allow, with a minimum of technical agreement outside of the interconnection standards themselves, the interconnection of information processing systems:

- from different manufacturers;
- under different managements;
- of different levels of complexity; and
- of different ages.

This Recommendation | International Standard defines a number of attribute sets and object classes which may be found useful across a range of applications of the Directory.

This Recommendation | International Standard provides the foundation frameworks upon which industry profiles can be defined by other standards groups and industry forums. Many of the features defined as optional in these frameworks may be mandated for use in certain environments through profiles. This ninth edition technically revises and enhances the eighth edition of this Recommendation | International Standard.

Annex A, which is an integral part of this Recommendation | International Standard, provides an ASN.1 module containing all of the type and value definitions which appear in this Recommendation | International Standard.

Annex B, which is not an integral part of this Recommendation | International Standard, provides some common naming and structure rules which may or may not be used by administrative authorities.

Annex C, which is not an integral part of this Recommendation | International Standard, lists the amendments and defect reports that have been incorporated to form this edition of this Recommendation | International Standard.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020

**INTERNATIONAL STANDARD
RECOMMENDATION ITU-T**

**Information technology – Open Systems Interconnection –
The Directory: Selected object classes**

SECTION 1 – GENERAL

1 Scope

This Recommendation | International Standard defines a number of object classes and name forms which may be found useful across a range of applications of the Directory. The definition of an object class involves listing a number of attribute types which are relevant to objects of that class. The definition of a name form involves naming the object class to which it applies and listing the attributes to be used in forming names for objects of that class. These definitions are used by the administrative authority which is responsible for the management of the directory information.

Any administrative authority can define its own object classes or subclasses and name forms for any purpose.

NOTE 1 – Those definitions may or may not use the notation specified in Rec. ITU-T X.501 | ISO/IEC 9594-2.

NOTE 2 – It is recommended that an object class defined in this Recommendation | International Standard, or a subclass derived from one, or a name form defined in this Recommendation | International Standard, be used in preference to the generation of a new one, whenever the semantics is appropriate for the application.

Administrative authorities may support some or all the selected object classes and name forms, and may also add additional ones.

All administrative authorities shall support the object classes which the directory uses for its own purpose (the top, alias and Directory system agent (DSA) object classes).

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent editions of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

2.1 Identical Recommendations | International Standards

- Recommendation ITU-T X.200 (1994) | ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model.*
- Recommendation ITU-T X.500 (2019) | ISO/IEC 9594-1:2020, *Information technology – Open Systems Interconnection – The Directory: Overview of concepts, models and services.*
- Recommendation ITU-T X.501 (2019) | ISO/IEC 9594-2:2020, *Information technology – Open Systems Interconnection – The Directory: Models.*
- Recommendation ITU-T X.509 (2019) | ISO/IEC 9594-8:2020, *Information technology – Open Systems Interconnection – The Directory: Public-key and attribute certificate frameworks.*
- Recommendation ITU-T X.511 (2019) | ISO/IEC 9594-3:2020, *Information technology – Open Systems Interconnection – The Directory: Abstract service definition.*
- Recommendation ITU-T X.518 (2019) | ISO/IEC 9594-4:2020, *Information technology – Open Systems Interconnection – The Directory: Procedures for distributed operation.*
- Recommendation ITU-T X.519 (2019) | ISO/IEC 9594-5:2020, *Information technology – Open Systems Interconnection – The Directory: Protocol specifications.*
- Recommendation ITU-T X.520 (2019) | ISO/IEC 9594-6:2020, *Information technology – Open Systems Interconnection – The Directory: Selected attribute types.*
- Recommendation ITU-T X.525 (2019) | ISO/IEC 9594-9:2020, *Information technology – Open Systems Interconnection – The Directory: Replication.*

- Recommendation ITU-T X.680 (2015) | ISO/IEC 8824-1:2015, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation.*
- Recommendation ITU-T X.681 (2015) | ISO/IEC 8824-2:2015, *Information technology – Abstract Syntax Notation One (ASN.1): Information object specification.*
- Recommendation ITU-T X.682 (2015) | ISO/IEC 8824-3:2015, *Information technology – Abstract Syntax Notation One (ASN.1): Constraint specification.*
- Recommendation ITU-T X.683 (2015) | ISO/IEC 8824-4:2015, *Information technology – Abstract Syntax Notation One (ASN.1): Parameterization of ASN.1 specifications.*
- Recommendation ITU-T X.690 (2015) | ISO/IEC 8825-1:2015, *Information technology – ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER).*

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply.

3.1 Communication Model definitions

The following terms are defined in Rec. ITU-T X.519 | ISO/IEC 9594-5:

- a) *application-entity*;
- b) *application process*.

3.2 Directory Model definitions

The following terms are defined in Rec. ITU-T X.501 | ISO/IEC 9594-2:

- a) *attribute*;
- b) *attribute type*;
- c) *Directory information tree (DIT)*;
- d) *Directory system agent (DSA)*;
- e) *attribute set*;
- f) *entry*;
- g) *name*;
- h) *object class*;
- i) *subclass*;
- j) *name form*;
- k) *structure rule*.

4 Conventions

The term "Directory Specification" (as in "this Directory Specification") shall be taken to mean Rec. ITU-T X.521 | ISO/IEC 9594-7. The term "Directory Specifications" shall be taken to mean the Rec. ITU-T X.500 | ISO/IEC 9594-1, Rec. ITU-T X.501 | ISO/IEC 9594-2, Rec. ITU-T X.511 | ISO/IEC 9594-3, Rec. ITU-T X.518 | ISO/IEC 9594-4, Rec. ITU-T X.519 | ISO/IEC 9594-5, Rec. ITU-T X.520 | ISO/IEC 9594-6, Rec. ITU-T X.521 | ISO/IEC 9594-7 and Rec. ITU-T X.525 | ISO/IEC 9594-9.

If an International Standard or ITU-T Recommendation is referenced within normal text without an indication of the edition, the edition shall be taken to be the latest one as specified in the normative references clause.

This Directory Specification makes extensive use of Abstract Syntax Notation One (ASN.1) for the formal specification of data types and values, as it is specified in Rec. ITU-T X.680 | ISO/IEC 8824-1, ITU-T X.681 | ISO/IEC 8824-2, ITU-T X.682 | ISO/IEC 8824-3, ITU-T X.683 | ISO/IEC 8824-4 and Rec. ITU-T X.690 | ISO/IEC 8825-1.

This Directory Specification presents ASN.1 notation in the bold Courier New typeface. When ASN.1 types and values are referenced in normal text, they are differentiated from normal text by presenting them in the bold Courier New typeface. The names of procedures, typically referenced when specifying the semantics of processing, are differentiated

from normal text by displaying them in bold Times New Roman. Access control permissions are presented in italicized Times New Roman.

Object classes and name forms are defined in this Directory Specification as values of the **OBJECT-CLASS** and **NAME-FORM** information object classes defined in Rec. ITU-T X.501 | ISO/IEC 9594-2.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020

SECTION 2 – SELECTED OBJECT CLASSES

5 Definition of useful attribute sets**5.1 Telecommunication attribute set**

This set of attributes is used to define those which are commonly used for business communications.

```
TelecommunicationAttributeSet ATTRIBUTE ::=
  {facsimileTelephoneNumber |
   internationalISDNNumber |
   telephoneNumber |
  -- teletexTerminalIdentifier (Attribute type has been deleted)
  -- teletexTerminalIdentifier | Attribute type has been deleted
   telexNumber |
   preferredDeliveryMethod |
   destinationIndicator |
   registeredAddress |
   x121Address}
```

5.2 Postal attribute set

This set of attributes is used to define those which are directly associated with postal delivery.

```
PostalAttributeSet ATTRIBUTE ::=
  {physicalDeliveryOfficeName |
   postalAddress |
   postalCode |
   postOfficeBox |
   streetAddress}
```

5.3 Locale attribute set

This set of attributes is used to define those which are commonly used for search purposes to indicate the locale of an object.

```
LocaleAttributeSet ATTRIBUTE ::=
  {localityName |
   stateOrProvinceName |
   streetAddress}
```

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020

5.4 Organizational attribute set

This set of attributes is used to define the attributes that an organization or organizational unit may typically possess.

```
OrganizationalAttributeSet ATTRIBUTE ::=
  {description |
   LocaleAttributeSet |
   PostalAttributeSet |
   TelecommunicationAttributeSet |
   businessCategory |
   seeAlso |
   searchGuide |
   userPassword}
```

6 Definition of selected object classes

6.1 Country

The `country` object class is used to define country entries in the DIT.

```
country OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {countryName}
  MAY CONTAIN   {description |
                searchGuide}
  LDAP-NAME     {"country"}
  ID            id-oc-country }
```

6.2 Locality

The `locality` object class is used to define locality in the DIT.

```
locality OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MAY CONTAIN   {description |
                searchGuide |
                LocaleAttributeSet |
                seeAlso}
  LDAP-NAME     {"locality"}
  ID            id-oc-locality }
```

At least one of Locality Name or State or Province Name shall be present.

6.3 Organization

The `organization` object class is used to define organization entries in the DIT.

```
organization OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {organizationName}
  MAY CONTAIN   {OrganizationalAttributeSet}
  LDAP-NAME     {"organization"}
  ID            id-oc-organization }
```

6.4 Organizational Unit

The `organizationalUnit` object class is used to define entries representing subdivisions of organizations.

```
organizationalUnit OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {organizationalUnitName}
  MAY CONTAIN   {OrganizationalAttributeSet}
  LDAP-NAME     {"organizationalUnit"}
  ID            id-oc-organizationalUnit }
```

6.5 Person

The **person** object class is used to define entries representing people generically.

```
person OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {commonName |
                 surname}
  MAY CONTAIN   {description |
                 telephoneNumber |
                 userPassword |
                 seeAlso}
  LDAP-NAME     {"person"}
  ID            id-oc-person }
```

6.6 Organizational Person

The **organizationalPerson** object class is used to define entries representing people employed by, or in some other important way associated with, an organization.

```
organizationalPerson OBJECT-CLASS ::= {
  SUBCLASS OF   {person}
  MAY CONTAIN   {LocaleAttributeSet |
                 PostalAttributeSet |
                 TelecommunicationAttributeSet |
                 organizationalUnitName |
                 title}
  LDAP-NAME     {"organizationalPerson"}
  ID            id-oc-organizationalPerson }
```

6.7 Organizational Role

The **organizationalRole** object class is used to define entries representing an organizational role, i.e., a position or role within an organization. An organizational role is normally considered to be filled by a particular organizational person. Over its lifetime, however, an organizational role may be filled by a number of different organizational people in succession. In general, an organizational role may be filled by a person or a non-human entity.

```
organizationalRole OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {commonName}
  MAY CONTAIN   {description |
                 LocaleAttributeSet |
                 organizationalUnitName |
                 PostalAttributeSet |
                 preferredDeliveryMethod |
                 roleOccupant |
                 seeAlso |
                 TelecommunicationAttributeSet}
  LDAP-NAME     {"organizationalRole"}
  ID            id-oc-organizationalRole }
```

6.8 Group Of Names

The **groupOfNames** object class is used to define entries representing an unordered set of names which represent individual objects or other groups of names. The membership of a group is static, i.e., it is explicitly modified by administrative action, rather than dynamically determined each time the group is referred to.

The membership of a group can be reduced to a set of individual object's names by replacing each group with its membership. This process could be carried out recursively until all constituent group names have been eliminated, and only the names of individual objects remain.

```
groupOfNames OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {commonName | member}
  MAY CONTAIN   {description |
                 organizationName |
                 organizationalUnitName |
                 owner }
```

```

        seeAlso |
        businessCategory}
LDAP-NAME  {"groupOfNames"}
ID         id-oc-groupOfNames }

```

6.9 Group Of Unique Names

The `groupOfUniqueNames` object class is used to define entries representing an unordered set of names whose integrity can be assured and which represent individual objects or other groups of names. The membership of a group is static, i.e., it is explicitly modified by administrative action, rather than dynamically determined each time the group is referred to.

```

groupOfUniqueNames OBJECT-CLASS ::= {
  SUBCLASS OF  {top}
  MUST CONTAIN {commonName |
                uniqueMember}
  MAY CONTAIN  {description |
                organizationName |
                organizationalUnitName |
                owner |
                seeAlso |
                businessCategory}
LDAP-NAME     {"groupOfUniqueNames"}
ID           id-oc-groupOfUniqueNames }

```

6.10 Residential Person

The `residentialPerson` object class is used to define entries representing a person in the residential environment.

```

residentialPerson OBJECT-CLASS ::= {
  SUBCLASS OF  {person}
  MUST CONTAIN {localityName}
  MAY CONTAIN  {LocaleAttributeSet |
                PostalAttributeSet |
                preferredDeliveryMethod |
                TelecommunicationAttributeSet |
                businessCategory}
LDAP-NAME     {"residentialPerson"}
ID           id-oc-residentialPerson }

```

6.11 Application Process

The `applicationProcess` object class is used to define entries representing application processes. An application process is an element within a real open-system which performs the information processing for a particular application (see Rec. ITU-T X.200 | ISO/IEC 7498-1).

```

applicationProcess OBJECT-CLASS ::= {
  SUBCLASS OF  {top}
  MUST CONTAIN {commonName}
  MAY CONTAIN  {description |
                localityName |
                organizationalUnitName |
                seeAlso}
LDAP-NAME     {"applicationProcess"}
ID           id-oc-applicationProcess }

```

6.12 Application Entity

The `applicationEntity` object class is used to define entries representing application-entities. An application-entity consists of those aspects of an application process pertinent to communications.

```

applicationEntity OBJECT-CLASS ::= {
  SUBCLASS OF  {top}
  MUST CONTAIN {commonName |
                presentationAddress}
  MAY CONTAIN  {description |
                localityName |
                organizationName |
                organizationalUnitName |

```

```

        seeAlso |
        supportedApplicationContext}
LDAP-NAME   {"applicationEntity"}
ID          id-oc-applicationEntity }

```

NOTE – If an application-entity is represented as a Directory object that is distinct from an application process, the **commonName** attribute is used to carry the value of the Application Entity Qualifier.

6.13 DSA

The **dSA** object class is used to define entries representing DSAs. A DSA is as defined in Rec. ITU-T X.501 | ISO/IEC 9594-2.

```

dSA OBJECT-CLASS ::= {
  SUBCLASS OF   {applicationEntity}
  MAY CONTAIN   {knowledgeInformation}
  LDAP-NAME     {"dSA"}
  ID            id-oc-dSA }

```

6.14 Device

The **device** object class is used to define entries representing devices. A device is a physical unit which can communicate, such as a modem, disk drive, etc.

```

device OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {commonName}
  MAY CONTAIN   {description |
                localityName |
                organizationName |
                organizationalUnitName |
                owner |
                seeAlso |
                serialNumber}
  LDAP-NAME     {"device"}
  ID            id-oc-device }

```

NOTE – At least one instance of **localityName**, **serialNumber** or **owner** attribute type, should be included. The choice is dependent on device type.

6.15 Strong Authentication User

The **strongAuthenticationUser** object class is used to define entries for objects which participate in strong authentication, as defined in Rec. ITU-T X.509 | ISO/IEC 9594-8.

```

strongAuthenticationUser OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  KIND          auxiliary
  MUST CONTAIN  {userCertificate}
  LDAP-NAME     {"strongAuthenticationUser"}
  LDAP-DESC     {"X.521 strong authentication user"}
  ID            id-oc-strongAuthenticationUser }

```

NOTE – Use of this object class has been deprecated in favour of the **pkiUser** and **pkiCA** object classes defined in Rec. ITU-T X.509 | ISO/IEC 9594-8. Implementations that use **strongAuthenticationUser**, **certificationAuthority** and **certificationAuthorityv2** object classes are still conformant to the standard, although new implementations are strongly recommended to move to the **pkiUser** and **pkiCA** object classes.

6.16 User Security Information

The **userSecurityInformation** object class is used to define entries for objects which need to indicate security information associated with them as defined in Rec. ITU-T X.509 | ISO/IEC 9594-8.

```

userSecurityInformation OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  KIND          auxiliary
  MAY CONTAIN   {supportedAlgorithms}
  LDAP-NAME     {"userSecurityInformation"}
  LDAP-DESC     {"X.521 user security information"}

```

```
ID          id-oc-userSecurityInformation }
```

6.17 User Password

The `userPwdClass` object class is used to define entries for objects that maintain a user password (`userPwd`).

```
userPwdClass OBJECT-CLASS ::= {
  KIND          auxiliary
  MAY CONTAIN   { userPwd }
  ID            id-oc-userPwdClass }
```

6.18 Certification Authority

The `certificationAuthority` object class is used to define entries for objects which act as certification authorities, as defined in Rec. ITU-T X.509 | ISO/IEC 9594-8.

```
certificationAuthority OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  KIND          auxiliary
  MUST CONTAIN  {cACertificate |
                certificateRevocationList |
                authorityRevocationList}
  MAY CONTAIN   {crossCertificatePair}
  LDAP-NAME     {"certificationAuthority"}
  LDAP-DESC     {"X.509 certificate authority"}
  ID            id-oc-certificationAuthority }
```

NOTE – Use of this object class has been deprecated in favour of the `pkiUser` and `pkiCA` object classes defined in Rec. ITU-T X.509 | ISO/IEC 9594-8. Implementations that use `strongAuthenticationUser`, `certificationAuthority` and `certificationAuthorityv2` object classes are still conformant to the standard, although new implementations are strongly recommended to move to the `pkiUser` and `pkiCA` object classes.

6.19 Certification Authority-V2

The `certificationAuthority-V2` object class is used to define entries for objects which act as certification authorities and can support the delta revocation list as defined in Rec. ITU-T X.509 | ISO/IEC 9594-8.

```
certificationAuthority-V2 OBJECT-CLASS ::= {
  SUBCLASS OF   {certificationAuthority}
  KIND          auxiliary
  MAY CONTAIN   {deltaRevocationList}
  LDAP-NAME     {"certificationAuthority-V2"}
  LDAP-DESC     {"X.509 certificate authority, version 2"}
  ID            id-oc-certificationAuthority-V2 }
```

NOTE – Use of this object class has been deprecated in favour of the `pkiUser` and `pkiCA` object classes defined in Rec. ITU-T X.509 | ISO/IEC 9594-8. Implementations that use `strongAuthenticationUser`, `certificationAuthority` and `certificationAuthorityv2` object classes are still conformant to the standard, although new implementations are strongly recommended to move to the `pkiUser` and `pkiCA` object classes.

6.20 DMD

The `dmd` object class is used to define DMD entries in the DIT.

```
dmd OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {dmdName}
  MAY CONTAIN   {OrganizationalAttributeSet}
  LDAP-NAME     {"dmd"}
  ID            id-oc-dmd }
```

6.21 OID Obj1

The `oidC1obj` object class is used to define a top level object identifier component entry in the DIT.

```
oidC1obj OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {oidC}
  LDAP-NAME     {"oidC1obj"}
```

```
ID          id-oc-oidC1obj }
```

6.22 OID Obj2

The `oidC2obj` object class is used to define second level object identifier component entries in the DIT.

```
oidC2obj OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {oidC}
  LDAP-NAME     {"oidC2obj"}
  ID            id-oc-oidC2obj }
```

6.23 OID ObjC

The `oidCobj` object class is used to define the third- or lower-level object identifier component entries in the DIT.

NOTE – A tag-based object identifier typically has only three levels, where the first two values are { 2 27 }.

```
oidCobj OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  {oidC}
  LDAP-NAME     {"oidCobj"}
  ID            id-oc-oidCobj }
```

6.24 OID root

The `oidRoot` object class is moved to here from Rec. ITU-T X.660 | ISO/IEC 9834-1.

```
oidRoot OBJECT-CLASS ::= {
  SUBCLASS OF   {alias}
  MUST CONTAIN  { oidC1 | oidC2 | oidC }
  LDAP-NAME     {"oidRoot"}
  ID            id-oidRoot }
```

6.25 OID arc

The `oidArc` object class is moved to here from Rec. ITU-T X.660 | ISO/IEC 9834-1.

```
oidArc OBJECT-CLASS ::= {
  SUBCLASS OF   {alias}
  MUST CONTAIN  {oidC}
  LDAP-NAME     {"oidArc"}
  ID            id-oidArc }
```

6.26 URN ObjC

The `urnCobj` object class is used to define the entries of an URN subtree as determined

```
urnCobj OBJECT-CLASS ::= {
  SUBCLASS OF   {top}
  MUST CONTAIN  { urnC }
  LDAP-NAME     {"urnCobj"}
  ID            id-oc-urnCobj }
```

6.27 ISO Tag Information

The `isoTagInfo` auxiliary object class may be used to add tag-based attribute types to an entry holding information associated with a specific ISO tag.

```
isoTagInfo OBJECT-CLASS ::= {
  SUBCLASS OF   { top }
  KIND          auxiliary
  MAY CONTAIN   { tagOid |
                  tagAfi |
                  uii |
                  uiiInUrn |
                  contentUrl |
                  tagLocation }
```

```
LDAP-NAME {"isoTagInfo"}
ID        id-oc-isoTagInfo }
```

6.28 ISO Tag Type

The **isoTagType** auxiliary object class may be used to add tag-based attribute types to an entry holding information about a specific type of tag (see Annex G of Rec. ITU-T X.520 | ISO/IEC 9594-6).

```
isoTagType OBJECT-CLASS ::= {
  SUBCLASS OF { top }
  KIND        auxiliary
  MAY CONTAIN { tagOid |
               tagAfi |
               uiiFormat }
  LDAP-NAME   {"isoTagType"}
  ID          id-oc-isoTagType }
```

6.29 EPC Tag Information object class

The **epcTagInfoObj** auxiliary object class may be used to add tag-based attribute types to an entry holding information associated with a specific EPC tag.

```
epcTagInfoObj OBJECT-CLASS ::= {
  SUBCLASS OF { top }
  KIND        auxiliary
  MAY CONTAIN { epcHeader |
               epcPartition |
               epc |
               epcInUrn |
               contentUrl |
               tagLocation }
  LDAP-NAME   {"epcTagInfoObj"}
  ID          id-oc-epcTagInfoObj }
```

6.30 EPC Tag Type Object Class

The **epcTagTypeObj** auxiliary object class may be used to add tag-based attribute types to an entry holding information about a specific type of EPC tag.

```
epcTagTypeObj OBJECT-CLASS ::= {
  SUBCLASS OF { top }
  KIND        auxiliary
  MAY CONTAIN { uiiFormat }
  LDAP-NAME   {"epcTagTypeObj"}
  ID          id-oc-epcTagTypeObj }
```

SECTION 3 – SELECTED NAME FORMS

7 Definition of selected name forms**7.1 Country name form**

The `countryNameForm` name form specifies how entries of object class `country` may be named.

```
countryNameForm NAME-FORM ::= {
  NAMES          country
  WITH ATTRIBUTES {countryName}
  ID             id-nf-countryNameForm }
```

7.2 Locality name form

The `locNameForm` name form specifies how entries of object class `locality` may be named.

```
locNameForm NAME-FORM ::= {
  NAMES          locality
  WITH ATTRIBUTES {localityName}
  ID             id-nf-locNameForm }
```

7.3 State Or Province name form

The `sOPNameForm` name form specifies how entries of object class `locality` may be named.

```
sOPNameForm NAME-FORM ::= {
  NAMES          locality
  WITH ATTRIBUTES {stateOrProvinceName}
  ID             id-nf-sOPNameForm }
```

7.4 Organization name form

The `orgNameForm` name form specifies how entries of object class `organization` may be named.

```
orgNameForm NAME-FORM ::= {
  NAMES          organization
  WITH ATTRIBUTES {organizationName}
  ID             id-nf-orgNameForm }
```

7.5 Organizational Unit name form

The `orgUnitNameForm` name form specifies how entries of object class `organizationalUnit` may be named.

```
orgUnitNameForm NAME-FORM ::= {
  NAMES          organizationalUnit
  WITH ATTRIBUTES {organizationalUnitName}
  ID             id-nf-orgUnitNameForm }
```

7.6 Person name form

The `personNameForm` name form specifies how entries of object class `person` may be named.

```
personNameForm NAME-FORM ::= {
  NAMES          person
  WITH ATTRIBUTES {commonName}
  ID             id-nf-personNameForm }
```

7.7 Organizational Person name form

The `orgPersonNameForm` name form specifies how entries of object class `organizationalPerson` may be named.

```
orgPersonNameForm NAME-FORM ::= {
  NAMES          organizationalPerson
  WITH ATTRIBUTES {commonName}
  AND OPTIONALLY {organizationalUnitName}
  ID             id-nf-orgPersonNameForm }
```

7.8 Organizational Role name form

The `orgRoleNameForm` name form specifies how entries of object class `organizationalRole` may be named.

```
orgRoleNameForm NAME-FORM ::= {
  NAMES          organizationalRole
  WITH ATTRIBUTES {commonName}
  ID             id-nf-orgRoleNameForm }
```

7.9 Group Of Names name form

The `gONNameForm` name form specifies how entries of object class `groupOfNames` may be named.

```
gONNameForm NAME-FORM ::= {
  NAMES          groupOfNames
  WITH ATTRIBUTES {commonName}
  ID             id-nf-gONNameForm }
```

7.10 Residential Person name form

The `resPersonNameForm` name form specifies how entries of object class `residentialPerson` may be named.

```
resPersonNameForm NAME-FORM ::= {
  NAMES          residentialPerson
  WITH ATTRIBUTES {commonName}
  AND OPTIONALLY {streetAddress}
  ID             id-nf-resPersonNameForm }
```

7.11 Application Process name form

The `applProcessNameForm` name form specifies how entries of object class `applicationProcess` may be named.

```
applProcessNameForm NAME-FORM ::= {
  NAMES          applicationProcess
  WITH ATTRIBUTES {commonName}
  ID             id-nf-applProcessNameForm }
```

7.12 Application Entity name form

The `applEntityNameForm` name form specifies how entries of object class `applicationEntity` may be named.

```
applEntityNameForm NAME-FORM ::= {
  NAMES          applicationEntity
  WITH ATTRIBUTES {commonName}
  ID             id-nf-applEntityNameForm }
```

7.13 DSA name form

The `dSANameForm` name form specifies how entries of object class `dSA` may be named.

```
dSANameForm NAME-FORM ::= {
  NAMES          dSA
  WITH ATTRIBUTES {commonName}
  ID             id-nf-dSANameForm }
```

7.14 Device name form

The `deviceNameForm` name form specifies how entries of object class `device` may be named.

```
deviceNameForm NAME-FORM ::= {
  NAMES          device
  WITH ATTRIBUTES {commonName}
  ID             id-nf-deviceNameForm }
```

7.15 DMD name form

The `dMDNameForm` name form specifies how entries of object class `dMD` may be named.

```
dMDNameForm NAME-FORM ::= {
  NAMES          dMD
  WITH ATTRIBUTES {dmdName}
  ID             id-nf-dMDNameForm }
```

7.16 OI DC1 name form

The `oidC1NameForm` name form specifies how the entry of object class `oidObj1` shall be named.

```
oidC1NameForm NAME-FORM ::= {
  NAMES          oidCobj
  WITH ATTRIBUTES {oidC}
  ID             id-nf-oidC1NameForm }
```

7.17 OI DC2 name form

The `oidC2NameForm` name form specifies how entries of object class `oidObj2` shall be named.

```
oidC2NameForm NAME-FORM ::= {
  NAMES          oidCobj
  WITH ATTRIBUTES {oidC}
  ID             id-nf-oidC2NameForm }
```

7.18 OI DC name form

The `oidCNameForm` name form specifies how entries of object class `oidObjC` shall be named.

```
oidCNameForm NAME-FORM ::= {
  NAMES          oidCobj
  WITH ATTRIBUTES {oidC}
  ID             id-nf-oidCNameForm }
```

7.19 URNC name form

The `urnCNameForm` specifies how entries of object class `urnCobj` shall be named.

```
urnCNameForm NAME-FORM ::= {
  NAMES          urnCobj
  WITH ATTRIBUTES {urnC}
  ID             id-nf-urnCNameForm }
```

7.20 OID root name form

The `oidRootNf` name form is moved to here from Rec. ITU-T X.660 | ISO/IEC 9834-1.

```
oidRootNf NAME-FORM ::= {  
  NAMES          oidRoot  
  WITH ATTRIBUTES {oidC1 | oidC2 | oidC}  
  ID             id-oidRootNf }
```

7.21 OID arc name form

The `oidArcNf` name form is moved to here from Rec. ITU-T X.660 | ISO/IEC 9834-1.

```
oidArcNf NAME-FORM ::= {  
  NAMES          oidArc  
  WITH ATTRIBUTES {oidC}  
  ID             id-oidArcNf }
```

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 9594-7:2020

Annex A

Selected object classes and name forms in ASN.1

(This annex forms an integral part of this Recommendation | International Standard.)

This annex includes all of the ASN.1 type and value definitions contained in this Directory Specification in the form of the ASN.1 module `SelectedObjectClasses`.

```

SelectedObjectClasses
    {joint-iso-itu-t ds(5) module(1) selectedObjectClasses(6) 9}
DEFINITIONS ::=
BEGIN

-- EXPORTS All
/*
The types and values defined in this module are exported for use in the other ASN.1
modules contained within the Directory Specifications, and for the use of other
applications which will use them to access Directory services. Other applications may
use them for their own purposes, but this will not constrain extensions and
modifications needed to maintain or improve the Directory service.
*/
IMPORTS

    -- from Rec. ITU-T X.501 | ISO/IEC 9594-2

    id, id-nf, id-oc
        FROM UsefulDefinitions
        {joint-iso-itu-t ds(5) module(1) usefulDefinitions(0) 9} WITH SUCCESSORS

    alias, ATTRIBUTE, NAME-FORM, OBJECT-CLASS, top
        FROM InformationFramework
        {joint-iso-itu-t ds(5) module(1) informationFramework(1) 9} WITH SUCCESSORS

    -- from Rec. ITU-T X.520 | ISO/IEC 9594-6

    businessCategory, commonName, contentUrl, countryName, description,
    destinationIndicator, dmdName, epc, epcInUrn, facsimileTelephoneNumber,
    internationalISDNNumber, knowledgeInformation, localityName, member, oidC, oidC1,
    oidC2, organizationalUnitName, organizationName, owner, physicalDeliveryOfficeName,
    postalAddress, postalCode, postOfficeBox, preferredDeliveryMethod,
    presentationAddress, registeredAddress, roleOccupant, searchGuide, seeAlso,
    serialNumber, stateOrProvinceName, streetAddress, supportedApplicationContext,
    surname, tagAfi, tagLocation, tagOid, telephoneNumber, telexNumber, title, uii,
    uiiFormat, uiiInUrn, uniqueMember, urnC, x121Address
        FROM SelectedAttributeTypes
        {joint-iso-itu-t ds(5) module(1) selectedAttributeTypes(5) 9} WITH SUCCESSORS

    -- from Rec. ITU-T X.509 | ISO/IEC 9594-8

    authorityRevocationList, cACertificate, certificateRevocationList,
    crossCertificatePair, deltaRevocationList, supportedAlgorithms,
    userCertificate, userPassword
        FROM AuthenticationFramework
        {joint-iso-itu-t ds(5) module(1) authenticationFramework(7) 9} WITH SUCCESSORS

    userPwd
        FROM PasswordPolicy
        {joint-iso-itu-t ds(5) module(1) passwordPolicy(39) 9} WITH SUCCESSORS ;

-- Attribute sets

TelecommunicationAttributeSet ATTRIBUTE ::=
    {facsimileTelephoneNumber |
    internationalISDNNumber |
    telephoneNumber |
    telexNumber |
    preferredDeliveryMethod |

```

```

destinationIndicator |
registeredAddress |
x121Address}

PostalAttributeSet ATTRIBUTE ::=
{physicalDeliveryOfficeName |
postalAddress |
postalCode |
postOfficeBox |
streetAddress}

LocaleAttributeSet ATTRIBUTE ::=
{localityName |
stateOrProvinceName |
streetAddress}

OrganizationalAttributeSet ATTRIBUTE ::=
{description |
LocaleAttributeSet |
PostalAttributeSet |
TelecommunicationAttributeSet |
businessCategory |
seeAlso |
searchGuide |
userPassword}

-- Object classes

country OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {countryName}
MAY CONTAIN {description |
searchGuide}
LDAP-NAME {"country"} -- RFC 4519
ID id-oc-country }

locality OBJECT-CLASS ::= {
SUBCLASS OF {top}
MAY CONTAIN {description |
searchGuide |
LocaleAttributeSet |
seeAlso}
LDAP-NAME {"locality"} -- RFC 4519
ID id-oc-locality }

organization OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {organizationName}
MAY CONTAIN {OrganizationalAttributeSet}
LDAP-NAME {"organization"} -- RFC 4519
ID id-oc-organization }

organizationalUnit OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {organizationalUnitName}
MAY CONTAIN {OrganizationalAttributeSet}
LDAP-NAME {"organizationalUnit"} -- RFC 4519
ID id-oc-organizationalUnit }

person OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {commonName |
surname}
MAY CONTAIN {description |
telephoneNumber |
userPassword |
seeAlso}
LDAP-NAME {"person"} -- RFC 4519
ID id-oc-person }

organizationalPerson OBJECT-CLASS ::= {

```

```

SUBCLASS OF {person}
MAY CONTAIN {LocaleAttributeSet |
             PostalAttributeSet |
             TelecommunicationAttributeSet |
             organizationalUnitName |
             title}
LDAP-NAME {"organizationalPerson"} -- RFC 4519
ID        id-oc-organizationalPerson }

organizationalRole OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {commonName}
MAY CONTAIN {description |
             LocaleAttributeSet |
             organizationalUnitName |
             PostalAttributeSet |
             preferredDeliveryMethod |
             roleOccupant |
             seeAlso |
             TelecommunicationAttributeSet}
LDAP-NAME {"organizationalRole"} -- RFC 4519
ID        id-oc-organizationalRole }

groupOfNames OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {commonName | member}
MAY CONTAIN {description |
             organizationName |
             organizationalUnitName |
             owner |
             seeAlso |
             businessCategory}
LDAP-NAME {"groupOfNames"} -- RFC 4519
ID        id-oc-groupOfNames }

groupOfUniqueNames OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {commonName |
             uniqueMember}
MAY CONTAIN {description |
             organizationName |
             organizationalUnitName |
             owner |
             seeAlso |
             businessCategory}
LDAP-NAME {"groupOfUniqueNames"} -- RFC 4519
ID        id-oc-groupOfUniqueNames }

residentialPerson OBJECT-CLASS ::= {
SUBCLASS OF {person}
MUST CONTAIN {localityName}
MAY CONTAIN {LocaleAttributeSet |
             PostalAttributeSet |
             preferredDeliveryMethod |
             TelecommunicationAttributeSet |
             businessCategory}
LDAP-NAME {"residentialPerson"} -- RFC 4519
ID        id-oc-residentialPerson }

applicationProcess OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {commonName}
MAY CONTAIN {description |
             localityName |
             organizationalUnitName |
             seeAlso}
LDAP-NAME {"applicationProcess"} -- RFC 4519
ID        id-oc-applicationProcess }

applicationEntity OBJECT-CLASS ::= {
SUBCLASS OF {top}

```

```

MUST CONTAIN {commonName |
              presentationAddress}
MAY CONTAIN  {description |
              localityName |
              organizationName |
              organizationalUnitName |
              seeAlso |
              supportedApplicationContext}
LDAP-NAME    {"applicationEntity"}
ID           id-oc-applicationEntity }

dSA OBJECT-CLASS ::= {
  SUBCLASS OF {applicationEntity}
  MAY CONTAIN {knowledgeInformation}
  LDAP-NAME   {"dSA"}
  ID          id-oc-dSA }

device OBJECT-CLASS ::= {
  SUBCLASS OF {top}
  MUST CONTAIN {commonName}
  MAY CONTAIN  {description |
              localityName |
              organizationName |
              organizationalUnitName |
              owner |
              seeAlso |
              serialNumber}
  LDAP-NAME    {"device"} -- RFC 4519
  ID           id-oc-device }

strongAuthenticationUser OBJECT-CLASS ::= {
  SUBCLASS OF {top}
  KIND        auxiliary
  MUST CONTAIN {userCertificate}
  LDAP-NAME    {"strongAuthenticationUser"} -- RFC 4523
  LDAP-DESC    {"X.521 strong authentication user"}
  ID           id-oc-strongAuthenticationUser }

userSecurityInformation OBJECT-CLASS ::= {
  SUBCLASS OF {top}
  KIND        auxiliary
  MAY CONTAIN {supportedAlgorithms}
  LDAP-NAME    {"userSecurityInformation"} -- RFC 4523
  LDAP-DESC    {"X.521 user security information"}
  ID           id-oc-userSecurityInformation }

userPwdClass OBJECT-CLASS ::= {
  KIND        auxiliary
  MAY CONTAIN { userPwd }
  ID          id-oc-userPwdClass }

certificationAuthority OBJECT-CLASS ::= {
  SUBCLASS OF {top}
  KIND        auxiliary
  MUST CONTAIN {cACertificate |
              certificateRevocationList |
              authorityRevocationList}
  MAY CONTAIN {crossCertificatePair}
  LDAP-NAME    {"certificationAuthority"} -- RFC 4523
  LDAP-DESC    {"X.509 certificate authority"}
  ID           id-oc-certificationAuthority }

certificationAuthority-V2 OBJECT-CLASS ::= {
  SUBCLASS OF {certificationAuthority}
  KIND        auxiliary
  MAY CONTAIN {deltaRevocationList}
  LDAP-NAME    {"certificationAuthority-V2"}
  LDAP-DESC    {"X.509 certificate authority, version 2"} -- RFC 4523
  ID           id-oc-certificationAuthority-V2 }

dMD OBJECT-CLASS ::= {

```

```

SUBCLASS OF {top}
MUST CONTAIN {dmdName}
MAY CONTAIN {OrganizationalAttributeSet}
LDAP-NAME {"dmd"}
ID id-oc-dmd }

```

```

oidC1obj OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {oidC}
LDAP-NAME {"oidC1obj"}
ID id-oc-oidC1obj }

```

```

oidC2obj OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {oidC}
LDAP-NAME {"oidC2obj"}
ID id-oc-oidC2obj }

```

```

oidCobj OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN {oidC}
LDAP-NAME {"oidCobj"}
ID id-oc-oidCobj }

```

```

oidRoot OBJECT-CLASS ::= {
SUBCLASS OF {alias}
MUST CONTAIN { oidC1 | oidC2 | oidC}
LDAP-NAME {"oidRoot"}
ID id-oidRoot }

```

```

oidArc OBJECT-CLASS ::= {
SUBCLASS OF {alias}
MUST CONTAIN {oidC}
LDAP-NAME {"oidArc"}
ID id-oidArc }

```

```

urnCobj OBJECT-CLASS ::= {
SUBCLASS OF {top}
MUST CONTAIN { urnC }
LDAP-NAME {"urnCobj"}
ID id-oc-urnCobj }

```

```

isoTagInfo OBJECT-CLASS ::= {
SUBCLASS OF { top }
KIND auxiliary
MAY CONTAIN { tagOid |
tagAfi |
uii |
uiiInUrn |
contentUrl |
tagLocation }
LDAP-NAME {"isoTagInfo"}
ID id-oc-isoTagInfo }

```

```

isoTagType OBJECT-CLASS ::= {
SUBCLASS OF { top }
KIND auxiliary
MAY CONTAIN { tagOid |
tagAfi |
uiiFormat }
LDAP-NAME {"isoTagType"}
ID id-oc-isoTagType }

```

```

epcTagInfoObj OBJECT-CLASS ::= {
SUBCLASS OF { top }
KIND auxiliary
MAY CONTAIN { epc |
epcInUrn |
contentUrl |
tagLocation }
LDAP-NAME {"epcTagInfoObj"}

```

```

ID          id-oc-epcTagInfoObj }

epcTagTypeObj OBJECT-CLASS ::= {
  SUBCLASS OF { top }
  KIND        auxiliary
  MAY CONTAIN { uiiFormat }
  LDAP-NAME   {"epcTagTypeObj"}
  ID          id-oc-epcTagTypeObj }

-- Name forms

countryNameForm NAME-FORM ::= {
  NAMES          country
  WITH ATTRIBUTES {countryName}
  ID             id-nf-countryNameForm }

locNameForm NAME-FORM ::= {
  NAMES          locality
  WITH ATTRIBUTES {localityName}
  ID             id-nf-locNameForm }

sOPNameForm NAME-FORM ::= {
  NAMES          locality
  WITH ATTRIBUTES {stateOrProvinceName}
  ID             id-nf-sOPNameForm }

orgNameForm NAME-FORM ::= {
  NAMES          organization
  WITH ATTRIBUTES {organizationName}
  ID             id-nf-orgNameForm }

orgUnitNameForm NAME-FORM ::= {
  NAMES          organizationalUnit
  WITH ATTRIBUTES {organizationalUnitName}
  ID             id-nf-orgUnitNameForm }

personNameForm NAME-FORM ::= {
  NAMES          person
  WITH ATTRIBUTES {commonName}
  ID             id-nf-personNameForm }

orgPersonNameForm NAME-FORM ::= {
  NAMES          organizationalPerson
  WITH ATTRIBUTES {commonName}
  AND OPTIONALLY {organizationalUnitName}
  ID             id-nf-orgPersonNameForm }

orgRoleNameForm NAME-FORM ::= {
  NAMES          organizationalRole
  WITH ATTRIBUTES {commonName}
  ID             id-nf-orgRoleNameForm }

gONNameForm NAME-FORM ::= {
  NAMES          groupOfNames
  WITH ATTRIBUTES {commonName}
  ID             id-nf-gONNameForm }

resPersonNameForm NAME-FORM ::= {
  NAMES          residentialPerson
  WITH ATTRIBUTES {commonName}
  AND OPTIONALLY {streetAddress}
  ID             id-nf-resPersonNameForm }

applProcessNameForm NAME-FORM ::= {
  NAMES          applicationProcess
  WITH ATTRIBUTES {commonName}
  ID             id-nf-applProcessNameForm }

applEntityNameForm NAME-FORM ::= {
  NAMES          applicationEntity
  WITH ATTRIBUTES {commonName}

```

```

ID                id-nf-applEntityNameForm }

dSASNameForm NAME-FORM ::= {
  NAMES           dSA
  WITH ATTRIBUTES {commonName}
  ID              id-nf-dSASNameForm }

deviceNameForm NAME-FORM ::= {
  NAMES           device
  WITH ATTRIBUTES {commonName}
  ID              id-nf-deviceNameForm }

dMDNameForm NAME-FORM ::= {
  NAMES           dMD
  WITH ATTRIBUTES {dmdName}
  ID              id-nf-dMDNameForm }

oidC1NameForm NAME-FORM ::= {
  NAMES           oidCobj
  WITH ATTRIBUTES {oidC}
  ID              id-nf-oidC1NameForm }

oidC2NameForm NAME-FORM ::= {
  NAMES           oidCobj
  WITH ATTRIBUTES {oidC}
  ID              id-nf-oidC2NameForm }

oidCNameForm NAME-FORM ::= {
  NAMES           oidCobj
  WITH ATTRIBUTES {oidC}
  ID              id-nf-oidCNameForm }

urnCNameForm NAME-FORM ::= {
  NAMES           urnCobj
  WITH ATTRIBUTES {urnC}
  ID              id-nf-urnCNameForm }

oidRootNf NAME-FORM ::= {
  NAMES           oidRoot
  WITH ATTRIBUTES {oidC1 | oidC2 | oidC}
  ID              id-oidRootNf }

oidArcNf NAME-FORM ::= {
  NAMES           oidArc
  WITH ATTRIBUTES {oidC}
  ID              id-oidArcNf }

-- Object identifier assignments
-- object identifiers assigned in other modules are shown in comments

-- Object classes

-- id-oc-top          OBJECT IDENTIFIER ::= {id-oc 0} Defined in X.501 | Part 2
-- id-oc-alias       OBJECT IDENTIFIER ::= {id-oc 1} Defined in X.501 | Part 2
id-oc-country       OBJECT IDENTIFIER ::= {id-oc 2}
id-oc-locality      OBJECT IDENTIFIER ::= {id-oc 3}
id-oc-organization  OBJECT IDENTIFIER ::= {id-oc 4}
id-oc-organizationalUnit OBJECT IDENTIFIER ::= {id-oc 5}
id-oc-person        OBJECT IDENTIFIER ::= {id-oc 6}
id-oc-organizationalPerson OBJECT IDENTIFIER ::= {id-oc 7}
id-oc-organizationalRole OBJECT IDENTIFIER ::= {id-oc 8}
id-oc-groupOfNames  OBJECT IDENTIFIER ::= {id-oc 9}
id-oc-residentialPerson OBJECT IDENTIFIER ::= {id-oc 10}
id-oc-applicationProcess OBJECT IDENTIFIER ::= {id-oc 11}
id-oc-applicationEntity OBJECT IDENTIFIER ::= {id-oc 12}
id-oc-dSA           OBJECT IDENTIFIER ::= {id-oc 13}
id-oc-device        OBJECT IDENTIFIER ::= {id-oc 14}
id-oc-strongAuthenticationUser OBJECT IDENTIFIER ::= {id-oc 15} -- Deprecated, see 6.15
id-oc-certificationAuthority OBJECT IDENTIFIER ::= {id-oc 16} -- Deprecated, see 6.17
id-oc-certificationAuthority-V2
OBJECT IDENTIFIER ::= {id-oc 16 2} -- Deprecated, see 6.18

```

```

id-oc-groupOfUniqueNames      OBJECT IDENTIFIER ::= {id-oc 17}
id-oc-userSecurityInformation  OBJECT IDENTIFIER ::= {id-oc 18}
-- id-oc-cRLDistributionPoint  OBJECT IDENTIFIER ::= {id-oc 19} Defined in X.509 | Part 8
id-oc-dmd                      OBJECT IDENTIFIER ::= {id-oc 20}
-- id-oc-pkiUser              OBJECT IDENTIFIER ::= {id-oc 21} Defined in X.509 | Part 8
-- id-oc-pkiCA                OBJECT IDENTIFIER ::= {id-oc 22} Defined in X.509 | Part 8
-- id-oc-deltaCRL             OBJECT IDENTIFIER ::= {id-oc 23} Defined in X.509 | Part 8
-- id-oc-pmiUser              OBJECT IDENTIFIER ::= {id-oc 24} Defined in X.509 | Part 8
-- id-oc-pmiAA                OBJECT IDENTIFIER ::= {id-oc 25} Defined in X.509 | Part 8
-- id-oc-pmiSOA               OBJECT IDENTIFIER ::= {id-oc 26} Defined in X.509 | Part 8
-- id-oc-attCertCRLDistributionPts
--                             OBJECT IDENTIFIER ::= {id-oc 27} Defined in X.509 | Part 8
-- id-oc-parent                OBJECT IDENTIFIER ::= {id-oc 28} Defined in X.501 | Part 2
-- id-oc-child                 OBJECT IDENTIFIER ::= {id-oc 29} Defined in X.501 | Part 2
-- id-oc-cpCps                 OBJECT IDENTIFIER ::= {id-oc 30} Defined in X.509 | Part 8
-- id-oc-pkiCertPath           OBJECT IDENTIFIER ::= {id-oc 31} Defined in X.509 | Part 8
-- id-oc-privilegePolicy       OBJECT IDENTIFIER ::= {id-oc 32} Defined in X.509 | Part 8
-- id-oc-pmiDelegationPath     OBJECT IDENTIFIER ::= {id-oc 33} Defined in X.509 | Part 8
-- id-oc-protectedPrivilegePolicy
--                             OBJECT IDENTIFIER ::= {id-oc 34} Defined in X.509 | Part 8
id-oc-oidC1obj                 OBJECT IDENTIFIER ::= {id-oc 35}
id-oc-oidC2obj                 OBJECT IDENTIFIER ::= {id-oc 36}
id-oc-oidCobj                  OBJECT IDENTIFIER ::= {id-oc 37}
id-oc-isoTagInfo               OBJECT IDENTIFIER ::= {id-oc 38}
id-oc-isoTagType               OBJECT IDENTIFIER ::= {id-oc 39}
-- id-oc-integrityInfo         OBJECT IDENTIFIER ::= {id-oc 40} Defined in X.501 | Part 2
id-oc-userPwdClass             OBJECT IDENTIFIER ::= {id-oc 41}
id-oc-urnCobj                  OBJECT IDENTIFIER ::= {id-oc 42}
id-oc-epcTagInfoObj           OBJECT IDENTIFIER ::= {id-oc 43}
id-oc-epcTagTypeObj           OBJECT IDENTIFIER ::= {id-oc 44}

id-oidRoot                     OBJECT IDENTIFIER ::= {id 3}
id-oidArc                      OBJECT IDENTIFIER ::= {id 5}

-- Name forms

id-nf-countryNameForm          OBJECT IDENTIFIER ::= {id-nf 0}
id-nf-locNameForm              OBJECT IDENTIFIER ::= {id-nf 1}
id-nf-sOPNameForm              OBJECT IDENTIFIER ::= {id-nf 2}
id-nf-orgNameForm              OBJECT IDENTIFIER ::= {id-nf 3}
id-nf-orgUnitNameForm          OBJECT IDENTIFIER ::= {id-nf 4}
id-nf-personNameForm           OBJECT IDENTIFIER ::= {id-nf 5}
id-nf-orgPersonNameForm        OBJECT IDENTIFIER ::= {id-nf 6}
id-nf-orgRoleNameForm          OBJECT IDENTIFIER ::= {id-nf 7}
id-nf-gONNameForm              OBJECT IDENTIFIER ::= {id-nf 8}
id-nf-resPersonNameForm        OBJECT IDENTIFIER ::= {id-nf 9}
id-nf-applProcessNameForm      OBJECT IDENTIFIER ::= {id-nf 10}
id-nf-applEntityNameForm       OBJECT IDENTIFIER ::= {id-nf 11}
id-nf-dSANNameForm             OBJECT IDENTIFIER ::= {id-nf 12}
id-nf-deviceNameForm           OBJECT IDENTIFIER ::= {id-nf 13}
-- id-nf-cRLDistPtNameForm     OBJECT IDENTIFIER ::= {id-nf 14}
id-nf-dMDNameForm              OBJECT IDENTIFIER ::= {id-nf 15}
-- id-nf-subentryNameForm      OBJECT IDENTIFIER ::= {id-nf 16}
id-nf-oidC1NameForm            OBJECT IDENTIFIER ::= {id-nf 17}
id-nf-oidC2NameForm            OBJECT IDENTIFIER ::= {id-nf 18}
id-nf-oidCNameForm             OBJECT IDENTIFIER ::= {id-nf 19}
id-nf-urnCNameForm             OBJECT IDENTIFIER ::= {id-nf 20}

id-oidRootNf                   OBJECT IDENTIFIER ::= {id 4}
id-oidArcNf                    OBJECT IDENTIFIER ::= {id 6}

END -- SelectedObjectClasses

```

Annex B

Suggested name forms and Directory information tree (DIT) structures

(This annex does not form an integral part of this Recommendation | International Standard.)

This annex suggests a Directory information tree (DIT) structure shown in Figure B.1 and related DIT structure rules using the name forms defined in clause 3. The rules cover an unconstrained DIT structure. This example is for illustrative purposes only, and is not intended to limit the types of names that can be validly constructed in the Directory.

The integer identifiers assigned in this annex and used in Figure B.1 are arbitrary and have no global (or standardized) significance. A particular structure rule identifier only has significance within the scope of the subschema in which it applied. Each Directory management domain (DMD) is responsible for creating its own DIT structure and structure rules that may differ from this example.

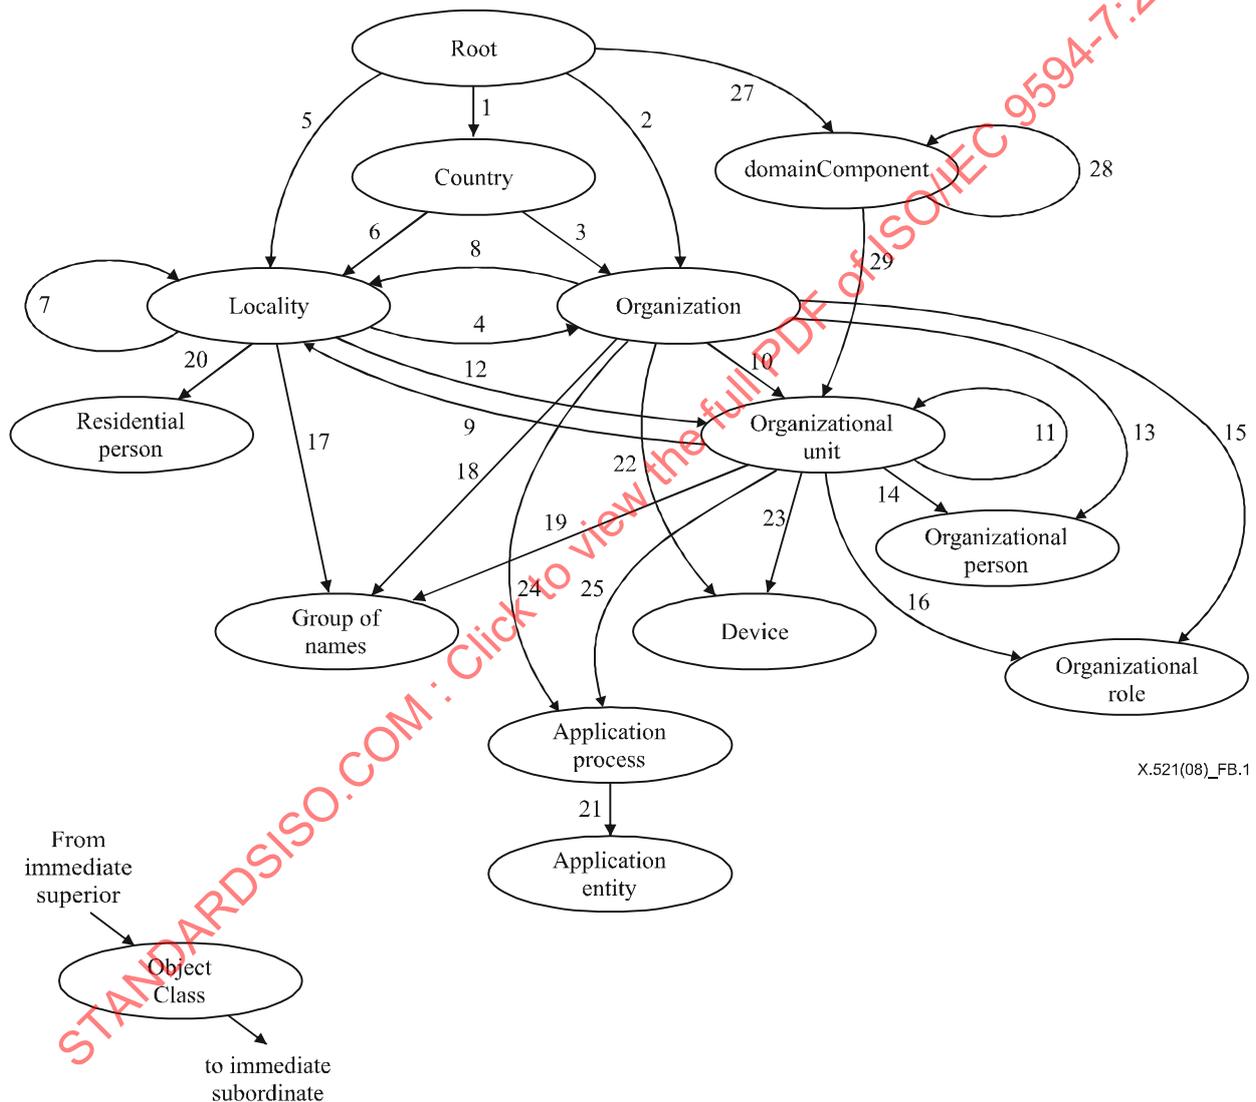


Figure B.1 – Example DIT structure

B.1 Country

Attribute type **countryName** is used for naming.

The root is the immediate superior to entries of object class **country**.

```
sr1 STRUCTURE-RULE ::= {
  NAME FORM    countryNameForm
  ID           1 }
```