

INTERNATIONAL
STANDARD

ISO/
IEC/IEEE
8802-1AB

Second edition
2017-07

AMENDMENT 1
2023-07

**Information technology —
Telecommunications and information
exchange between systems — Local
and metropolitan area networks —
Specific requirements —**

**Part 1AB:
Station and media access control
connectivity discovery**

AMENDMENT 1: YANG data model

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains —
Exigences spécifiques —*

*Partie 1AB: Découverte de connectivité des stations et du contrôle
d'accès aux supports*

AMENDEMENT 1: Modèle de données YANG



Reference number
ISO/IEC/IEEE 8802-1AB:2017/Amd.1:2023(E)

© IEEE 2022



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from IEEE at the address below.

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

Email: stds.ipr@ieee.org
Website: www.ieee.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO/IEC documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <https://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

ISO/IEC/IEEE 8802-1AB:2017/Amd.1 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE 802.1ABcu-2021) and drafted in accordance with its editorial rules. It was adopted, under the "fast-track procedure" defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

IEEE Std 802.1ABcu™-2021
(Amendment to IEEE Std 802.1AB™-2016)

**IEEE Standard for
Local and metropolitan area networks—**

**Station and Media Access Control
Connectivity Discovery**

Amendment 1: YANG Data Model

Developed by the
LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 8 December 2021
IEEE SA Standards Board

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 802-1AB:2017/Amd 1:2023

ISO/IEC/IEEE 8802-1AB:2017/Amd.1:2023(E)

Abstract: This amendment to IEEE Std 802.1AB-2016 specifies a Unified Modeling Language (UML)-based information model and a YANG data model that allows configuration and status reporting for bridges and bridge components with regards to topology discovery.

Keywords: Bridged Local Area Networks, IEEE 802[®], IEEE 802.1AB[™], IEEE 802.1ABcu[™], local area networks (LANs), MAC Bridges, metropolitan area networks, YANG

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2022 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 13 April 2022. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-8299-8 STD25172
Print: ISBN 978-1-5044-8300-1 STDPD25172

IEEE prohibits discrimination, harassment and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

STANDARDS.PDF.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE Standards documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page (<https://standards.ieee.org/ipr/disclaimers.html>), appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE SA) Standards Board. IEEE develops its standards through an accredited consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed by volunteers with scientific, academic, and industry-based expertise in technical working groups. Volunteers are not necessarily members of IEEE or IEEE SA, and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE makes no warranties or representations concerning its standards, and expressly disclaims all warranties, express or implied, concerning this standard, including but not limited to the warranties of merchantability, fitness for a particular purpose and non-infringement. In addition, IEEE does not warrant or represent that the use of the material contained in its standards is free from patent infringement. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity, nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: THE NEED TO PROCURE SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE is the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that the presenter's views should be considered the personal views of that individual rather than the formal position of IEEE, IEEE SA, the Standards Committee, or the Working Group.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE or IEEE SA. However, **IEEE does not provide interpretations, consulting information, or advice pertaining to IEEE Standards documents.**

Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its Societies and Standards Coordinating Committees are not able to provide an instant response to comments, or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in evaluating comments or in revisions to an IEEE standard is welcome to join the relevant IEEE working group. You can indicate interest in a working group using the Interests tab in the Manage Profile & Interests area of the [IEEE SA myProject system](#).¹ An IEEE Account is needed to access the application.

Comments on standards should be submitted using the [Contact Us](#) form.²

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not constitute compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Data privacy

Users of IEEE Standards documents should evaluate the standards for considerations of data privacy and data ownership in the context of assessing and using the standards in compliance with applicable laws and regulations.

¹ Available at: https://development.standards.ieee.org/myproject-web/public/view.html#landing_

² Available at: <https://standards.ieee.org/content/ieee-standards/en/about/contact/index.html>

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under US and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate licensing fees, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400; <https://www.copyright.com/>. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every 10 years. When a document is more than 10 years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit [IEEE Xplore](#) or [contact IEEE](#).³ For more information about the IEEE SA or IEEE's standards development process, visit the IEEE SA Website.

Errata

Errata, if any, for all IEEE standards can be accessed on the [IEEE SA Website](#).⁴ Search for standard number and year of approval to access the web page of the published standard. Errata links are located under the Additional Resources Details section. Errata are also available in [IEEE Xplore](#). Users are encouraged to periodically check for errata.

Patents

IEEE Standards are developed in compliance with the [IEEE SA Patent Policy](#).⁵

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has

³ Available at: <https://ieeexplore.ieee.org/browse/standards/collection/ieee>.

⁴ Available at: <https://standards.ieee.org/standard/index.html>.

⁵ Available at: <https://standards.ieee.org/about/sasb/patcom/materials.html>.

filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE SA Website at <https://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

IMPORTANT NOTICE

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. IEEE Standards development activities consider research and information presented to the standards development group in developing any safety recommendations. Other information about safety practices, changes in technology or technology implementation, or impact by peripheral systems also may be pertinent to safety considerations during implementation of the standard. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

Participants

At the time this amendment was submitted to the IEEE SA Standards Board for approval, the IEEE 802.1 Working Group had the following membership:

Glenn Parsons, Chair

Jessy Rouyer, Vice-Chair

János Farkas, Chair, Time-Sensitive Networking Task Group

Craig Gunther, Vice-Chair, Time-Sensitive Networking Task Group

Scott Mansfield, Editor

Astrit Ademaj	Satoko Itaya	Atsushi Sato
Ralf Assmann	Yoshihiro Ito	Frank Schewe
Rudy Belliardi	Michael Karl	Michael Seaman
Christian Boiger	Stephan Kehrer	Maik Seewald
Paul Bottorff	Randy Kelsey	Ramesh Sivakolundu
Radhakrishna Canchi	Gavin Lai	Johannes Specht
Feng Chen	James Lawlis	Marius Stanica
Paul Congdon	Joao Lopes	Guenter Steindl
Rodney Cummings	Lily Lv	Liyang Sun
Josef Dorr	Christophe Mangin	Karim Traore
Hesham Elbakoury	Kenichi Maruhashi	Max Turner
Anna Engelmann	Olaf Mater	Balazs Varga
Thomas Enzinger	David McCall	Ganesh Venkatesan
Donald Fedyk	Larry McMillan	Tongtong Wang
Norman Finn	John Messenger	Xinyuan Wang
Geoffrey Garner	Hiroki Nakano	Karl Weber
Amrit Gopal	Hiroshi Ohue	Ludwig Winkel
Marina Gutierrez	Donald R. Pannell	Jordon Woods
Stephen Haddock	Michael Potts	Takahiro Yamaura
Mark Hantel	Dieter Proell	Yue Yin
Jerome Henry	Wei Qiu	Nader Zein
Marc Holness	Karen Randall	William Zhao
Daniel Hopf	Maximilian Riegel	Helge Zinner
Woojung Huh	Silvana Rodrigues	

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Vern Brethour	Pranav Jha	R. K. Rannow
William Byrd	Lokesh Kabra	Maximilian Riegel
Paul Cardinal	Piotr Karocki	Jessy Rouyer
Steven Carlson	Stephan Kehrer	Frank Schewe
Pin Chang	Randy Kelsey	Maik Seewald
Paul Congdon	Stuart Kerry	Guenter Steindl
Charles Cook	Yongbum Kim	Walter Struppler
Michael Cowan	David Kornbau	Mitsutoshi Sugawara
Rodney Cummings	Hyeong Ho Lee	David Tremblay
János Farkas	Ting Li	Max Turner
Avraham Freedman	Scott Mansfield	John Vergis
Stephen Haddock	Jonathon Mclendon	Stephen Webb
Marco Hernandez	Satoshi Obara	Scott Willy
Werner Hoelzl	Glenn Parsons	James Young
Marc Holness	Bansi Patel	Yu Yuan
Raj Jain	Clinton Powell	Oren Yuen
	Dieter Proell	

When the IEEE SA Standards Board approved this standard on 8 December 2021, it had the following membership:

Gary Hoffman, *Chair*
Jon Walter Rosdahl, *Vice Chair*
John D. Kulick, *Past Chair*
Konstantinos Karachalios, *Secretary*

Edward A. Addy
Doug Edwards
Ramy Ahmed Fathy
J. Travis Griffith
Thomas Koshy
Joseph L. Koepfinger*
David J. Law

Howard Li
Daozhuang Lin
Kevin Lu
Daleep C. Mohla
Chenhui Niu
Damir Novosel
Annette Reilly
Dorothy Stanley

Mehmet Ulema
Lei Wang
F. Keith Waters
Karl Weber
Sha Wei
Howard Wolfman
Daidi Zhong

*Member Emeritus

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

Introduction

This introduction is not part of IEEE Std 802.1ABcu-2021, IEEE Standard for Local and metropolitan area networks—Station and Media Access Control Connectivity Discovery—Amendment 1: YANG Data Model.

The scope of this standard is to define a protocol and management elements, suitable for advertising information to stations attached to the same IEEE 802 LAN, for the purpose of populating physical topology and device discovery management information databases. The protocol facilitates the identification of stations connected by IEEE 802 LANs/MANs, their points of interconnection, and access points for management protocols.

This standard contains state-of-the-art material. The area covered by this standard is undergoing evolution. Revisions are anticipated within the next few years to clarify existing material, to correct possible errors, and to incorporate new related material. Information on the current revision state of this and other IEEE 802 standards may be obtained from

Secretary, IEEE SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854
USA

Contents

1.	Overview.....	12
1.2	Purpose.....	12
2.	Normative references.....	13
3.	Definitions and numerical representation.....	14
3.1	Definitions.....	14
5.	Conformance.....	15
5.3	Required capabilities.....	15
6.	Principles of operation.....	16
9.	LLDP agent operation.....	17
9.2	State machines.....	17
12.	LLDP YANG definitions.....	18
12.1	Internet Standard Management Framework.....	18
12.2	Information model for LLDP management.....	18
12.3	Structure of the LLDP YANG model.....	21
12.4	Relationship to other YANG modules.....	23
12.5	Security considerations.....	23
12.6	Definition of the YANG modules.....	24
	Annex A (normative) PICS proforma.....	52
	Annex D (informative) Bibliography.....	53

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

IEEE Standard for Local and metropolitan area networks—

Station and Media Access Control Connectivity Discovery

Amendment 1: YANG Data Model

(This amendment is based on IEEE Std 802.1AB™-2016.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in *bold italic*. Four editing instructions are used: change, delete, insert, and replace. *Change* is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strikethrough~~ (to remove old material) and underscore (to add new material). *Delete* removes existing material. *Insert* adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. *Replace* is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.⁶

⁶ Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

1. Overview

1.2 Purpose

Change 1.2 as follows:

~~An IETF MIB (IETF RFC 2922 [B9]) and a number of vendor specific MIBs have been created to describe a network's physical topology and associated systems within that topology.~~

This standard specifies the necessary protocol and management elements to

- a) Facilitate multi-vendor inter-operability and the use of standard management tools to discover and make available physical topology information for network management.
- b) Make it possible for network management to discover certain configuration inconsistencies or malfunctions that can result in impaired communication at higher layers.
- c) Provide information to assist network management in making resource changes and/or re-configurations that correct configuration inconsistencies or malfunctions identified in b) above.
- d) Provide IETF MIB (IETF RFC 2922 [B9]) to describe a network's physical topology and associated systems within that topology.
- e) Provide YANG configuration and operational models supporting Station and Media Access Control Connectivity Discovery.

2. Normative references

Insert the following references into Clause 2 in alphanumeric order:

IEEE Std 802d™-2017, IEEE Standard for Local and Metropolitan Area Networks: Overview and Architecture—Amendment 1: Allocation of Uniform Resource Name (URN) Values in IEEE 802® Standards.^{7, 8}

IETF RFC 6241, Network Configuration Protocol (NETCONF), June 2011.⁹

IETF RFC 6991, Common YANG Data Types, July 2013.

IETF RFC 7950, The YANG 1.1 Data Modeling Language, August 2016.

IETF RFC 8343, A YANG Data Model for Interface Management, March 2018.

IETF RFC 8349, A YANG Data Model for Routing Management (NMDA Version), March 2018.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

⁷ IEEE publications are available from the Institute of Electrical and Electronics Engineers (<https://standards.ieee.org/>).

⁸ The IEEE standards or products referred to in Clause 2 are trademarks of the Institute of Electrical and Electronics Engineers, Incorporated.

⁹ IETF RFCs are available from the Internet Engineering Task Force (<https://www.rfc-archive.org/>).

3. Definitions and numerical representation

3.1 Definitions

Change the first paragraph of 3.1 as follows (note change in footnote text):

For the purposes of this document, the following terms and definitions apply. The *IEEE Standards Dictionary Online* should be consulted for terms not defined in this clause.¹⁰

Insert new definitions at the end of 3.1 as follows:

YANG: IETF defined data modeling language, published as IETF RFC 7950.

YANG model: One or more YANG modules used to configure and monitor the managed element or system.

YANG module: The description of the data model used to configure and monitor the managed element or system. A YANG module defines a hierarchy of nodes that can be used for NETCONF-based (see IETF RFC 7803 [B13]) and RESTCONF-based (see IETF RFC 8040 [B14]) operations.

¹⁰*IEEE Standards Dictionary Online* subscription is available at: <http://dictionary.ieee.org>.
http://www.ieee.org/portal/innovate/products/standard/standards_dictionary.html

5. Conformance

5.3 Required capabilities

Change item n) in the lettered list of 5.3 as follows:

- n) If neither SNMP nor YANG ~~is not~~ are supported, the system shall provide storage and retrieval capability equivalent to the functionality specified in 10.1 for the operating mode being implemented.

Insert new item o) after item n) in the lettered list of 5.3 as follows:

- o) If YANG is supported, then the system shall conform to the LLDP management specifications in Clause 12 and shall implement the sections of the LLDP YANG module for the operating mode being implemented.

6. Principles of operation

Change the first paragraph of the introduction of Clause 6 as follows:

LLDP is a link layer protocol that allows an IEEE 802 LAN station to advertise the capabilities and current status of the system associated with an MSAP. The MSAP provides the MAC service to an LLC Entity, and that LLC Entity provides an LSAP to an LLDP agent that transmits and receives information to and from the LLDP agents of other stations attached to the same LAN. The information distributed and received in each LLDPDU is stored in one or more Management Information Bases (MIBs) or YANG modules. Figure 6-1 illustrates the LLDP agent and its relationship to its LLC Entity and MSAP, and to additional MIBs or YANG modules designed by the IETF, IEEE 802, and others.

Replace Figure 6-1 with the following figure (with YANG references added):

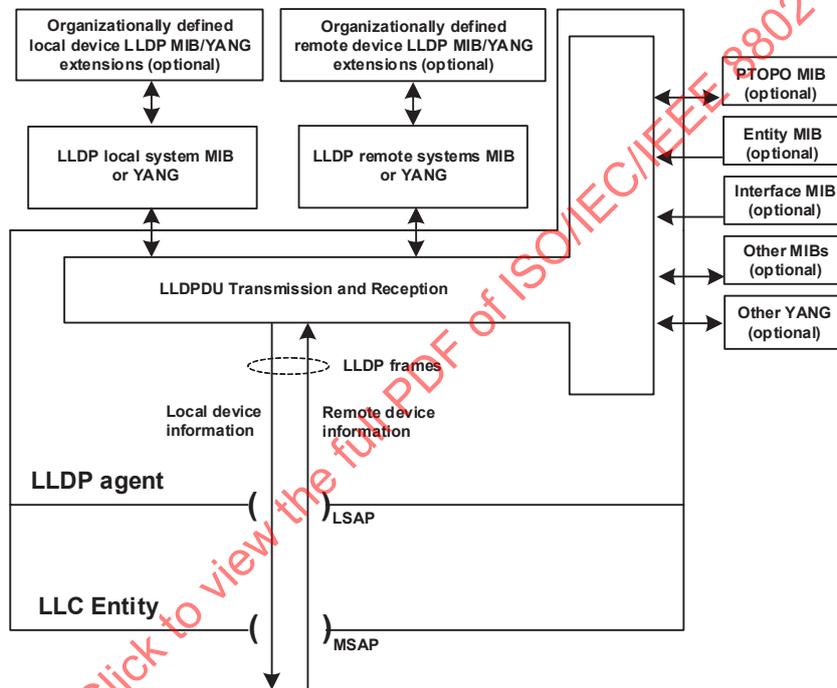


Figure 6-1—LLDP agent and its relationship to its LLC entity

Change the second paragraph of the introduction of Clause 6 as follows:

This clause describes general principles of LLDP operation. The following clauses specify transmission, reception, and addressing of LLPDUs (Clause 7); LLDPDU formats (Clause 8); operation of each LLDP agent in detail including state machines (Clause 9); management of LLDP (Clause 10); and the MIB module (Clause 11) or YANG module (Clause 12) used for LLDP management (Clause 11).

9. LLDP agent operation

9.2 State machines

9.2.5 Per-Agent variables

9.2.5.6 msgTxHold

Change 9.2.5.6 as follows:

This variable is used, as a multiplier of msgTxInterval, to determine the value of txTTL that is carried in LLDP frames transmitted by the LLDP agent. The recommended default value of msgTxHold is 4; this value can be changed by management to any value in the range 2+ through 100.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-1AB:2017/Amd 1:2023

Insert Clause 12 after Clause 11 as follows:

12. LLDP YANG definitions

This clause specifies YANG modules that provide control and status monitoring of systems and system components that implement functionality specified in this standard.

This clause:

- a) Introduces the YANG framework that governs the naming and hierarchy of configuration and operational data structures in the data models, and the modeling of network interfaces (12.1).
- b) Describes the information data model and its relationship to the operational processes and managed objects specified in the other clauses of this standard, and provides a UML representation of each data model (12.2).
- c) Describes the structure of the data models, each of which comprises or makes use of one or more YANG modules (12.3).
- d) Includes a relationship description of other modules imported in YANG modules (12.4).
- e) Reviews security considerations applicable to each of the modules, with specific reference to data nodes in the YANG modules that compose the model (12.5).
- f) Includes each of the YANG modules and its data schema (12.6).

12.1 Internet Standard Management Framework

This YANG module uses the YANG 1.1 Data Modeling Language as specified in IETF RFC 7950.

The YANG framework applies hierarchy in the following areas:

- a) The uniform resource name (URN), as specified in IEEE Std 802d. The structure of the URN is such that `ieee` is the root (i.e., name-space identifier), followed by the standard, then the working group developing the standard.
- b) The YANG objects form a hierarchy of configuration and operational data structures that define the YANG model.

12.2 Information model for LLDP management

The YANG objects are based on the TLVs detailed in 8.5 and 8.6, and the agent operation variables detailed in 9.1 and 9.2. A UML-like representation of the management model is provided in the following subclauses.

The purpose of a UML-like¹¹ diagram is to express the model design on a single piece of paper. The structure of the UML-like representation shows the name of the object followed by a list of properties for the object. The properties indicate its type and accessibility. It should be noted that the UML-like representation is meant to express simplified semantics for the properties. It is not meant to provide the specific datatype as used to encode the object in either MIB or YANG. In the UML-like representation, a box with a white background represents information that comes from sources outside of the IEEE. A box with a gray background represents objects that are defined by this IEEE Standard.

The YANG hierarchical structure that incorporates the LLDP YANG modules supported by this standard is represented by Figure 12-1. In the figures in this clause, items that are shaded gray are described in this

¹¹A description of the UML-like diagrams used in this clause is provided at <https://1.ieee802.org/uml-like-diagrams>.

document, items with no background shading are defined elsewhere. The YANG data model is realized in two YANG modules. One module *ieee802-dot1ab-types* provides data types that are needed by the LLDP configuration and monitoring objects. The *ieee802-dot1ab-lldp* module provides the LLDP configuration and monitoring objects. The ability to augment the port container to support extension TLVs is also shown. The LLDP capabilities are not only applicable to IEEE Std 802.1Q bridges, but also (for example) end stations, and routers.

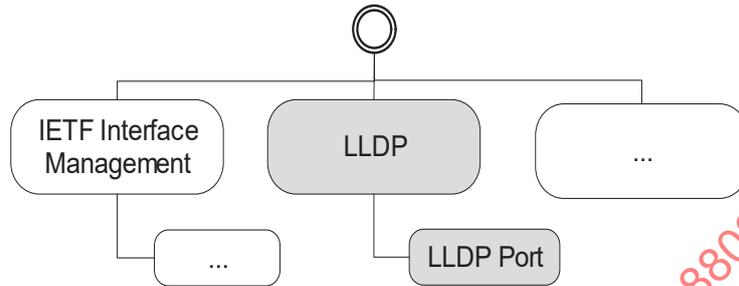


Figure 12-1—YANG root hierarchy with LLDP YANG modules

12.2.1 LLDP UML

The LLDP configuration and monitoring objects in Figure 12-2 show the objects that are applicable on a per-agent or chassis associated with the LLDP agent.

lldp		
uint32	message-fast-tx;	// (9.2.5.5) r-w
uint32	message-tx-hold-multiplier;	// (9.2.5.6) r-w
uint32	message-tx-interval;	// (9.2.5.7) r-w
uint32	reinit-delay;	// (9.2.5.10) r-w
uint32	tx-credit-max;	// (9.2.5.17) r-w
uint32	tx-fast-init;	// (9.2.5.19) r-w
uint32	notification-interval;	// (9.2.5.7) r-w
remote-statistics		
timestamp	last-change-time;	// r
zero-based-counter32	remote-inserts;	// r
zero-based-counter32	remote-deletes;	// r
zero-based-counter32	remote-drops;	// r
zero-based-counter32	remote-ageouts;	// r
local-system-data		
enum	chassis-id-subtype;	// (8.5.2.2) r
string	chassis-id;	// (8.5.2.3) r
string	system-name;	// (8.5.6.2) r
string	system-description;	// (8.5.7.2) r
bits	system-capabilities-supported	// (8.5.8.1) r
bits	system-capabilities-enabled	// (8.5.8.2) r

Figure 12-2—LLDP configuration and monitoring objects

12.2.2 LLDP Port UML

The LLDP port configuration and monitoring objects in Figure 12-3 show the objects that are applicable to an LLDP port.

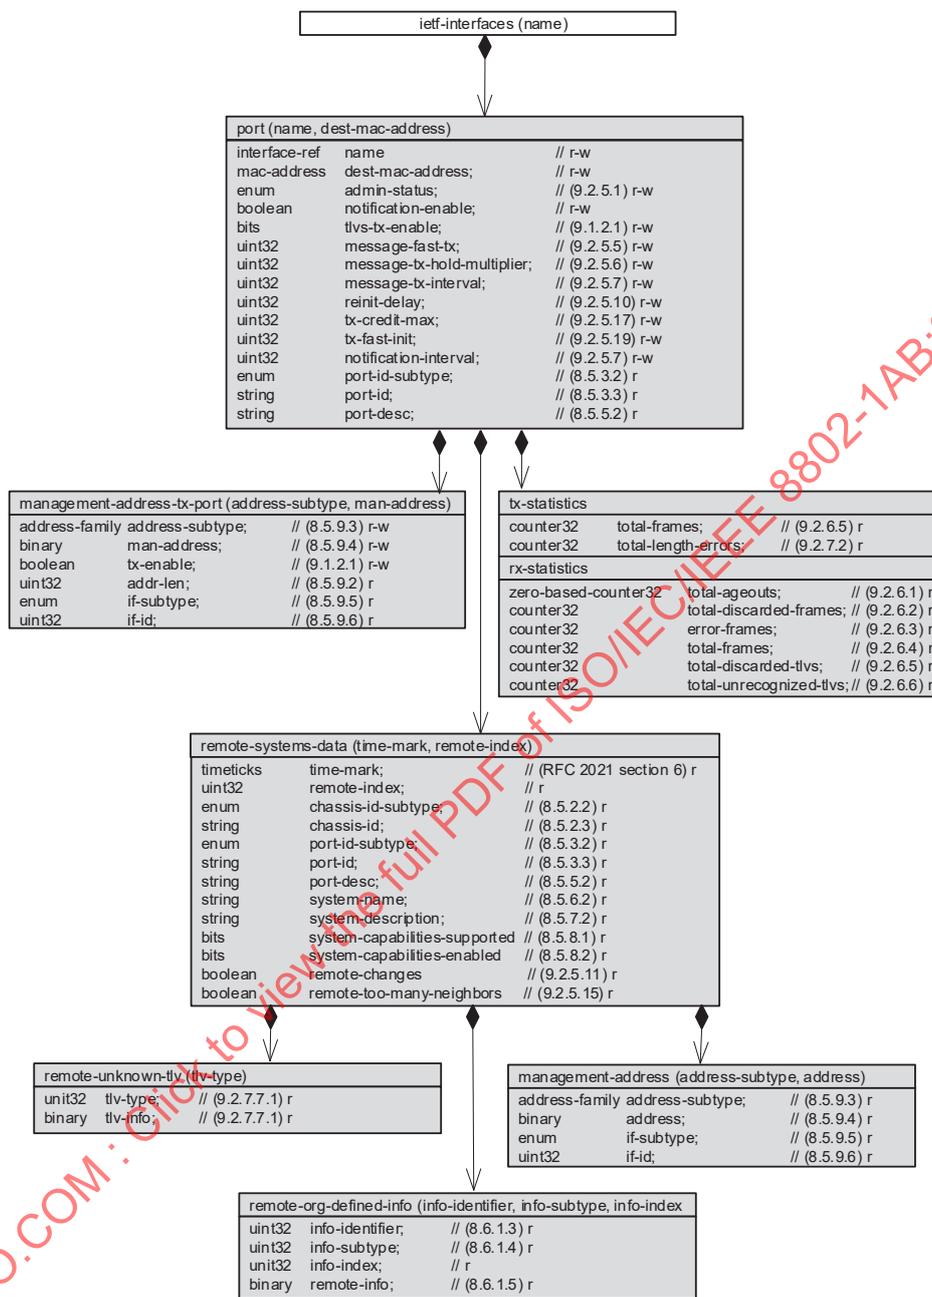


Figure 12-3—LLDP port configuration and monitoring objects

12.3 Structure of the LLDP YANG model

The IEEE YANG model specified in this standard is divided into two YANG modules. A summary of the modules contained in this clause is represented in Table 12-1.

Table 12-1—Structure of the YANG modules

Module	Subclause	Notes
ieee802-dot1ab-types	12.6.2.2	Type definitions used for LLDP YANG
ieee802-dot1ab-lldp	12.6.2.3	LLDP Generic Management

In the YANG module definitions below, if any discrepancy between the DESCRIPTION text and the corresponding definition in any other part of this standard occurs, the definitions outside this subclause take precedence.

12.3.1 Structure of the *ieee802-dot1ab-lldp* module

The *ieee802-dot1ab-lldp* YANG module is divided into several YANG branches (e.g., subtrees). A summary of the YANG subtrees associated with this module is presented in Table 12-2.

Table 12-2—Structure of the *ieee802-dot1ab-lldp* module

Branches	References	Notes
lldp		Link Layer Discovery Protocol (LLDP) configuration and operational information
message-fast-tx	9.2.5.5	
message-tx-hold-multiplier	9.2.5.6	
message-tx-interval	9.2.5.7	
reinit-delay	9.2.5.10	
tx-credit-max	9.2.5.17	
tx-fast-init	9.2.5.19	
notification-interval	9.2.5.7	
remote-statistics	10.5.2	LLDP remote operational statistics data
local-system-data	10.5.2	LLDP local system operational data
port	9.2.4	LLDP configuration information for a particular port
management-address-tx-port	8.5.9	Set of ports on which the local system management address instance will be transmitted
tx-statistics	9.2.6	LLDP frame transmission statistics for a particular port
rx-statistics	9.2.6	LLDP frame reception statistics for a particular port
remote-system-data		Information about a particular physical network connection

12.4 Relationship to other YANG modules

This clause describes how the *ieee802-dot1ab-lldp* YANG module is related to the YANG modules that are imported.

12.4.1 IEEE LLDP Types Module

The *ieee802-dot1ab-types* module provides reusable types that are used by the *ieee802-dot1ab-lldp* module.

12.4.2 IETF Routing Module

The *ietf-routing* YANG module (IETF RFC 8349) is a module defined by the IETF for management of a routing subsystem. This document only uses the address-family identity, which is used as the base identity for address families.

12.4.3 IETF YANG Types Module

The *ietf-yang-types* YANG module (IETF RFC 6991) contains a set of derived YANG types. This document leverages timestamp, timeticks, zero-based-counter32, and counter32.

12.4.4 IETF Interfaces YANG Module

The *ietf-interfaces* YANG module (IETF RFC 8343) contains a set of YANG definitions for managing network interfaces. This document models a port as an interface.

12.4.5 IEEE 802 Types Module

The *ieee802-types* module provides reusable types that are used in IEEE 802 standards.

The type for mac-addresses defined in *ieee802-types* has a pattern that allows upper and lower case letters. To avoid issues with string comparison, it is suggested to only use upper case for the letters in the hexadecimal numbers. Implementers using code comparing MAC addresses should note that there is still an issue with a difference between the IETF mac-address definition and the IEEE mac-address definition.

12.5 Security considerations

The YANG modules defined in this clause are designed to be accessed via a network configuration protocol (e.g., NETCONF protocol). In the case of NETCONF, the lowest NETCONF layer is the secure transport layer and the mandatory to implement secure transport is SSH. The NETCONF access control model provides the means to restrict access for particular NETCONF users to a pre-configured subset of all available NETCONF protocol operations and content.

It is the responsibility of a system's implementor and administrator to ensure that the protocol entities in the system that support NETCONF, and any other remote configuration protocols that make use of these YANG modules, are properly configured to allow access only to those users who have legitimate rights to read or write data nodes. This standard does not specify how the credentials of those users are to be stored or validated.

12.5.1 Security considerations of the *ieee802-dot1ab-lldp* YANG module

There are several management objects defined in the *ieee802-dot1ab-lldp* YANG module that are configurable (i.e., read-write) and/or operational (i.e., read-only). Such objects may be considered sensitive or vulnerable in some network environments. A network configuration protocol, such as NETCONF (IETF

RFC 6241), can support protocol operations that can edit or delete YANG module configuration data (e.g., edit-config, delete-config, copy-config). If this is done in a non-secure environment without proper protection, then negative effects on the network operation are possible.

The following objects in the *ieee802-dot1ab-lldp* YANG module can be manipulated to interfere with the operation of LLDP. This could, for example, be used to return incorrect information about neighbor nodes, or cause a denial-of-service attack.

- lldp/message-fast-tx
- lldp/message-tx-hold-multiplier
- lldp/message-tx-interval
- lldp/reinit-delay
- lldp/tx-credit-max
- lldp/tx-fast-init
- lldp/notification-interval
- lldp/port/name
- lldp/port/dest-mac-address
- lldp/port/admin-status
- lldp/port/notification-enable
- lldp/port/tlvs-tx-enable
- lldp/port/message-fast-tx
- lldp/port/message-tx-hold-multiplier
- lldp/port/message-tx-interval
- lldp/port/reinit-delay
- lldp/port/tx-credit-max
- lldp/port/tx-fast-init
- lldp/port/notification-interval
- lldp/port/management-address-tx-port/address-subtype
- lldp/port/management-address-tx-port/man-address
- lldp/port/management-address-tx-port/tx-enable

Some of the readable data in this YANG module may be considered sensitive or vulnerable in some network environments. It is important to control all types of access (e.g., including NETCONF get and get-config operations) to these objects and possibly to even encrypt the values of these objects when sending them over the network. For example the system name and other information about the remote systems could provide information about the configuration and topology of the network and could be considered a privacy threat.

12.6 Definition of the YANG modules^{12,13}

12.6.1 YANG schema definitions

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is as follows:

- Brackets “[“ and “]” enclose list keys.
- Abbreviations before data node names: “rw” means configuration (read-write), and “ro” means state data (read-only).
- Symbols after data node names: “?” means an optional node, “!” means a presence container, and “*” denotes a list and leaf-list.

¹²Copyright release for YANG modules: Users of this standard may freely reproduce the YANG modules contained in this subclause so that they can be used for their intended purpose.

¹³An ASCII version of the YANG module(s) can be obtained by Web browser from the IEEE 802.1 Website at <https://1.ieee802.org/yang-modules/>.

- Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (“:”).
- Ellipsis (“...”) stand for contents of subtrees that are not shown.

12.6.1.1 YANG schema definition for *ieee802-dot1ab-lldp* YANG module

```

module: ieee802-dot1ab-lldp
  +--rw lldp
    +--rw message-fast-tx?          uint32
    +--rw message-tx-hold-multiplier?  uint32
    +--rw message-tx-interval?        uint32
    +--rw reinit-delay?              uint32
    +--rw tx-credit-max?              uint32
    +--rw tx-fast-init?               uint32
    +--rw notification-interval?      uint32
    +--ro remote-statistics
      | +--ro last-change-time?      yang:timestamp
      | +--ro remote-inserts?        yang:zero-based-counter32
      | +--ro remote-deletes?        yang:zero-based-counter32
      | +--ro remote-drops?          yang:zero-based-counter32
      | +--ro remote-ageouts?        yang:zero-based-counter32
    +--ro local-system-data
      | +--ro chassis-id-subtype?     ieee:chassis-id-subtype-type
      | +--ro chassis-id?             ieee:chassis-id-type
      | +--ro system-name?            string
      | +--ro system-description?     string
      | +--ro system-capabilities-supported?
      | | lldp-types:system-capabilities-map
      | +--ro system-capabilities-enabled?
      | | lldp-types:system-capabilities-map
    +--rw port* [name dest-mac-address]
      +--rw name                     if:interface-ref
      +--rw dest-mac-address          ieee:mac-address
      +--rw admin-status?             enumeration
      +--rw notification-enable?      boolean
      +--rw tlvs-tx-enable?           bits
      +--rw message-fast-tx?          uint32
      +--rw message-tx-hold-multiplier?  uint32
      +--rw message-tx-interval?      uint32
      +--rw reinit-delay?             uint32
      +--rw tx-credit-max?            uint32
      +--rw tx-fast-init?             uint32
      +--rw notification-interval?    uint32
      +--rw management-address-tx-port* [address-subtype man-address]
        | +--rw address-subtype       identityref
        | +--rw man-address            lldp-types:man-addr-type
        | +--rw tx-enable?             boolean
        | +--ro addr-len?              uint32
        | +--ro if-subtype?            lldp-types:man-addr-if-subtype
        | +--ro if-id?                 uint32
      +--ro port-id-subtype?          ieee:port-id-subtype-type
      +--ro port-id?                  ieee:port-id-type
      +--ro port-desc?                 string
      +--ro tx-statistics
        | +--ro total-frames?          yang:counter32
        | +--ro total-length-errors?   yang:counter32
      +--ro rx-statistics
        | +--ro total-ageouts?         yang:zero-based-counter32
        | +--ro total-discarded-frames? yang:counter32
        | +--ro error-frames?          yang:counter32
        | +--ro total-frames?          yang:counter32
        | +--ro total-discarded-tlvs?  yang:counter32
        | +--ro total-unrecognized-tlvs? yang:counter32
      +--ro remote-systems-data* [time-mark remote-index]

```

```

+--ro time-mark                               yang:timeticks
+--ro remote-index                             uint32
+--ro remote-too-many-neighbors?              boolean
+--ro remote-changes?                         boolean
+--ro chassis-id-subtype?                     ieee:chassis-id-subtype-type
+--ro chassis-id?                             ieee:chassis-id-type
+--ro port-id-subtype?                         ieee:port-id-subtype-type
+--ro port-id?                                ieee:port-id-type
+--ro port-desc?                              string
+--ro system-name?                            string
+--ro system-description?                     string
+--ro system-capabilities-supported?
|   lldp-types:system-capabilities-map
+--ro system-capabilities-enabled?
|   lldp-types:system-capabilities-map
+--ro management-address* [address-subtype address]
|   +--ro address-subtype                     identityref
|   +--ro address                             lldp-types:man-addr-type
|   +--ro if-subtype?                         lldp-types:man-addr-if-subtype
|   +--ro if-id?                              uint32
+--ro remote-unknown-tlv* [tlv-type]
|   +--ro tlv-type                            uint32
|   +--ro tlv-info?                          binary
+--ro remote-org-defined-info*
|   [info-identifier info-subtype info index]
|   +--ro info-identifier                     uint32
|   +--ro info-subtype                       uint32
|   +--ro info-index                         uint32
|   +--ro remote-info?                       binary
    
```

notifications:

```

+---n remote-table-change
+--ro remote-insert? -> /lldp/remote-statistics/remote-inserts
+--ro remote-delete? -> /lldp/remote-statistics/remote-deletes
+--ro remote-drops? -> /lldp/remote-statistics/remote-drops
+--ro remote-ageouts? -> /lldp/remote-statistics/remote-ageouts
    
```

12.6.2 YANG data model definitions

12.6.2.1 Definition for the ieee802-types module

```

module ieee802-types {
  namespace urn:ieee:std:802.1Q:yang:ieee802-types;
  prefix ieee;
  organization
    "IEEE 802.1 Working Group";
  contact
    "WG-URL: http://ieee802.org/1/
    WG-EMail: stds-802-1-1@ieee.org

    Contact: IEEE 802.1 Working Group Chair
    Postal: C/O IEEE 802.1 Working Group
           IEEE Standards Association
           445 Hoes Lane
           Piscataway, NJ 08854
    
```

USA

E-mail: stds-802-1-chairs@ieee.org";

description

"This module contains a collection of generally useful derived data types for IEEE YANG models. Copyright(C) IEEE (2022). All rights reserved. This version of this YANG module is part of IEEE Std 802.1ABcu; see the standard itself for full legal notices.";

revision 2022-03-16 {**description**

"Published as part of IEEE Std 802.1ABcu.";

reference

"IEEE Std 802.1AB-2016";

}

revision 2020-06-04 {**description**

"Published as part of IEEE Std 802.1Qcx-2020. Second version.";

reference

"IEEE Std 802.1Qcx-2020, Bridges and Bridged Networks - YANG Data Model for Connectivity Fault Management.";

}

revision 2018-03-07 {**description**

"Published as part of IEEE Std 802.1Q-2018. Initial version.";

reference

"IEEE Std 802.1Q-2018, Bridges and Bridged Networks.";

}

typedef *mac-address* {**type** string {

pattern "[0-9a-fA-F]{2}(-[0-9a-fA-F]{2}){5}";

}

description

"The mac-address type represents a MAC address in the canonical format and hexadecimal format specified by IEEE Std 802. The hexadecimal representation uses uppercase characters.";

reference

"3.1 of IEEE Std 802-2014

8.1 of IEEE Std 802-2014";

}

typedef *chassis-id-subtype-type* {**type** enumeration {

enum chassis-component {

value 1;

description

"Represents a chassis identifier based on the value of entPhysicalAlias object (defined in IETF RFC 2737) for a chassis

```

        component (i.e., an entPhysicalClass value of chassis(3)).";
    }
    enum interface-alias {
        value 2;
        description
            "Represents a chassis identifier based on the value of ifAlias
            object (defined in IETF RFC 2863) for an interface on the
            containing chassis.";
    }
    enum port-component {
        value 3;
        description
            "Represents a chassis identifier based on the value of
            entPhysicalAlias object (defined in IETF RFC 2737) for a port or
            backplane component (i.e., entPhysicalClass value of port(10) or
            backplane(4)), within the containing chassis.";
    }
    enum mac-address {
        value 4;
        description
            "Represents a chassis identifier based on the value of a unicast
            source address (encoded in network byte order and IEEE 802.3
            canonical bit order), of a port on the containing chassis as
            defined in IEEE Std 802-2014.";
    }
    enum network-address {
        value 5;
        description
            "Represents a chassis identifier based on a network address,
            associated with a particular chassis. The encoded address is
            actually composed of two fields. The first field is a single octet,
            representing the IANA AddressFamilyNumbers value for the specific
            address type, and the second field is the network address value.";
    }
    enum interface-name {
        value 6;
        description
            "Represents a chassis identifier based on the value of ifName
            object (defined in IETF RFC 2863) for an interface on the
            containing chassis.";
    }
    enum local {
        value 7;
        description
            "Represents a chassis identifier based on a locally defined value.";
    }
}

```

```

}
description
  "The source of a chassis identifier.";
reference
  "IEEE Std 802-2014
  IETF RFC 2737
  IETF RFC 2863";
}
typedef chassis-id-type {
  type string {
    length "1..255";
  }
description
  "The format of a chassis identifier string. Objects of this type are
  always used with an associated chassis-id-subtype object, which
  identifies the format of the particular chassis-id object instance.

  If the associated chassis-id-subtype object has a value of
  chassis-component, then the octet string identifies a particular
  instance of the entPhysicalAlias object (defined in IETF RFC 2737) for
  a chassis component (i.e., an entPhysicalClass value of chassis(3)).

  If the associated chassis-id-subtype object has a value of
  interface-alias, then the octet string identifies a particular instance
  of the ifAlias object (defined in IETF RFC 2863) for an interface on
  the containing chassis. If the particular ifAlias object does not
  contain any values, another chassis identifier type should be used.

  If the associated chassis-id-subtype object has a value of
  port-component, then the octet string identifies a particular instance
  of the entPhysicalAlias object (defined in IETF RFC 2737) for a port or
  backplane component within the containing chassis.

  If the associated chassis-id-subtype object has a value of mac-address,
  then this string identifies a particular unicast source address
  (encoded in network byte order and IEEE 802.3 canonical bit order), of
  a port on the containing chassis as defined in IEEE Std 802-2014.

  If the associated chassis-id-subtype object has a value of
  network-address, then this string identifies a particular network
  address, encoded in network byte order, associated with one or more
  ports on the containing chassis. The first octet contains the IANA
  Address Family Numbers enumeration value for the specific address type,
  and octets 2 through N contain the network address value in network
  byte order."

```

If the associated chassis-id-subtype object has a value of interface-name, then the octet string identifies a particular instance of the ifName object (defined in IETF RFC 2863) for an interface on the containing chassis. If the particular ifName object does not contain any values, another chassis identifier type should be used.

If the associated chassis-id-subtype object has a value of local, then this string identifies a locally assigned Chassis ID.:";

reference

"IEEE Std 802-2014
 IETF RFC 2737
 IETF RFC 2863";

```

}
typedef port-id-subtype-type {
    type enumeration {
        enum interface-alias {
            value 1;
            description
                "Represents a port identifier based on the IfAlias MIB object,
                defined in IETF RFC 2863.";
        }
        enum port-component {
            value 2;
            description
                "Represents a port identifier based on the value of
                entPhysicalAlias (defined in IETF RFC 2737) for a port component
                (i.e., entPhysicalClass value of port(10)), within the containing
                chassis.";
        }
        enum mac-address {
            value 3;
            description
                "Represents a port identifier based on a unicast source address
                (encoded in network byte order and IEEE 802.3 canonical bit order),
                which has been detected by the agent and associated with a
                particular port (IEEE Std 802-2014).";
        }
        enum network-address {
            value 4;
            description
                "Represents a port identifier based on a network address, detected
                by the agent and associated with a particular port.";
        }
        enum interface-name {
            value 5;
            description
    
```

```

    "Represents a port identifier based on the ifName MIB object,
    defined in IETF RFC 2863.";
}
enum agent-circuit-id {
    value 6;
    description
        "Represents a port identifier based on the agent-local identifier
        of the circuit (defined in RFC 3046), detected by the agent and
        associated with a particular port.";
}
enum local {
    value 7;
    description
        "Represents a port identifier based on a value locally assigned.";
}
}
description
    "The source of a particular type of port identifier.";
reference
    "IEEE Std 802-2014
    IETF RFC 2737
    IETF RFC 2863
    IETF RFC 3046";
}
typedef port-id-type {
    type string {
        length "1..255";
    }
}
description
    "The format of a port identifier string. Objects of this type are
    always used with an associated port-id-subtype object, which identifies
    the format of the particular port-id object instance.

    If the associated port-id-subtype object has a value of
    interface-alias, then the octet string identifies a particular instance
    of the ifAlias object (defined in IETF RFC 2863). If the particular
    ifAlias object does not contain any values, another port identifier
    type should be used.

    If the associated port-id-subtype object has a value of port-component,
    then the octet string identifies a particular instance of the
    entPhysicalAlias object (defined in IETF RFC 2737) for a port or
    backplane component.

    If the associated port-id-subtype object has a value of mac-address,
    then this string identifies a particular unicast source address

```

(encoded in network byte order and IEEE 802.3 canonical bit order)
associated with the port (IEEE Std 802-2014).

If the associated port-id-subtype object has a value of network-address, then this string identifies a network address associated with the port. The first octet contains the IANA AddressFamilyNumbers enumeration value for the specific address type, and octets 2 through N contain the networkAddress address value in network byte order.

If the associated port-id-subtype object has a value of interface-name, then the octet string identifies a particular instance of the ifName object (defined in IETF RFC 2863). If the particular ifName object does not contain any values, another port identifier type should be used.

If the associated port-id-subtype object has a value of agent-circuit-id, then this string identifies a agent-local identifier of the circuit (defined in RFC 3046).

If the associated port-id-subtype object has a value of local, then this string identifies a locally assigned port ID.";

```
reference
  "IEEE Std 802-2014
  IETF RFC 2737
  IETF RFC 2863
  IETF RFC 3046";
}
}
```

12.6.2.2 Definition for the *ieee802-dot1ab-types* module

```
module ieee802-dot1ab-types {
  yang-version "1.1";
  namespace urn:ieee:std:802.1Q:yang:ieee802-dot1ab-types;
  prefix llq-types;
  organization
    "IEEE 802.1 Working Group";
  contact
    "WG-URL: http://ieee802.org/1/
    WG-EMail: stds-802-1-1@ieee.org
    Contact: IEEE 802.1 Working Group Chair
    Postal: C/O IEEE 802.1 Working Group
    IEEE Standards Association
    445 Hoes Lane
    Piscataway, NJ 08854
    USA

    E-mail: stds-802-1-chairs@ieee.org";
  description
```

"Common types used within ieee802-dot1ab-lldp modules. Copyright(C) IEEE (2022). All rights reserved. This version of this YANG module is part of IEEE Std 802.1ABcu; see the standard itself for full legal notices.";

```

revision 2022-03-15 {
  description
    "Published as part of IEEE Std 802.1ABcu.";
  reference
    "IEEE Std 802.1AB-2016";
}
typedef man-addr-if-subtype {
  type enumeration {
    enum unknown {
      value 1;
      description
        "Interface is not known.";
    }
    enum port-ref {
      value 2;
      description
        "Interface based on the port-ref MIB object.";
    }
    enum system-port-number {
      value 3;
      description
        "Interface based on the system port number.";
    }
  }
  description
    "Management address interface subtype.";
  reference
    "8.5.9.5 of IEEE Std 802.1AB-2016";
}
typedef man-addr-type {
  type string {
    pattern "[0-9A-F]{2}([0-9A-F]{2}){0,30}";
  }
  description
    "Management address associated with the LLDP agent.";
  reference
    "8.5.9.4 of IEEE Std 802.1AB-2016";
}
typedef system-capabilities-map {
  type bits {
    bit other {
      position 0;
      description
        "System has capabilities other than those listed below.";
    }
    bit repeater {
      position 1;
      description
        "System has repeater capability.";
    }
    bit bridge {
      position 2;
      description
        "System has bridge capability.";
    }
    bit wlan-access-point {

```

```

        position 3;
        description
            "System has WLAN access point capability.";
    }
    bit router {
        position 4;
        description
            "System has router capability.";
    }
    bit telephone {
        position 5;
        description
            "System has telephone capability.";
    }
    bit docsis-cable-device {
        position 6;
        description
            "System has DOCSIS Cable Device capability.";
        reference
            "IETF RFC 4639";
    }
    bit station-only {
        position 7;
        description
            "System has only station capability.";
    }
    bit cvlan-component {
        position 8;
        description
            "System has C-VLAN component functionality.";
    }
    bit svlan-component {
        position 9;
        description
            "System has S-VLAN component functionality.";
    }
    bit two-port-mac-relay {
        position 10;
        description
            "System has Two-port MAC Relay (TPMR) functionality.";
    }
    }
    description
        "This describes system capabilities.";
    reference
        "8.5.8.1 of IEEE Std 802.1AB-2016";
}
typedef port-list {
    type binary {
        length "0..512";
    }
}
description
    "Each octet within this value specifies a set of eight ports, with the
    first octet specifying ports 1 through 8, the second octet specifying
    ports 9 through 16, etc. Within each octet, the most significant bit
    represents the lowest numbered port, and the least significant bit
    represents the highest numbered port. Thus, each port of the system is
    represented by a single bit within the value of this object. If that
    bit has a value of '1' then that port is included in the set of ports;

```

```

    the port is not included if its bit has a value of '0'.";
  reference
    "IETF RFC 2674 section 5";
}
}

```

12.6.2.3 Definition for *ieee802-dot1ab-lldp* YANG module

```

module ieee802-dot1ab-lldp {
  yang-version "1.1";

  /*** NAMESPACE / PREFIX DEFINITION ***/
  namespace urn:ieee:std:802.1AB:yang:ieee802-dot1ab-lldp;
  prefix lldp;

  /*** LINKAGE (IMPORTS / INCLUDES) ***/
  import ieee802-dot1ab-types {
    prefix lldp-types;
  }
  import ietf-routing {
    prefix rt;
  }
  import ietf-yang-types {
    prefix yang;
  }
  import ietf-interfaces {
    prefix if;
  }
  import ieee802-types {
    prefix ieee;
  }

  /*** META INFORMATION ***/
  organization
    "Institute of Electrical and Electronics Engineers";
  contact
    "WG-URL: http://ieee802.org/1/
    WG-EMail: stds-802-1-1@ieee.org
    Contact: IEEE 802.1 Working Group Chair
    Postal: C/O IEEE 802.1 Working Group
    IEEE Standards Association
    445 Hoes Lane
    Piscataway, NJ 08854
    USA

    E-mail: stds-802-1-chairs@ieee.org";
}

```

description

"Management Information Base module for LLDP configuration, statistics, local system data, and remote systems data components. Copyright(C) IEEE (2022). All rights reserved. This version of this YANG module is part of IEEE Std 802.1ABcu; see the standard itself for full legal notices.";

revision 2022-03-15 {

description

"Published as part of IEEE Std 802.1ABcu.";

reference

"IEEE Std 802.1AB-2016";

}

*/** GROUPING DEFINITIONS **/*

grouping *lldp-cfg* {

description

"LLDP basic configuration group.";

leaf *message-fast-tx* {

type uint32 {

range "1..3600";

}

units "ticks";

default "1";

description

"Time interval in timer ticks between transmissions during fast transmission periods (i.e., *txFast* is non-zero).";

reference

"9.1.1, 9.2.5.5 of IEEE Std 802.1AB-2016";

}

leaf *message-tx-hold-multiplier* {

type uint32 {

range "2..10";

}

default "4";

description

"Multiplier of *msg-tx-interval*.";

reference

"9.2.5.6 of IEEE Std 802.1AB-2016";

}

leaf *message-tx-interval* {

type uint32 {

range "1..3600";

}

units "ticks";

default "30";

description

"Time interval in timer ticks between transmissions during normal



```

        transmission periods (i.e., txFast is zero).";
    reference
        "9.1.1, 9.2.5.7 of IEEE Std 802.1AB-2016";
}
leaf reinit-delay {
    type uint32 {
        range "1..10";
    }
    units "second";
    default "2";
    description
        "Amount of delay (in units of seconds) from when admin-status becomes
        'disabled' until re-initialization is attempted.";
    reference
        "9.2.5.10 of IEEE Std 802.1AB-2016";
}
leaf tx-credit-max {
    type uint32 {
        range "1..10";
    }
    default "5";
    description
        "The maximum number of consecutive LLDPDUs that can be transmitted at
        any time.";
    reference
        "9.2.5.17 of IEEE Std 802.1AB-2016";
}
leaf tx-fast-init {
    type uint32 {
        range "1..8";
    }
    default "4";
    description
        "Initial value for the fast transmitting LLDPDU.";
    reference
        "9.2.5.19 of IEEE Std 802.1AB-2016";
}
leaf notification-interval {
    type uint32 {
        range "1..3600";
    }
    units "second";
    default "30";
    description
        "Controls the transmission of LLDP notifications.";
    reference

```

```

    "9.2.5.7 of IEEE Std 802.1AB-2016";
  }
}

/**** SCHEMA DEFINITIONS ****/
container lldp {
  description
    "Link Layer Discovery Protocol configuration and operational
    information.";
  uses lldp-cfg;
  container remote-statistics {
    config false;
    description
      "LLDP remote operational statistics data.";
    leaf last-change-time {
      type yang:timestamp;
      description
        "The value of sysUpTime object.";
      reference
        "11.5.1 of IEEE Std 802.1AB-2016:
        lldpV2StatsRemTablesLastChangeTime";
    }
    leaf remote-inserts {
      type yang:zero-based-counter32;
      units "table entries";
      description
        "The number of times the complete set of information advertised by
        a particular MSAP has been inserted into tables contained in
        remote-systems-data and lldpExtensions objects.";
      reference
        "11.5.1 of IEEE Std 802.1AB-2016: lldpV2StatsRemTablesInserts";
    }
    leaf remote-deletes {
      type yang:zero-based-counter32;
      units "table entries";
      description
        "The number of times the complete set of information advertised by
        a particular MSAP has been deleted from tables contained in
        remote-systems-data and lldpExtensions objects.";
      reference
        "11.5.1 of IEEE Std 802.1AB-2016: lldpV2StatsRemTablesDeletes";
    }
    leaf remote-drops {
      type yang:zero-based-counter32;
      units "table entries";
      description

```

"The number of times the complete set of information advertised by a particular MSAP could not be entered into tables contained in remote-systems-data and lldpExtensions objects because of insufficient resources.";

reference

"11.5.1 of IEEE Std 802.1AB-2016: lldpV2StatsRemTablesDrops";

}

leaf remote-ageouts {

type yang:zero-based-counter32;

description

"The number of times the complete set of information advertised by a particular MSAP has been deleted from tables contained in remote-systems-data and lldpExtensions objects because the information timeliness interval has expired.";

reference

"11.5.1 of IEEE Std 802.1AB-2016: lldpV2StatsRemTablesAgeouts";

}

}

container local-system-data {

config false;

description

"LLDP local system operational data.";

leaf chassis-id-subtype {

type ieee:chassis-id-subtype-type;

description

"The type of encoding used to identify the chassis associated with the local system.";

reference

"8.5.2.2 of IEEE Std 802.1AB-2016";

}

leaf chassis-id {

type ieee:chassis-id-type;

description

"Chassis component associated with the local system.";

reference

"8.5.2.3 of IEEE Std 802.1AB-2016";

}

leaf system-name {

type string {

length "0..255";

}

description

"System name of the local system.";

reference

"8.5.6.2 of IEEE Std 802.1AB-2016";

}

```

leaf system-description {
    type string {
        length "0..255";
    }
    description
        "System description of the local system.";
    reference
        "8.5.7.2 of IEEE Std 802.1AB-2016";
}

leaf system-capabilities-supported {
    type lldp-types:system-capabilities-map;
    description
        "System capabilities are supported on the local system.";
    reference
        "8.5.8.1 of IEEE Std 802.1AB-2016";
}

leaf system-capabilities-enabled {
    type lldp-types:system-capabilities-map;
    description
        "System capabilities that are enabled on the local system.";
    reference
        "8.5.8.2 of IEEE Std 802.1AB-2016";
}
}

/* LLDP port configuration table */
list port {
    key "name dest-mac-address";
    description
        "LLDP configuration information for a particular port.";
    leaf name {
        type if:interface-ref;
        description
            "The port name used to identify the port component (contained in
            the local chassis with the LLDP agent) associated with this entry.";
    }
    leaf dest-mac-address {
        type ieee:mac-address;
        description
            "Destination MAC address. The ieee:mac-address type has a pattern
            that allows upper and lower case letters. To avoid issues with
            string compairson, it is suggested to only use upper case for the
            letters in the hexadecimal numbers. Implementers using code
            comparing MAC addresses should note that there is still an issue
            with a difference between the IETF mac-address definition and the
            IEEE mac-address definition.";
    }
}

```

```

}
leaf admin-status {
  type enumeration {
    enum tx-only {
      value 1;
      description
        "Transmit LLDP frames only.";
    }
    enum rx-only {
      value 2;
      description
        "Receive LLDP frames only.";
    }
    enum tx-and-rx {
      value 3;
      description
        "Transmit and Receive LLDP frames.";
    }
    enum disabled {
      value 4;
      description
        "Do Not Transmit or Receive LLDP frames.";
    }
  }
  default "tx-and-rx";
  description
    "Administrative status of the local LLDP agent.";
  reference
    "9.2.5.1 of IEEE Std 802.1AB-2016";
}
leaf notification-enable {
  type boolean;
  default "false";
  description
    "Notification status.";
}
leaf tlvs-tx-enable {
  type bits {
    bit port-desc {
      position 0;
      description
        "Transmit 'Port Description TLV'.";
    }
  }
  bit sys-name {
    position 1;
    description

```

```

        "Transmit 'System Name TLV'.";
    }
    bit sys-desc {
        position 2;
        description
            "Transmit 'System Description TLV'.";
    }
    bit sys-cap {
        position 3;
        description
            "Transmit 'System Capabilities TLV'.";
    }
}
description
    "LLDP TLVs whose transmission is allowed on the local LLDP agent by
    the network management.";
reference
    "9.1.2.1 of IEEE Std 802.1AB-2016";
}
uses lldp-cfg;
list management-address-tx-port {
    key "address-subtype man-address";
    description
        "Set of ports (represented as a PortList) on which the local system
        management address instance will be transmitted.";
    leaf address-subtype {
        type identityref {
            base rt:address-family;
        }
        description
            "Type of address.";
        reference
            "8.5.9.3 of IEEE Std 802.1AB-2016";
    }
    leaf man-address {
        type lldp-types:man-addr-type;
        description
            "Management address associated with this TLV.";
        reference
            "8.5.9.4 of IEEE Std 802.1AB-2016";
    }
}
leaf tx-enable {
    type boolean;
    default "false";
    description
        "Transmission enabled status.";
}

```