

First edition  
2003-07-01

---

---

**Software engineering — Product  
quality —**

**Part 3:  
Internal metrics**

*Génie du logiciel — Qualité des produits —*

*Partie 3: Métrologie interne*

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

---

---

Reference number  
ISO/IEC TR 9126-3:2003(E)



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

© ISO/IEC 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword.....	vi
Introduction .....	vii
1 Scope.....	1
2 Conformance .....	2
3 Normative references.....	2
4 Terms and definitions .....	2
5 Abbreviated terms .....	2
6 Use of software quality metrics .....	3
7 How to read and use the metrics tables .....	4
8 Metrics tables.....	4
8.1 Functionality metrics.....	4
8.1.1 Suitability metrics .....	5
8.1.2 Accuracy metrics .....	5
8.1.3 Interoperability metrics.....	5
8.1.4 Security metrics.....	5
8.1.5 Functionality compliance metrics .....	5
8.2 Reliability metrics .....	12
8.2.1 Maturity metrics.....	12
8.2.2 Fault tolerance metrics.....	12
8.2.3 Recoverability metrics.....	12
8.2.4 Reliability compliance metrics.....	12
8.3 Usability Metrics .....	17
8.3.1 Understandability metrics .....	17
8.3.2 Learnability metrics .....	17
8.3.3 Operability metrics .....	17
8.3.4 Attractiveness metrics .....	17
8.3.5 Usability compliance metrics.....	17
8.4 Efficiency metrics .....	24
8.4.1 Time behaviour metrics .....	24
8.4.2 Resource utilization metrics .....	24
8.4.3 Efficiency compliance metrics.....	24
8.5 Maintainability metrics .....	28
8.5.1 Analysability metrics .....	28
8.5.2 Changeability metrics .....	28
8.5.3 Stability metrics.....	28
8.5.4 Testability metrics.....	28
8.5.5 Maintainability compliance metrics.....	28
8.6 Portability metrics.....	34
8.6.1 Adaptability metrics .....	34
8.6.2 Installability metrics .....	34

8.6.3	Co-existence metrics.....	34
8.6.4	Replaceability metrics.....	34
8.6.5	Portability compliance metrics.....	34
<b>Annex A (informative) Considerations When Using Metrics .....</b>		<b>41</b>
<b>A.1 Interpretation of measures .....</b>		<b>41</b>
A.1.1	Potential differences between test and operational contexts of use .....	41
A.1.2	Issues affecting validity of results .....	42
A.1.3	Balance of measurement resources .....	42
A.1.4	Correctness of specification.....	42
<b>A.2 Validation of Metrics .....</b>		<b>42</b>
A.2.1	Desirable Properties for Metrics .....	42
A.2.2	Demonstrating the Validity of Metrics .....	43
<b>A.3 Use of metrics for estimation (judgement) and prediction (forecast) .....</b>		<b>44</b>
A.3.1	Quality characteristics prediction by current data.....	44
A.3.2	Current quality characteristics estimation on current facts .....	44
<b>A.4 Detecting deviations and anomalies in quality problem prone components.....</b>		<b>45</b>
<b>A.5 Displaying measurement results.....</b>		<b>45</b>
<b>Annex B (informative) Use of Quality in Use, External &amp; Internal Metrics (Framework Example) .....</b>		<b>46</b>
<b>B.1 Introduction .....</b>		<b>46</b>
<b>B.2 Overview of Development and Quality Process .....</b>		<b>46</b>
<b>B.3 Quality Approach Steps .....</b>		<b>47</b>
B.3.1	General.....	47
B.3.2	Step #1 Quality requirements identification .....	47
B.3.3	Step #2 Specification of the evaluation.....	48
B.3.4	Step #3 Design of the evaluation .....	50
B.3.5	Step #4 Execution of the evaluation .....	50
B.3.6	Step #5 Feedback to the organization .....	50
<b>Annex C (informative) Detailed explanation of metric scale types and measurement types .....</b>		<b>51</b>
<b>C.1 Metric Scale Types .....</b>		<b>51</b>
<b>C.2 Measurement Types.....</b>		<b>52</b>
C.2.1	Size Measure Type.....	52
C.2.2	Time measure type .....	55
C.2.2.0	General.....	55
C.2.3	Count measure type .....	56
<b>Annex D (informative) Term(s).....</b>		<b>58</b>
<b>D.1 Definitions.....</b>		<b>58</b>
D.1.1	Quality.....	58
D.1.2	Software and user.....	58
D.1.3	Measurement.....	59
<b>Annex E (informative) Pure Internal Metrics .....</b>		<b>60</b>
<b>E.1 Pure Internal Metrics.....</b>		<b>60</b>

Table 8.1.1 Suitability metrics.....	6
Table 8.1.2 Accuracy metrics.....	8
Table 8.1.3 Interoperability metrics.....	9
Table 8.1.4 Security metrics.....	10
Table 8.1.5 Functionality compliance metrics.....	11
Table 8.2.1 Maturity metrics.....	13
Table 8.2.2 Fault tolerance metrics.....	14
Table 8.2.3 Recoverability metrics.....	15
Table 8.2.4 Reliability compliance metrics.....	16
Table 8.3.1 Understandability metrics.....	18
Table 8.3.2 Learnability metrics.....	19
Table 8.3.3 Operability metrics.....	20
Table 8.3.4 Attractiveness metrics.....	22
Table 8.3.5 Usability compliance metrics.....	23
Table 8.4.1 Time behaviour metrics.....	25
Table 8.4.2 Resource utilisation metrics.....	26
Table 8.4.3 Efficiency compliance metrics.....	27
Table 8.5.1 Analysability metrics.....	29
Table 8.5.2 Changeability metrics.....	30
Table 8.5.3 Stability metrics.....	31
Table 8.5.4 Testability metrics.....	32
Table 8.5.5 Maintainability compliance metrics.....	33
Table 8.6.1 Adaptability metrics.....	35
Table 8.6.2 Installability metrics.....	37
Table 8.6.3 Co-existence metrics.....	38
Table 8.6.4 Replaceability metrics.....	39
Table 8.6.5 Portability compliance metrics.....	40
Table B.1 Quality Measurement Model.....	46
Table B.2 User Needs Characteristics & Weights.....	47
Table B.3 Quality measurement tables.....	48
Table B.4 Measurement plan.....	50

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

In exceptional circumstances, the joint technical committee may propose the publication of a Technical Report of one of the following types:

- type 1, when the required support cannot be obtained for the publication of an International Standard, despite repeated efforts;
- type 2, when the subject is still under technical development or where for any other reason there is the future but not immediate possibility of an agreement on an International Standard;
- type 3, when the joint technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example).

Technical Reports of types 1 and 2 are subject to review within three years of publication, to decide whether they can be transformed into International Standards. Technical Reports of type 3 do not necessarily have to be reviewed until the data they provide are considered to be no longer valid or useful.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC TR 9126-3:2003, which is a Technical Report of type 2, was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 7, *Software and system engineering*.

This document is being issued in the Technical Report (type 2) series of publications (according to the Procedures for the technical work of ISO/IEC JTC 1) as a "prospective standard for provisional application" in the field of external metrics for quantitatively measuring external software because there is an urgent need for guidance on how standards in this field should be used to meet an identified need.

This document is not to be regarded as an "International Standard". It is proposed for provisional application so that information and experience of its use in practice may be gathered. Comments on the content of this document should be sent to the ISO Central Secretariat.

A review of this Technical Report (type 2) will be carried out not later than three years after its publication with the options of: extension for another three years; conversion into an International Standard; or withdrawal.

ISO/IEC 9126 consists of the following parts, under the general title *Software engineering — Product quality*:

- *Part 1: Quality model*
- *Part 2: External metrics*
- *Part 3: Internal metrics*
- *Part 4: Quality in use metrics*

## Introduction

This Technical Report provides internal metrics for measuring attributes of six external quality characteristics defined in ISO/IEC 9126-1. The metrics listed in this Technical Report are not intended to be an exhaustive set. Developers, evaluators, quality managers and acquirers may select metrics from this Technical Report for defining requirements, evaluating software products, measuring quality aspects and other purposes. They may also modify the metrics or use metrics which are not included here. This Technical Report is applicable to any kind of software product, although each of the metrics is not always applicable to every kind of software product.

ISO/IEC 9126-1 defines terms for the software quality characteristics and how these characteristics are decomposed into subcharacteristics. ISO/IEC 9126-1, however, does not describe how any of these subcharacteristics could be measured. ISO/IEC TR 9126-2 defines external metrics, ISO/IEC TR 9126-3 defines internal metrics and ISO/IEC 9126-4 defines quality in use metrics, for measurement of the characteristics or the subcharacteristics. Internal metrics measure the software itself, external metrics measure the behaviour of the computer-based system that includes the software, and quality in use metrics measure the effects of using the software in a specific context of use.

This Technical Report is intended to be used together with ISO/IEC 9126-1. It is strongly recommended to read ISO/IEC 14598-1 and ISO/IEC 9126-1, prior to using this Technical Report, particularly if the reader is not familiar with the use of software metrics for product specification and evaluation.

Clauses 1 to 7 and Annexes A to D are common to ISO/IEC TR 9126-2, ISO/IEC TR 9126-3, and ISO/IEC 9126-4. Annex E is for ISO/IEC TR 9126-3 use.



# Software engineering — Product quality —

## Part 3: Internal metrics

### 1 Scope

This Technical Report defines internal metrics for quantitatively measuring external software quality in terms of characteristics and subcharacteristics defined in ISO/IEC 9126-1, and is intended to be used together with ISO/IEC 9126-1.

This Technical Report contains:

- I. an explanation of how to apply software quality metrics
- II. a basic set of metrics for each subcharacteristic
- III. an example of how to apply metrics during the software product life cycle

This Technical Report does not assign ranges of values of these metrics to rated levels or to grades of compliance, because these values are defined for each software product or a part of the software product, by its nature, depending on such factors as category of the software, integrity level and users' needs. Some attributes may have a desirable range of values, which does not depend on specific user needs but depends on generic factors; for example, human cognitive factors.

This Technical Report can be applied to any kind of software for any application. Users of this Technical Report can select or modify and apply metrics and measures from this Technical Report or may define application-specific metrics for their individual application domain. For example, the specific measurement of quality characteristics such as safety or security may be found in International Standards or Technical Reports provided by IEC 65 and ISO/IEC JTC 1/SC 27.

Intended users of this Technical Report include:

- Acquirer (an individual or organization that acquires or procures a system, software product or software service from a supplier);
- Evaluator (an individual or organization that performs an evaluation. An evaluator may, for example, be a testing laboratory, the quality department of a software development organization, a government organization or a user);
- Developer (an individual or organization that performs development activities, including requirements analysis, design, and testing through acceptance during the software life cycle process);
- Maintainer (an individual or organization that performs maintenance activities);
- Supplier (an individual or organization that enters into a contract with the acquirer for the supply of a system, software product or software service under the terms of the contract) when validating software quality at qualification test;
- User (an individual or organization that uses the software product to perform a specific function) when evaluating quality of software product at acceptance test;
- Quality manager (an individual or organization that performs a systematic examination of the software product or software services) when evaluating software quality as part of quality assurance and quality control.

## 2 Conformance

There are no conformance requirements in this Technical Report.

NOTE General conformance requirements for metrics are in ISO/IEC 9126-1 Quality model.

## 3 Normative references

ISO/IEC 9126-1:2001, *Software engineering — Product quality — Part 1: Quality model*

ISO/IEC TR 9126-2<sup>1)</sup>, *Software engineering — Product quality — Part 2: External metrics*

ISO/IEC 9126-4<sup>1)</sup>, *Software engineering — Product quality — Part 4: Quality in use metrics*

ISO/IEC 14598-1:1999, *Information technology — Software product evaluation — Part 1: General overview*

ISO/IEC 14598-2:2000, *Software engineering — Product evaluation — Part 2: Planning and management*

ISO/IEC 14598-3:2000, *Software engineering — Product evaluation — Part 3: Process for developers*

ISO/IEC 14598-4:1999, *Software engineering — Product evaluation — Part 4: Process for acquirers*

ISO/IEC 14598-5:1998, *Information technology — Software product evaluation — Part 5: Process for evaluators*

ISO/IEC 14598-6:2001, *Software engineering — Product evaluation — Part 6: Documentation of evaluation modules*

ISO/IEC 12207:1995, *Information technology — Software life cycle processes*

ISO/IEC 14143-1:1998, *Information technology — Software measurement — Functional size measurement — Part 1: Definition of concepts*

ISO 2382-20:1990, *Information technology — Vocabulary — Part 20: System development*

ISO 9241-10:1996, *Ergonomic requirements for office work with visual display terminals (VDTs) — Part 10: Dialogue principles*

## 4 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 14598-1:1999 and ISO/IEC 9126-1:2001 apply. They are also listed in Annex D.

## 5 Abbreviated terms

The following abbreviations are used in this Technical Report:

SQA — Software Quality Assurance (Group)

SLCP — Software Life Cycle Processes


---

1) To be published.

## 6 Use of software quality metrics

These Technical Reports (ISO/IEC TR 9126-2 External metrics, ISO/IEC TR 9126-3 Internal metrics and ISO/IEC 9126-4 Quality in use metrics) provide a suggested set of software quality metrics (external, internal and quality in use metrics) to be used with the ISO/IEC 9126-1 Quality model. The user of these Technical Reports may modify the metrics defined, and/or may also use metrics not listed. When using a modified or a new metric not identified in these Technical Reports, the user should specify how the metrics relate to the ISO/IEC 9126-1 quality model or any other substitute quality model that is being used.

The user of these Technical Reports should select the quality characteristics and subcharacteristics to be evaluated, from ISO/IEC 9126-1; identify the appropriate direct and indirect measures, identify the relevant metrics and then interpret the measurement result in an objective manner. The user of these Technical Reports also may select product quality evaluation processes during the software life cycle from the ISO/IEC 14598 series of standards. These give methods for measurement, assessment and evaluation of software product quality. They are intended for use by developers, acquirers and independent evaluators, particularly those responsible for software product evaluation (see Figure 1).

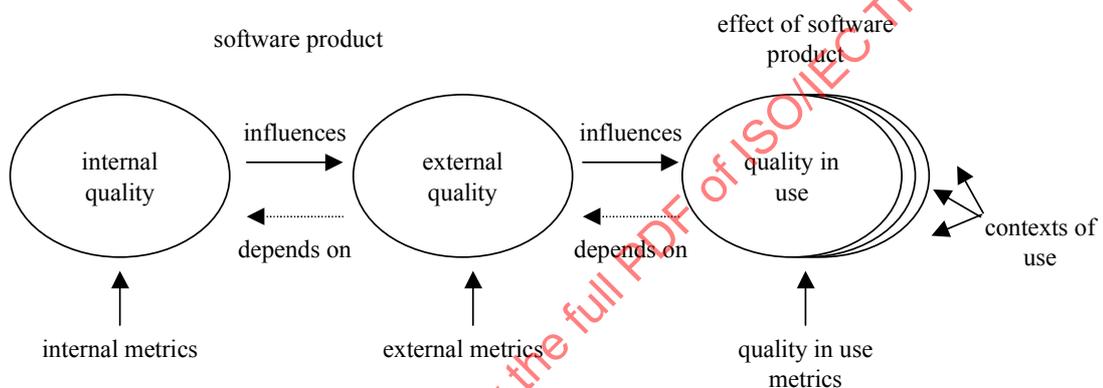

**Figure 1 – Relationship between types of metrics**

The internal metrics may be applied to a non-executable software product during its development stages (such as request for proposal, requirements definition, design specification or source code). Internal metrics provide the users with the ability to measure the quality of the intermediate deliverables and thereby predict the quality of the final product. This allows the user to identify quality issues and initiate corrective action as early as possible in the development life cycle.

The external metrics may be used to measure the quality of the software product by measuring the behaviour of the system of which it is a part. The external metrics can only be used during the testing stages of the life cycle process and during any operational stages. The measurement is performed when executing the software product in the system environment in which it is intended to operate.

The quality in use metrics measure whether a product meets the needs of specified users to achieve specified goals with effectiveness, productivity, safety and satisfaction in a specified context of use. This can be only achieved in a realistic system environment.

User quality needs can be specified as quality requirements by quality in use metrics, by external metrics, and sometimes by internal metrics. These requirements specified by metrics should be used as criteria when a product is evaluated.

It is recommended to use internal metrics having a relationship as strong as possible with the target external metrics so that they can be used to predict the values of external metrics. However, it is often difficult to design a rigorous theoretical model that provides a strong relationship between internal metrics and external metrics. Therefore, a hypothetical model that may contain ambiguity may be designed and the extent of the relationship may be modelled statistically during the use of metrics.

Recommendations and requirements related to validity and reliability are given in ISO/IEC 9126-1, Clause A.4. Additional detailed considerations when using metrics are given in Annex A of this Technical Report.

## 7 How to read and use the metrics tables

The metrics listed in Clause 8 are categorized by the characteristics and subcharacteristics in ISO/IEC 9126-1. The following information is given for each metric in the table:

- a) **Metric name:** Corresponding metrics in the internal metrics table and external metrics table have similar names.
- b) **Purpose of the metric:** This is expressed as the question to be answered by the application of the metric.
- c) **Method of application:** Provides an outline of the application.
- d) **Measurement, formula and data element computations:** Provides the measurement formula and explains the meanings of the used data elements.

NOTE In some situations more than one formula is proposed for a metric.

- e) **Interpretation of measured value:** Provides the range and preferred values.
- f) **Metric scale type:** Type of scale used by the metric. Scale types used are; Nominal scale, Ordinal scale, Interval scale, Ratio scale and Absolute scale.

NOTE A more detailed explanation is given in Annex C.

- g) **Measure type:** Types used are; Size type (e.g. Function size, Source size), Time type (e.g. Elapsed time, User time), Count type (e.g. Number of changes, Number of failures).

NOTE A more detailed explanation is given in Annex C.

- h) **Input to measurement:** Source of data used in the measurement.
- i) **ISO/IEC 12207 SLCP Reference:** Identifies software life cycle process(es) where the metric is applicable.
- j) **Target audience:** Identifies the user(s) of the measurement results.

## 8 Metrics tables

The metrics listed in this clause are not intended to be an exhaustive set and may not have been validated. They are listed by software quality characteristics and subcharacteristics, in the order introduced in ISO/IEC 9126-1.

Metrics, which may be applicable, are not limited to these listed here. Additional specific metrics for particular purposes are provided in other related documents, such as functional size measurement or precise time efficiency measurement.

NOTE 1 It is recommended to refer a specific metric or measurement form from specific standards, technical reports or guidelines. Functional size measurement is defined in ISO/IEC 14143. An example of precise time efficiency measurement can be referred from ISO/IEC 14756.

Metrics should be validated before application in a specific environment (see Annex A).

NOTE 2 This list of metrics is not finalized, and may be revised in future versions of this Technical Report. Readers of this Technical Report are invited to provide feedback.

### 8.1 Functionality metrics

Internal functionality metrics are used for predicting if the software product in question will satisfy prescribed functional requirements and implied user needs.

**8.1.1 Suitability metrics**

Internal suitability metrics indicate a set of attributes for assessing explicitly functions to prescribed tasks, and for determining their adequacy for performing the tasks.

**8.1.2 Accuracy metrics**

Internal accuracy metrics indicate a set of attributes for assessing the capability of the software product to achieve correct or agreeable results.

**8.1.3 Interoperability metrics**

Internal Interoperability metrics indicate a set of attributes for assessing the capability of the software product's interaction with designated systems.

**8.1.4 Security metrics**

Internal security metrics indicate a set of attributes for assessing the capability of the software product to avoid illegal access to the system and/or data.

**8.1.5 Functionality compliance metrics**

Internal compliance metrics indicate a set of attributes for assessing the capability of the software product to comply to such items as standards, conventions or regulations of the user organization in relation to functionality.

Table 8.1.1 Suitability metrics

Internal suitability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Sources of input to measurement	ISO/IEC 12207 SSCP Reference	Target audience
<b>Functional adequacy</b>	How adequate are the checked functions?	Count the number of implemented functions that are suitable for performing the specified tasks, then measure the ratio of it to functions implemented. The following may be measured: -all or parts of design specifications -completed modules/parts of software products	X=1-A/B A= Number of functions in which problems are detected in evaluation B= Number of functions checked	0 <= X <= 1 The closer to 1, the more adequate.	absolute	X=count/ count A=count B=count	Req spec Design Source code Review report	6.5 Validation 6.6 Joint review	Requirers Developers	
<b>Functional implementation completeness</b>	How complete is the functional implementation?	Count the number of missing functions detected in evaluation and compare with the number of function described in the requirement specifications.	X=1-A/B A=Number of missing functions detected in evaluation. B=Number of functions described in requirement specifications	0 <= X <= 1 The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	Req spec Design Source code Review report	6.5 Validation 6.6 Joint review	Requirers Developers	

**FOOTNOTE**

Input to the measurement process is the updated requirement specifications. Any changes identified during life cycle must be applied to the requirement specifications before using in measurement process.

STANDARDSIS.COM: Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.1.1 (continued)

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Sources of input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Functional implementation coverage</b>	How correct is the functional implementation?	Count the number of incorrectly implemented or missing functions and compare with the number of functions described in the requirement specifications.	X=1-A/B A= Number of incorrectly implemented or missing functions detected B= Number of functions described in requirement specifications.	0 <= X <= 1 The closer to 1, the more correct.	absolute	X=count/ count A=count B=count	Req spec Design Source code Review report	6.5 Validation 6.6 Joint review	Requirers Developers
<b>FOOTNOTES</b>									
1	Review by functional item.								
2	Input to the measurement process is the updated requirement specifications. Any changes identified during life cycle must be applied to the requirement specifications before using in measurement process.								
<b>Functional specification stability (volatility)</b>	How stable is the functional specification during the development life cycle?	Count the number of functions changed (added, modified, or deleted) during development life cycle phase, then compare with the number of functions described in the requirement specifications.	X=1-A/B A=Number of functions changed during development life cycle phases B=Number of functions described in requirement specifications	0 <= X <= 1 The closer to 1 the more stable.	absolute	A=Count B=Count X=Count/ Count	Requirement specifications Review report	6.5 Validation 6.3 Quality Assurance 5.3 Qualification testing 6.8 Problem Resolution 5.4 Operation	Developers Maintainers

Table 8.1.2 Accuracy metrics

Internal accuracy metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Computational Accuracy</b>		How completely have the accuracy requirements been implemented?	Count the number of functions that have implemented the accuracy requirements and compare with the number of functions with specific accuracy requirements.	X=A/B A= Number of functions in which specific accuracy requirements had been implemented, as confirmed in evaluation B= Number of functions for which specific accuracy requirements need to be implemented	0 <= X <= 1. The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	Verification Joint review	Requirers Developers
		How complete was the implementation of specific levels of precision for the data items?	Count the number of data items that meet the requirements of specific levels of precision and compare to the total number of data items with specific level of precision requirements.	X=A/B A= Number of data items implemented with specific levels of precision, confirmed in evaluation B= Number of data items that require specific levels of precision	0 <= X <= 1. The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	Verification Joint review	Requirers Developers

STANDARD.PDF.COM - To view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.1.3 Interoperability metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Data exchangeability (Data format based)</b>	How correctly have the interface data formats been implemented?	Count the number of interface data formats that have been implemented correctly as in the specifications and compare to the number of data formats to be exchanged as in the specifications.	X=A/B A=Number of interface data formats that have been implemented correctly as in the specifications B=Number of data formats to be exchanged as in the specifications	0 <= X <= 1. The closer to 1, the more correct.	absolute	X=count/ A=count B=count	Req spec Design Source code Review report	Verification Joint review	Developers Requirers
<b>Interface consistency (protocol)</b>	How correctly have the interface protocols been implemented?	Count the number of interface protocols that were implemented correctly as in the specifications and compare with the number of interface protocols to be implemented as in the specifications.	X=A/B A=Number of interface protocols implementing consistent format as in the specification confirmed in review B=Number of interface protocols to be implemented as in the specifications	0 <= X <= 1 The closer to 1, the more consistent.	absolute	X=count/ A=count B=count	Req spec Design Source code Review report	Verification Joint review	Developers Requirers

Table 8.1.4 Security metrics

Internal security metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Access auditability</b>	How auditable is access login?	Count the number of access types that are being logged correctly as in the specifications and compare with the number of access types that are required to be logged in the specifications.	X=A/B A= Number of access types that are being logged as in the specifications B= Number of access types required to be logged in the specifications.	0 <= X <= 1 The closer to 1, the more auditable.	Absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	6.5 Validation 6.6 Joint review	Requirers Developers	
	How controllable is access to the system?	Count the number of access controllability requirements implemented correctly as in the specifications and compare with the number of access controllability requirements in the specifications.	X=A/B A= Number of access controllability requirements implemented correctly as in the specifications B= Number of access controllability requirements in the specifications	0 <= X <= 1 The closer to 1, the more controllable.	Absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	6.5 Validation 6.6 Joint review	Requirers Developers	
<b>Data corruption prevention</b>	How complete is the implementation of data corruption prevention?	Count the number of implemented instances of data corruption prevention as specified and compare with the number of instances of operations/ access specified in requirements as capable of corrupting/ destroying data.	X=A/B A= Number of implemented instances of data corruption prevention as specified confirmed in review B= Number of instances of operation/access identified in requirements as capable of corrupting/destroying data	0 <= X <= 1 The closer to 1, the more complete.	Absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	6.5 Validation 6.6 Joint review	Developers	
	<p><b>FOOTNOTE</b> Consider security levels when using this metric.</p>									
<b>Data encryption</b>	How complete is the implementation of data encryption?	Count the number of implemented instances of encryptable/decryptable data items as specified and compare with the number of instances of data items requiring data encryption/decryption facility as in specifications.	X=A/B A=Number of implemented instances of encryptable/decryptable data items as specified confirmed in review B= Number of data items requiring data encryption/decryption specifications	0 <= X <= 1 The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	Requirement specification Design Source code Review report	6.5 Validation	Developers	
	<p><b>FOOTNOTE</b> Data encryption: e.g., data in open database, data in public communication facility.</p>									

Table 8.1.5 Functionality compliance metrics

Internal functionality compliance metrics		Internal functionality compliance metrics		Internal functionality compliance metrics		Internal functionality compliance metrics			
Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Functional compliance</b>	How compliant is the functionality of the product to applicable regulations, standards and conventions?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	X=A/B A= Number of correctly implemented items related to functionality compliance confirmed in evaluation B= Total number of compliance items	0 <= X <= 1. The closer to 1, the more compliant.	absolute	X=count/ A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	Verification Joint review	Requirers Developers
<b>Intersystem standard compliance</b>	How compliant are the interfaces to applicable regulations, standards and conventions?	Count the number of interfaces that meet required compliance and compare with the number of interfaces requiring compliance as in the specifications.	X=A/B A= Number of correctly implemented interfaces as specified, confirmed in review B= Total number of interfaces requiring compliance	0 <= X <= 1. The closer to 1, the more compliant.	absolute	X=count/ A=count B=count	Req spec Design Source code Review report	Verification Joint review	Developers Requirers

**FOOTNOTE**

All specified attributes of a standard must be checked.

## 8.2 Reliability metrics

Internal reliability metrics are used for predicting if the software product in question will satisfy prescribed reliability needs, during the development of the software product.

### 8.2.1 Maturity metrics

Internal maturity metrics indicate a set of attributes for assessing the maturity of the software.

### 8.2.2 Fault tolerance metrics

Internal fault tolerance metrics indicate a set of attributes for assessing the software products capability in maintaining a desired performance level in case of operational faults or infringement of its specified interface.

### 8.2.3 Recoverability metrics

Internal recoverability metrics indicate a set of attributes for assessing the software product's capability to re-establish an adequate level of performance and recover the data directly affected in case of a failure.

### 8.2.4 Reliability compliance metrics

Internal compliance metrics relating to reliability indicate a set of attributes for assessing the capability of the software product to comply to such items as standards, conventions or regulations of the user organization in relation to reliability.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.2.1 Maturity metrics

Internal maturity metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Fault detection</b>	How many faults were detected in reviewed product?	Count the number of detected faults in review and compare it to the number of estimated faults to be detected in this phase.	X=A/B A=Absolute number of faults detected in review B=Number of estimated faults to be detected in review (using past history or reference model)	0 <= X A high value for X implies good product quality, while A=0 does not necessarily imply fault free status of the reviewed item.	Absolute	X=count A=count B=count	Value A comes from review report Value B comes from the organization database.	Verification Joint review	Developers	
<b>FOOTNOTES</b>										
1	This metric should only be used for prediction during development.									
2	It is necessary to convert this value(X) to the <0, 1> interval if making summarization of characteristics.									
<b>Fault removal</b>	How many faults have been corrected?	Count the number of faults removed during design/coding and compare it to the number of faults detected in review during design/coding.	X=A A=Number of corrected faults in design/coding Y=A/B A=Number of corrected faults design/coding B= Number of faults detected in review	0 <= X A high value of X implies, that less faults remain. 0 <= Y <= 1 The closer to 1, the better. (more faults removed)	ratio	X=count A=count	Value A comes from fault removal report. Value B comes from review report.	Verification Joint review	Developers	
<b>Test adequacy</b>	How much of the required test cases are covered by the test plan?	Count the number of cases planned and compare it to the number of test cases required to obtain adequate test coverage.	X=A/B A=Number of test cases designed in test plan and confirmed in review B= Number of test cases required	0 <= X Where X is greater the better adequacy	absolute	X=count A=count B=count	Value A comes from test plan Value B comes from requirements	QA Problem resolution Verification	Developers Maintainers	
<b>FOOTNOTE</b>										
It is necessary to convert this value (X) to the <0, 1> interval if making summarization of characteristics.										

Table 8.2.2 Fault tolerance metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Failure avoidance</b>	How many fault patterns were brought under control to avoid critical and serious failures?	Count the number of avoided fault patterns and compare it to the number of fault patterns to be considered.	X=A/B A=Number of fault patterns having avoidance in design/code B=Number of fault patterns to be considered <b>COMMENT(S)</b> <i>Fault pattern examples out of range data deadlock.</i> <b>COMMENT(S)</b> <i>Fault tree analysis technique may be used to detect fault patterns.</i>	0 ≤ X Where X is greater the better failure avoidance.	absolute	X=count/ count A=count B=count	Value A comes from review report Value B comes from requirement specification document.	Verification Validation Joint review Problem resolution	Developers Requirers Maintainers
<b>Incorrect operation avoidance</b>	How many functions are implemented with incorrect operations avoidance capability?	Count the number of implemented functions to avoid critical and serious failures caused by incorrect operations and compare it to the number of incorrect operation patterns to be considered. <b>COMMENT(S)</b> <i>Also data damage in addition to system failure.</i>	X=A/B A=Number of functions implemented to avoid incorrect operation patterns B=Number of incorrect operation patterns to be considered <b>COMMENT(S)</b> <i>Incorrect operation patterns Incorrect data types as parameters Incorrect sequence of data input Incorrect sequence of operation.</i> <b>COMMENT(S)</b> <i>Fault tree analysis technique may be used to detect incorrect operation patterns.</i>	0 ≤ X Where X is greater the better incorrect operation avoidance.	absolute	X=count/ count A=count B=count	Value A comes from review report Value B comes from requirement specification document.	Verification Validation Joint review Problem resolution	Developers Requirers Maintainers

Table 8.2.3 Recoverability metrics

Internal recoverability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Restorability</b>	How capable is the product in restoring itself after abnormal event or at request?	Count the number of implemented restoration requirements and compare it to the number of restoration requirements in the specifications. Restoration requirement examples: database checkpoint, transaction checkpoint, redo function, undo function.	X=A/B A=Number of implemented restoration requirements confirmed in review B=Number of restoration requirements in the specifications	0 <= X <= 1 Where X is greater, the better restorability	Absolute	X=count/ count A=count B=count	A comes from review document B comes from requirements or design document	Verification Joint review	Developers Maintainers	
<b>Restoration Effectiveness</b>	How effective is the restoration capability?	Count the number of implemented restoration requirements meeting target restoration time (by calculations or simulations) and compare it to the number of restoration requirements with specified target time.	X=A/B A=Number of implemented restoration requirements meeting target restore time B=Number of restoration requirements with specified target times	0 <= X <= 1 Where X is greater, the better effectiveness	Absolute	X=count/ count A=count B=count	A comes from review document B comes from requirements or design document	Verification Joint review	Developers Maintainers	

**Table 8.2.4 Reliability compliance metrics**

Internal reliability compliance metrics									
Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Reliability compliance</b>	How compliant is the reliability of the product to applicable regulations, standards and conventions?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	X=A/B A= Number of correctly implemented items related to reliability compliance confirmed in evaluation B= Total number of compliance items	0 ≤ X ≤ 1. The closer to 1, the more compliant.	Absolute	X=count/ count A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	Verification Joint review	Requirers Developers

STANDARDS.PDF.COM :: Click to view the full PDF of ISO/IEC TR 9126-3:2003

### 8.3 Usability Metrics

Internal usability metrics are used for predicting the extent to which the software in question can be understood, learned, operated, attractive and compliant with usability regulations and guidelines.

NOTE It should be possible for the measures taken to be used to establish acceptance criteria or to make comparisons between products. This means that the measures should be counting items of known value. Results should report the mean value and the standard error of the mean

#### 8.3.1 Understandability metrics

Users should be able to select a software product which is suitable for their intended use. Internal understandability metrics assess whether new users can understand:

- whether the software is suitable
- how it can be used for particular tasks.

#### 8.3.2 Learnability metrics

Internal learnability metrics assess how long users take to learn how to use particular functions, and the effectiveness of help systems and documentation.

Learnability is strongly related to understandability, and understandability measurements can be indicators of the learnability potential of the software.

#### 8.3.3 Operability metrics

Internal operability metrics assess whether users can operate and control the software. Operability metrics can be categorized by the dialogue principles in ISO 9241-10:

- suitability of the software for the task
- self-descriptiveness of the software
- controllability of the software
- conformity of the software with user expectations
- error tolerance of the software
- suitability of the software for individualization

The choice of functions to test will be influenced by the expected frequency of use of functions, the criticality of the functions, and any anticipated usability problems.

#### 8.3.4 Attractiveness metrics

Internal attractiveness metrics assess the appearance of the software, and will be influenced by factors such as screen design and colour. This is particularly important for consumer products.

#### 8.3.5 Usability compliance metrics

Internal compliance metrics assess adherence to standards, conventions, style guides or regulations relating to usability.

Table 8.3.1 Understandability metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Internal understandability metrics</b>									
<b>Completeness of description</b>	What proportion of functions (or types of function) are adequately described and compared with the total number of functions in the product description?	Count the number of functions which are adequately described and compare with the total number of functions in the product.	X= A/B A= Number of functions (or types of functions) described in the product description B= Total number of functions (or types of functions)	0<=X<=1 The closer to 1 the more complete.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers
<b>FOOTNOTES</b>									
1	This indicates whether potential users will understand the capability of the product after reading the product description.								
2	See also ISO/IEC 9127 Consumer software package.								
<b>Demonstration capability</b>	What proportion of functions requiring demonstration have demonstration capability?	Count the number of functions that are adequately demonstrable and compare with the total number of functions requiring demonstration capability.	X=A/B A= Number of functions demonstrated and confirmed in review B= Total number of functions requiring demonstration capability	0<=X<=1 The closer to 1 the more capable.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers
<b>FOOTNOTE</b>									
Demonstrations step through the process showing how the product is used. This includes 'wizards'.									
<b>Evident functions</b>	What proportion of the product functions are evident to the user?	Count the number of functions that are evident to the user and compare with the total number of functions.	X= A/B A= Number of functions (or types of functions) evident to the user B= Total number of functions (or types of functions)	0<=X<=1 The closer to 1 the better.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers
<b>FOOTNOTE</b>									
This indicates whether users will be able to locate functions by exploring the interface (e.g. by inspecting the menus).									
<b>Function understandability</b>	What proportion of the product functions will the user be able to understand correctly?	Count the number of user interface functions where purposes is understood by the user and compare with the number of user interface functions.	X= A/B A= Number of user interface functions whose purpose is understood by the user B= Number of user interface functions	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers

Table 8.3.2 Learnability metrics

Internal learnability metrics									
Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Completeness of user documentation and/or help facility</b>	What proportion of functions are described in the user documentation and/or help facility?	Count the number of functions implemented with help facility and/or documentation and compare with the total number of functions in product.	X= A/B A= Number of functions described B= Total of number of functions provided	0 <= X <= 1 The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers

**FOOTNOTE**

Three metrics are possible: completeness of the documentation, completeness of the help facility or completeness of the help and documentation used in combination.

Table 8.3.3 Operability metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Input validity checking</b>	What proportion of input items provide check for valid data?	Count the number of input items, which check for valid data and compare with the number of input items, which could check for valid data.	X=A/B A=Number of input items which check for valid data B=Number of input items which could check for valid data	0 <= X <= 1 The closer to 1, the better.	Absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Requirers
<b>User operation cancellability</b>	What proportion of functions can be cancelled prior to completion?	Count the number of implemented functions, which can be cancelled by the user prior to completion and compare it with the number of functions requiring the precancellation capability.	X=A/B A=Number of implemented functions which can be cancelled by the user B= Number of functions requiring the precancellation capability	0 <= X <= 1 The closer to 1, the better cancellability.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Requirers
<b>User operation Undoability</b>	What proportion of functions can be undone?	Count the number of implemented functions, which can be undone by the user after completion and compare it with the number of functions.	X=A/B A=Number of implemented functions which can be undone by the user B= Number of functions	0 <= X <= 1 The closer to 1, the better undoability.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Requirers
<b>FOOTNOTE</b>	<i>Either single undoability or multiple undoability after several subsequent actions can be assessed.</i>								
<b>Customisability</b>	What proportion of functions can be customised during operation?	Count the number of implemented functions, which can be customized by the user during operation and compare it with the number of functions requiring the customization capability.	X=A/B A=Number of functions which can be customised during operation B=Number of functions requiring the customization capability	0 <= X <= 1 The closer to 1, the better customisability.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Requirers
<b>Physical accessibility</b>	What proportion of functions can be customised for access by users with physical handicaps?	Count the number of implemented functions, which can be customised by users with physical handicaps and compare it with the number of functions.	X=A/B A=Number of functions which can be customised B=Number of functions	0 <= X <= 1 The closer to 1, the better physical accessibility.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Requirers
<b>FOOTNOTE</b>	<i>Examples of physical accessibility are inability to use a mouse and blindness.</i>								

Table 8.3.3 (continued)

Internal Operability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Operation status monitoring capability</b>	What proportion of functions have operations status monitoring capability?	Count the number of implemented functions, which status can be monitored and compare it with the number of functions requiring the monitoring capability.	X=A/B A=Number of functions having status monitoring capability B=Number of functions that are required to have monitoring capability	0 <= X <= 1 The closer to 1, the better monitoring capability.	absolute	X=count/ count	Req spec	Design Review report	Verification Joint review	Developers Requirers
<b>FOOTNOTE</b> Status includes progress monitoring.										
<b>Operational consistency</b>	What proportion of operations behave the same way to similar operations in other parts of the system?	Count the number of instances of operations with inconsistent behaviour and compare it with the total number of operations	X=1-A/B A=Number of instances of operations with inconsistent behaviour B=Total number of operations	0 <= X <= 1 The closer to 1, the more consistent.	absolute	X=count/ count	Req spec	Design Review report	Verification Joint review	Developers Requirers
<b>Message Clarity</b>	What proportion of messages are self-explanatory?	Count the numbers of implemented messages with clear explanations and compare it with the total number of messages implemented.	X=A/B A=Number of implemented messages with clear explanations B=Number of messages implemented	0 <= X <= 1 The closer to 1, the more clear.	absolute	X=count/ count	Req spec	Design Review report	Verification Joint review	Developers Requirers
<b>FOOTNOTE</b> Clear error messages explain to the user what action to take to recover from the error.										
<b>Interface element clarity</b>	What proportion of interface elements are self-explanatory?	Count the number of interface elements which are self-explanatory and compare it with the total number of interface elements	X=A/B A=Number of interface elements which are self-explanatory B=Total number of interface elements	0 <= X <= 1 The closer to 1, the more clear.	absolute	X=count/ count	Req spec	Design Review report	Verification Joint review	Developers Requirers
<b>FOOTNOTE</b> Elements are self explanatory when they use plain text or provide "hover-help" or "tool tips".										
<b>Operational error recoverability</b>	What proportion of functions can tolerate user error?	Count the number of functions implemented with user error tolerance and compare it to the total number of functions requiring the tolerance capability	X=A/B A=Number of functions implemented with user error tolerance B=Total number of functions requiring the tolerance capability	0 <= X <= 1 The closer to 1, the more recoverable.	absolute	X=count/ count	Req spec	Design Review report	Verification Joint review	Developers Requirers

**Table 8.3.4 Attractiveness metrics**

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Attractive interaction</b>	How attractive is the interface to the user?	Questionnaire to users	Questionnaire to assess the attractiveness of the interface to users, taking account of attributes such as colour and graphical design.  <b>COMMENT(S)</b> <i>Issues that potentially contribute to attractiveness include: Alignment of items (Vertical and Horizontal), Grouping, Use of colours, Appropriate and reasonable sized graphics, Use of whitespace/separators/borders, Animation, Typography, and 3D interface.</i>	Assessment of classification.	Ordinal	X= Count (Count is a score)	Req spec Design Review report	Verification Joint review	Requirers Developers
<b>FOOTNOTE</b>									
<i>This could be based on screen sketches or mock-ups.</i>									
<b>User Interface appearance customisability</b>	What proportion of user interface elements can be customised in appearance?	Inspection (by expert)	X=A/B A=Number of types of interface elements that can be customised B=Total number of types of interface elements	0 <= X <= 1 The closer to 1, the better.	Absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Requirers Developers

Table 8.3.5 Usability compliance metrics

Internal usability compliance metrics									
Metric name	Purpose	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Usability compliance</b>	How compliant is the product to applicable regulations, standards and conventions for usability?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	X=A/B A= Number of correctly implemented items related to usability compliance confirmed in evaluation B= Total number of compliance items	0 <= X <= 1 The closer to 1, the more compliant.	absolute	X=count/ count A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	Verification Joint review	Requirers Developers

## 8.4 Efficiency metrics

Internal efficiency metrics are used for predicting the efficiency of behaviour of the software product during testing or operating. To measure efficiency, the stated conditions should be defined, i.e., the hardware configuration and the software configuration of a reference environment (which has to be defined in the software specifications) should be defined. When citing measured time behaviour values the reference environment should be referred.

### 8.4.1 Time behaviour metrics

Internal time behaviour metrics indicate a set of attributes for predicting the time behaviour of the computer system including the software product during testing or operating.

### 8.4.2 Resource utilization metrics

Internal resource utilization metrics indicate a set of attributes for predicting the utilization of hardware resources by the computer system including the software product during testing or operating.

### 8.4.3 Efficiency compliance metrics

Internal compliance metrics relating to efficiency indicate a set of attributes for assessing the capability of the software product to comply to such items as standards, conventions or regulations of the user organization in relation to efficiency.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.4.1 Time behaviour metrics

Internal time behaviour metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLC Reference	Target audience
<b>Response time</b>	Metric name	What is the estimated time to complete a specified task?	Evaluate the efficiency of the operating system and the application system calls. Estimate the response time based on this. The following may be measured, -all or parts of design specifications -test complete transaction path -test complete modules/parts of software product -complete software product during test phase.	X=time (calculated or simulated)	The shorter the better.	ratio	X=time	Known operating system. Estimated time in system calls.	Verification Joint review	Developers Requirers
<b>Throughput time</b>	Metric name	What is the estimated number of tasks that can be performed over a unit of time?	Evaluate the efficiency of handling resources in the system. Make a factor based upon the application calls to the system in handling the resources.	X=No of tasks per unit of time	The greater the better.	ratio	X=count	Known operating system. Estimated time in system calls.	Verification Joint review	Developers Requirers
<b>Turnaround time</b>	Metric name	What is the estimated time to complete a group of related tasks as a job lot?	Evaluate the efficiency of the operating system and the application system calls. Estimate the response time to complete a group of related tasks based on this. The following may be measured, -all or parts of design specifications -test complete transaction path -test complete modules/parts of software product -complete software product during test phase.	X=time (calculated or simulated)	The shorter the better.	ratio	X=time	Known operating system. Estimated time in system calls.	Verification Joint review	Developers Requirers

Table 8.4.2 Resource utilisation metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Internal resource utilisation metrics</b>									
<b>I/O Utilization</b>	What is the estimated I/O utilization to complete a specified task?	Estimate the I/O utilization requirement for the application.	X=number of buffers(calculated or simulated)	The shorter the better.	ratio	X=size	Source code	Verification	Developers
<b>I/O Utilization Message Density</b>	What is the density of messages relating to I/O utilization in the lines of code responsible in making system calls?	Count the number of errors pertaining to I/O failure and warnings and compare it to the estimated number of lines of code responsible in system calls.	X=A/B A=number of I/O related error messages. B=number of lines of code directly related to system calls	The greater the better.	Absolute	X=count/ count A=count B=count	Source code	Verification	Developers
<b>Memory utilization</b>	What is the estimated memory size that the product will occupy to complete a specified task?	Estimate the memory requirement.	X=size in bytes (calculated or simulated)	The lesser the better.	ratio	X=size	Estimated size of memory utilization.	Verification	Developers
<b>Memory utilization message density</b>	What is the density of messages relating to memory utilization in the lines of code responsible in making system calls?	Count the number of error messages pertaining to memory failure and warnings and compare it to the estimated number of lines of code responsible in system calls.	X=A/B A=Number of memory related error messages. B=Number of lines of code directly related to system calls	The greater the better.	ratio	X=count/ count A=count B=count	Source code	Verification	Developers
<b>Transmission Utilization</b>	What is the estimated amount of transmission resources utilization?	Estimate the Transmission resource utilization requirements by estimating the transmission volumes.	X=bits/time (calculated or simulated)	The lesser the better.	ratio	X=time	Known operating system. Estimated time in system calls.	Verification	Developers

Table 8.4.3 Efficiency compliance metrics

Internal Efficiency compliance metrics									
Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SSCP Reference	Target audience
<b>Efficiency Compliance</b>	How compliant is the efficiency of the product to applicable regulations, standards and conventions?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	$X=A/B$ A= Number of correctly implemented items related to efficiency compliance confirmed in evaluation B= Total number of compliance items	$0 \leq X \leq 1$ The closer to 1, the more compliant.	absolute	X=count/ count A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	Verification Joint review	Requirers Developers

## 8.5 Maintainability metrics

Internal maintainability metrics are used for predicting the level of effort required for modifying the software product.

### 8.5.1 Analysability metrics

Internal analysability metrics indicate a set of attributes for predicting the maintainer's or user's spent effort or spent resources in trying to diagnose for deficiencies or causes of failure, or for identification of parts to be modified in the software product.

### 8.5.2 Changeability metrics

Internal changeability metrics indicate a set of attributes for predicting the maintainer's or user's spent effort when trying to implement a specified modification in the software product.

### 8.5.3 Stability metrics

Internal stability metrics indicate a set of attributes for predicting how stable the software product would be after any modification.

### 8.5.4 Testability metrics

Internal testability metrics indicate a set of attributes for predicting the amount of designed and implemented autonomous test aid functions present in the software product.

### 8.5.5 Maintainability compliance metrics

Internal compliance metrics relating to maintainability indicate a set of attributes for assessing the capability of the software product to comply to such items as standards, conventions or regulations of the user organization in relation to software maintainability.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.5.1 Analysability metrics

Internal analysability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Activity recording</b>	How thorough is the recording of the system status?	Count the number of items logged in the activity log as specified and compare it to the number of items required to be logged.	X=A/B A=Number of implemented data login items as specified confirmed in review B=Number of data items to be logged defined in the specifications	0 <= X <= 1 The closer to 1, more data provided to record system status. <b>COMMENT(S)</b> <i>It is necessary to convert this value to the &lt;0,1&gt; interval if making summarization of characteristics.</i>	Absolute	X=count/ count A=count B=count	Value A comes from review report. Value B comes from requirement specifications.	Verification Joint review	Maintainers Users	
<b>Readiness of diagnostic function</b>	How thorough is the provision of the diagnostic functions?	Count the number of implemented diagnostic functions as specified and compare it to the number of diagnostic functions required in specifications. <b>COMMENT(S)</b> <i>This metric is also used to measure failure analysis capability and causal analysis capability.</i>	X=A/B A=Number of implemented diagnostic functions as specified confirmed in review B=Number of diagnostic functions required in review	0 <= X The closer to 1, the better implementation of diagnostic functions. <b>COMMENT(S)</b> <i>It is necessary to convert this value to the &lt;0,1&gt; interval if making summarization of characteristics.</i>	Absolute	X=count/ count A=count B=count	Value A comes from review report. Value B comes from requirement specifications.	Verification Joint review	Maintainers Users	

**Table 8.5.2 Changeability metrics**

Internal changeability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Change recordability</b>		Are changes to specifications and program modules recorded adequately in the code with comment lines?	Record ratio of module change information.	$X=A/B$ A=Number of changes in functions/modules having change comments confirmed in review B=Total number of functions/modules changed from original code	$0 \leq X \leq 1$ The closer to 1, the more recordable. The change control 0 indicates poor change control or little changes, high stability.	absolute	X=count/count A=count B=count	Configuration control system Version logs Specifications	Verification Joint review	Developers Maintainers Requirers

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.5.3 Stability metrics

Internal stability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Change impact</b>	What is the frequency of adverse impacts after modification?	Count the number of detected adverse impacts after modification and compare it to the number of modifications performed.	X=1-A/B A=Number of detected adverse impacts after modifications B=Number of modifications made	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	A comes from review report B comes from review report	Joint review Verification	Developers Maintainers Requirers	
<b>Modification impact localization</b>	How large is the impact of the modification on the software product?	Count the number of affected variables from a modification and compare it to the total number of variables in the product. <b>COMMENT(S)</b> Impacted variable is a) All variables in the instruction which was changed. b) Variable which is in the same instruction with the variable defined by a).	X=A/B A=Number of affected variable data by modification, confirmed in review B=Total number of variables	0 <= X <= 1 The closer to 0, the lesser impact of modification.	absolute	X=count/ count A=count B=count	A comes from review report B comes from review report	Joint review Verification	Developers Maintainers Requirers	

Table 8.5.4 Testability metrics

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 Reference	Target audience
<b>Completeness of built-in test function</b>	How complete is the built-in test capability?	Count the number of implemented built-in test functions as specified and compare it to the number of built-in test functions in the requirements.	X=A/B A=Number of implemented built-in test function as specified confirmed in review B=Number of built-in test function required	0 <= X <= 1 The closer to 1, the more complete.	absolute	X=count/ count A=count B=count	A comes from review document B comes from requirements or design document	Verification Joint review	Developers Maintainers Requirers
<b>Autonomy of testability</b>	How independently can the software be tested?	Count the number of dependencies on other systems for testing that have been simulated with stubs and compare it with the total number of test dependencies on other systems.	X=A/B A=Number of dependencies on other systems for testing that have been simulated with stubs B= Total number of test dependencies on other systems	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	A comes from review document B comes from requirements or design document	Verification Joint review	Developers Maintainers Requirers
<b>Test progress observability</b>	How complete are the built in test result displays during testing?	Count the number of implemented checkpoints as specified and compare it to the number specified checkpoints required by design.	X=A/B A=Number of implemented checkpoints as specified confirmed in review B=Number of designed checkpoints	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	A comes from review document B comes from design document	Verification Joint review	Developers Maintainers Requirers

**Table 8.5.5 Maintainability compliance metrics**

Internal maintainability compliance metrics	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Maintainability compliance</b>	How compliant is the maintainability of the product to applicable regulations, standards and conventions?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	X=A/B A= Number of correctly implemented items related to maintainability compliance confirmed in evaluation B= Total number of compliance items	0 <= X <= 1 The closer to 1, the more compliant.	absolute	X=count/ count A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	Verification Joint review	Requirers Developers

STANDARD.PDF.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

## 8.6 Portability metrics

Internal portability metrics are used for predicting the effect the software product may have on the behaviour of the implementor or system during the porting activity.

### 8.6.1 Adaptability metrics

Internal adaptability metrics indicate a set of attributes for predicting the impact the software product may have on the effort of the user who is trying to adapt the software product to different specified environments.

### 8.6.2 Installability metrics

Internal installability metrics indicate a set of attributes for predicting the impact the software product may have on the effort of the user who is trying to install the software in a user specified environment.

### 8.6.3 Co-existence metrics

Internal co-existence metrics indicate a set of attributes for predicting the impact the software product may have on other software products sharing the same operational hardware resources.

### 8.6.4 Replaceability metrics

Internal replaceability metrics indicate a set of attributes for predicting the impact the software product may have on the effort of the user who is trying to use the software in place of other specified software in a specified environment and context of use.

### 8.6.5 Portability compliance metrics

Internal compliance metrics relating to portability indicate a set of attributes for assessing the capability of the software product to comply to such items as standards, conventions or regulations of the user organization in relation to portability.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.6.1 Adaptability metrics

Internal adaptability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SCLP Reference	Target audience
<b>Adaptability of data structures</b>	How adaptable is the product to the data structure changes?	Count the number of data structures, which are operable and has no limitation after adaptation and compare it to the total number of data structures requiring adaptation capability.	X=A/B	X=count/ count	0 <= X <= 1 The closer to 1, the better.	absolute	Req spec Design Review report	Verification Joint review	Developers Maintainers Requirers	
			A=Number of data structures which are operable and has no limitation after adaptation, confirmed in review B=Total number of data structures requiring adaptation capability	A=count B=count	Developers Maintainers Requirers					
<b>Hardware environmental adaptability</b> (adaptability to hardware devices and network facilities)	How adaptable is the product to the H/W related environmental change?	Count the number of implemented functions which are capable of achieving required results in specified multiple H/W environments as specified and compare it to the number of functions with H/W environment adaptation capability requirements.	X=A/B	X=count/ count	0 <= X <= 1 The closer to 1, the better.	absolute	Req spec Design Review report	Verification Joint review	Developers Maintainers Requirers	
			A=Number of implemented functions which are capable of achieving required results in specified multiple H/W environment as specified, confirmed in review B=Total number of functions with HW environment adaptation capability requirements	A=count B=count	Developers Maintainers Requirers					
<b>Organisational environment adaptability</b> (Organisation adaptability to infrastructure of organisation)	How adaptable is the product to organizational change?	Count the number of implemented functions which are capable of achieving required results in specified multiple organizational and business environments as specified and compare it to the number of functions with organizational environment adaptation capability requirements.	X=A/B	X=count/ count	0 <= X <= 1 The closer to 1, the better.	absolute	Req spec Design Review report	Verification Joint review	Developers Maintainers Requirers	
			A=Number of implemented functions which are capable of achieving required results in specified multiple organizational and business environment as specified, confirmed in review B=Total number of functions with organizational environment adaptation capability requirements	A=count B=count	Developers Maintainers Requirers					
<b>Porting user friendliness</b>	How effortless is it to perform porting operations on the product?	Count the number of implemented functions which are capable of supporting ease-of-adaptation by user as specified and compare it to the number of functions with easy-to-adapt capability requirements.	X=A/B	X=count/ count	0 <= X <= 1 The closer to 1, the more friendly.	absolute	Req spec Design Review report	Verification Joint review	Developers Maintainers Requirers	
		A=Number of functions supporting ease-of-adaptation by user as specified, confirmed in review B=Total number of functions with ease-to-adapt capability requirements	A=count B=count	Developers Maintainers Requirers						

Table 8.6.1 (continued)

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>System software environmental adaptability</b> (adaptability to OS, network software and co-operated application software)	How adaptable is the product to system software related environmental changes?	Count the number of implemented functions which are capable of achieving required results in specified multiple system software environments as specified and compare it to the number of functions with system software environment adaptation capability requirements.	X=A/B A=Number of implemented functions which are capable of achieving required results in specified multiple system software environment as specified, confirmed in review B=Total number of functions with system software environment adaptation capability requirements B=Total number of functions with system software environment adaptation capability requirements	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Req spec Design Review report	Verification Joint review	Developers Maintainers Requirers

STANDARDS 4U.COM Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.6.2 Installability metrics

Internal installability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SSCP Reference	Target audience
<b>Ease of Setup Re-try</b>	How easy is it to repeat setup operation?	Count the number of implemented setup retry operations and compare it to the number of setup retry operations required.	X=A/B A=Number of implemented retry operations for setup, confirmed in review B=Total number of setup operations required	0 <= X <= 1 The closer to 1, the easier.	absolute count	X=count/ count	Review report	6.5 Validation	Developers	
<b>Installation effort</b>	What level of effort is required for installation?	Count the number of implemented installation automated steps and compare it to the number of prescribed installation steps.	X=A/B A=Number of automated installation steps confirmed in review B=Number of installation steps required <b>COMMENT(S)</b> Prescribed: e.g., number of windows/commands/manual operation to reach target operation.	0 <= X <= 1 The closer to 1, the better.	absolute count	X=count/ count	Review report	6.5 Validation	Developers	
<b>Installation flexibility</b>	How flexible and customizable is the installation capability?	Count the number of implemented customizable installation operations as specified and compare it to the number of installation operations with customization capability requirements.	X=A/B A=Number of implemented customizable installation operation as specified confirmed in review B=Number of customizable installation operation required <b>COMMENT(S)</b> Customizable: e.g., nesting depth, number of panels.	0 <= X <= 1 The closer to 1, the more flexible.	absolute count	X=count/ count	Requirement specification Review report	6.5 Validation	Developers	

**Table 8.6.3 Co-existence metrics**

Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Available co-existence</b>	How flexible is the product in sharing its environment with other products without adverse impacts on other products?	Count the number of entities with which product can exist as specified and compare it to the number of entities in production environment that require co-existence.	X=A/B A= Number of entities with which product can co-exist as specified B= Number of entities in production environment that require co-existence	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Requirements specification Review report Test report	Verification Joint review	Requirers Developers Maintainers

STANDARD PDF COPY.COM :: Click to view the full PDF of ISO/IEC TR 9126-3:2003

Table 8.6.4 Replaceability metrics

Internal replaceability metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SSCP Reference	Target audience
<b>Continued use of data</b>	What is the amount of original data that remain unchanged after replacement with this product?	Count the number of data items, that continue to be used after replacement as specified, and compare it to the total number of data items required to be used from the old data after software replacement.	X=A/B	A=Number of software data items that continue to be used as specified after replacement, confirmed in evaluation B=Number of old data items required to be used from old software	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Design Source code Review report Test report	Verification Joint review	Requirers Developers Maintainers
			X=A/B	A=Number of functions covered by new software that produces similar results, confirmed in review B=Number of functions in old software	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Design Source code Review report Test report	Verification Joint review	Requirers Developers Maintainers
<b>Function inclusiveness</b>	What's the amount of functions that remain unchanged?	Count the number of functions covered by new software that produces similar results and compare it to the number of function in the old software.	X=A/B	A=Number of functions covered by new software that produces similar results, confirmed in review B=Number of functions in old software	0 <= X <= 1 The closer to 1, the better.	absolute	X=count/ count A=count B=count	Design Source code Review report Test report	Verification Joint review	Requirers Developers Maintainers

**Table 8.6.5 Portability compliance metrics**

Internal portability compliance metrics	Metric name	Purpose of the metrics	Method of application	Measurement, formula and data element computations	Interpretation of measured value	Metric scale type	Measure type	Input to measurement	ISO/IEC 12207 SLCP Reference	Target audience
<b>Portability compliance</b>	How compliant is the portability of the product to applicable regulations, standards and conventions?	Count the number of items requiring compliance that have been met and compare with the number of items requiring compliance as in the specification.	X=A/B A= Number of correctly implemented items related to portability compliance confirmed in evaluation B= Total number of compliance items	0 <= X <= 1 The closer to 1, the more complete.	absolute X=count/count A=count B=count	Specification of compliance and related standards, conventions or regulations. Design Source code Review report	ISO/IEC 12207 SLCP Reference Verification Joint review	Requirers Developers		

STANDARD.PDFISO.COM : Click to view the full PDF of ISO/IEC TR 9126-3:2003

## Annex A (informative)

### Considerations When Using Metrics

#### A.1 Interpretation of measures

##### A.1.1 Potential differences between test and operational contexts of use

When planning the use of metrics or interpreting measures it is important to have a clear understanding of the intended context of use of the software, and any potential differences between the test and operational contexts of use. For example, the "time required to learn operation" measure is often different between skilled operators and unskilled operators in similar software systems. Examples of potential differences are given below.

##### a) Differences between testing environment and the operational environment

Are there any significant differences between the testing environment and the operational execution in user environment?

The following are examples:

- testing with higher / comparable / lower performance of CPU of operational computer;
- testing with higher / comparable / lower performance of operational network and communication;
- testing with higher / comparable / lower performance of operational operating system;
- testing with higher / comparable / lower performance of operational user interface.

##### b) Differences between testing execution and actual operational execution

Are there any significant differences between the testing execution and operational execution in user environment?

The following are examples:

- coverage of functionality in test environment;
- test case sampling ratio;
- automated testing of real time transactions;
- stress loads;
- 24 hour 7 days a week (non stop) operation;
- appropriateness of data for testing of exceptions and errors;
- periodical processing;
- resource utilisation;
- levels of interruption;
- production pressures;
- distractions.

**c) User profile under observation**

Are there any significant differences between test user profiles and operational user profiles?

The following are examples:

- mix of type of users;
- user skill levels;
- specialist users or average users;
- limited user group or public users.

**A.1.2 Issues affecting validity of results**

The following issues may affect the validity of the data that is collected.

**(a) procedures for collecting evaluation results:**

- automatically with tools or facilities / manually collected / questionnaires or interviews;

**(b) source of evaluation results**

- developers' self reports / reviewers' report / evaluator's report;

**(c) results data validation**

- developers' self check / inspection by independent evaluators.

**A.1.3 Balance of measurement resources**

Is the balance of measures used at each stage appropriate for the evaluation purpose?

It is important to balance the effort used to apply an appropriate range of metrics for internal, external and quality in use measures.

**A.1.4 Correctness of specification**

Are there significant differences between the software specification and the real operational needs?

Measurements taken during software product evaluation at different stages are compared against product specifications. Therefore, it is very important to ensure by verification and validation that the product specifications used for evaluation reflect the actual and real needs in operation.

**A.2 Validation of Metrics**

**A.2.1 Desirable Properties for Metrics**

To obtain valid results from a quality evaluation, the metrics should have the properties stated below. If a metric does not have these properties, the metric description should explain the associated constraint on its validity and, as far as possible, how that situation can be handled.

- a) Reliability (of metric):** Reliability is associated with random error. A metric is free of random error if random variations do not affect the results of the metric.

- b) Repeatability (of metric):** repeated use of the metric for the same product using the same evaluation specification (including the same environment), type of users, and environment by the same evaluators, should produce the same results within appropriate tolerances. The appropriate tolerances should include such things as fatigue, and learning effect.
- c) Reproducibility (of metric):** use of the metric for the same product using the same evaluation specification (including the same environment), type of users, and environment by different evaluators, should produce the same results within appropriate tolerances.

NOTE 1 It is recommended to use statistical analysis to measure the variability of the results.

- d) Availability (of metric):** The metric should clearly indicate the conditions (e.g. presence of specific attributes) which constrain its usage.
- e) Indicativeness (of metric):** Capability of the metric to identify parts or items of the software which should be improved, given the measured results compared to the expected ones.

NOTE 2 The selected or proposed metric should provide documented evidence of the availability of the metric for use, unlike those requiring project inspection only.

- f) Correctness (of measure):** The metric should have the following properties:
- 1) Objectivity (of measure): the metric results and its data input should be factual: i.e., not influenced by the feelings or the opinions of the evaluator, test users, etc. (except for satisfaction or attractiveness metrics where user feelings and opinions are being measured).
  - 2) Impartiality (of measure): the measurement should not be biased towards any particular result.
  - 3) Sufficient precision (of measure): Precision is determined by the design of the metric, and particularly by the choice of the material definition used as the basis for the metric. The metric user will describe the precision and the sensitivity of the metric.
- g) Meaningfulness (of measure):** the measurement should produce meaningful results about the software behaviour or quality characteristics.

The metric should also be cost effective: that is, more costly metrics should provide higher value results.

### A.2.2 Demonstrating the Validity of Metrics

The users of metrics should identify the methods for demonstrating the validity of metrics, as shown below:

#### (a) Correlation

The variation in the quality characteristics values (the measures of principal metrics in operational use) explained by the variation in the metric values, is given by the square of the linear coefficient.

An evaluator can predict quality characteristics without measuring them directly by using correlated metrics.

#### (b) Tracking

If a metric  $M$  is directly related to a quality characteristics value  $Q$  (the measures of principal metrics in operational use), for a given product or process, then a change value  $Q(T1)$  to  $Q(T2)$ , would be accompanied by a change metric value from  $M(T1)$  to  $M(T2)$ , in the same direction (for example, if  $Q$  increases,  $M$  increases).

An evaluator can detect movement of quality characteristics along a time period without measuring directly by using those metrics which have tracking ability.

**(c) Consistency**

If quality characteristics values (the measures of principal metrics in operational use)  $Q_1, Q_2, \dots, Q_n$ , corresponding to products or processes 1, 2, ..., n, have the relationship  $Q_1 > Q_2 > \dots > Q_n$ , then the corresponding metric values would have the relationship  $M_1 > M_2 > \dots > M_n$ .

An evaluator can notice exceptional and error prone components of software by using those metrics which have consistency ability.

**(d) Predictability**

If a metric is used at time  $T_1$  to predict a quality characteristic value  $Q$  (the measures of principal metrics in operational use) at  $T_2$ , prediction error, which is  $\{(\text{predicted } Q(T_2) - \text{actual } Q(T_2)) / \text{actual } Q(T_2)\}$ , would be within allowed prediction error range.

An evaluator can predict the movement of quality characteristics in the future by using these metrics, which measure predictability.

**(e) Discriminative**

A metric would be able to discriminate between high and low quality software.

An evaluator can categorize software components and rate quality characteristics values by using those metrics which have discriminative ability.

**A.3 Use of metrics for estimation (judgement) and prediction (forecast)**

Estimation and prediction of the quality characteristics of the software product at the earlier stages are two of the most rewarding uses of metrics.

**A.3.1 Quality characteristics prediction by current data**

**(a) Prediction by regression analysis**

When predicting the future value (measure) of the same characteristic (attribute) by using the current value (data) of it (the attribute), a regression analysis is useful based on a set of data that is observed in a sufficient period of time.

For example, the value of MTBF (Mean Time Between Failures) that is obtained during the testing stage (activities) can be used to estimate the MTBF in operation stage.

**(b) Prediction by correlation analysis**

When predicting the future value (measure) of a characteristic (attribute) by using the current measured values of a different attribute, a correlation analysis is useful using a validated function which shows the correlation.

For example, the complexity of modules during coding stage may be used to predict time or effort required for program modification and test during maintenance process.

**A.3.2 Current quality characteristics estimation on current facts**

**(a) Estimation by correlation analysis**

When estimating the current values of an attribute which are directly unmeasurable, or if there is any other measure that has strong correlation with the target measure, a correlation analysis is useful.

For example, because the number of remaining faults in a software product is not measurable, it may be estimated by using the number and trend of detected faults.

Those metrics which are used for predicting the attributes that are not directly measurable should be estimated as explained below:

- Using models for predicting the attribute;
- Using formula for predicting the attribute;
- Using basis of experience for predicting the attribute;
- Using justification for predicting the attribute.

Those metrics which are used for predicting the attributes that are not directly measurable may be validated as explained below:

- Identify measures of attributes which are to be predicted;
- Identify the metrics which will be used for prediction;
- Perform a statistical analysis based validation;
- Document the results;
- Repeat the above periodically.

#### **A.4 Detecting deviations and anomalies in quality problem prone components**

The following quality control tools may be used to analyse deviations and anomalies in software product components:

- (a) process charts (functional modules of software)
- (b) Pareto analysis and diagrams
- (c) histograms and scatter diagrams
- (d) run diagrams, correlation diagrams and stratification
- (e) Ishikawa (Fishbone) diagrams
- (f) statistical process control (functional modules of software)
- (g) check sheets

The above tools can be used to identify quality issues from data obtained by applying the metrics.

#### **A.5 Displaying measurement results**

##### **(a) Displaying quality characteristics evaluation results**

The following graphical presentations are useful to display quality evaluation results for each of the quality characteristic and subcharacteristic.

Radar chart; Bar chart numbered histogram, multi-variates chart, Importance Performance Matrix, etc.

##### **(b) Displaying measures**

There are useful graphical presentations such as Pareto chart, trend charts, histograms, correlation charts, etc.

## Annex B (informative)

### Use of Quality in Use, External & Internal Metrics (Framework Example)

#### B.1 Introduction

This framework example is a high level description of how the ISO/IEC 9126 Quality model and related metrics may be used during the software development and implementation to achieve a quality product that meets user's specified requirements. The concepts shown in this example may be implemented in various forms of customization to suit the individual, organization or project. The example uses the key life cycle processes from ISO/IEC 12207 as a reference to the traditional software development life cycle and quality evaluation process steps from ISO/IEC 14598-3 as a reference to the traditional Software Product Quality evaluation process. The concepts can be mapped onto other models of software life cycles if the user so wishes as long as the underlying concepts are understood.

#### B.2 Overview of Development and Quality Process

Table B.1 depicts an example model that links the Software Development life cycle process activities (activity 1 to activity 8) to their key deliverables and the relevant reference models for measuring quality of the deliverables (i.e., Quality in Use, External Quality, or Internal Quality).

Row 1 describes the software development life cycle process activities. (This may be customized to suit individual needs). Row 2 describes whether an actual measure or a prediction is possible for the category of measures (i.e., Quality in Use, External Quality, or Internal Quality). Row 3 describes the key deliverable that may be measured for Quality and Row 4 describes the metrics that may be applied on each deliverable at each process activity.

**Table B.1 Quality Measurement Model**

	Activity 1	Activity 2	Activity 3	Activity 4	Activity 5	Activity 6	Activity 7	Activity 8
<b>Phase</b>	Requirement analysis (Software and systems)	Architectural design (Software and systems)	Software detailed design	Software coding and testing	Software integration and software qualification testing	System integration and system qualification testing	Software installation	Software acceptance support
<b>9126 series model reference</b>	Required user quality, Required internal quality, Required external quality	Predicted quality in use, Predicted external quality, Measured internal quality	Predicted quality in use, Predicted external quality, Measured internal quality	Predicted quality in use, Measured external quality, Predicted external quality, Measured internal quality	Predicted quality in use, Measured external quality, Predicted external quality, Measured internal quality	Predicted quality in use, Measured external quality, Measured internal quality	Predicted quality in use, Measured external quality, Measured internal quality	Measured quality in use, Measured external quality, Measured internal quality
<b>Key deliverables of activity</b>	User quality requirements (specified), External quality requirements (specified), Internal quality requirements (specified)	Architecture design of Software / system	Software detailed design	Software code, Test results	Software product, Test results	Integrated system, Test results	Installed system	Delivered software product
<b>Metrics used to measure</b>	Internal metrics (External metrics may be applied to validate specifications)	Internal metrics	Internal metrics	Internal metrics External metrics	Internal metrics External metrics	Internal metrics External metrics	Internal metrics External metrics	Quality in use metrics Internal metrics External metrics

## B.3 Quality Approach Steps

### B.3.1 General

Evaluation of the Quality during the development cycle is divided into the following steps. Step 1 has to be completed during the Requirement Analysis activity. Steps 2 to 5 have to be repeated during each process activity defined above.

### B.3.2 Step #1 Quality requirements identification

For each of the Quality characteristics and subcharacteristics defined in the Quality model determine the User Needs weights using the two examples in Table B.2 for each category of the measurement. (Quality in Use, External and Internal Quality). Assigning relative weights will allow the evaluators to focus their efforts on the most important subcharacteristics.

**Table B.2 User Needs Characteristics & Weights**

(a)

Quality in Use		
	CHARACTERISTIC	WEIGHT (High/Medium/Low)
	Effectiveness	H
	Productivity	H
	Safety	L
	Satisfaction	M

(b)

External & Internal Quality		
CHARACTERISTIC	SUBCHARACTERISTIC	WEIGHT (High/Medium/Low)
<b>Functionality</b>	Suitability	H
	Accuracy	H
	Interoperability	L
	Security	L
	Compliance	M
<b>Reliability</b>	Maturity (hardware/software/data)	L
	Fault tolerance	L
	Recoverability (data, process, technology)	H
	Compliance	H
<b>Usability</b>	Understandability	M
	Learnability	L
	Operability	H
	Attractiveness	M
	Compliance	H
<b>Efficiency</b>	Time behaviour	H
	Resource utilization	H
	Compliance	H
<b>Maintainability</b>	Analyzability	H
	Changeability	M
	Stability	L
	Testability	M
	Compliance	H
<b>Portability</b>	Adaptability	H
	Installability	L
	Co-existence	H
	Replaceability	M
	Compliance	H

NOTE Weights can be expressed in the High/Medium/Low manner or using the ordinal type scale in the range 1-9 (e.g.: 1-3 = low, 4-6 = medium, 7-9 = high).

**B.3.3 Step #2 Specification of the evaluation**

This step is applied during every development process activity.

For each of the Quality subcharacteristics defined in the Quality model identify the metrics to be applied and the required levels to achieve the User Needs set in Step 1 and record as shown in the example in Table B.3.

Basic input and directions for the content formulation can be obtained from the example in Table B.1 that explains what can be measured at this stage of the development cycle.

NOTE It is possible, that some of the rows of the tables would be empty during the specific activities of the development cycle, because it would not be possible to measure all of the subcharacteristics early in the development process.

**Table B.3 Quality measurement tables**

(a)

<b>Quality in Use Measurement Category</b>				
	CHARACTERISTIC	METRICS	REQUIRED LEVEL	ASSESSMENT ACTUAL RESULT
	Effectiveness			
	Productivity			
	Safety			
	Satisfaction			

(b)

<b>External Quality Measurement Category</b>				
CHARACTERISTIC	SUBCHARACTERISTIC	METRICS	REQUIRED LEVEL	ASSESSMENT ACTUAL RESULT
<b>Functionality</b>	Suitability			
	Accuracy			
	Interoperability			
	Security			
	Compliance			
<b>Reliability</b>	Maturity (hardware/software/data)			
	Fault tolerance			
	Recoverability (data, process, technology)			
	Compliance			
<b>Usability</b>	Understandability			
	Learnability			
	Operability			
	Attractiveness			
	Compliance			
<b>Efficiency</b>	Time behaviour			
	Resource utilisation			
	Compliance			
<b>Maintainability</b>	Analyzability			
	Changeability			
	Stability			
	Testability			
	Compliance			

<b>Portability</b>	Adaptability			
	Instability			
	Co-existence			
	Replaceability			
	Compliance			

(c)

<b>Internal Quality Measurement Category</b>				
CHARACTERISTIC	SUBCHARACTERISTIC	METRICS	REQUIRED LEVEL	ASSESSMENT ACTUAL RESULT
<b>Functionality</b>	Suitability			
	Accuracy			
	Interoperability			
	Security			
	Compliance			
<b>Reliability</b>	Maturity (hardware/software/data)			
	Fault tolerance			
	Recoverability (data, process, technology)			
	Compliance			
<b>Usability</b>	Understandability			
	Learnability			
	Operability			
	Attractiveness			
	Compliance			
<b>Efficiency</b>	Time behaviour			
	Resource utilisation			
	Compliance			
<b>Maintainability</b>	Analyzability			
	Changeability			
	Stability			
	Testability			
	Compliance			
<b>Portability</b>	Adaptability			
	Instability			
	Co-existence			
	Replaceability			
	Compliance			