

# TECHNICAL SPECIFICATION



Information technology – Telecommunications cabling requirements for remote powering of terminal equipment

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV





**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2020 ISO/IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)**

67 000 electrotechnical terminology entries in English and French extracted from the Terms and definitions clause of IEC publications issued between 2002 and 2015. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

STANDARDSISO.COM : Click to view the full PDF of IEC TS 2015:2017+AMD1:2020 CSV



ISO/IEC TS 29125

Edition 1.1 2020-05  
CONSOLIDATED VERSION

# TECHNICAL SPECIFICATION



Information technology – Telecommunications cabling requirements for remote powering of terminal equipment

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 35.200

ISBN 978-2-8322-8389-9

**Warning! Make sure that you obtained this publication from an authorized distributor.**

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

## REDLINE VERSION



Information technology – Telecommunications cabling requirements for remote powering of terminal equipment

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV



## CONTENTS

FOREWORD .....	5
INTRODUCTION .....	7
INTRODUCTION to the amendment .....	7
1 Scope .....	8
2 Normative references .....	8
3 Terms, definitions and abbreviated terms .....	9
3.1 Terms and definitions .....	9
3.2 Abbreviated terms .....	9
4 Conformance .....	10
5 Cabling selection and performance .....	10
6 Installation conditions .....	10
6.1 General .....	10
6.2 Ambient temperature .....	10
6.3 Temperature rise and current capacity .....	11
6.4 Factors affecting temperature increase .....	13
6.4.1 General .....	13
6.4.2 Installation near equipment .....	13
6.4.3 Cable count within a bundle .....	13
6.4.4 Reducing temperature increase .....	15
6.4.5 Cable bundle suspended in air .....	19
6.4.6 Administration .....	19
7 Remote power delivery over balanced cabling .....	19
7.1 4-pair balanced cabling .....	19
7.2 1-pair balanced cabling .....	21
8 Connecting hardware .....	22
8.1 General .....	22
8.2 4-pair balanced cabling .....	22
8.3 1-pair balanced cabling .....	23
Annex A (informative) Mitigation considerations for installed cabling .....	24
A.1 General .....	24
A.2 Minimum cabling class .....	24
A.3 Bundle size and location .....	24
A.4 Mitigation options .....	24
Annex B (informative) Modelling temperature rise for cable types, bundle sizes and installation conditions .....	25
B.1 Model basics .....	25
B.2 Power dissipated ( $P$ ) .....	25
B.3 Temperature difference from ambient temperature to bundle surface ( $\Delta T_U$ ) .....	26
B.3.1 Model equations .....	26
B.3.2 Typical values for constant $\rho_U$ .....	26
B.4 Temperature difference from bundle surface to bundle centre ( $\Delta T_{th}$ ) .....	26
B.4.1 Model equations .....	26
B.4.2 Typical values for constant $\rho_{th}$ .....	26
B.5 Temperature variation within the bundle ( $\Delta T(x)$ ) .....	27
B.6 Alternative presentation of the model .....	27

B.7	Adaptation model used to derive temperature rise vs. cables in a bundle .....	27
B.8	Calculations .....	28
B.9	Example.....	28
B.10	Coefficients for air and conduit.....	29
Annex C (informative)	Transmission parameters related to remote powering.....	30
C.1	DC loop resistance.....	30
C.1.1	4-pair cabling.....	30
C.1.2	1-pair cabling.....	30
C.2	DC resistance unbalance (within pair).....	30
C.2.1	General .....	30
C.2.2	4-pair cabling.....	31
C.2.3	1-pair cabling.....	31
C.3	DC resistance unbalance (pair to pair).....	31
Annex D (informative)	Illustrations of heating of various bundle sizes and configurations .....	33
D.1	Limiting cable bundle size.....	33
D.2	Separating into smaller bundles .....	34
Annex E (informative)	Test protocol .....	35
E.1	Background.....	35
E.2	Test set-up .....	35
Annex F (informative)	Detailed test procedure .....	38
F.1	General.....	38
F.2	Test set-up .....	38
F.2.1	Thermocouple placement.....	38
F.2.2	Measurement of cable bundle in air .....	39
F.2.3	Measurement of cable bundle in conduit.....	40
Bibliography	.....	42
Figure 1	– Examples of end point powering systems using signal pairs (top) and spare pairs (bottom) .....	20
Figure 2	– Examples of mid-span powering systems .....	21
Figure 3	– Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air .....	18
Figure 4	– Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit.....	19
Figure 5	– Single pair remote powering using signal pairs.....	22
Figure B.1	– Temperature rise profile.....	25
Figure D.1	– 91-cable bundle.....	33
Figure D.2	– Three bundles of 37 cables.....	33
Figure D.3	– Three bundles of 37 cables with separation .....	34
Figure E.1	– 37-cable bundle and temperature location.....	35
Figure E.2	– "Perfect bundle" and thermocouple configuration .....	36
Figure E.3	–4-pair cabling conductor configuration.....	36
Figure E.4	– 1-pair cabling conductor configuration .....	36
Figure F.1	– Placement of thermocouple.....	38
Figure F.2	– Securing of the thermocouple.....	39
Figure F.3	– Test set-up for cable bundles in air .....	40

STANDARD ISO/IEC TS 29125:2017+AMD1:2020 CSV

Figure F.4 – Test set-up for cable bundles in conduit ..... 41

Table 1 – Maximum current per conductor versus temperature rise in a 37 4-pair cable bundle in air and conduit ( <del>all 4 pairs energized</del> ).....	11
Table 2 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 4-pair cables (all pairs energized).....	12
Table 3 – Temperature rise versus 4-pair cable bundle size (500 mA per conductor) .....	14
Table 4 – Temperature rise for a type of 4-pair cable versus the number of energized pairs in a 37-cable bundle (500 mA per conductor) .....	17
Table 5 – Maximum current per conductor versus temperature rise in a 37 1-pair cable bundle in air and conduit.....	12
Table 6 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 1-pair cables of different conductor diameters in air and conduit.....	13
Table 7 – Temperature rise versus 1-pair cable bundle size (1 000 mA per conductor) .....	15
Table 8 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air .....	17
Table 9 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit.....	18
Table B.1 – Bundling coefficients for different types of 4-pair cables and cords (all 4 pairs energized) in air and conduit .....	29
Table B.2 – DC resistance and bundling coefficients for 1-pair cables of different conductor diameters (all conductors energized) in air and conduit .....	29
Table C.1 – Maximum DC loop resistance of channels.....	30
Table C.2 – DC resistance unbalance of 4-pair cables, connecting hardware and channels.....	31
Table C.3 – DC resistance unbalance (pair to pair).....	32

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

**INFORMATION TECHNOLOGY –**  
**TELECOMMUNICATIONS CABLING REQUIREMENTS**  
**FOR REMOTE POWERING OF TERMINAL EQUIPMENT**

**FOREWORD**

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

**This consolidated version of the official IEC Standard and its amendment(s) has been prepared for user convenience.**

**ISO/IEC TS 29125 edition 1.1 contains the first edition (2017-04) and its amendment 1 (2020-05) [documents JTC1-SC25/2919/DTS and JTC1-SC25/2945/RVDTS].**

**In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.**

The main task of the joint technical committee is to prepare International Standards. In exceptional circumstances, the joint technical committee may propose the publication of a Technical Specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- when the subject is still under technical development or where, for any other reason, there is the future but not immediate possibility of an agreement on an International Standard.

Technical Specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

ISO/IEC TS 29125, which is a Technical Specification, has been prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) extension of the current per conductor from 300 mA to 500 mA;
- b) provision of additional details of installation conditions that were not described in ISO/IEC TR 29125:2010;
- c) inclusion of guidelines for cords;
- d) inclusion of a model to calculate temperature rise in different bundle sizes.

This Technical Specification has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

This document specifies the use of generic balanced cabling for customer premises, as specified in the ISO/IEC 11801 series, for remote powering of terminal equipment. It provides guidance on new cabling installations and renovations. The customer premises may encompass one or more buildings or may be within a building that contains more than one organization. The cabling may be installed prior to the selection of remote powering equipment or powered terminal equipment.

ISO/IEC 11801-1 specifies a structure and performance requirements for cabling subsystems that support a wide range of applications. They provide appropriate equipment interfaces to the cabling infrastructure in equipment rooms, telecommunications rooms and work areas.

A growing number of organizations employ equipment at locations that require the provision of remote powering. This document was created to provide supplementary information to ISO/IEC 11801-1 to implement remote powering over generic balanced cabling as specified in ISO/IEC 11801-1.

This document provides additional guidance for remote powering on the use of balanced cabling systems as specified in ISO/IEC 11801-1 and guidance on different installation conditions that require special considerations:

- information to bring together all the considerations about remote powering in a single document;
- guidance on mating and un-mating of connectors that convey remote power.

This document does not include requirements from national or local safety standards and regulations.

This document was developed based on a number of contributions describing remote powering over telecommunications cabling under different installation conditions. The relevant safety standards and regulations, application standard, and equipment manufacturers give guidance on factors that should be taken into account during design of the generic balanced cabling that supports the distribution of remote powering.

This document extends the current per conductor specified in ISO/IEC TR 29125:2010 from 300 mA to 500 mA. This document covers additional details of installation conditions that are not described in ISO/IEC TR 29125:2010. This document includes guidelines for cords. This document addresses the use of generic balanced single pair cabling for customer premises, to be specified in future amendments of the ISO/IEC 11801 series, for remote powering of terminal equipment. This document uses measurements and empirical models to estimate the thermal performance of single pair cable bundles of various conductor diameters.

## INTRODUCTION to the amendment

This amendment incorporates changes necessary to include remote powering using single pair cabling.

## INFORMATION TECHNOLOGY –

# TELECOMMUNICATIONS CABLING REQUIREMENTS FOR REMOTE POWERING OF TERMINAL EQUIPMENT

## 1 Scope

This document

- a) addresses the support of safety extra low voltage (SELV) and limited power source (LPS) applications that provide remote power over:
  - 4-pair balanced cabling in accordance with the reference implementations of ISO/IEC 11801 series standards using currents per conductor of up to 500 mA;
  - 1-pair balanced cabling using currents per conductor of up to 1 000 mA;and targets the support of applications that provide remote power over balanced cabling to terminal equipment,
- b) covers the transmission and electrical parameters needed to support remote power over balanced cabling,
- c) covers various installation scenarios and how these may impact the capability of balanced cabling to support remote powering,
- d) specifies design and configuration of cabling as specified in ISO/IEC 11801-1.

NOTE SELV requirements specify a maximum voltage of 60 V DC and LPS is understood in the applications referenced to be up to 100 W supplied within 4-pair cabling.

This document includes a mathematical model to predict the behaviour of different bundle sizes, various cabling constructions, and installation conditions for different current capacities.

Safety (e.g. electrical safety and protection and fire) and electromagnetic compatibility (EMC) requirements are outside the scope of this document, and are covered by other standards and regulations. However, information given by this document can be of assistance.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11801-1, *Information technology – Generic cabling for customer premises – Part 1: General requirements*

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC TR 24746, *Information technology – Generic cabling for customer premises – Mid-span DTE power insertion*

### 3 Terms, definitions and abbreviated terms

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11801-1, ISO/IEC 14763-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

##### 3.1.1

#### **power source equipment**

equipment that provides power

##### 3.1.2

#### **cable bundle**

several cables tied together or in contact with one another in a parallel configuration for at least 1 m, with the cross-section profile of the arrangement basically circular

##### 3.1.3

#### **conductor**

element intended to carry electric current

[SOURCE IEC 60050-151:2001, 151-12-05, modified – The 3 Notes have been deleted.]

##### 3.1.4

#### **current carrying capacity**

maximum current a cable circuit (one or several conductors) can support resulting in a specified increase of temperature of the conductor beyond the ambient temperature, not exceeding the maximum allowed operating temperature of the cable

[SOURCE: IEC 61156-1:2007/AMD1:2009, 3.24, modified – "increase of temperature" has replaced "increase of the surface temperature".]

##### 3.1.5

#### **remote powering**

supply of power to application specific equipment via balanced cabling

##### 3.1.6

#### **temperature rise**

difference in temperature between the initial temperature of the conductor without power and the final temperature of the powered conductor at steady state

#### 3.2 Abbreviated terms

EMC	electromagnetic compatibility
FD	floor distributor
HVAC	heating, ventilation and air conditioning
PTZ	pan, tilt, zoom
WAP	wireless access point

## 4 Conformance

For cabling to comply with this document, the following applies:

- a) the design of the cabling shall comply with the relevant cabling design standard of the ISO/IEC 11801 series;
- b) the installation shall comply with ISO/IEC 14763-2 as amended by the additional requirements of this document.

## 5 Cabling selection and performance

Cabling for remote powering ~~should~~ can be implemented using 4-pair and 1-pair balanced cabling.

This cabling will be used simultaneously to support signal transmission and remote power feeding for the terminal equipment. This document assumes the use of balanced cabling components specified in the reference implementation clause of the relevant design standards of the ISO/IEC 11801 series.

The transmission parameters of balanced cables related to remote powering can be found in Annex C.

## 6 Installation conditions

### 6.1 General

Cabling may be installed in different types of continuous and non-continuous pathway systems as described in ISO/IEC 14763-2. The installation of a cable within the pathway systems should take into account the specified operating temperature of the cable. Due to the Joule effect, each energized conductor has a temperature rise. Larger cable bundles have more heat generation and therefore the temperature rise is worse than smaller cable bundles.

The cable bundle size is limited by the current capacity in 6.3 and the induced temperature rise that results in an operating temperature of the cable, not to exceed its temperature rating.

The following guidelines for pathway selection and installation should be considered:

- a) installation design including the type of pathways selected, the pathway fill factor, whether the pathway is sealed at both ends,
- b) the pathway environment and whether the pathway goes through thermally insulated areas in which case the type of insulation will be a significant factor. For optimal thermal performance, pathway design should avoid any insulated areas,
- c) thermal aspects of the entire pathway (e.g. open tray, closed tray, ventilated, non-ventilated, plastic conduit, metal conduit, fire barriers) should be taken into account.

### 6.2 Ambient temperature

Different segments of a link can have different ambient temperatures, which can influence the amount of remote power that can be delivered. Therefore the ambient temperature in different length segments of a link or channel has a direct impact on the operating temperature of the cable used for the link or channel and can limit the capability of the cable for remote power delivery to powered terminal equipment. The worst case installed cabling condition with respect to the maximum ambient temperature shall be used to determine the maximum operating temperature for a link or channel when subject to remote powering.

### 6.3 Temperature rise and current capacity

When remote power is applied to balanced cabling, the temperature of the cabling will rise due to resistive heat generation (Joule effect) in the conductors. Depending on cable construction and installed cabling conditions, the heat generated will be dissipated into the surrounding environment until a steady state is reached with the temperature of the cable bundle (operating temperature) higher than the ambient temperature of the surrounding environment. The maximum temperature of any cable shall not exceed the temperature rating of the cable. The standards in the ISO/IEC 11801 series require this temperature to be 60 °C (minimum).

Temperature rise in the cable will lead to an increase in insertion loss as indicated in the reference implementations of the ISO/IEC 11801 series standards and should be taken into account when selecting cables and using them in links or channels. The maximum length of the channel or link should be reduced based on the maximum temperature of the cable using the de-rating factors in ISO/IEC 11801-1.

The maximum current per conductor for different temperature rise in a bundle of 37 cables of 4-pair Category 5 cables with solid conductors, and 37 cords of 4-pair 0,40 mm stranded cords with all pairs energized is shown in Table 1.

The maximum current per conductor for different temperature rise in a bundle of 37 cables of 1-pair cables with 0,57 mm diameter conductors, and 37 cords of 1-pair 0,40 mm cords with all pairs energized is shown in Table 5.

Annex B provides an engineering model that may be used for specific cable types, cable constructions, and installation conditions to derive the bundle size for a particular current per conductor. Clause B.7 describes a simplified version of the engineering model in Annex B and was used to derive the worst case values in Tables 1, 2, 3 and 4 to 9 based on constants calculated from measurements of typical cables for each cable category or conductor diameter. The measurement procedures used to determine the constants are detailed in Annex F.

**Table 1 – Maximum current per conductor versus temperature rise in a 37 4-pair cable bundle in air and conduit (all 4 pairs energized)**

Temperature rise °C	Current per conductor 0,4 mm cords mA		Current per conductor Category 5 cables mA	
	air	conduit	air	conduit
5	278	223	341	287
7,5	340	273	418	351
10	393	315	482	406
12,5	439	352	539	453
15	481	386	591	497
17,5	520	417	638	537
20	556	446	682	574

Temperature rise above 10 °C shown in grey background is not recommended.

NOTE These values are based on conductor temperature measurement of typical cables and cords.

**Table 5 – Maximum current per conductor versus temperature rise in a 37 1-pair cable bundle in air and conduit**

Temperature rise °C	Current per conductor 0,57 mm diameter mA		Current per conductor 0,40 mm cords mA	
	air	conduit	air	conduit
5	866	738	608	518
7,5	1 061	904	744	634
10	1 225	1 044	860	732
12,5	1 370	1 167	961	819
15	1 501	1 278	1 053	897
17,5	1 621	1 381	1 137	969
20	1 733	1 476	1 216	1 036

Temperature rise above 10 °C shown in grey background is not recommended.

NOTE These values are based on conductor temperature measurement of typical cables and cords.

Table 2 shows current capacity for different categories of 4-pair cable, independent of construction, for a given temperature rise. Table 6 shows current capacity for 1-pair cables of conductor diameters of cable, independent of construction, for a given temperature rise.

**Table 2 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 4-pair cables (all pairs energized)**

$\Delta T$	0,4 mm cords mA		Category 5 cables mA		Category 6 cables mA		Category 6 <sub>A</sub> cables mA		Category 7 cables mA		Category 7 <sub>A</sub> cables mA	
	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit
2	175	141	215	181	246	207	267	229	267	229	324	264
4	248	199	305	256	348	293	378	324	378	324	459	373
6	304	244	373	314	427	359	463	397	463	397	562	457
8	351	282	431	363	493	414	535	459	535	459	649	528
10	393	315	482	406	551	463	598	513	598	513	725	590
12	430	345	528	444	604	507	655	562	655	562	795	646
14	465	373	571	480	652	548	708	607	708	607	858	698
16	497	399	610	513	697	586	756	649	756	649	918	746
18	527	423	647	544	740	622	802	688	802	688	973	792
20	556	446	682	574	780	655	846	725	846	725	1026	835

Temperature rise above 10 °C shown in grey background is not recommended

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The current per conductor for each category is dependent on the cable construction.

**Table 6 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 1-pair cables of different conductor diameters in air and conduit**

$\Delta T$	0,32 mm diameter		0,40 mm diameter		0,51 mm diameter		0,57 mm diameter		0,65 mm diameter		0,81 mm diameter		1,02 mm diameter	
	mA		mA		mA		mA		mA		mA		mA	
°C	air	conduit												
2	307	262	384	327	490	417	548	466	624	532	779	663	981	835
4	435	370	543	463	693	590	775	660	883	753	1 101	938	1 387	1 181
6	533	454	666	567	849	723	949	808	1 082	922	1 349	1 149	1 699	1 446
8	615	524	769	655	981	835	1 096	933	1 249	1 065	1 558	1 327	1 962	1 670
10	688	586	860	732	1 096	934	1 225	1 044	1 397	1 190	1 742	1 484	2 194	1 867
12	753	642	942	802	1 201	1 023	1 342	1 143	1 530	1 304	1 908	1 625	2 403	2 046
14	814	693	1 017	867	1 297	1 105	1 450	1 235	1 653	1 409	2 061	1 755	2 596	2 210
16	870	741	1 087	926	1 387	1 181	1 550	1 320	1 767	1 506	2 203	1 877	2 775	2 362
18	923	786	1 153	983	1 471	1 253	1 644	1 400	1 874	1 597	2 337	1 991	2 943	2 506
20	973	829	1 216	1 036	1 551	1 321	1 733	1 476	1 976	1 684	2 463	2 098	3 102	2 641

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various conductor diameters of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The current per conductor for each 1-pair cable is also dependent on the cable construction.

## 6.4 Factors affecting temperature increase

### 6.4.1 General

The steady state temperature for the conductor of any power carrying cable is reached when the generation of heat within the cable (Joule effect) is equal to the heat dissipated into the environment, be it the open atmosphere, trays, ducts or other cables which can also be power carrying cables.

### 6.4.2 Installation near equipment

Ambient temperature near equipment will be higher and also installation of telecommunications cables and cords in hot aisles will lead to higher ambient temperature around the patch cord bundle.

### 6.4.3 Cable count within a bundle

This document uses 37-cable bundles as the basis for developing the temperature rise and current per conductor with all pairs energized. For other cases (e.g. where bundle count exceeds 37 cables), the guidelines provided in 6.4 can be used. ~~Refer to Table 3 to determine the maximum temperature rise using 500 mA per conductor for cable bundles of different count.~~

This document uses 37-cable bundles as the basis for developing the temperature rise and current per conductor with all pairs energized. For other cases (e.g. where bundle count exceeds 37 cables), the guidelines provided in 6.4 can be used.

Refer to Table 7 to determine the maximum temperature rise using 1 000 mA per conductor for 1-pair cable bundles of different count.

**Table 3 – Temperature rise versus 4-pair cable bundle size (500 mA per conductor)**

Number of cables	Temperature rise °C											
	0,4 mm cords		Cat 5 cables		Cat 6 cables		Cat 6 <sub>A</sub> cables		Cat 7 cables		Cat 7 <sub>A</sub> cables	
	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit
1	1,9	3,1	1,1	1,7	0,8	1,3	0,7	1,1	0,7	1,1	0,6	0,9
7	5,7	9,1	3,5	5,2	2,6	4,0	2,3	3,3	2,3	3,3	1,7	2,6
19	10,5	16,5	6,7	9,7	5,1	7,4	4,4	6,1	4,4	6,1	3,1	4,7
24	12,2	19,1	7,9	11,3	6,0	8,7	5,1	7,1	5,1	7,1	3,6	5,5
37	16,2	25,1	10,7	15,2	8,2	11,6	7,0	9,5	7,0	9,5	4,7	7,2
48	19,3	29,8	13,0	18,2	10,0	14,0	8,5	11,4	8,5	11,4	5,7	8,5
52	20,3	31,4	13,8	19,3	10,6	14,8	9,0	12,0	9,0	12,0	6,0	9,0
61	22,7	34,9	15,5	21,6	12,0	16,6	10,1	13,4	10,1	13,4	6,7	10,0
64	23,5	36,1	16,1	22,4	12,4	17,1	10,5	13,9	10,5	13,9	6,9	10,3
74	26,0	39,8	17,9	24,9	13,9	19,1	11,7	15,4	11,7	15,4	7,7	11,3
91	30,1	45,9	21,0	29,0	16,4	22,2	13,8	17,9	13,8	17,9	8,9	13,1

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 500 mA per conductor, for all pairs in all cables in the bundle.

NOTE 2 The current per conductor for each category is dependent on the cable construction.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

**Table 7 – Temperature rise versus 1-pair cable bundle size  
 (1 000 mA per conductor)**

Number of cables	Temperature rise													
	°C													
	0,32 mm diameter		0,40 mm diameter		0,51 mm diameter		0,57 mm diameter		0,65 mm diameter		0,81 mm diameter		1,02 mm diameter	
	mA		mA		mA		mA		mA		mA		mA	
	air	conduit												
1	2,9	4,4	1,9	2,8	1,1	1,7	0,9	1,4	0,7	1,1	0,5	0,7	0,3	0,4
7	8,2	11,9	5,2	7,6	3,2	4,7	2,6	3,8	2,0	2,9	1,3	1,9	0,8	1,2
19	14,3	20,2	9,2	12,9	5,6	8,0	4,5	6,4	3,5	4,9	2,2	3,2	1,4	2,0
24	16,4	23,0	10,5	14,7	6,4	9,0	5,2	7,2	4,0	5,6	2,6	3,6	1,6	2,3
37	21,1	29,1	13,5	18,6	8,3	11,5	6,7	9,2	5,1	7,1	3,3	4,5	2,1	2,9
48	24,7	33,6	15,8	21,5	9,7	13,2	7,8	10,6	6,0	8,1	3,9	5,2	2,4	3,3
52	25,9	35,2	16,6	22,5	10,2	13,8	8,2	11,1	6,3	8,5	4,0	5,5	2,5	3,5
61	28,6	38,5	18,3	24,6	11,3	15,1	9,0	12,1	6,9	9,3	4,5	6,0	2,8	3,8
64	29,4	39,5	18,8	25,3	11,6	15,6	9,3	12,5	7,1	9,6	4,6	6,2	2,9	3,9
74	32,2	42,9	20,6	27,5	12,7	16,9	10,2	13,5	7,8	10,4	5,0	6,7	3,2	4,2
91	36,7	48,4	23,5	31,0	14,5	19,0	11,6	15,2	8,9	11,7	5,7	7,5	3,6	4,8

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance of the various conductor diameters of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 1 000 mA per conductor, for all cables in the bundle.

NOTE 2 The current per conductor for each conductor diameter is also dependent on the cable construction.

#### 6.4.4 Reducing temperature increase

Minimizing the cabling temperature rise is recommended, as it

- reduces the impact on the transmission performance (e.g. insertion loss) of the cabling,
- reduces the HVAC loading within the premises,
- allows operation in higher ambient temperatures without exceeding the cable temperature rating,
- reduces the overall cost of delivering remote power by minimizing the resistive heating loss (power dissipated in the cabling).

The temperature rise can be reduced by minimizing the heat generation and maximizing the heat dissipation. Examples of how this can be achieved include:

- using higher category cable (for 4-pair cables),
- selecting a larger conductor size which decreases per unit length DC resistance,
- improving thermal dissipation by selecting cable with
  - improved heat transfer coefficient between materials within the cable,
  - improved heat transfer coefficient between cable sheath and air,
  - screen or other additional metallic elements,
  - solid insulation,

- a larger diameter,
- reducing the number of energized pairs,
- reducing the number of cables per bundle and avoiding tight cable bundles,
- selection of applications and devices that use lower current.

NOTE Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

Mixing power-carrying cabling with unpowered cabling in bundles is also recommended as a practice to minimize heat rise.

If bundling is necessary, separate large bundles into smaller bundles, as described in Annex D. Other mitigation considerations are described in Annex A. Otherwise avoid bundling cables to minimize temperature rise.

Table 4 shows the effect of energizing the number of pairs within a 37-cable bundle for different 4-pair cable categories.

Table 8 shows the effect of energizing the number of pairs within a 37-cable bundle for different 1-pair cable constructions in air. Figure 1 shows this data in graphical form.

Table 9 shows the effect of energizing the number of pairs within a 37-cable bundle for different 1-pair cable constructions in conduit. Figure 2 shows this data in graphical form.

The recommendation of ISO/IEC 14763-2 for 4-pair cable bundles of no more than 24 is further reinforced for remote powering due to:

- 1) installation factors,
- 2) possible high ambient temperature,
- 3) the use of 0,4 mm conductor diameter cords,
- 4) higher currents up to 500 mA per conductor with all 4 pairs energized.

**Table 4 – Temperature rise for a type of 4-pair cable versus the number of energized pairs in a 37-cable bundle (500 mA per conductor)**

No. of pairs	$\Delta T$ (°C)											
	0,4 mm cords		Cat 5 cables		Cat 6 cables		Cat 6 <sub>A</sub> cables		Cat 7 cables		Cat 7 <sub>A</sub> cables	
	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit
24	5,2	8,4	3,2	4,7	2,4	3,6	2,0	3,0	2,0	3,0	1,5	2,4
48	7,9	12,5	5,0	7,2	3,7	5,5	3,2	4,6	3,2	4,6	2,3	3,6
96	12,2	19,1	7,9	11,3	6,0	8,7	5,1	7,1	5,1	7,1	3,6	5,5
144	15,9	24,7	10,5	14,9	8,0	11,4	6,8	9,3	6,8	9,3	4,7	7,0
148	16,2	25,1	10,7	15,2	8,2	11,6	7,0	9,5	7,0	9,5	4,7	7,2

Temperature rise above 10 C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 500 mA on each energized conductor

NOTE 2 The current per conductor for each category is dependent on the cable construction.


**Table 8 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air**

Bundle size	$\Delta T$ (°C)				
	Current (mA)				
	200	400	600	800	1 000
7	0,103	0,413	0,93	1,653	2,582
19	0,18	0,722	1,624	2,887	4,511
37	0,266	1,065	2,396	4,26	6,656
61	0,36	1,442	3,244	5,767	9,01
91	0,463	1,852	4,166	7,407	11,573

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the DC resistance of the cable conductors. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The temperature rise for a particular cable is also dependent on the cable construction.

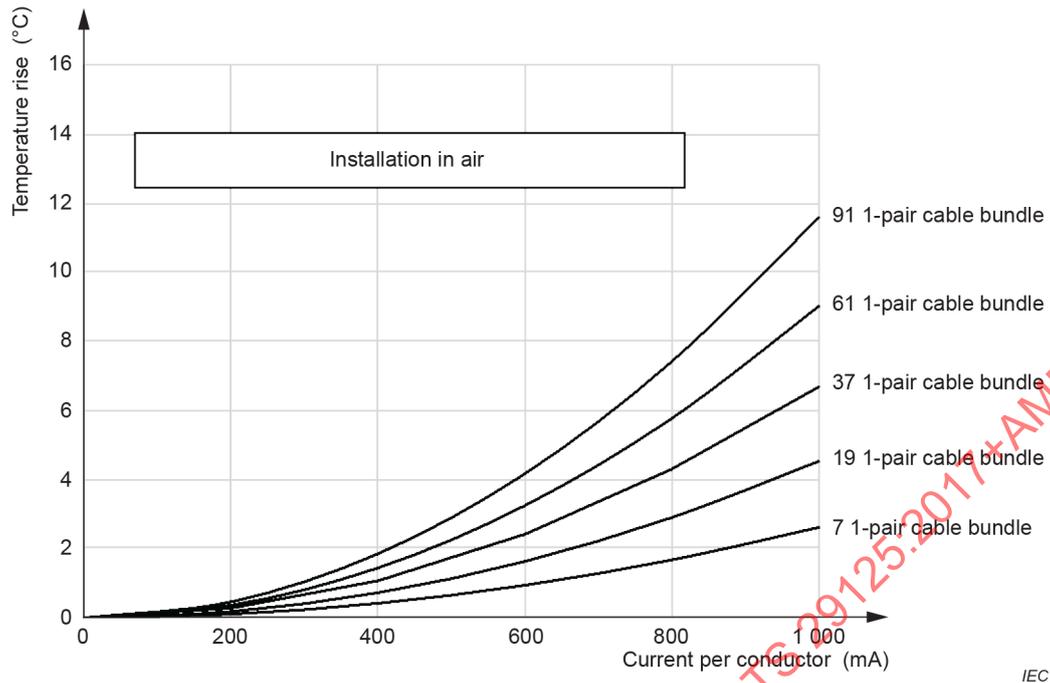

**Figure 3 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air**


**Table 9 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit**

Bundle size	$\Delta T$ (°C)				
	Current (mA)				
	200	400	600	800	1 000
7	0,15	0,6	1,351	2,401	3,752
19	0,255	1,02	2,295	4,081	6,376
37	0,367	1,467	3,302	5,87	9,171
61	0,485	1,941	4,366	7,762	12,128
91	0,61	2,439	5,488	9,756	15,244

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the DC resistance of the cable conductors. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The temperature rise for a particular cable is also dependent on the cable construction.

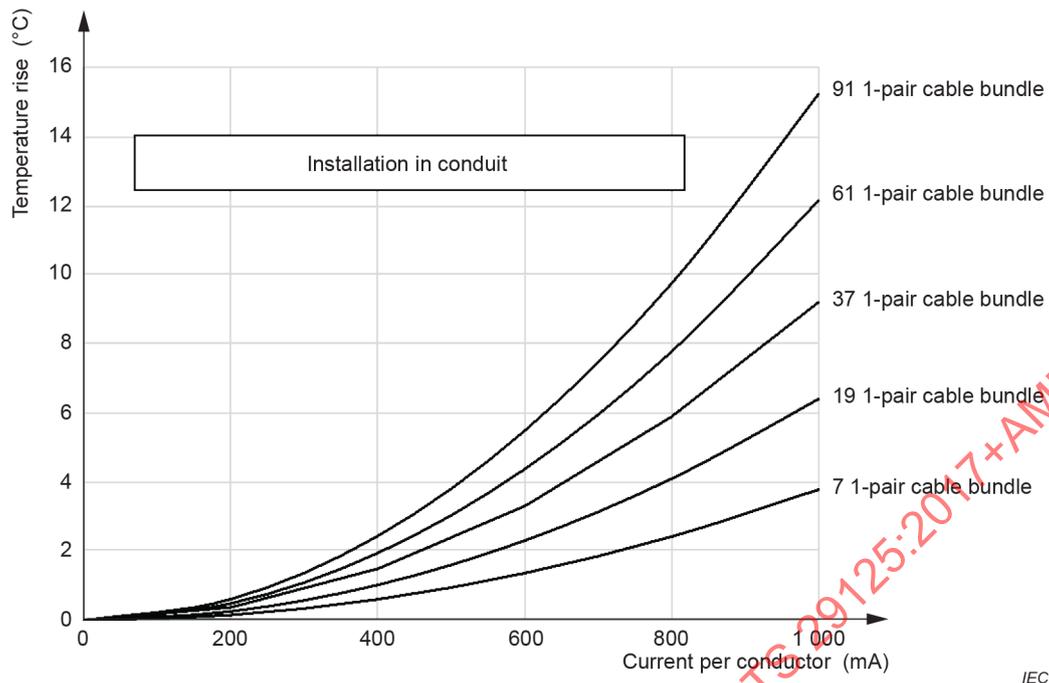

**Figure 4 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit**

#### 6.4.5 Cable bundle suspended in air

The maximum ambient temperature of 50 °C is possible in certain environments and operating conditions. To allow for this ambient temperature and limit the temperature rise to 10 °C, for the minimum Category 5 cables supporting 500 mA per conductor, it is necessary to limit the bundle size to a smaller number than 100 cables.

#### 6.4.6 Administration


The administration system as described in ISO/IEC 14763-2 can be used to select the channels in a bundle to use to supply power optimally. For example, the administration system can be used to record the powering details of the cables used for remote powering. An AIM system as specified in ISO/IEC 18598 can be designed to use bundle records and issue alerts when a bundle exceeds its thermal capacity.

### 7 Remote power delivery over balanced cabling

#### 7.1 4-pair balanced cabling


Figure 1 shows examples of specified transmission paths used in generic balanced cabling. The channel is the transmission path between equipment such as a LAN switch or hub and the terminal equipment. The channel does not include the connections at the data source equipment and the terminal equipment. The channel, the permanent link or the CP link shall meet the transmission requirements specified in the design standards.

Remote power may be provided to terminal equipment via balanced cabling equipment interfaces. Remote power may be introduced to the balanced cabling channel at the FD using spare pairs, if available, or by remote power supplied over the phantom circuit of data pairs from the power sourcing equipment, as shown in Figure 1.

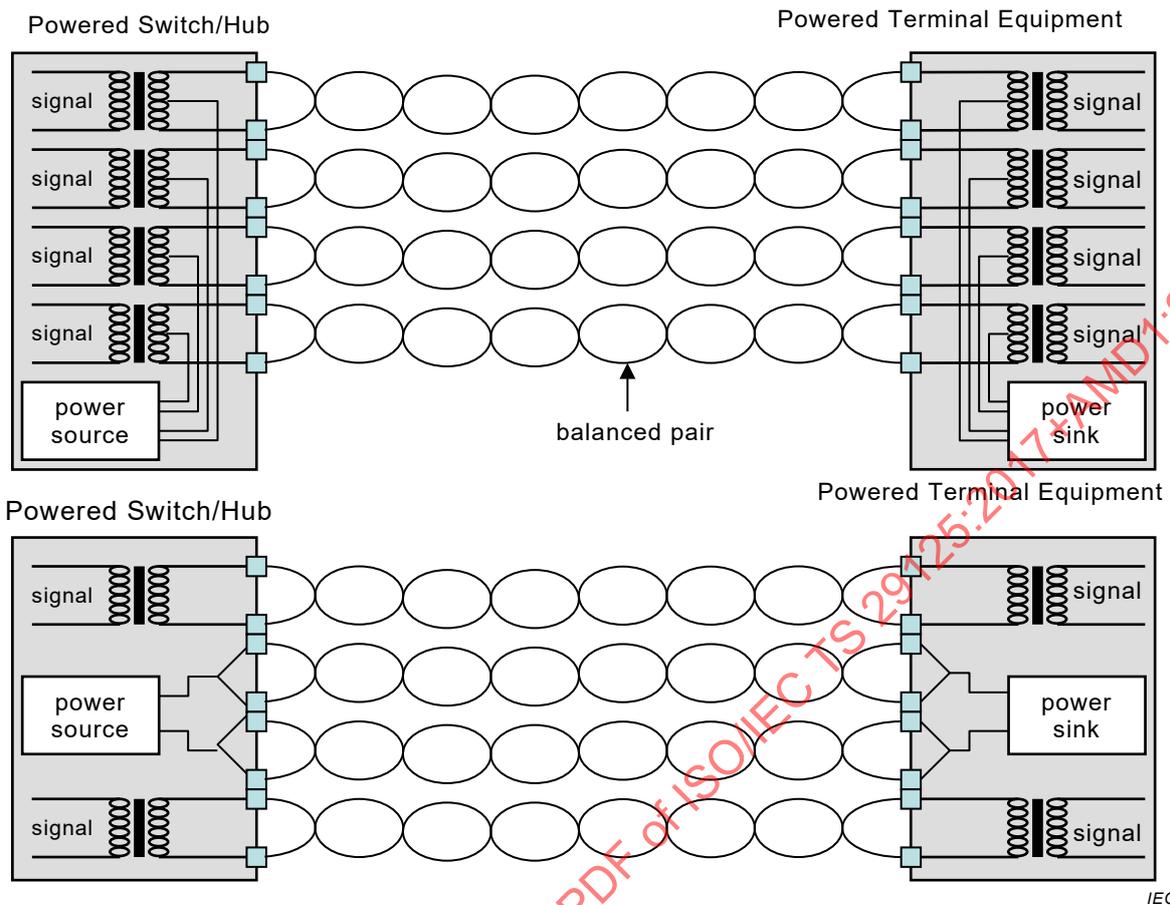

**Figure 1 – Examples of end point powering systems using signal pairs (top) and spare pairs (bottom)**

Alternatively, remote power may be supplied by mid-span power source equipment that inserts remote power independent of the data source equipment, as shown in Figure 2.

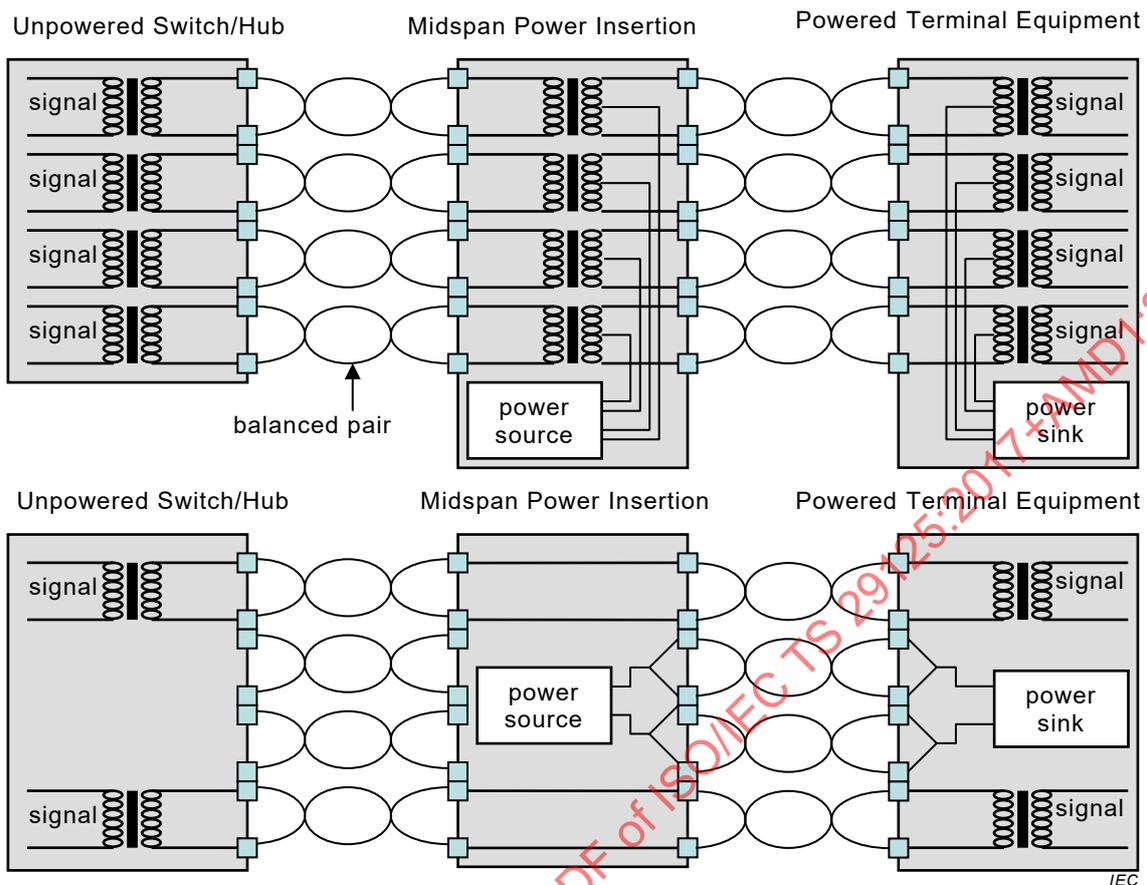


**Figure 2 – Examples of mid-span powering systems**

When mid-span power source equipment replaces a generic balanced cabling component or components, the data pairs shall meet the performance requirements of the component or components it replaces (e.g. patch cord, patch panel or combination thereof), regardless of the equipment interfaces used for input and output connections. Placement of mid-span power insertion equipment shall be external to the permanent link, see ISO/IEC TR 24746.

## 7.2 1-pair balanced cabling

Figure 5 shows examples of specified transmission paths used in 1-pair balanced cabling. The channel is the transmission path between equipment such as a LAN switch or hub and the terminal equipment. The channel does not include the connections at the data source equipment and the terminal equipment. The channel, the permanent link or the CP link shall meet the transmission requirements specified in the design standards.

Remote power may be provided to terminal equipment via balanced cabling equipment interfaces. Remote power is introduced to the balanced cabling channel at the Floor Distributor using the phantom circuit of data pairs from the power sourcing equipment, as shown in Figure 5.

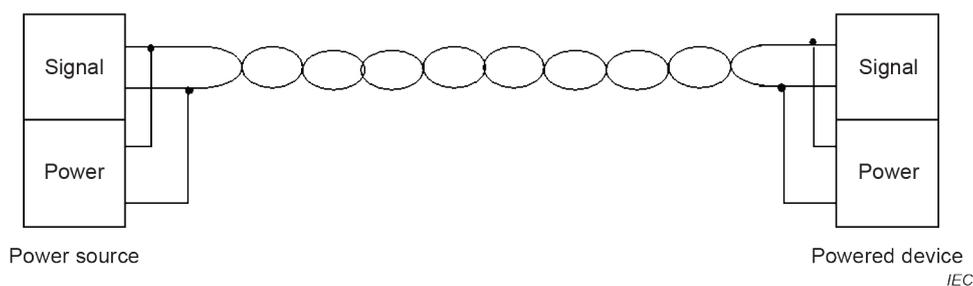

**Figure 5 – Single pair remote powering using signal pairs**

When mid-span power source equipment replaces a generic balanced cabling component or components, the data pair shall meet the performance requirements of the component or components it replaces (e.g. patch cord, patch panel or combination thereof), regardless of the equipment interfaces used for input and output connections.

## 8 Connecting hardware

### 8.1 General

~~Connecting hardware in channels used to support remote power applications shall have an appropriate current rating when mated. Connecting hardware contacts may deteriorate as a result of mating or un-mating under electrical load, leading to possible degradation of transmission characteristics (see IEC 60512-99-001). Manufacturers should be consulted regarding the number of mating and un-mating cycles supported by connecting hardware while conveying the intended levels of electrical power.~~

The temporary removal of remote power should be considered before mating or un-mating connecting hardware in a remotely powered channel.

It is preferable that remote powering is not present during mating or un-mating of connecting hardware.

Intelligent powering systems such as Power over Ethernet and Power over Ethernet-*plus* (defined in ISO/IEC/IEEE 8802-3) automatically recognize compliant loads before applying the required level of remote power, thus eliminating electrical stress during connector mating.

ISO/IEC/IEEE 8802-3 also defines optional features to remotely manage the provision of electrical power to each port via port power management which can be used to remove remote power from a particular channel prior to un-mating connectors.

Port power management is therefore the preferred approach to reconfiguration of remotely powered cabling channels.

### 8.2 4-pair balanced cabling

Connecting hardware in channels used to support remote power applications shall have an appropriate current rating when mated. Connecting hardware contacts may deteriorate as a result of mating or un-mating under electrical load, leading to possible degradation of transmission characteristics (see IEC 60512-99-001). Manufacturers should be consulted regarding the number of mating and un-mating cycles supported by connecting hardware while conveying the intended levels of electrical power.

Where it is not practicable to switch off the remote power before mating or un-mating (e.g. for power sources that do not have power management), connecting hardware having the required performance for mating and un-mating under the relevant levels of electrical power and load should be chosen. These requirements are not within the scope of the balanced

connecting hardware standards (e.g. IEC 60603-7, IEC 61076-3-104 and IEC 61076-3-110) referenced from ISO/IEC 11801-1 and equivalent standards but may be assessed using additional test schedules.

NOTE A test schedule for engaging and separating connectors under electrical load is described in IEC 60512-99-001.

### 8.3 1-pair balanced cabling

Contacts need to support 2,0 A for mating and un-mating under load.

Connecting hardware in channels used to support remote power applications shall have an appropriate current rating when mated. Connecting hardware contacts may deteriorate as a result of mating or un-mating under electrical load, leading to possible degradation of transmission characteristics (IEC 60512-99-002). Manufacturers should be consulted regarding the number of mating and un-mating cycles supported by connecting hardware while conveying the intended levels of electrical power.

NOTE A test schedule for engaging and separating connectors under electrical load is described in IEC 60512-99-002.

## **Annex A** (informative)

### **Mitigation considerations for installed cabling**

#### **A.1 General**

Installed cabling is not easy to change to support new applications with additional requirements. Annex A offers some considerations that can be useful to provide remote power over existing installations of Class D or better balanced cabling. Consideration should be given to local heat dissipation conditions, for instance going through framed wall construction or through insulating material.

#### **A.2 Minimum cabling class**

Class D is the minimum cabling suitable for remote powering. Better balanced cabling is recommended to allow higher power needed by emerging applications such as next generation WAPs and outdoor heated PTZ cameras.

#### **A.3 Bundle size and location**

Cables with improved thermal characteristics may be configured into larger bundles. The location of a cable bundle is also an important consideration. Conduits sealed at both ends typically retain more heat than open conduits, leading to a higher temperature rise in the sealed conduit. If cables are installed in an open tray, the temperature rise will be lower than the temperature rise in conduits (sealed or unsealed) for the same bundle size.

#### **A.4 Mitigation options**

If an existing installation does not meet the current capacity in this document for a particular bundle size, the following mitigation options may be considered.

- a) Use only half the cables in a bundle for remote powering with the other half used for applications that do not need remote power.
- b) If ambient temperatures are high, consider adding air-conditioning or air-circulation over cabling segments that are exposed to high temperature.
- c) If possible, separate larger bundles into smaller bundles.

If it is not possible to implement any of the mitigation options listed above, and the number of data terminals requiring remote powering is significant, upgrade the installation using cables with improved thermal characteristics.

Additionally, when the number of data terminals requiring remote powering is significant, upgrade the installation using the appropriate installation procedures to keep the bundle size reasonably low (e.g. 24 cable count) to allow proper heat dissipation all along the channel, permanent link or CP link.

## Annex B (informative)

### Modelling temperature rise for cable types, bundle sizes and installation conditions

#### B.1 Model basics

This model derives the temperature rise based on measured data for different cable types and installation environments:

- $\Delta T$  is the total temperature rise between the ambient temperature (or that of the unpowered bundle) and the centre of the bundle;
- $\Delta T_{th}$  is the temperature rise between the outer surface and the centre of the bundle;
- $\Delta T_u$  is the temperature rise between the ambient temperature (or that of the unpowered bundle) and the outer surface of the bundle.

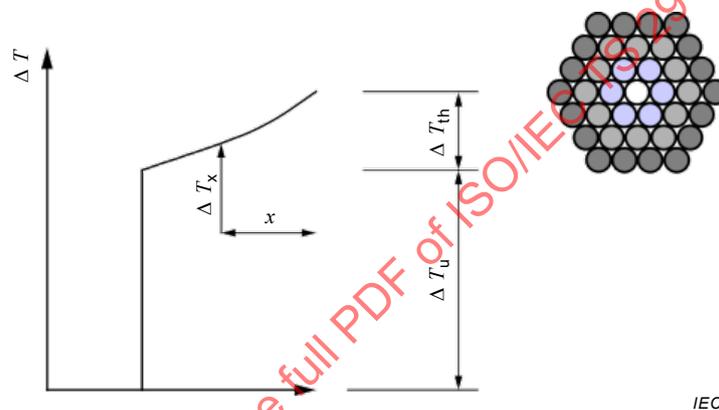


Figure B.1 – Temperature rise profile

An additional element of the model provides a calculation for the temperatures within the bundle at a distance  $x$  from the centre ( $\Delta T_x$ ).

#### B.2 Power dissipated ( $P$ )

The model uses a common factor which is defined as  $P$ :

$$P = N \times n_c \times i_c^2 \times R \quad (\text{B.1})$$

where

$i_c$  is the current per conductor (A) = 0,5 times the current delivered by a pair;

$n_c$  is the number of conductors per cable carrying remote powering current ( $i_c$ )  
= 2 times the number of pairs carrying remote powering current;

$N$  is the number of cables carrying remote powering current;

$R$  is the average DC resistance per unit length ( $\Omega/\text{m}$ ) of conductors carrying remote powering current.

It is recognized that resistance is a function of temperature. This may be neglected for small temperature rises of  $\leq 20$  °C. However, for calculations resulting in larger temperature rises iteration should be employed within the model. Without such iteration the model produces an underestimate of the temperature rise.

### B.3 Temperature difference from ambient temperature to bundle surface ( $\Delta T_u$ )

#### B.3.1 Model equations

$$\Delta T_u = \frac{\rho_u \times P}{\left( d \times \sqrt{N} \times 4 \sqrt{\frac{3}{4} \times \pi^6} \right)} \approx \left( \frac{\rho_u \times P}{d \times \sqrt{N} \times 5,182} \right) \text{ °C} \quad (\text{B.2})$$

where

$\rho_u$  is the constant relating to installation environment;

$d$  is the cable diameter (m).

#### B.3.2 Typical values for constant $\rho_u$

Examples of factors for common use cases determined empirically are listed below. Other use cases may be developed under engineering supervision. Formula (B.2) indicates that for all cable constructions and conduits/trays filled up to at least 40 % capacity as defined in ISO/IEC 14763-2,  $\rho_u$  is

- 0,15 under ventilated conditions,
- 0,25 for plastic conduits or open metal trays,
- 0,5 for closed metal trays,
- 0,75 with insulation.

The mapping of test results is ongoing and may lead to a refinement of these models.

### B.4 Temperature difference from bundle surface to bundle centre ( $\Delta T_{th}$ )

#### B.4.1 Model equations

$$\Delta T_{th} = \frac{\rho_{th} \times P}{4 \times \pi} \approx \frac{\rho_{th} \times P}{12,6} \text{ °C} \quad (\text{B.3})$$

where

$\rho_{th}$  is a constant relating to cable construction.

#### B.4.2 Typical values for constant $\rho_{th}$

Work undertaken during the development of this document and mapping of test results to the model into Formula (B.3) indicates that:

- $\rho_{th} = 5$  for U/UTP cable constructions;
- $\rho_{th} = 3$  for F/UTP cable constructions;
- $\rho_{th} = 2,75$  for S/FTP cable constructions.

The mapping of test results is ongoing and might lead to a refinement of these models.

## B.5 Temperature variation within the bundle ( $\Delta T(x)$ )

The temperature variation within the bundle is calculated according to Formula (B.4):

$$\Delta T(x) = \Delta T_u + \Delta T_{th} \left( 1 - \frac{4\pi \times x^2}{2\sqrt{3} \times N \times d^2} \right) \approx \Delta T_u + \Delta T_{th} \left( 1 - \frac{3,63 \times x^2}{N \times d^2} \right) \text{ } ^\circ\text{C} \quad (\text{B.4})$$

where

$x$  is the distance from the centre of the bundle ( $0 \leq x \leq$  bundle radius), in metres (m).

## B.6 Alternative presentation of the model

An alternative approximation of the model enables the calculation of  $\Delta T$  using a curve-fitting approach which provides a single value to allow comparison with simpler test set-ups where only the equivalent of measurements from thermocouples  $T_{2a}$  and  $T_A$  of Figure F.2 are used.

In such cases, the model equations of (B.2) and (B.3) can be combined and presented as follows:

$$\Delta T = C \times i_c^2 \times R \quad (\text{B.5})$$

where

$$C \approx \frac{\rho_u \times n_c \times \sqrt{N}}{(5 \times d)} + \frac{\rho_{th} \times N \times n_c}{12,6} \quad (\text{B.6})$$

This also allows  $\Delta T$  to be presented as a function of  $d$  or  $N$ .

See Annex E for a recommended method to validate the model described in Annex B.

## B.7 Adaptation model used to derive temperature rise vs. cables in a bundle

Based on the principles in Formulas (B.5) and (B.6), for a constant current, the predicted temperature rise for a bundle of cables will increase with the number of cables in the bundle.

The adaptation model describing this increase can be represented as shown in Formula (B.7).

$$\Delta T(I, N) = (C_1 N + C_2 \times \sqrt{N}) \times I^2 \quad (\text{B.7})$$

where

$\Delta T$  is the temperature rise in  $^\circ\text{C}$ ,

$I$  is the current in amperes,

$N$  is the number of cables in the bundle,

$C_1$  is the coefficient that describes all variables associated with the geometry of the cable,

$C_2$  is the coefficient that describes all variables associated with the environment surrounding the cable bundle.

## B.8 Calculations

For a fixed current and given cable bundle size, the temperature rise of the cable in the centre of the bundle can be measured. Another measurement can be made using the same cable type, same fixed current, and same environment surrounding the cable bundle, but with either a larger or smaller cable bundle size than the cable bundle already measured. The results of these two measurements provide the information needed to calculate the coefficients  $C_1$  and  $C_2$ .

Stated mathematically, the first measurement result is shown symbolically in Formula (B.8).

$$\Delta T_1(I, N_1) = (C_1 N_1 + C_2 \times \sqrt{N_1}) \times I^2 \quad (\text{B.8})$$

Stated mathematically, the second measurement result is shown symbolically in Formula (B.9).

$$\Delta T_2(I, N_2) = (C_1 N_2 + C_2 \times \sqrt{N_2}) \times I^2 \quad (\text{B.9})$$

The coefficients  $C_1$  and  $C_2$  can be solved algebraically using Formulas (B.8) and (B.9).

An alternative method is to construct a matrix equation using Formulas (B.8) and (B.9) as shown in Formula (B.10).

$$\begin{bmatrix} \Delta T_1 \\ \Delta T_2 \end{bmatrix} = \begin{bmatrix} N_1 & \sqrt{N_1} \\ N_2 & \sqrt{N_2} \end{bmatrix} \times \begin{bmatrix} C_1 \\ C_2 \end{bmatrix} \times I^2 \quad (\text{B.10})$$

Solving for the unknown variables results in Formula (B.11).

$$\begin{bmatrix} C_1 \\ C_2 \end{bmatrix} = \begin{bmatrix} N_1 & \sqrt{N_1} \\ N_2 & \sqrt{N_2} \end{bmatrix}^{-1} \times \begin{bmatrix} \Delta T_1 \\ \Delta T_2 \end{bmatrix} \times I^{-2} \quad (\text{B.11})$$

## B.9 Example

For a fixed current of 500 mA per conductor and cable bundle size of 37, the temperature rise of a Category 6 cable in the centre of the bundle in air is measured to be 7,26 °C.

Another measurement using the same cable type, same fixed current of 500 mA per conductor, and same air environment surrounding the cable bundle, but with a cable bundle size of 61, resulted in a temperature rise of the cable in the centre of the bundle of 11,10 °C.

Using these values and Formula (B.5) results in Formula (B.12).

$$\begin{bmatrix} C_1 \\ C_2 \end{bmatrix} = \begin{bmatrix} 37 & \sqrt{37} \\ 61 & \sqrt{61} \end{bmatrix}^{-1} \times \begin{bmatrix} 7,26 \\ 11,10 \end{bmatrix} \times (1,0)^{-2} \quad (\text{B.12})$$

Solving Formula (B.12) gives the results for the coefficients  $C_1$  and  $C_2$  in Formula (B.13).

$$\begin{bmatrix} C_1 \\ C_2 \end{bmatrix} = \begin{bmatrix} 0,13 \\ 0,39 \end{bmatrix} \quad (\text{B.13})$$

## B.10 Coefficients for air and conduit

Table B.1 shows the bundling coefficients determined from measurements for the different 4-pair cables and cords using at least two different bundle sizes (e.g. 37 and 61 cables per bundle).

Table B.2 shows the resistance per metre and the bundling coefficients determined from measurements for the different 1-pair cables and cords using at least two different bundle sizes (e.g. 37 and 19 cables per bundle).

See Annex F for a recommended method to determine the constants for different types of cables and cords.

**Table B.1 – Bundling coefficients for different types of 4-pair cables and cords (all 4 pairs energized) in air and conduit**

Bundling coefficients				
	open air		conduit	
	$C_1$	$C_2$	$C_1$	$C_2$
0,4 mm cords	0,144 5	1,780 0	0,198 0	2,925 0
Cat 5 cables	0,126 7	0,993 3	0,158 3	1,530 0
Cat 6 cables	0,105 7	0,707 0	0,120 6	1,178 3
Cat 6 <sub>A</sub> cables	0,085 7	0,626 3	0,092 6	0,996 7
Cat 7 cables	0,085 7	0,626 3	0,092 6	0,996 7
Cat 7 <sub>A</sub> cables	0,043 6	0,515	0,055 5	0,841

NOTE The bundling coefficients for Cat 7<sub>A</sub> cables were determined from the relative resistance values in IEC TR 61156-1-6.

**Table B.2 – DC resistance and bundling coefficients for 1-pair cables of different conductor diameters (all conductors energized) in air and conduit**

Conductor diameter mm	$R$ Ω/m	Bundling coefficients			
		in air		in conduit	
		$C_1$	$C_2$	$C_1$	$C_2$
0,32	0,220 2	0,109 1	0,885	0,026 1	1,349
0,40	0,140 9	0,069 9	1,797	0,053	2,739
0,51	0,086 7	0,043	1,105	0,032 6	1,685
0,57	0,069 4	0,034 4	0,885	0,026 1	1,349
0,65	0,053 4	0,026 5	0,680 6	0,020 1	1,037
0,81	0,034 4	0,017	0,438 3	0,012 9	0,668
1,02	0,021 7	0,010 7	0,276 4	0,008 2	0,421 3

NOTE The bundling coefficients are directly proportional to the square of the ratio of the two conductor diameters.

## Annex C (informative)

### Transmission parameters related to remote powering

#### C.1 DC loop resistance

##### C.1.1 4-pair cabling

The DC loop resistance requirements of each pair of a channel are specified in ISO/IEC 11801-1 when measured in accordance with IEC 61935-1. For convenience, Table C.1 shows those requirements.

**Table C.1 – Maximum DC loop resistance of channels**

Category 5	Category 6	Category 6 <sub>A</sub>	Category 7	Category 7 <sub>A</sub>
Ω	Ω	Ω	Ω	Ω
25	25	25	25	25

NOTE DC loop resistance applies only to pairs that provide DC continuity end-to-end. For testing connectivity, refer to IEC 61935-1.

##### C.1.2 1-pair cabling

The DC loop resistance requirements of a 1-pair channel can be calculated using Table B.2 for DC resistance of 90 m of single pair cables, 10 m of single pair cords, and 4 connections with 0,10 Ω per connection. For example, for a T1-B channel the maximum DC resistance is typically 17 Ω.

The DC loop resistance is dependent on the conductor diameter and length of the cabling. Selecting a larger conductor diameter is one way to reduce DC loop resistance and improve both energy consumption and heating. Careful attention to cable routing to minimize cable lengths will substantially decrease DC loop resistance.

While the values in Table C.1 represent the maximum DC loop resistance values specified, the actual DC loop resistance is dependent on the conductor size and length of the cabling. Selecting a larger conductor size, often associated with a higher-performance category of cabling, is one way to reduce DC loop resistance and improve both energy consumption and heating. Careful attention to cable routing to minimize cable lengths will substantially decrease DC loop resistance.

#### C.2 DC resistance unbalance (within pair)

##### C.2.1 General

~~The DC resistance unbalance requirements of each pair of a cable, connector, or channel are specified in ISO/IEC 11801-1. For convenience, Table C.2 shows those requirements as shown in Formula (C.1).~~

The resistance unbalance within a pair,  $R_{u,pair}$ , is defined by:

$$R_{u,pair} = \left\{ \frac{|R_{c1} - R_{c2}|}{R_{c1} + R_{c2}} \right\} \times 100\% \quad (C.1)$$

where

$R_{c1}$  is the DC resistance of one conductor in a pair,

$R_{c2}$  is the DC resistance of the other conductor in the pair.

### C.2.2 4-pair cabling

The DC resistance unbalance requirements of each pair of a cable, connector, or channel are specified in ISO/IEC 11801-1. For convenience, Table C.2 shows those requirements as shown in Formula (C.1).

**Table C.2 – DC resistance unbalance of 4-pair cables, connecting hardware and channels**

Category	Cable	Connecting hardware	Channel
Category 5	$\leq 2,5\%$ <sup>a</sup>	$\leq 50\text{ m}\Omega$ <sup>b</sup>	$\leq 3\%$ <sup>e</sup> or $\leq 200\text{ m}\Omega$ <sup>c,d</sup> whichever is greater.
Category 6	$\leq 2,5\%$ <sup>a</sup>		
Category 6 <sub>A</sub> , 7, 7 <sub>A</sub>	$\leq 2,0\%$ <sup>a,c</sup>		

<sup>a</sup> When measured in accordance with IEC 61156-1 at, or corrected to, a temperature of 20 °C.  
<sup>b</sup> Maximum difference between any two conductors of Category 5, 6, 6<sub>A</sub>, 7, 7<sub>A</sub> connecting hardware measured in accordance with IEC 60512-2-1:2002, Test 2a.  
<sup>c</sup> Based on a DC resistance unbalance of each connection of 50 mΩ.  
<sup>d</sup> As channel length decreases, the DC resistance unbalance becomes bounded by the DC resistance unbalance of the connecting hardware,  $\leq 200\text{ m}\Omega$  for four connectors. Therefore, as the contribution of the cable to total channel DC resistance decreases, it is possible for the DC resistance unbalance expressed as a percentage to exceed 3 %.  
<sup>e</sup> When measured in accordance with IEC 61935-1.

### C.2.3 1-pair cabling

The DC resistance unbalance requirements of each pair of a cable, connector, or channel are expected to be similar to those of Category 5 components of Table C.2.

## C.3 DC resistance unbalance (pair to pair)

The pair-to-pair DC resistance unbalance  $R_{u,\text{between pairs}}$  is defined by Formula (C.2).

$$R_{u,\text{between pairs}} = \left\{ \frac{|R_{p1} - R_{p2}|}{R_{p1} + R_{p2}} \right\} \times 100\% \quad (\text{C.2})$$

where

$R_{p1}$  is the DC parallel resistance of the conductors of a pair,

$R_{p2}$  is the DC parallel resistance of the conductors of another pair.

and

$$R_{px} = R_{c1} \times R_{c2} / (R_{c1} + R_{c2})$$

where

$R_{c1}$  is the DC resistance of one conductor in a pair,

$R_{c2}$  is the DC resistance of the other conductor in the pair.

The DC resistance unbalance (pair to pair) requirements of a cable, permanent link, or channel are shown in Table C.3. The requirements for DC resistance unbalance are based on statistical analysis of a survey of installed cabling.

**Table C.3 – DC resistance unbalance (pair to pair)**

Category/Class	Cable	Permanent link <sup>a,b</sup>	Channel <sup>a,b</sup>
Category 5/Class D	5 %	7 % or 0,1 Ω, whichever is greater	7 % or 0,1 Ω, whichever is greater
Category 6/Class E			
Category 6 <sub>A</sub> /Class E <sub>A</sub>			
Category 7/ Class F			
Category 7 <sub>A</sub> /Class F <sub>A</sub>			
<sup>a</sup> As channel and permanent link length decreases, the DC resistance unbalance becomes bounded by the DC resistance unbalance of the connecting hardware, ≤ 100 mΩ for four connectors on two pairs in parallel. Therefore, as the contribution of the cable to total channel DC resistance decreases, it is possible for the DC resistance unbalance expressed as a percentage to exceed 7 %. Field measurements may have accuracy limitations below 0,2 Ω.			
<sup>b</sup> When measurements of DC loop resistance are used to calculate pair-to-pair DC resistance unbalance, the accuracy of measurements of DC loop resistance for both pairs should be taken into consideration (see IEC 61935-1).			

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

## Annex D (informative)

### Illustrations of heating of various bundle sizes and configurations

#### D.1 Limiting cable bundle size

Separating large bundles into smaller bundles reduces the maximum temperature rise when it results in a larger separation or overall surface area (e.g. 3 × 37-cable bundles had lower temperature rise than a 91-cable bundle).

The measured temperature rise in the centre of a 91-cable bundle shown in Figure D.1 was higher than the worst case measured temperature rise in the centre of three smaller bundles of 37 cables as shown in Figure D.2.

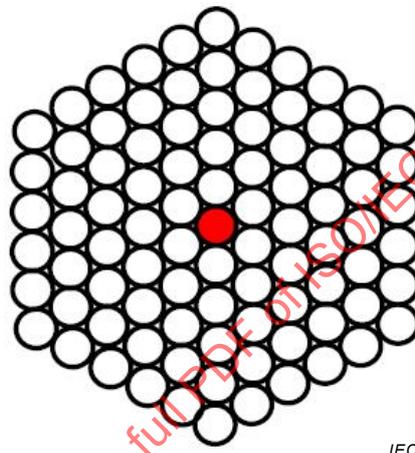


Figure D.1 – 91-cable bundle

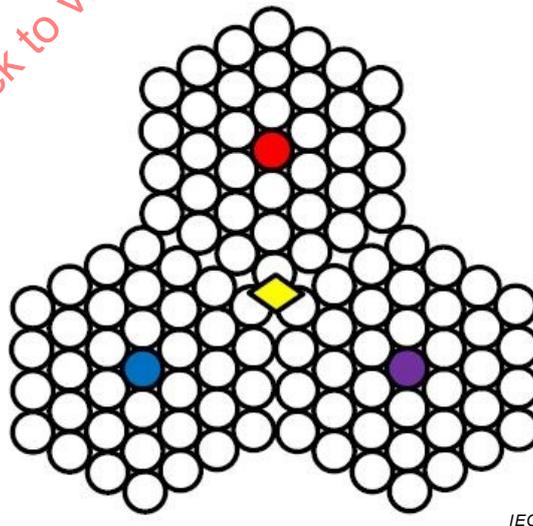


Figure D.2 – Three bundles of 37 cables

## D.2 Separating into smaller bundles

Separation of bundles into three bundles as illustrated in Figure D.3 reduces the maximum temperature rise even further.

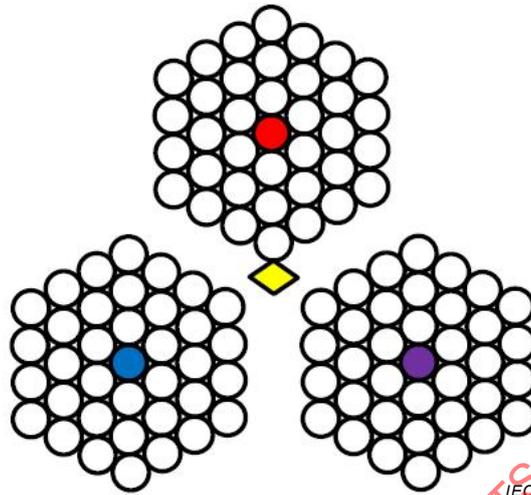


Figure D.3 – Three bundles of 37 cables with separation

## Annex E (informative)

### Test protocol

#### E.1 Background

The testing protocol detailed in Annex E is intended for the determination and collation of information in laboratory conditions. It may be applied to assess the performance of specific products in the configuration specified within the protocol, but is not intended to be applied as acceptance testing for such products or for installed cabling.

The testing protocol is required to be able to measure the temperatures of conductors, cables and cable bundles for the models in Annex B based upon the variables of  $i_c$ ,  $n_c$ ,  $N$  and  $R$ .


The test protocol provides test configurations, methods and data submission formats that are necessary to produce effective comparative data which support the planning, installation and operational recommendations of this document.

#### E.2 Test set-up

All tests shall be undertaken on bundles containing ~~thirty seven ( 37 ) 4 pair~~ cables each having a nominally circular cross-section. This quantity is used in order to produce a cable bundle with three complete layers surrounding a centre cable as shown in Figure E.1.

NOTE 1 Circular bundles can be constructed with lower numbers of cables (e.g. 7 or 19, where smaller containment systems are under investigation), but these are considered inappropriate for the needs of the recommendations of this document.

NOTE 2 Thermocouples  $T_{2b}$  and  $T_{2c}$  are optional and are only necessary for data intended to validate the model of Annex B.

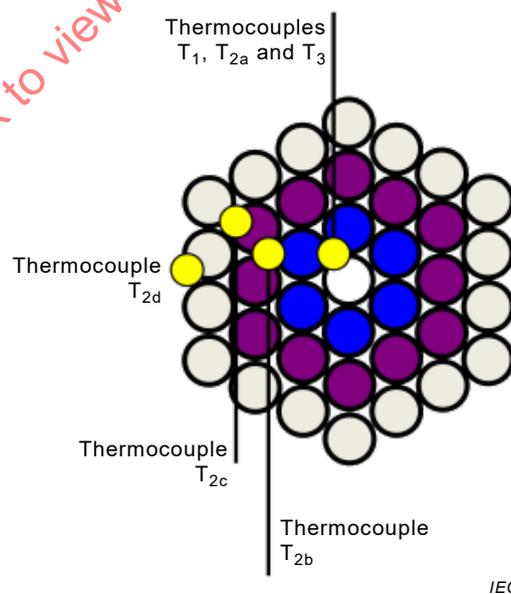

IEC

Figure E.1 – 37-cable bundle and temperature location

The minimum length of the “perfect bundle”, i.e. that length over which the bundle is configured with three complete layers surrounding a centre cable in a circular construction, is 2,4 m. This is shown in Figure E.2.

Dimensions in metres

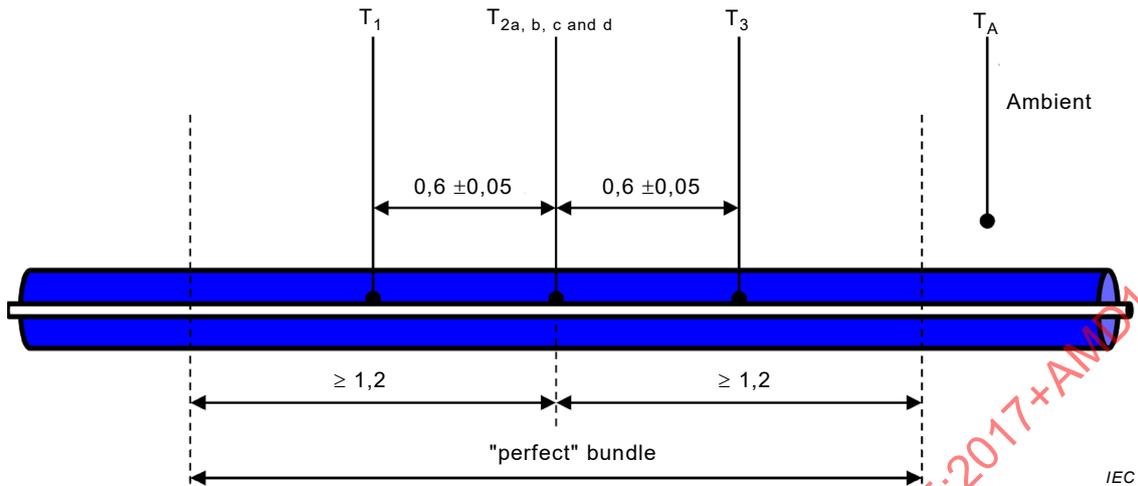


Figure E.2 – "Perfect bundle" and thermocouple configuration

The cables are configured to allow the balanced pairs within them to be fed with a constant current. The test shall be coupled with all conductors in series so the same current is flowing through the whole set-up as shown in Figure E.3 for 4-pair cabling and Figure E.4 for 1-pair cabling.

NOTE 3 This can be achieved by the use of a single cable wound around formers at either end or by individual cables with pairs connected together at each end.

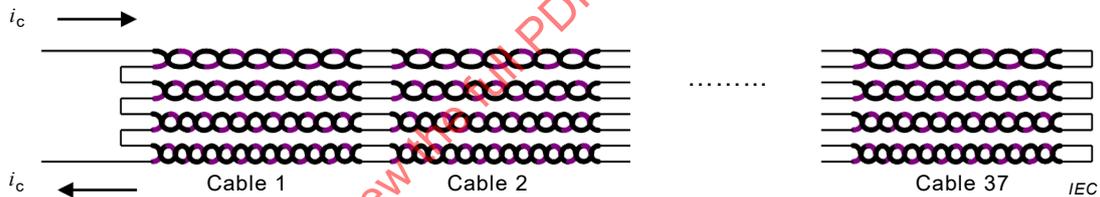


Figure E.3 – 4-pair cabling conductor configuration

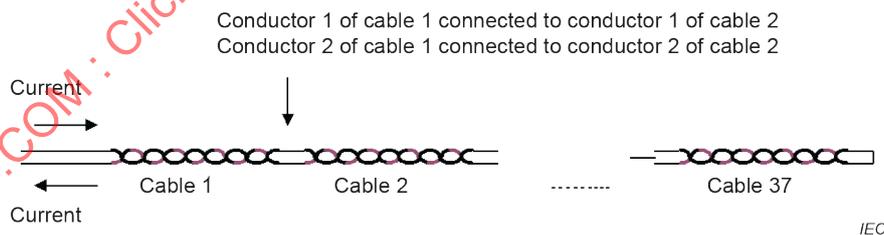


Figure E.4 – 1-pair cabling conductor configuration

A minimum of six thermocouples shall be placed within the length of the "perfect bundle": four ( $T_{2a}$ ,  $T_{2b}$ ,  $T_{2c}$  and  $T_{2d}$ ) shall be placed on the middle of its length, with each one measuring the temperature of successive cable layers, and one to either side ( $T_1$  and  $T_3$ ) at a distance of  $(0,6 \pm 0,05)$  m. This configuration is shown in Figure E.2.

The thermocouples  $T_{2a}$ ,  $T_{2b}$ ,  $T_{2c}$  and  $T_{2d}$  shall be placed on the outer edge of each of the cable layers (i.e. at distances  $d/2$ ,  $3d/2$ ,  $5d/2$  and  $7d/2$ , respectively, from the centre of the bundle, where  $d$  is the cable diameter).

A further thermocouple ( $T_A$ ) is used to obtain ambient temperature information.

NOTE 4 This thermocouple configuration and bundle length has been shown to provide a uniform temperature profile along the bundle. Shorter lengths show temperature drop-off towards the ends of the bundles.

Additional thermocouples may be used to provide temperature information for particular installation conditions (e.g. for fire barriers placed around the central area of the bundle). Any information from these thermocouples is considered additional to that of  $T_1$ ,  $T_2$  and  $T_3$ . If it is desired to calculate a temperature of the central cable of the “perfect bundle”, access to the conductors of that cable is necessary to enable measurements such as voltage drop to be made. However, the temperature of the conductors of the cable varies between the points of access and the location of the thermocouples  $T_1$  and  $T_3$ . This potential variation should be taken into account in any assessment.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

## Annex F (informative)

### Detailed test procedure

#### F.1 General

In the testing performed to derive the data presented in this document, cable bundles were carefully formed leaving little or no separation between cables. This was done to obtain worst case temperature rise results.

The method applies to both 4-pair and 1-pair cabling although Figures F.1 to F.4 show 4-pair implementations.

#### F.2 Test set-up

##### F.2.1 Thermocouple placement


A slot is cut in the cable jacket to provide access to the centre of the cable as shown in Figure F.1. When cutting the jacket, it is important to ensure that the insulation of the individual pairs of the cable is not damaged.



IEC

**Figure F.1 – Placement of thermocouple**

The thermocouple is secured in place by compression and wrapping with tape as shown in Figure F.2. This cable will be the centre cable of the cable bundle.

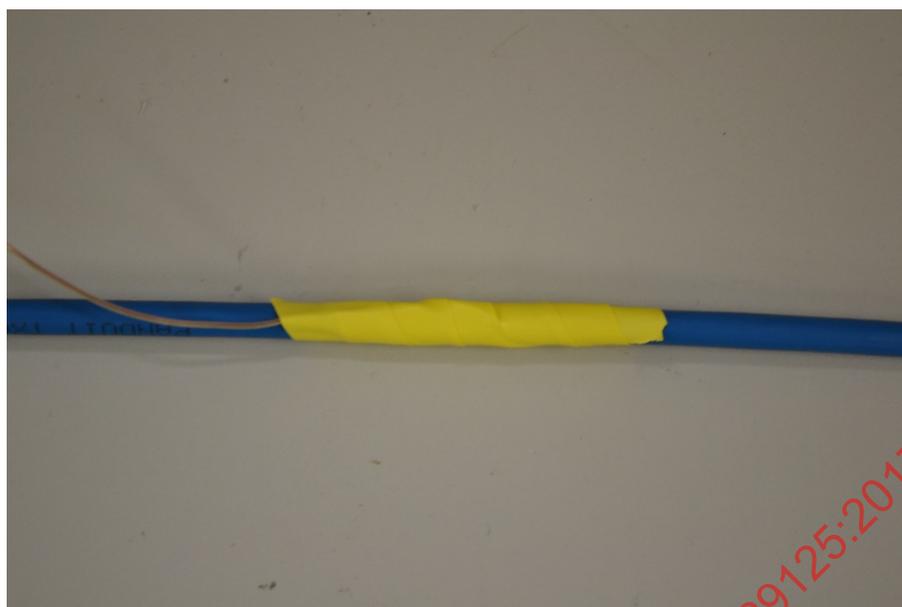

IEC

**Figure F.2 – Securing of the thermocouple**

#### **F.2.2 Measurement of cable bundle in air**

A single length of cable is wrapped continuously around two anchored PVC pipes to form the cable bundles shown in Figure F.3. The anchored PVC pipes are 3 m apart and secured to two 50 mm × 3 m boards.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV




**Figure F.3 – Test set-up for cable bundles in air**

The bundle on the left is a cable bundle size of 61 and the bundle on the right is a cable bundle size of 37. The conductors exposed on each end are soldered together in a configuration to allow current to flow through each pair of the cable when connected to a current controlled voltage source.

### **F.2.3 Measurement of cable bundle in conduit**

A conduit is split down the centre and assembled around the same bundles used in the set-up for cable bundle measurement in air. The conduit is split longitudinally in half, placed around the bundles, and then secured in place with hose-clamps as shown in Figure F.4.

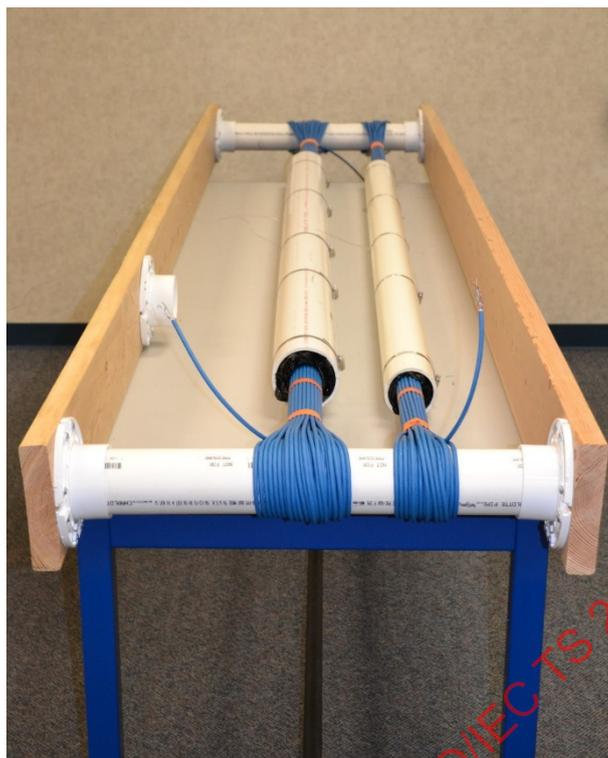

**Figure F.4 – Test set-up for cable bundles in conduit**

The ends of the conduit are stuffed with plastic bags to prevent the possibility of any convection air currents. The size of the conduit may be changed to maintain a cable-to-conduit fill percentage close to 40 %.

## Bibliography

IEC 60512-2-1:2002, *Connectors for electronic equipment – Tests and measurements – Part 2-1: Electrical continuity and contact resistance tests – Test 2a: Contact resistance – Millivolt level method*

IEC 60512-99-001, *Connectors for electronic equipment – Tests and measurements – Part-99-001: Test schedule for engaging and separating connectors under electrical load – Test 99a: Connectors used in twisted pair communication cabling with remote power*

IEC 60512-99-002, *Connectors for electrical and electronic equipment – Tests and measurements – Part 99-002: Endurance test schedules – Test 99b: Test schedule for unmating under electrical load*

IEC 60603-7 (all parts), *Connectors for electronic equipment – Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*

IEC 60950-1, *Information technology equipment – Safety – Part 1: General requirements*

IEC 60950-21, *Information technology equipment – Safety – Part 21: Remote power feeding*

IEC 61076-3-104, *Connectors for electronic equipment – Product requirements – Part 3-104: Detail specification for 8-way, shielded free and fixed connectors for data transmissions with frequencies up to 1 000 MHz*

IEC 61076-3-110, *Connectors for electronic equipment – Product requirements – Part 3-110: Detail specification for shielded, free and fixed connectors for data transmission with frequencies up to 1 000 MHz*

IEC 61156-1:2007, *Multicore and symmetrical pair/quad cables for digital communications – Part 1: Generic specification*

IEC TR 61156-1-6, *Multicore and symmetrical pair/quad cables for digital communications – Part 1-6: Nominal DC-resistance values of floor-wiring and work-area cables for digital communications*

IEC 61935-1, *Specification for the testing of balanced and coaxial information technology cabling – Part 1: Installed balanced cabling as specified in ISO/IEC 11801 and related standards*

ISO/IEC 11801 (all parts), *Information technology – Generic cabling for customer premises*

ISO/IEC 18598, *Information technology – Automated infrastructure management (AIM) systems – Requirements, data exchange and applications*

ISO/IEC/IEEE 8802-3:2014, *Standard for Ethernet*

---



# ISO/IEC TS 29125

Edition 1.1 2020-05  
CONSOLIDATED VERSION

## FINAL VERSION



**Information technology – Telecommunications cabling requirements for remote powering of terminal equipment**

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV



## CONTENTS

FOREWORD .....	5
INTRODUCTION .....	7
INTRODUCTION to the amendment .....	7
1 Scope .....	8
2 Normative references .....	8
3 Terms, definitions and abbreviated terms .....	9
3.1 Terms and definitions .....	9
3.2 Abbreviated terms .....	9
4 Conformance .....	10
5 Cabling selection and performance .....	10
6 Installation conditions .....	10
6.1 General .....	10
6.2 Ambient temperature .....	10
6.3 Temperature rise and current capacity .....	11
6.4 Factors affecting temperature increase .....	13
6.4.1 General .....	13
6.4.2 Installation near equipment .....	13
6.4.3 Cable count within a bundle .....	13
6.4.4 Reducing temperature increase .....	15
6.4.5 Cable bundle suspended in air .....	19
6.4.6 Administration .....	19
7 Remote power delivery over balanced cabling .....	19
7.1 4-pair balanced cabling .....	19
7.2 1-pair balanced cabling .....	21
8 Connecting hardware .....	22
8.1 General .....	22
8.2 4-pair balanced cabling .....	22
8.3 1-pair balanced cabling .....	23
Annex A (informative) Mitigation considerations for installed cabling .....	24
A.1 General .....	24
A.2 Minimum cabling class .....	24
A.3 Bundle size and location .....	24
A.4 Mitigation options .....	24
Annex B (informative) Modelling temperature rise for cable types, bundle sizes and installation conditions .....	25
B.1 Model basics .....	25
B.2 Power dissipated ( $P$ ) .....	25
B.3 Temperature difference from ambient temperature to bundle surface ( $\Delta T_U$ ) .....	26
B.3.1 Model equations .....	26
B.3.2 Typical values for constant $\rho_U$ .....	26
B.4 Temperature difference from bundle surface to bundle centre ( $\Delta T_{th}$ ) .....	26
B.4.1 Model equations .....	26
B.4.2 Typical values for constant $\rho_{th}$ .....	26
B.5 Temperature variation within the bundle ( $\Delta T(x)$ ) .....	27
B.6 Alternative presentation of the model .....	27

B.7	Adaptation model used to derive temperature rise vs. cables in a bundle .....	27
B.8	Calculations .....	28
B.9	Example.....	28
B.10	Coefficients for air and conduit.....	29
Annex C (informative)	Transmission parameters related to remote powering.....	30
C.1	DC loop resistance.....	30
C.1.1	4-pair cabling.....	30
C.1.2	1-pair cabling.....	30
C.2	DC resistance unbalance (within pair).....	30
C.2.1	General .....	30
C.2.2	4-pair cabling.....	31
C.2.3	1-pair cabling.....	31
C.3	DC resistance unbalance (pair to pair).....	31
Annex D (informative)	Illustrations of heating of various bundle sizes and configurations .....	33
D.1	Limiting cable bundle size.....	33
D.2	Separating into smaller bundles .....	34
Annex E (informative)	Test protocol .....	35
E.1	Background.....	35
E.2	Test set-up .....	35
Annex F (informative)	Detailed test procedure .....	38
F.1	General.....	38
F.2	Test set-up .....	38
F.2.1	Thermocouple placement.....	38
F.2.2	Measurement of cable bundle in air .....	39
F.2.3	Measurement of cable bundle in conduit.....	40
Bibliography	.....	42
Figure 1	– Examples of end point powering systems using signal pairs (top) and spare pairs (bottom) .....	20
Figure 2	– Examples of mid-span powering systems .....	21
Figure 3	– Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air.....	18
Figure 4	– Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit.....	19
Figure 5	– Single pair remote powering using signal pairs.....	22
Figure B.1	– Temperature rise profile.....	25
Figure D.1	– 91-cable bundle.....	33
Figure D.2	– Three bundles of 37 cables.....	33
Figure D.3	– Three bundles of 37 cables with separation .....	34
Figure E.1	– 37-cable bundle and temperature location.....	35
Figure E.2	– "Perfect bundle" and thermocouple configuration .....	36
Figure E.3	–4-pair cabling conductor configuration.....	36
Figure E.4	– 1-pair cabling conductor configuration .....	36
Figure F.1	– Placement of thermocouple.....	38
Figure F.2	– Securing of the thermocouple.....	39
Figure F.3	– Test set-up for cable bundles in air .....	40

STANDARD ISO/IEC TS 29125:2017+AMD1:2020 CSV

Figure F.4 – Test set-up for cable bundles in conduit ..... 41

Table 1 – Maximum current per conductor versus temperature rise in a 37 4-pair cable bundle in air and conduit ..... 11

Table 2 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 4-pair cables (all pairs energized) ..... 12

Table 3 – Temperature rise versus 4-pair cable bundle size (500 mA per conductor) ..... 14

Table 4 – Temperature rise for a type of 4-pair cable versus the number of energized pairs in a 37-cable bundle (500 mA per conductor) ..... 17

Table 5 – Maximum current per conductor versus temperature rise in a 37 1-pair cable bundle in air and conduit ..... 12

Table 6 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 1-pair cables of different conductor diameters in air and conduit ..... 13

Table 7 – Temperature rise versus 1-pair cable bundle size (1 000 mA per conductor) ..... 15

Table 8 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air ..... 17

Table 9 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit ..... 18

Table B.1 – Bundling coefficients for different types of 4-pair cables and cords (all 4 pairs energized) in air and conduit ..... 29

Table B.2 – DC resistance and bundling coefficients for 1-pair cables of different conductor diameters (all conductors energized) in air and conduit ..... 29

Table C.1 – Maximum DC loop resistance of channels ..... 30

Table C.2 – DC resistance unbalance of 4-pair cables, connecting hardware and channels ..... 31

Table C.3 – DC resistance unbalance (pair to pair) ..... 32

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

**INFORMATION TECHNOLOGY –**  
**TELECOMMUNICATIONS CABLING REQUIREMENTS**  
**FOR REMOTE POWERING OF TERMINAL EQUIPMENT**

**FOREWORD**

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

**This consolidated version of the official IEC Standard and its amendment(s) has been prepared for user convenience.**

**ISO/IEC TS 29125 edition 1.1 contains the first edition (2017-04) and its amendment 1 (2020-05) [documents JTC1-SC25/2919/DTS and JTC1-SC25/2945/RVDTS].**

**This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.**

The main task of the joint technical committee is to prepare International Standards. In exceptional circumstances, the joint technical committee may propose the publication of a Technical Specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- when the subject is still under technical development or where, for any other reason, there is the future but not immediate possibility of an agreement on an International Standard.

Technical Specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

ISO/IEC TS 29125, which is a Technical Specification, has been prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) extension of the current per conductor from 300 mA to 500 mA;
- b) provision of additional details of installation conditions that were not described in ISO/IEC TR 29125:2010;
- c) inclusion of guidelines for cords;
- d) inclusion of a model to calculate temperature rise in different bundle sizes.

This Technical Specification has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

This document specifies the use of generic balanced cabling for customer premises, as specified in the ISO/IEC 11801 series, for remote powering of terminal equipment. It provides guidance on new cabling installations and renovations. The customer premises may encompass one or more buildings or may be within a building that contains more than one organization. The cabling may be installed prior to the selection of remote powering equipment or powered terminal equipment.

ISO/IEC 11801-1 specifies a structure and performance requirements for cabling subsystems that support a wide range of applications. They provide appropriate equipment interfaces to the cabling infrastructure in equipment rooms, telecommunications rooms and work areas.

A growing number of organizations employ equipment at locations that require the provision of remote powering. This document was created to provide supplementary information to ISO/IEC 11801-1 to implement remote powering over generic balanced cabling as specified in ISO/IEC 11801-1.

This document provides additional guidance for remote powering on the use of balanced cabling systems as specified in ISO/IEC 11801-1 and guidance on different installation conditions that require special considerations:

- information to bring together all the considerations about remote powering in a single document;
- guidance on mating and un-mating of connectors that convey remote power.

This document does not include requirements from national or local safety standards and regulations.

This document was developed based on a number of contributions describing remote powering over telecommunications cabling under different installation conditions. The relevant safety standards and regulations, application standard, and equipment manufacturers give guidance on factors that should be taken into account during design of the generic balanced cabling that supports the distribution of remote powering.

This document extends the current per conductor specified in ISO/IEC TR 29125:2010 from 300 mA to 500 mA. This document covers additional details of installation conditions that are not described in ISO/IEC TR 29125:2010. This document includes guidelines for cords. This document addresses the use of generic balanced single pair cabling for customer premises, to be specified in future amendments of the ISO/IEC 11801 series, for remote powering of terminal equipment. This document uses measurements and empirical models to estimate the thermal performance of single pair cable bundles of various conductor diameters.

## INTRODUCTION to the amendment

This amendment incorporates changes necessary to include remote powering using single pair cabling.

# INFORMATION TECHNOLOGY –

## TELECOMMUNICATIONS CABLING REQUIREMENTS FOR REMOTE POWERING OF TERMINAL EQUIPMENT

### 1 Scope

This document

- a) addresses the support of safety extra low voltage (SELV) and limited power source (LPS) applications that provide remote power over:
  - 4-pair balanced cabling in accordance with the reference implementations of ISO/IEC 11801 series standards using currents per conductor of up to 500 mA;
  - 1-pair balanced cabling using currents per conductor of up to 1 000 mA;and targets the support of applications that provide remote power over balanced cabling to terminal equipment,
- b) covers the transmission and electrical parameters needed to support remote power over balanced cabling,
- c) covers various installation scenarios and how these may impact the capability of balanced cabling to support remote powering,
- d) specifies design and configuration of cabling as specified in ISO/IEC 11801-1.

NOTE SELV requirements specify a maximum voltage of 60 V DC and LPS is understood in the applications referenced to be up to 100 W supplied within 4-pair cabling.

This document includes a mathematical model to predict the behaviour of different bundle sizes, various cabling constructions, and installation conditions for different current capacities.

Safety (e.g. electrical safety and protection and fire) and electromagnetic compatibility (EMC) requirements are outside the scope of this document, and are covered by other standards and regulations. However, information given by this document can be of assistance.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11801-1, *Information technology – Generic cabling for customer premises – Part 1: General requirements*

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC TR 24746, *Information technology – Generic cabling for customer premises – Mid-span DTE power insertion*

### 3 Terms, definitions and abbreviated terms

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11801-1, ISO/IEC 14763-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

##### 3.1.1

##### **power source equipment**

equipment that provides power

##### 3.1.2

##### **cable bundle**

several cables tied together or in contact with one another in a parallel configuration for at least 1 m, with the cross-section profile of the arrangement basically circular

##### 3.1.3

##### **conductor**

element intended to carry electric current

[SOURCE IEC 60050-151:2001, 151-12-05, modified – The 3 Notes have been deleted.]

##### 3.1.4

##### **current carrying capacity**

maximum current a cable circuit (one or several conductors) can support resulting in a specified increase of temperature of the conductor beyond the ambient temperature, not exceeding the maximum allowed operating temperature of the cable

[SOURCE: IEC 61156-1:2007/AMD1:2009, 3.24, modified – "increase of temperature" has replaced "increase of the surface temperature".]

##### 3.1.5

##### **remote powering**

supply of power to application specific equipment via balanced cabling

##### 3.1.6

##### **temperature rise**

difference in temperature between the initial temperature of the conductor without power and the final temperature of the powered conductor at steady state

#### 3.2 Abbreviated terms

EMC	electromagnetic compatibility
FD	floor distributor
HVAC	heating, ventilation and air conditioning
PTZ	pan, tilt, zoom
WAP	wireless access point

## 4 Conformance

For cabling to comply with this document, the following applies:

- a) the design of the cabling shall comply with the relevant cabling design standard of the ISO/IEC 11801 series;
- b) the installation shall comply with ISO/IEC 14763-2 as amended by the additional requirements of this document.

## 5 Cabling selection and performance

Cabling for remote powering can be implemented using 4-pair and 1-pair balanced cabling.

This cabling will be used simultaneously to support signal transmission and remote power feeding for the terminal equipment. This document assumes the use of balanced cabling components specified in the reference implementation clause of the relevant design standards of the ISO/IEC 11801 series.

The transmission parameters of balanced cables related to remote powering can be found in Annex C.

## 6 Installation conditions

### 6.1 General

Cabling may be installed in different types of continuous and non-continuous pathway systems as described in ISO/IEC 14763-2. The installation of a cable within the pathway systems should take into account the specified operating temperature of the cable. Due to the Joule effect, each energized conductor has a temperature rise. Larger cable bundles have more heat generation and therefore the temperature rise is worse than smaller cable bundles.

The cable bundle size is limited by the current capacity in 6.3 and the induced temperature rise that results in an operating temperature of the cable, not to exceed its temperature rating.

The following guidelines for pathway selection and installation should be considered:

- a) installation design including the type of pathways selected, the pathway fill factor, whether the pathway is sealed at both ends,
- b) the pathway environment and whether the pathway goes through thermally insulated areas, in which case the type of insulation will be a significant factor. For optimal thermal performance, pathway design should avoid any insulated areas,
- c) thermal aspects of the entire pathway (e.g. open tray, closed tray, ventilated, non-ventilated, plastic conduit, metal conduit, fire barriers) should be taken into account.

### 6.2 Ambient temperature

Different segments of a link can have different ambient temperatures, which can influence the amount of remote power that can be delivered. Therefore the ambient temperature in different length segments of a link or channel has a direct impact on the operating temperature of the cable used for the link or channel and can limit the capability of the cable for remote power delivery to powered terminal equipment. The worst case installed cabling condition with respect to the maximum ambient temperature shall be used to determine the maximum operating temperature for a link or channel when subject to remote powering.

### 6.3 Temperature rise and current capacity

When remote power is applied to balanced cabling, the temperature of the cabling will rise due to resistive heat generation (Joule effect) in the conductors. Depending on cable construction and installed cabling conditions, the heat generated will be dissipated into the surrounding environment until a steady state is reached with the temperature of the cable bundle (operating temperature) higher than the ambient temperature of the surrounding environment. The maximum temperature of any cable shall not exceed the temperature rating of the cable. The standards in the ISO/IEC 11801 series require this temperature to be 60 °C (minimum).

Temperature rise in the cable will lead to an increase in insertion loss as indicated in the reference implementations of the ISO/IEC 11801 series standards and should be taken into account when selecting cables and using them in links or channels. The maximum length of the channel or link should be reduced based on the maximum temperature of the cable using the de-rating factors in ISO/IEC 11801-1.

The maximum current per conductor for different temperature rise in a bundle of 37 cables of 4-pair Category 5 cables with solid conductors, and 37 cords of 4-pair 0,40 mm stranded cords with all pairs energized is shown in Table 1.

The maximum current per conductor for different temperature rise in a bundle of 37 cables of 1-pair cables with 0,57 mm diameter conductors, and 37 cords of 1-pair 0,40 mm cords with all pairs energized is shown in Table 5.

Annex B provides an engineering model that may be used for specific cable types, cable constructions, and installation conditions to derive the bundle size for a particular current per conductor. Clause B.7 describes a simplified version of the engineering model in Annex B and was used to derive the worst case values in Tables 1 to 9 based on constants calculated from measurements of typical cables for each cable category or conductor diameter. The measurement procedures used to determine the constants are detailed in Annex F.

**Table 1 – Maximum current per conductor versus temperature rise in a 37 4-pair cable bundle in air and conduit**

Temperature rise °C	Current per conductor 0,4 mm cords mA		Current per conductor Category 5 cables mA	
	air	conduit	air	conduit
5	278	223	341	287
7,5	340	273	418	351
10	393	315	482	406
12,5	439	352	539	453
15	481	386	591	497
17,5	520	417	638	537
20	556	446	682	574

Temperature rise above 10 °C shown in grey background is not recommended.

NOTE These values are based on conductor temperature measurement of typical cables and cords.

**Table 5 – Maximum current per conductor versus temperature rise in a 37 1-pair cable bundle in air and conduit**

Temperature rise °C	Current per conductor 0,57 mm diameter mA		Current per conductor 0,40 mm cords mA	
	air	conduit	air	conduit
5	866	738	608	518
7,5	1 061	904	744	634
10	1 225	1 044	860	732
12,5	1 370	1 167	961	819
15	1 501	1 278	1 053	897
17,5	1 621	1 381	1 137	969
20	1 733	1 476	1 216	1 036

Temperature rise above 10 °C shown in grey background is not recommended.

NOTE These values are based on conductor temperature measurement of typical cables and cords.

Table 2 shows current capacity for different categories of 4-pair cable, independent of construction, for a given temperature rise. Table 6 shows current capacity for 1-pair cables of conductor diameters of cable, independent of construction, for a given temperature rise.

**Table 2 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 4-pair cables (all pairs energized)**

$\Delta T$ °C	0,4 mm cords mA		Category 5 cables mA		Category 6 cables mA		Category 6 <sub>A</sub> cables mA		Category 7 cables mA		Category 7 <sub>A</sub> cables mA	
	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit	air	cond- uit
2	175	141	215	181	246	207	267	229	267	229	324	264
4	248	199	305	256	348	293	378	324	378	324	459	373
6	304	244	373	314	427	359	463	397	463	397	562	457
8	351	282	431	363	493	414	535	459	535	459	649	528
10	393	315	482	406	551	463	598	513	598	513	725	590
12	430	345	528	444	604	507	655	562	655	562	795	646
14	465	373	571	480	652	548	708	607	708	607	858	698
16	497	399	610	513	697	586	756	649	756	649	918	746
18	527	423	647	544	740	622	802	688	802	688	973	792
20	556	446	682	574	780	655	846	725	846	725	1026	835

Temperature rise above 10 °C shown in grey background is not recommended

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The current per conductor for each category is dependent on the cable construction.

**Table 6 – Calculated worst case current per conductor versus temperature rise in a bundle of 37 1-pair cables of different conductor diameters in air and conduit**

$\Delta T$	0,32 mm diameter		0,40 mm diameter		0,51 mm diameter		0,57 mm diameter		0,65 mm diameter		0,81 mm diameter		1,02 mm diameter	
	mA		mA		mA		mA		mA		mA		mA	
°C	air	conduit												
2	307	262	384	327	490	417	548	466	624	532	779	663	981	835
4	435	370	543	463	693	590	775	660	883	753	1 101	938	1 387	1 181
6	533	454	666	567	849	723	949	808	1 082	922	1 349	1 149	1 699	1 446
8	615	524	769	655	981	835	1 096	933	1 249	1 065	1 558	1 327	1 962	1 670
10	688	586	860	732	1 096	934	1 225	1 044	1 397	1 190	1 742	1 484	2 194	1 867
12	753	642	942	802	1 201	1 023	1 342	1 143	1 530	1 304	1 908	1 625	2 403	2 046
14	814	693	1 017	867	1 297	1 105	1 450	1 235	1 653	1 409	2 061	1 755	2 596	2 210
16	870	741	1 087	926	1 387	1 181	1 550	1 320	1 767	1 506	2 203	1 877	2 775	2 362
18	923	786	1 153	983	1 471	1 253	1 644	1 400	1 874	1 597	2 337	1 991	2 943	2 506
20	973	829	1 216	1 036	1 551	1 321	1 733	1 476	1 976	1 684	2 463	2 098	3 102	2 641

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various conductor diameters of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The current per conductor for each 1-pair cable is also dependent on the cable construction.

## 6.4 Factors affecting temperature increase

### 6.4.1 General

The steady state temperature for the conductor of any power carrying cable is reached when the generation of heat within the cable (Joule effect) is equal to the heat dissipated into the environment, be it the open atmosphere, trays, ducts or other cables which can also be power carrying cables.

### 6.4.2 Installation near equipment

Ambient temperature near equipment will be higher and also installation of telecommunications cables and cords in hot aisles will lead to higher ambient temperature around the patch cord bundle.

### 6.4.3 Cable count within a bundle

This document uses 37-cable bundles as the basis for developing the temperature rise and current per conductor with all pairs energized. For other cases (e.g. where bundle count exceeds 37 cables), the guidelines provided in 6.4 can be used.

This document uses 37-cable bundles as the basis for developing the temperature rise and current per conductor with all pairs energized. For other cases (e.g. where bundle count exceeds 37 cables), the guidelines provided in 6.4 can be used.

Refer to Table 7 to determine the maximum temperature rise using 1 000 mA per conductor for 1-pair cable bundles of different count.

**Table 3 – Temperature rise versus 4-pair cable bundle size (500 mA per conductor)**

Number of cables	Temperature rise °C											
	0,4 mm cords		Cat 5 cables		Cat 6 cables		Cat 6 <sub>A</sub> cables		Cat 7 cables		Cat 7 <sub>A</sub> cables	
	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit
1	1,9	3,1	1,1	1,7	0,8	1,3	0,7	1,1	0,7	1,1	0,6	0,9
7	5,7	9,1	3,5	5,2	2,6	4,0	2,3	3,3	2,3	3,3	1,7	2,6
19	10,5	16,5	6,7	9,7	5,1	7,4	4,4	6,1	4,4	6,1	3,1	4,7
24	12,2	19,1	7,9	11,3	6,0	8,7	5,1	7,1	5,1	7,1	3,6	5,5
37	16,2	25,1	10,7	15,2	8,2	11,6	7,0	9,5	7,0	9,5	4,7	7,2
48	19,3	29,8	13,0	18,2	10,0	14,0	8,5	11,4	8,5	11,4	5,7	8,5
52	20,3	31,4	13,8	19,3	10,6	14,8	9,0	12,0	9,0	12,0	6,0	9,0
61	22,7	34,9	15,5	21,6	12,0	16,6	10,1	13,4	10,1	13,4	6,7	10,0
64	23,5	36,1	16,1	22,4	12,4	17,1	10,5	13,9	10,5	13,9	6,9	10,3
74	26,0	39,8	17,9	24,9	13,9	19,1	11,7	15,4	11,7	15,4	7,7	11,3
91	30,1	45,9	21,0	29,0	16,4	22,2	13,8	17,9	13,8	17,9	8,9	13,1

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 500 mA per conductor, for all pairs in all cables in the bundle.

NOTE 2 The current per conductor for each category is dependent on the cable construction.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

**Table 7 – Temperature rise versus 1-pair cable bundle size  
 (1 000 mA per conductor)**

Number of cables	Temperature rise													
	°C													
	0,32 mm diameter		0,40 mm diameter		0,51 mm diameter		0,57 mm diameter		0,65 mm diameter		0,81 mm diameter		1,02 mm diameter	
	mA		mA		mA		mA		mA		mA		mA	
	air	conduit												
1	2,9	4,4	1,9	2,8	1,1	1,7	0,9	1,4	0,7	1,1	0,5	0,7	0,3	0,4
7	8,2	11,9	5,2	7,6	3,2	4,7	2,6	3,8	2,0	2,9	1,3	1,9	0,8	1,2
19	14,3	20,2	9,2	12,9	5,6	8,0	4,5	6,4	3,5	4,9	2,2	3,2	1,4	2,0
24	16,4	23,0	10,5	14,7	6,4	9,0	5,2	7,2	4,0	5,6	2,6	3,6	1,6	2,3
37	21,1	29,1	13,5	18,6	8,3	11,5	6,7	9,2	5,1	7,1	3,3	4,5	2,1	2,9
48	24,7	33,6	15,8	21,5	9,7	13,2	7,8	10,6	6,0	8,1	3,9	5,2	2,4	3,3
52	25,9	35,2	16,6	22,5	10,2	13,8	8,2	11,1	6,3	8,5	4,0	5,5	2,5	3,5
61	28,6	38,5	18,3	24,6	11,3	15,1	9,0	12,1	6,9	9,3	4,5	6,0	2,8	3,8
64	29,4	39,5	18,8	25,3	11,6	15,6	9,3	12,5	7,1	9,6	4,6	6,2	2,9	3,9
74	32,2	42,9	20,6	27,5	12,7	16,9	10,2	13,5	7,8	10,4	5,0	6,7	3,2	4,2
91	36,7	48,4	23,5	31,0	14,5	19,0	11,6	15,2	8,9	11,7	5,7	7,5	3,6	4,8

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance of the various conductor diameters of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 1 000 mA per conductor, for all cables in the bundle.

NOTE 2 The current per conductor for each conductor diameter is also dependent on the cable construction.

#### 6.4.4 Reducing temperature increase

Minimizing the cabling temperature rise is recommended, as it

- reduces the impact on the transmission performance (e.g. insertion loss) of the cabling,
- reduces the HVAC loading within the premises,
- allows operation in higher ambient temperatures without exceeding the cable temperature rating,
- reduces the overall cost of delivering remote power by minimizing the resistive heating loss (power dissipated in the cabling).

The temperature rise can be reduced by minimizing the heat generation and maximizing the heat dissipation. Examples of how this can be achieved include:

- using higher category cable (for 4-pair cables),
- selecting a larger conductor size which decreases per unit length DC resistance,
- improving thermal dissipation by selecting cable with
  - improved heat transfer coefficient between materials within the cable,
  - improved heat transfer coefficient between cable sheath and air,
  - screen or other additional metallic elements,
  - solid insulation,

- a larger diameter,
- reducing the number of energized pairs,
- reducing the number of cables per bundle and avoiding tight cable bundles,
- selection of applications and devices that use lower current.

NOTE Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

Mixing power-carrying cabling with unpowered cabling in bundles is also recommended as a practice to minimize heat rise.

If bundling is necessary, separate large bundles into smaller bundles, as described in Annex D. Other mitigation considerations are described in Annex A. Otherwise avoid bundling cables to minimize temperature rise.

Table 4 shows the effect of energizing the number of pairs within a 37-cable bundle for different 4-pair cable categories.

Table 8 shows the effect of energizing the number of pairs within a 37-cable bundle for different 1-pair cable constructions in air. Figure 1 shows this data in graphical form.

Table 9 shows the effect of energizing the number of pairs within a 37-cable bundle for different 1-pair cable constructions in conduit. Figure 2 shows this data in graphical form.

The recommendation of ISO/IEC 14763-2 for 4-pair cable bundles of no more than 24 is further reinforced for remote powering due to:

- 1) installation factors,
- 2) possible high ambient temperature,
- 3) the use of 0,4 mm conductor diameter cords,
- 4) higher currents up to 500 mA per conductor with all 4 pairs energized.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

**Table 4 – Temperature rise for a type of 4-pair cable versus the number of energized pairs in a 37-cable bundle (500 mA per conductor)**

No. of pairs	$\Delta T$ (°C)											
	0,4 mm cords		Cat 5 cables		Cat 6 cables		Cat 6 <sub>A</sub> cables		Cat 7 cables		Cat 7 <sub>A</sub> cables	
	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit	air	cond-uit
24	5,2	8,4	3,2	4,7	2,4	3,6	2,0	3,0	2,0	3,0	1,5	2,4
48	7,9	12,5	5,0	7,2	3,7	5,5	3,2	4,6	3,2	4,6	2,3	3,6
96	12,2	19,1	7,9	11,3	6,0	8,7	5,1	7,1	5,1	7,1	3,6	5,5
144	15,9	24,7	10,5	14,9	8,0	11,4	6,8	9,3	6,8	9,3	4,7	7,0
148	16,2	25,1	10,7	15,2	8,2	11,6	7,0	9,5	7,0	9,5	4,7	7,2

Temperature rise above 10 C shown in grey background is not recommended.

The values in this table are based on the implicit DC resistance derived from the insertion loss of the various categories of cable. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE 1 The temperature rise (°C) is based upon a current of 500 mA on each energized conductor

NOTE 2 The current per conductor for each category is dependent on the cable construction.


**Table 8 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air**

Bundle size	$\Delta T$ (°C)				
	Current (mA)				
	200	400	600	800	1 000
7	0,103	0,413	0,93	1,653	2,582
19	0,18	0,722	1,624	2,887	4,511
37	0,266	1,065	2,396	4,26	6,656
61	0,36	1,442	3,244	5,767	9,01
91	0,463	1,852	4,166	7,407	11,573

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the DC resistance of the cable conductors. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The temperature rise for a particular cable is also dependent on the cable construction.

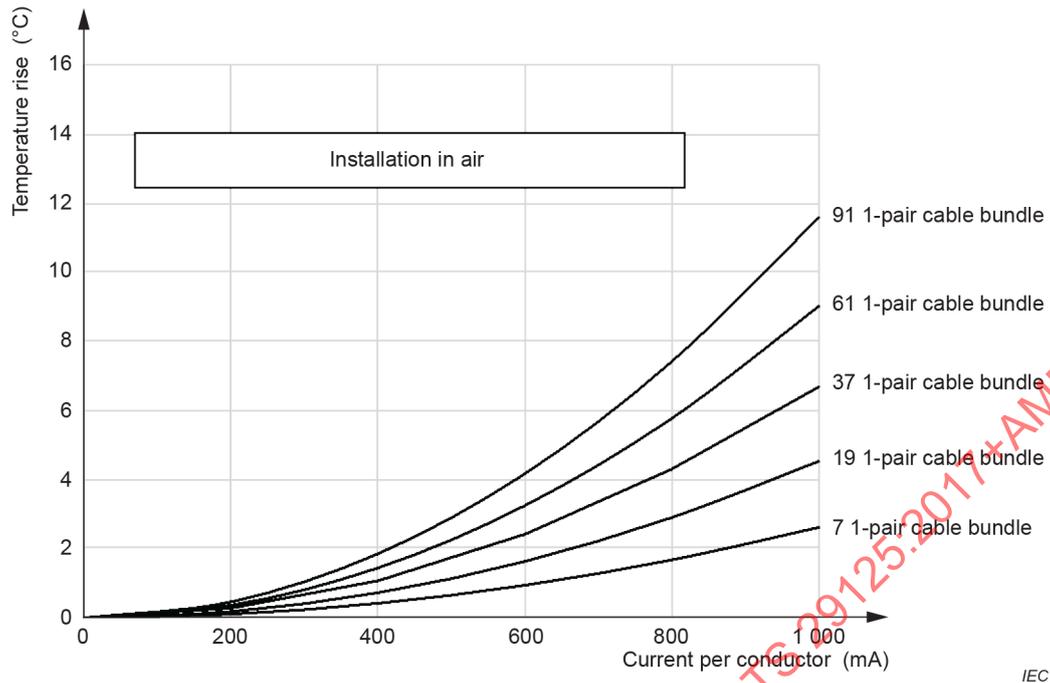

**Figure 3 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in air**


**Table 9 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit**

Bundle size	$\Delta T$ (°C)				
	Current (mA)				
	200	400	600	800	1 000
7	0,15	0,6	1,351	2,401	3,752
19	0,255	1,02	2,295	4,081	6,376
37	0,367	1,467	3,302	5,87	9,171
61	0,485	1,941	4,366	7,762	12,128
91	0,61	2,439	5,488	9,756	15,244

Temperature rise above 10 °C shown in grey background is not recommended.

The values in this table are based on the DC resistance of the cable conductors. Manufacturers' and/or suppliers' specifications give information relating to a specific cable.

NOTE The temperature rise for a particular cable is also dependent on the cable construction.

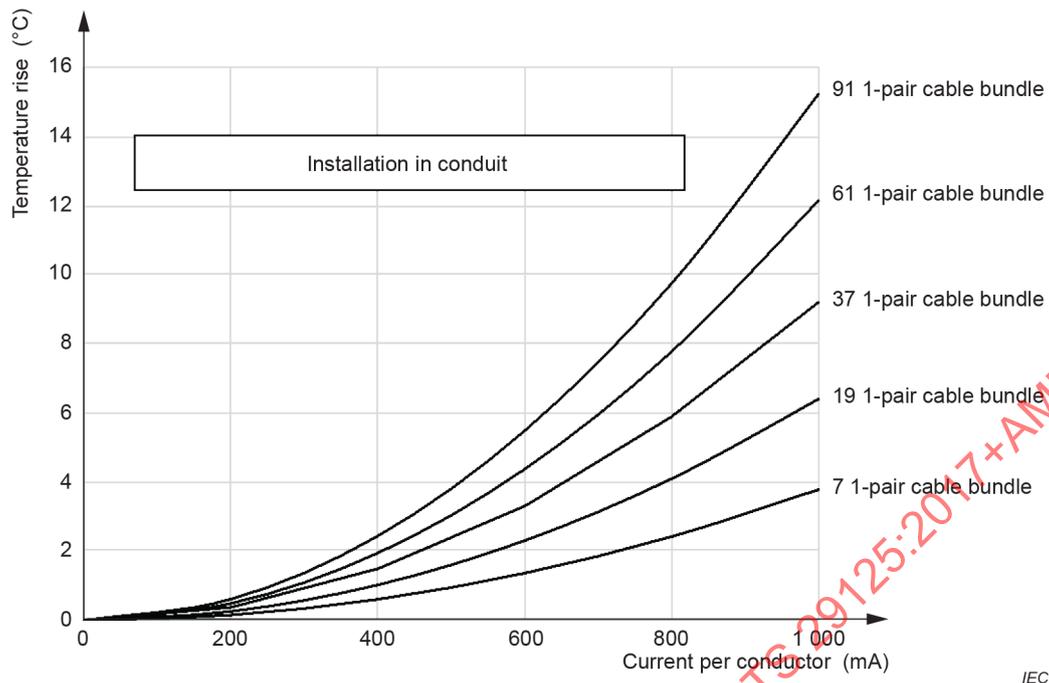

**Figure 4 – Temperature rise for a 0,57 mm conductor diameter 1-pair cable versus current for different bundle sizes in conduit**

#### 6.4.5 Cable bundle suspended in air

The maximum ambient temperature of 50 °C is possible in certain environments and operating conditions. To allow for this ambient temperature and limit the temperature rise to 10 °C, for the minimum Category 5 cables supporting 500 mA per conductor, it is necessary to limit the bundle size to a smaller number than 100 cables.

#### 6.4.6 Administration


The administration system as described in ISO/IEC 14763-2 can be used to select the channels in a bundle to use to supply power optimally. For example, the administration system can be used to record the powering details of the cables used for remote powering. An AIM system as specified in ISO/IEC 18598 can be designed to use bundle records and issue alerts when a bundle exceeds its thermal capacity.

### 7 Remote power delivery over balanced cabling

#### 7.1 4-pair balanced cabling


Figure 1 shows examples of specified transmission paths used in generic balanced cabling. The channel is the transmission path between equipment such as a LAN switch or hub and the terminal equipment. The channel does not include the connections at the data source equipment and the terminal equipment. The channel, the permanent link or the CP link shall meet the transmission requirements specified in the design standards.

Remote power may be provided to terminal equipment via balanced cabling equipment interfaces. Remote power may be introduced to the balanced cabling channel at the FD using spare pairs, if available, or by remote power supplied over the phantom circuit of data pairs from the power sourcing equipment, as shown in Figure 1.

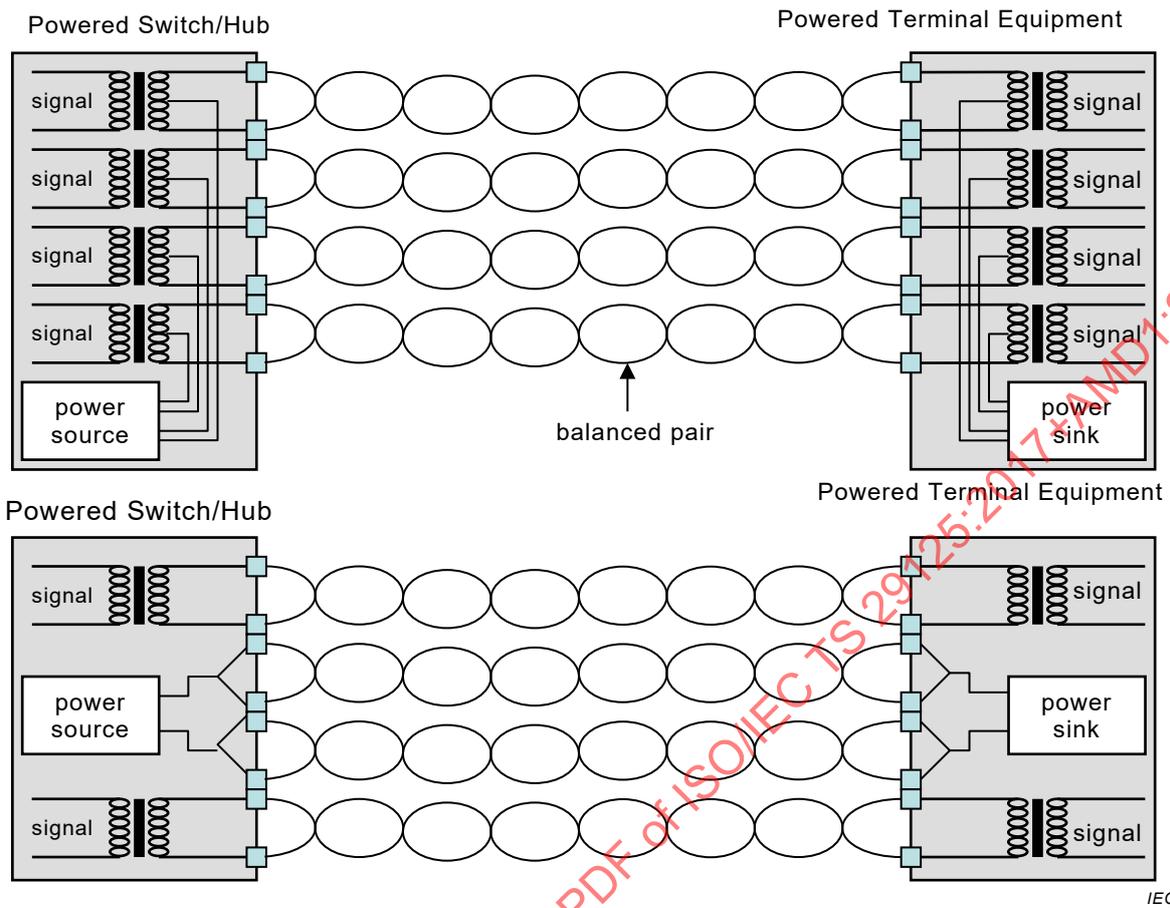

**Figure 1 – Examples of end point powering systems using signal pairs (top) and spare pairs (bottom)**

Alternatively, remote power may be supplied by mid-span power source equipment that inserts remote power independent of the data source equipment, as shown in Figure 2.

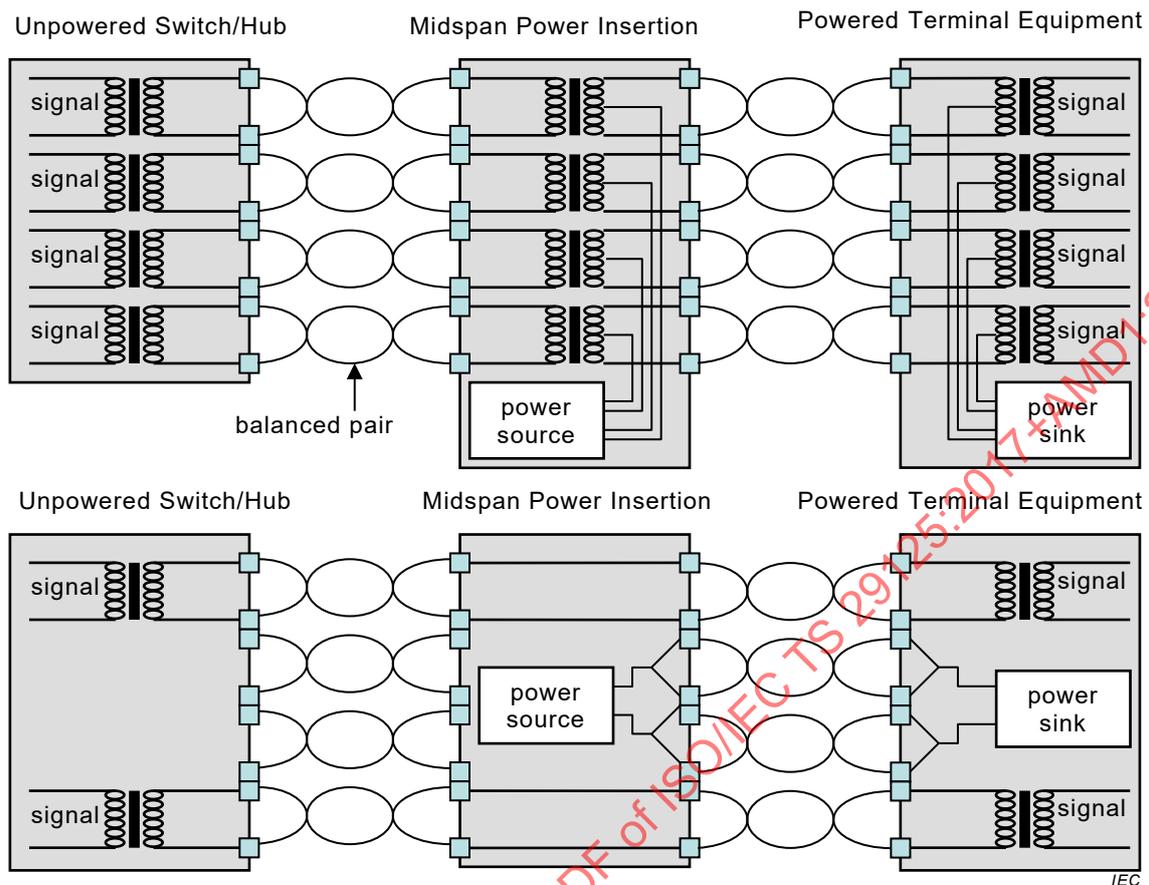


**Figure 2 – Examples of mid-span powering systems**

When mid-span power source equipment replaces a generic balanced cabling component or components, the data pairs shall meet the performance requirements of the component or components it replaces (e.g. patch cord, patch panel or combination thereof), regardless of the equipment interfaces used for input and output connections. Placement of mid-span power insertion equipment shall be external to the permanent link, see ISO/IEC TR 24746.

## 7.2 1-pair balanced cabling

Figure 5 shows examples of specified transmission paths used in 1-pair balanced cabling. The channel is the transmission path between equipment such as a LAN switch or hub and the terminal equipment. The channel does not include the connections at the data source equipment and the terminal equipment. The channel, the permanent link or the CP link shall meet the transmission requirements specified in the design standards.

Remote power may be provided to terminal equipment via balanced cabling equipment interfaces. Remote power is introduced to the balanced cabling channel at the Floor Distributor using the phantom circuit of data pairs from the power sourcing equipment, as shown in Figure 5.

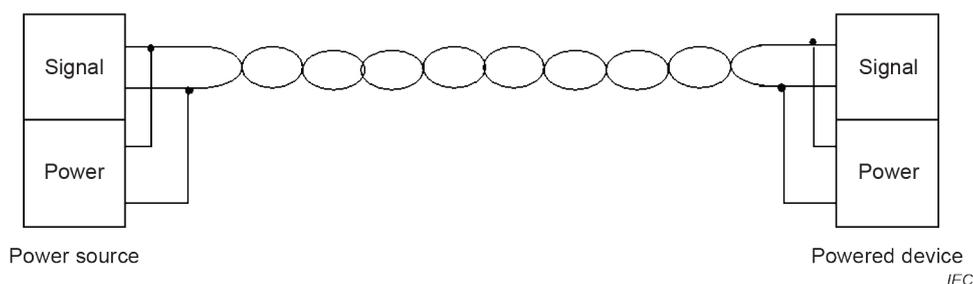

**Figure 5 – Single pair remote powering using signal pairs**

When mid-span power source equipment replaces a generic balanced cabling component or components, the data pair shall meet the performance requirements of the component or components it replaces (e.g. patch cord, patch panel or combination thereof), regardless of the equipment interfaces used for input and output connections.

## 8 Connecting hardware

### 8.1 General

The temporary removal of remote power should be considered before mating or un-mating connecting hardware in a remotely powered channel.

It is preferable that remote powering is not present during mating or un-mating of connecting hardware.

Intelligent powering systems such as Power over Ethernet and Power over Ethernet-*plus* (defined in ISO/IEC/IEEE 8802-3) automatically recognize compliant loads before applying the required level of remote power, thus eliminating electrical stress during connector mating.

ISO/IEC/IEEE 8802-3 also defines optional features to remotely manage the provision of electrical power to each port via port power management which can be used to remove remote power from a particular channel prior to un-mating connectors.

Port power management is therefore the preferred approach to reconfiguration of remotely powered cabling channels.

### 8.2 4-pair balanced cabling

Connecting hardware in channels used to support remote power applications shall have an appropriate current rating when mated. Connecting hardware contacts may deteriorate as a result of mating or un-mating under electrical load, leading to possible degradation of transmission characteristics (see IEC 60512-99-001). Manufacturers should be consulted regarding the number of mating and un-mating cycles supported by connecting hardware while conveying the intended levels of electrical power.

Where it is not practicable to switch off the remote power before mating or un-mating (e.g. for power sources that do not have power management), connecting hardware having the required performance for mating and un-mating under the relevant levels of electrical power and load should be chosen. These requirements are not within the scope of the balanced connecting hardware standards (e.g. IEC 60603-7, IEC 61076-3-104 and IEC 61076-3-110) referenced from ISO/IEC 11801-1 and equivalent standards but may be assessed using additional test schedules.

NOTE A test schedule for engaging and separating connectors under electrical load is described in IEC 60512-99-001.

### 8.3 1-pair balanced cabling

Contacts need to support 2,0 A for mating and un-mating under load.

Connecting hardware in channels used to support remote power applications shall have an appropriate current rating when mated. Connecting hardware contacts may deteriorate as a result of mating or un-mating under electrical load, leading to possible degradation of transmission characteristics (IEC 60512-99-002). Manufacturers should be consulted regarding the number of mating and un-mating cycles supported by connecting hardware while conveying the intended levels of electrical power.

NOTE A test schedule for engaging and separating connectors under electrical load is described in IEC 60512-99-002.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC TS 29125:2017+AMD1:2020 CSV

## **Annex A** (informative)

### **Mitigation considerations for installed cabling**

#### **A.1 General**

Installed cabling is not easy to change to support new applications with additional requirements. Annex A offers some considerations that can be useful to provide remote power over existing installations of Class D or better balanced cabling. Consideration should be given to local heat dissipation conditions, for instance going through framed wall construction or through insulating material.

#### **A.2 Minimum cabling class**

Class D is the minimum cabling suitable for remote powering. Better balanced cabling is recommended to allow higher power needed by emerging applications such as next generation WAPs and outdoor heated PTZ cameras.

#### **A.3 Bundle size and location**

Cables with improved thermal characteristics may be configured into larger bundles. The location of a cable bundle is also an important consideration. Conduits sealed at both ends typically retain more heat than open conduits, leading to a higher temperature rise in the sealed conduit. If cables are installed in an open tray, the temperature rise will be lower than the temperature rise in conduits (sealed or unsealed) for the same bundle size.

#### **A.4 Mitigation options**

If an existing installation does not meet the current capacity in this document for a particular bundle size, the following mitigation options may be considered.

- a) Use only half the cables in a bundle for remote powering with the other half used for applications that do not need remote power.
- b) If ambient temperatures are high, consider adding air-conditioning or air-circulation over cabling segments that are exposed to high temperature.
- c) If possible, separate larger bundles into smaller bundles.

If it is not possible to implement any of the mitigation options listed above, and the number of data terminals requiring remote powering is significant, upgrade the installation using cables with improved thermal characteristics.

Additionally, when the number of data terminals requiring remote powering is significant, upgrade the installation using the appropriate installation procedures to keep the bundle size reasonably low (e.g. 24 cable count) to allow proper heat dissipation all along the channel, permanent link or CP link.

## Annex B (informative)

### Modelling temperature rise for cable types, bundle sizes and installation conditions

#### B.1 Model basics

This model derives the temperature rise based on measured data for different cable types and installation environments:

- $\Delta T$  is the total temperature rise between the ambient temperature (or that of the unpowered bundle) and the centre of the bundle;
- $\Delta T_{th}$  is the temperature rise between the outer surface and the centre of the bundle;
- $\Delta T_u$  is the temperature rise between the ambient temperature (or that of the unpowered bundle) and the outer surface of the bundle.

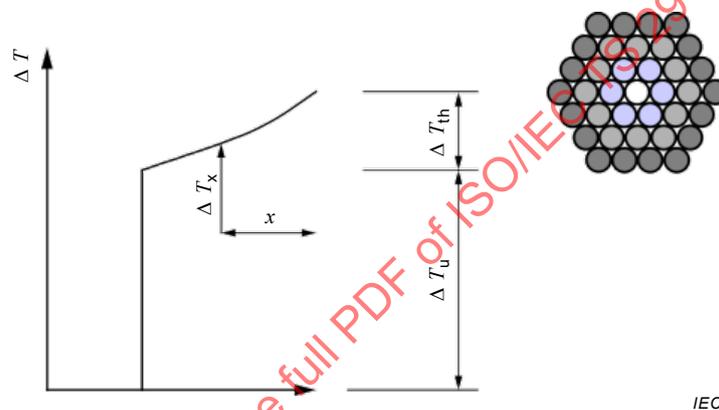


Figure B.1 – Temperature rise profile

An additional element of the model provides a calculation for the temperatures within the bundle at a distance  $x$  from the centre ( $\Delta T_x$ ).

#### B.2 Power dissipated ( $P$ )

The model uses a common factor which is defined as  $P$ :

$$P = N \times n_c \times i_c^2 \times R \quad (\text{B.1})$$

where

$i_c$  is the current per conductor (A) = 0,5 times the current delivered by a pair;

$n_c$  is the number of conductors per cable carrying remote powering current ( $i_c$ )  
= 2 times the number of pairs carrying remote powering current;

$N$  is the number of cables carrying remote powering current;

$R$  is the average DC resistance per unit length ( $\Omega/\text{m}$ ) of conductors carrying remote powering current.

It is recognized that resistance is a function of temperature. This may be neglected for small temperature rises of  $\leq 20$  °C. However, for calculations resulting in larger temperature rises iteration should be employed within the model. Without such iteration the model produces an underestimate of the temperature rise.

### B.3 Temperature difference from ambient temperature to bundle surface ( $\Delta T_u$ )

#### B.3.1 Model equations

$$\Delta T_u = \frac{\rho_u \times P}{\left( d \times \sqrt{N} \times 4 \sqrt{\frac{3}{4} \times \pi^6} \right)} \approx \left( \frac{\rho_u \times P}{d \times \sqrt{N} \times 5,182} \right) \text{ °C} \quad (\text{B.2})$$

where

$\rho_u$  is the constant relating to installation environment;

$d$  is the cable diameter (m).

#### B.3.2 Typical values for constant $\rho_u$

Examples of factors for common use cases determined empirically are listed below. Other use cases may be developed under engineering supervision. Formula (B.2) indicates that for all cable constructions and conduits/trays filled up to at least 40 % capacity as defined in ISO/IEC 14763-2,  $\rho_u$  is

- a) 0,15 under ventilated conditions,
- b) 0,25 for plastic conduits or open metal trays,
- c) 0,5 for closed metal trays,
- d) 0,75 with insulation.

The mapping of test results is ongoing and may lead to a refinement of these models.

### B.4 Temperature difference from bundle surface to bundle centre ( $\Delta T_{th}$ )

#### B.4.1 Model equations

$$\Delta T_{th} = \frac{\rho_{th} \times P}{4 \times \pi} \approx \frac{\rho_{th} \times P}{12,6} \text{ °C} \quad (\text{B.3})$$

where

$\rho_{th}$  is a constant relating to cable construction.

#### B.4.2 Typical values for constant $\rho_{th}$

Work undertaken during the development of this document and mapping of test results to the model into Formula (B.3) indicates that:

- $\rho_{th} = 5$  for U/UTP cable constructions;
- $\rho_{th} = 3$  for F/UTP cable constructions;
- $\rho_{th} = 2,75$  for S/FTP cable constructions.

The mapping of test results is ongoing and might lead to a refinement of these models.