

ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO RECOMMENDATION R 299

MACHINE TOOL TABLES

T SLOTS AND CORRESPONDING BOLTS

2nd EDITION

March 1971

This second edition supersedes the first edition

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

STANDARDSISO.COM : Click to view the full PDF of ISO/R 299:1971

BRIEF HISTORY

The ISO Recommendation R 299, *T slots for machine tools*, was drawn up by Technical Committee ISO/TC 39, *Machine tools*, the Secretariat of which is held by the Association Française de Normalisation (AFNOR).

Work on this question led, to the adoption of Draft ISO Recommendation No. 452, which was circulated to all the ISO Member Bodies for enquiry. It was approved by 26 Member Bodies. No Member Body opposed the approval of the Draft.

This Draft ISO Recommendation was then submitted by correspondence to the ISO Council, which decided to accept it as an ISO RECOMMENDATION.

BRIEF HISTORY RELATING TO THE SECOND EDITION

The Secretariat of Technical Committee ISO/TC 39, *Machine tools*, decided to revise the ISO Recommendation R 299-1963 and adopted Draft ISO Recommendation No. 1960 on this question. It also adopted Draft ISO Recommendation No. 1961, which was a complement to this ISO Recommendation.

These Draft ISO Recommendations were circulated to all ISO Member Bodies for enquiry in February 1970. They were approved, subject to a few modifications of an editorial nature, by the following Member Bodies :

Belgium	Italy	Switzerland
Czechoslovakia*	Japan	Thailand
France	Korea, Dem. P. Rep. of	Turkey
Germany	Netherlands	U.A.R.
Greece	Poland	United Kingdom**
Hungary	South Africa, Rep. of	U.S.S.R.
Ireland	Spain	
Israel	Sweden	

* The Czechoslovakia Member Body approved Draft No. 1961 only.

** The United Kingdom Member Body approved Draft No. 1960 but opposed the approval of Draft No. 1961.

These two Draft ISO Recommendations were then submitted by correspondence as a single document to the ISO Council, which decided to accept it as a second edition of the ISO Recommendation R 299, under the new title : *Machine tool tables – T slots and corresponding bolts*.

The present edition cancels and replaces the first edition of ISO Recommendation R 299-1963.

STANDARDSISO.COM : Click to view the full PDF of ISO/R 299:1971


MACHINE TOOL TABLES**T SLOTS AND CORRESPONDING BOLTS****1. SCOPE**

This ISO Recommendation specifies the dimensions and the spacing of T slots for machine tool tables. It also specifies the dimensions of bolts to be used in these slots.

2. DIMENSIONS OF SLOTS AND BOLTS

The dimensions of T slots and of the corresponding bolts are specified in Table 1, both in millimetres and in inches, except for sizes below 10 mm and above 42 mm, for which there are no corresponding values in inches. The corresponding values ensure practical interchangeability between machines made in either of the two systems of measurement, as well as, in many cases, interchangeability with existing machines.

For tenon slots, there is no interchangeability from one system of measurement to the other, since the nominal dimension A is not identical in millimetres and in inches.

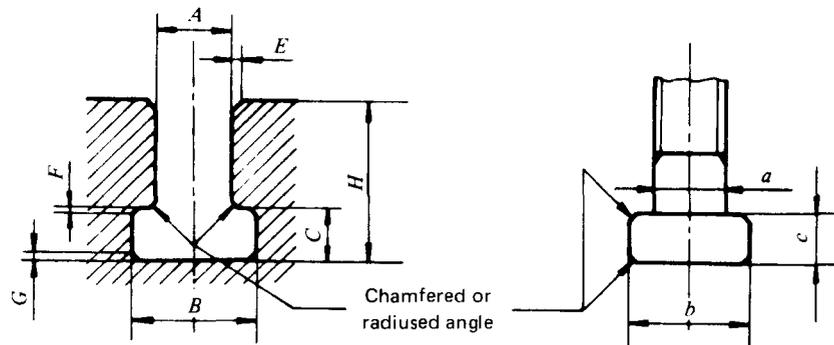

E, F and G : 45°-chamfer height or radius

TABLE 1

Dimensions in millimetres

Slot										Bolt		
<i>A</i>	<i>B</i>		<i>C</i>		<i>H</i>		<i>E</i>	<i>F</i>	<i>G</i>	<i>a</i>	<i>b</i>	<i>c</i>
	min.	max.	min.	max.	min.	max.						
5	10	11	3	3.5	8	10	1	0.6	1	4	9	2.5
6	11	12.5	5	6	11	13	1	0.6	1	5	10	4
8	14.5	16	7	8	15	18	1	0.6	1	6	13	6
10	16	18	7	8	17	21	1	0.6	1	8	15	6
12	19	21	8	9	20	25	1	0.6	1	10	18	7
14	23	25	9	11	23	28	1.6	0.6	1.6	12	22	8
18	30	32	12	14	30	36	1.6	1	1.6	16	28	10
22	37	40	16	18	38	45	1.6	1	2.5	20	34	14
28	46	50	20	22	48	56	1.6	1	2.5	24	43	18
36	56	60	25	28	61	71	2.5	1	2.5	30	53	23
42	68	72	32	35	74	85	2.5	1.6	4	36	64	28
48	80	85	36	40	84	95	2.5	2	6	42	75	32
54	90	95	40	44	94	106	2.5	2	6	48	85	36

Dimensions in inches

Slot										Bolt		
<i>A</i>	<i>B</i>		<i>C</i>		<i>H</i>		<i>E</i>	<i>F</i>	<i>G</i>	<i>a</i>	<i>b</i>	<i>c</i>
	min.	max.	min.	max.	min.	max.						
$\frac{11}{32}$	$\frac{41}{64}$	$\frac{23}{32}$	$\frac{1}{4}$	$\frac{19}{64}$	$\frac{13}{16}$	$\frac{21}{32}$	$\frac{3}{64}$	$\frac{1}{32}$	$\frac{3}{64}$	$\frac{5}{16}$	$\frac{19}{32}$	$\frac{15}{64}$
$\frac{7}{16}$	$\frac{3}{4}$	$\frac{53}{64}$	$\frac{19}{64}$	$\frac{11}{32}$	1	$\frac{13}{16}$	$\frac{3}{64}$	$\frac{1}{32}$	$\frac{3}{64}$	$\frac{3}{8}$	$\frac{11}{16}$	$\frac{9}{32}$
$\frac{9}{16}$	$\frac{29}{32}$	$\frac{63}{64}$	$\frac{23}{64}$	$\frac{7}{16}$	$1\frac{1}{8}$	$\frac{15}{16}$	$\frac{1}{16}$	$\frac{1}{32}$	$\frac{1}{16}$	$\frac{1}{2}$	$\frac{7}{8}$	$\frac{5}{16}$
$\frac{11}{16}$	$1\frac{3}{16}$	$1\frac{17}{64}$	$\frac{29}{64}$	$\frac{17}{32}$	$1\frac{7}{16}$	$1\frac{3}{16}$	$\frac{1}{16}$	$\frac{3}{64}$	$\frac{1}{16}$	$\frac{5}{8}$	$1\frac{1}{8}$	$\frac{13}{32}$
$\frac{13}{16}$	$1\frac{7}{16}$	$1\frac{9}{16}$	$\frac{19}{32}$	$\frac{43}{64}$	$1\frac{3}{4}$	$1\frac{1}{2}$	$\frac{1}{16}$	$\frac{3}{64}$	$\frac{1}{16}$	$\frac{3}{4}$	$1\frac{5}{16}$	$\frac{17}{32}$
$1\frac{1}{16}$	$1\frac{13}{16}$	$1\frac{31}{32}$	$\frac{25}{32}$	$\frac{55}{64}$	$2\frac{3}{16}$	$1\frac{7}{8}$	$\frac{1}{16}$	$\frac{3}{64}$	$\frac{7}{64}$	1	$1\frac{11}{16}$	$\frac{11}{16}$
$1\frac{5}{16}$	$2\frac{3}{16}$	$2\frac{11}{32}$	1	$1\frac{1}{8}$	$2\frac{13}{16}$	$2\frac{7}{16}$	$\frac{7}{64}$	$\frac{3}{64}$	$\frac{7}{64}$	$1\frac{1}{4}$	$2\frac{1}{16}$	$\frac{15}{16}$
$1\frac{9}{16}$	$2\frac{11}{16}$	$2\frac{27}{32}$	$1\frac{1}{4}$	$1\frac{3}{8}$	$3\frac{3}{8}$	$2\frac{15}{16}$	$\frac{7}{64}$	$\frac{1}{16}$	$\frac{5}{32}$	$1\frac{1}{2}$	$2\frac{1}{2}$	$1\frac{3}{16}$

Slots : Tolerances on *A* : H12 for fixing slots,
H8 for tenon slots.

Bolts : Tolerances on *a, b, c* : usual tolerances for bolts and nuts.

NOTE. — Though the assembly by bolts is the only one shown, any other device complying with the same interchangeability conditions may be regarded as in agreement with this ISO Recommendation.