
**Mechanical vibration — Description
and determination of seated postures
with reference to whole-body
vibration**

*Vibrations mécaniques — Description et détermination des postures
assises en référence à des vibrations transmises à l'ensemble du corps*

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 10687:2022



STANDARDSISO.COM : Click to view the full PDF of ISO/TR 10687:2022



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Description of posture quantities.....	1
4.1 General.....	1
4.2 Points on the body.....	1
4.3 Inclinations and axial rotations.....	3
4.4 Symbols.....	4
5 Biomechanical background.....	5
5.1 General.....	5
5.2 Spinal segments.....	5
5.3 Body segments apart from the spine.....	5
5.4 Other quantities.....	6
6 Coordinate system.....	6
7 Characterization of postures.....	7
7.1 General.....	7
7.2 Postural information.....	7
7.2.1 Angles of body segments.....	8
7.2.2 Sagittal inclination of the head.....	9
7.2.3 Lateral inclination of the head.....	9
7.2.4 Sagittal inclination of the thoracic spine.....	10
7.2.5 Lateral inclination of the thoracic spine.....	10
7.2.6 Sagittal inclination of the lumbar spine.....	11
7.2.7 Lateral inclination of the lumbar spine.....	11
7.2.8 Sagittal flexion of the neck.....	12
7.2.9 Lateral flexion of the neck.....	12
7.2.10 Neck torsion.....	13
7.2.11 Sagittal flexion of the back.....	13
7.2.12 Lateral flexion of the back.....	14
7.2.13 Back torsion.....	14
7.2.14 Curvature of the lumbar spine (kyphosis, lordosis).....	15
7.2.15 Lateral tilt of the pelvis.....	15
7.2.16 Axial rotation of the pelvis.....	16
7.3 Other information.....	16
7.3.1 General.....	16
7.3.2 Body support.....	17
7.3.3 Controls.....	17
7.3.4 External loading.....	17
8 Methods for determination of posture quantities.....	17
8.1 General.....	17
8.2 Optical methods.....	17
8.3 Ultrasonic sensors.....	18
8.4 Electro-goniometers.....	18
8.5 Other transducer-based methods.....	18
8.6 Visual methods.....	18
9 Measurement errors.....	18
Annex A (informative) Examples for the application to different body segments.....	20
Annex B (informative) Assessment of health effects.....	26

Annex C (informative) Field measurements	30
Bibliography	32

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 10687:2022

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 4, *Human exposure to mechanical vibration and shock*.

This second edition cancels and replaces the first edition (ISO/TR 10687:2012) which has been technically revised.

This edition was created to clarify conventions and measurements and was updated with some of the latest research results.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Seated persons exposed to whole-body vibration carry a risk for musculoskeletal problems such as low-back problems and for spinal degeneration which is most likely increased by unfavourable postures. However, the biomechanical mechanism of this increase is not fully understood.

It is therefore necessary, as a first step, to determine the posture and ergonomic environment of a seated person with special focus on the spine.

This document is offering a collection of ideas on how to measure postures which are dynamic. To this end, this document summarizes descriptive quantities that

- are likely to be relevant for the assessment of adverse health effects due to whole-body vibration and unfavourable seated posture,
- can be determined using a variety of methods,
- are in accordance with the description of static, unfavourable seated postures as far as angles of body segments are concerned, and
- include additional information, e.g. the presence of arm- or backrests.

The whole set of quantities and conventions used can be reported in order to

- facilitate the comparison of seated postures,
- be able to compare different methods for the determination of the seated posture, and
- permit further investigation, e.g. in biomechanical laboratories, on the basis of the determined seated postures.

Due to limitations of the applied assessment methods, it might be necessary to combine different methods in order to be able to report a complete list of quantities.

This document does not specify sampling strategies or evaluation methods.

Mechanical vibration — Description and determination of seated postures with reference to whole-body vibration

1 Scope

This document summarizes descriptive quantities for those responsible (e.g. scientists, safety engineers) for determination of postures for a seated person who is exposed to whole-body vibration. It is the intention that the results of different methods can be easily related to these quantities and that they allow for a common terminology between practitioners. The focus of this document is to offer a collection of ideas on how to measure postures in practice. The postures determined can also be used as a basis for further investigation or as a means of comparison for different methods. Although some of the approaches described here can be applied to standing or recumbent positions, additional considerations are likely to be required in these cases.

NOTE 1 This work is closely related to International Standards which focus on static postures (ISO 11226^[4]) or on radiologically accessible landmarks, i.e. points on the body (ISO 8727^[3]).

Additionally, this document deals with dynamic postures where body angles or associated movements are determined visually or by measuring points on the skin or clothing.

NOTE 2 Nevertheless, ISO 8727^[3] and ISO 11226^[4] put forward principles for further extensions of posture determination which are followed in this document, in particular for measurements of body angles.

This document does not specify sampling strategies or evaluation methods.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Description of posture quantities

4.1 General

This clause summarizes the description of measurable quantities used in 7.2. The basis of the descriptions is the points on the body as shown in Figure 1.

4.2 Points on the body


With the help of the points on the body presented in Figure 1, lines and planes can be defined, which in turn define a posture. They are chosen in such a way that their position in space is relevant for the strain on the spine.

A line between two points is represented by the respective normalized vector, v_l . A plane is represented by three points and a normalized vector, v_{pl} , perpendicular to that plane.

Their angles with respect to the coordinate system can in turn be correlated to movements of parts of the spine that are considered to be independent from one another.

A general vector in the coordinate system described in [Clause 6](#) is represented in [Figure 2](#).


Having defined suitable points on the body, two markers for optical measurement systems determine a line, v_l , and three markers are needed for a plane, v_{pl} . Triaxial accelerometers, on the other hand, combined with, e.g. gyroscopes or magnetic sensors, offer a possibility to measure a (local) line, v_l , with only one sensor unit.

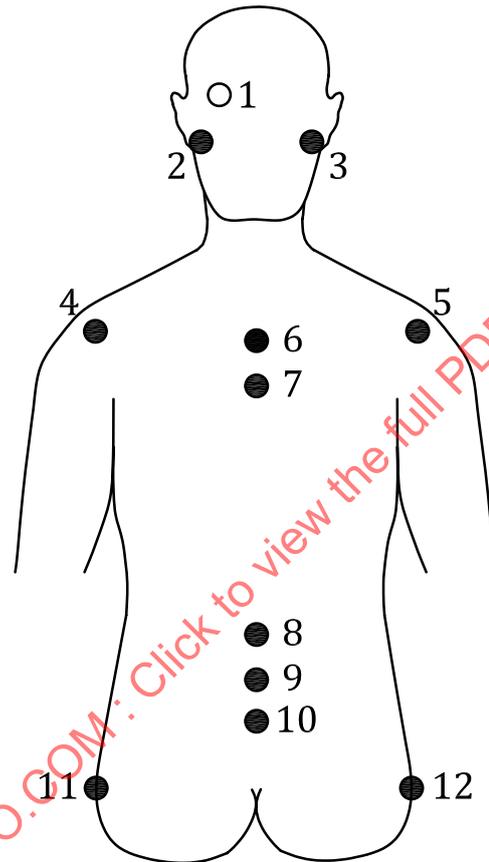

Key

- | | | | |
|---|----------------------------------|----|----------------------------------|
| 1 | left lateral canthus | 7 | T ₃ (spinous process) |
| 2 | left tragus | 8 | L ₁ (spinous process) |
| 3 | right tragus | 9 | L ₃ (spinous process) |
| 4 | left acromion | 10 | L ₅ (spinous process) |
| 5 | right acromion | 11 | left greater trochanter |
| 6 | C ₇ (spinous process) | 12 | right greater trochanter |

Figure 1 — Sketch of the human body with landmarks, i.e. points on the body that can be monitored if using a marker-based measurement system

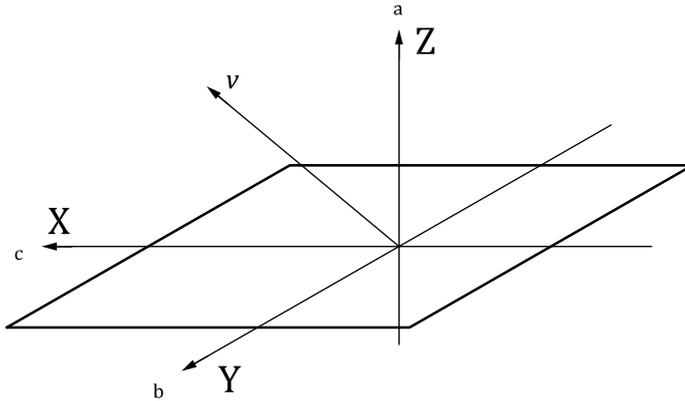**Key**

- a Toward the head.
- b Toward the left-hand side.
- c Anterior.

Figure 2 — Cartesian coordinate system for a general vector, v

Experiments that do not measure the absolute posture in space, but a relative posture, can provide the reference (the upright standing or seated posture) in the Cartesian coordinate system of [Clause 6](#) in order to be able to transform their data later.

4.3 Inclinations and axial rotations

To more easily understand and visualize the inclination and axial rotation convention, the reader can consider reviewing [Clauses 5 to 7](#).

Once the posture of a part of the body is defined by a vector, v , its sagittal inclination can be defined by the angle θ_{incl}^{xz} of the projection of v on to the xz -plane and the Z -axis, as given by [Formula \(1\)](#):

$$\theta_{incl}^{xz} = \arctan \frac{v^x}{v^z} \quad (1)$$

This is shown in [Figure 3 a\)](#). A sagittal extension is given by $v^x < 0$. The lateral inclination is defined accordingly by the angle of the projection of v on to the yz -plane and the Z -axis, as given by [Formula \(2\)](#):

$$\theta_{incl}^{yz} = \arctan \frac{v^y}{v^z} \quad (2)$$

Here, the sign of v^y determines left and right lateral inclination.

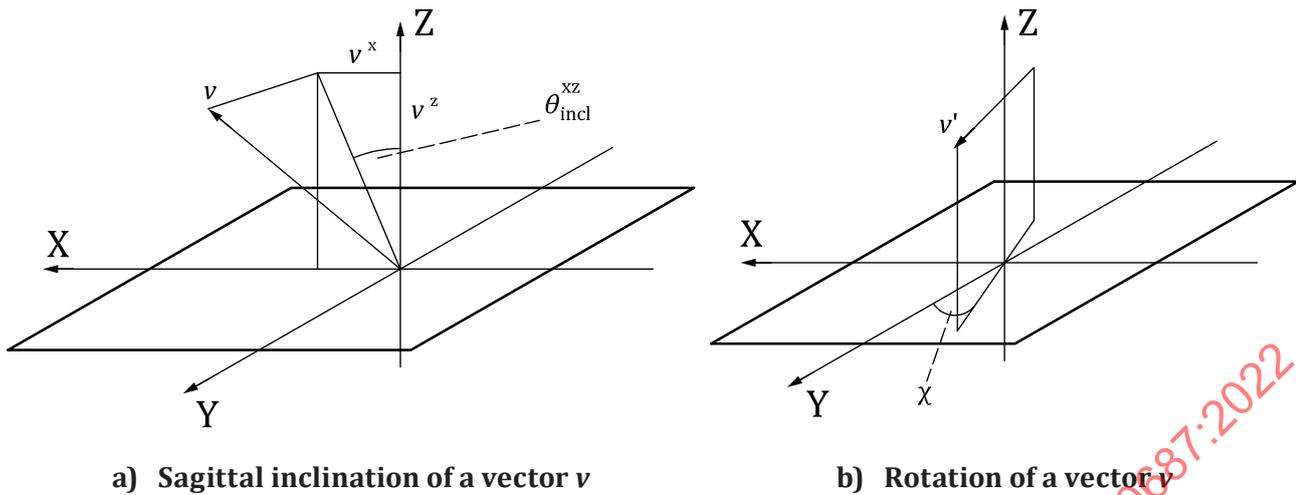


Figure 3 — Sagittal inclination and rotation of a vector \mathbf{v}

The effects of inclinations on a given vector \mathbf{v}'_{rot} parallel to \mathbf{z} can be described by applying a rotary matrix to that vector $\mathbf{D}^{-1}(\theta, \phi)\mathbf{v}'_{rot} = \mathbf{v}_{rot}$ where θ, ϕ are the polar angles of \mathbf{v}_{rot} . Consequently, the effects can be eliminated by the inverse rotary matrix $\mathbf{v}'_{rot} = \mathbf{D}(\theta, \phi)\mathbf{v}_{rot}$. This is used to describe axial rotation independently from inclinations.

If \mathbf{v}_{rot} is the rotation axis around which another unit vector \mathbf{v} is rotated, and if $\mathbf{v}'_{rot} = \mathbf{D}(\theta, \phi)\mathbf{v}_{rot}$ is parallel to \mathbf{z} , then $\mathbf{v}' = \mathbf{D}(\theta, \phi)\mathbf{v}$ defines the vector \mathbf{v}' which in this document is always chosen to be orthogonal to \mathbf{v}'_{rot} and \mathbf{z} , see Figure 3 b).

This defines the rotation angle of \mathbf{v} around \mathbf{v}_{rot} independent from inclinations, with respect to \mathbf{y} by the scalar product given by Formula (3):

$$\chi = \arccos(\mathbf{v}' \cdot \mathbf{y}) \tag{3}$$

This is illustrated in Figure 3 b).

Annex A gives examples for the application of these definitions to different body segments. Angles pertinent to different body segments are shown in 7.2.2 to 7.2.10.

4.4 Symbols

- C_1 to C_7 vertebrae of the cervical spine
- D rotary matrix
- L_1 to L_5 vertebrae of the lumbar spine
- N normalization constant
- T_1 to T_{12} vertebrae of the thoracic spine
- th, ls subscripts indicating the thoracic and lumbar spine
- $\mathbf{v} = \overline{AB}$ vector between points A and B
- $\mathbf{v} = (v^x, v^y, v^z)$ vector, represented by its Cartesian coordinates

$v' = Dv$	vector without influence of inclination
x, y, z	unit vectors of the Cartesian coordinate system parallel to the X, Y and Z axes
χ	angle between two vectors
θ, ϕ	polar angles, the Z-axis of the coordinate system as polar axis

5 Biomechanical background

5.1 General

This clause provides the biomechanical background for the selection of relevant quantities with respect to the spinal load of seated persons subject to whole-body vibration.

5.2 Spinal segments

In order to describe the spinal load as closely as possible, the range of motion of different parts of the spine in inclination and axial rotation can be considered. A summary is given in [Table 1](#) which indicates that the lumbar, thoracic and cervical spine show different mobility and can, therefore, be treated separately.

Table 1 — Maxima and minima of spinal tolerances towards movement according to Reference [6]

Type of movement	Maxima (vertebrae)	Minima (vertebrae)
Sagittal inclination	C ₀ /C ₁ , C ₄ /C ₅ , L ₄ /L ₅ , L ₅ /S ₁	T ₉ /T ₁₀
Lateral inclination	C ₁ /C ₂ , C ₇ /T ₁ , L ₃ /L ₄	T ₅ /T ₆
Axial Rotation	C ₁ /C ₂ , T ₁₂ /L ₁	T ₅ /T ₆
NOTE	C ₀ is the occiput.	

Due to the large mobility in the cervical spine (vertebrae C₁ to C₇), it is more feasible to describe its movement by the position of the head (sagittal and lateral inclination, axial rotation).

The thoracic spine (vertebrae T₁ to T₁₂) is separated from the lumbar spine by a distinct minimum for all types of movement. Therefore, the axial rotation, sagittal inclination and lateral inclination of the thoracic spine are investigated separately.

The lower part of the lumbar spine is closely connected to the pelvis. The forward and backward tilting of the pelvis leads concomitantly to the lordosis or kyphosis of the lumbar spine (vertebrae L₁ to L₅). This is an additional degree of freedom which has already been addressed in ISO 11226^[4]. As for the other degrees of freedom of the lumbar spine, it is sufficient to measure the sagittal and lateral inclination, since the axial rotation is negligible for the seated person.

5.3 Body segments apart from the spine

Appendicular body segments (i.e. the upper and lower limb) are known to affect the biomechanical response of the seated body. The position of the lower limb can affect the apparent mass and transmissibility as can the position of the upper limb. For drivers, the position of the upper limb can be dictated by the nature of the driving task, the nature and position of controls. The position of the lower limb can be dictated by the presence of pedals, the seat height, and upholstery in the vehicle.

In order to fully describe the position and loading on the spine of the seated subject, one can consider the position of all body segments as this affects the position of the centre of mass which the musculoskeletal system is required to support.

5.4 Other quantities

Detailed segmental positions alone do not fully describe the loading on the body. For example, one set of segment angles could be stable or unstable depending on whether a seat was present or not. Similarly, they do not allow for a description of the biomechanical response as it is known that the presence of a backrest affects the apparent mass and transmissibility.

6 Coordinate system

In most cases, the person is seated in a vehicle with the position of the pelvis in the seat pointing forward. Because the direction of the seat might not correspond to the direction of motion of the vehicle, the seat might not have a clear front (e.g. a stool) or the coordinate systems used in other whole-body vibration standards, e.g. ISO 2631-1^[1] and ISO 5805^[2] does not match this coordinate system; consequently, appropriate transformations can be necessary.


A suitable coordinate system resembles an external polar coordinate system. It consists of orthogonal unit vectors x , y , and z . The vector x is fore-aft at the pelvis; y is lateral and left at the pelvis and z is vertical at the pelvis (see [Figure 4](#)). For upright seated persons, the vector z opposes gravity. The Y-axis of the coordinate system is parallel to the Y-axis of the pelvis, given by the line that connects the greater trochanters. This coordinate system is the basis for all variables concerning the movements of the spine described in [Clause 7](#).

NOTE 1 The line that connects the greater trochanters is not necessarily the rotational axis of the pelvis. Within the levels of accuracy of this document, this is acceptable.

If the pelvis orientation does not correspond to the seat orientation, the coordinate system rotates with the pelvis. This might be the case, e.g. when the driver is leaning out of the window or is driving backwards for a longer time. Then, the coordinate system can be transformed in such a way that the transformed coordinate system's new Y-axis is again parallel to the Y-axis of the pelvis and the angle of old and new Z-axis is minimal. If there is spinal axial rotation, the origin is defined at the pelvis.

NOTE 2 In this case, the transformed coordinate system does not correspond to the coordinate system of the seated person in the measurement standard for whole-body vibration (see ISO 2631-1^[1]). Both coordinate systems can be associated with each other by a unitary transformation.

NOTE 3 In many cases, additional transformations are necessary when the seat coordinate system is not in line with the vehicle coordinate system.

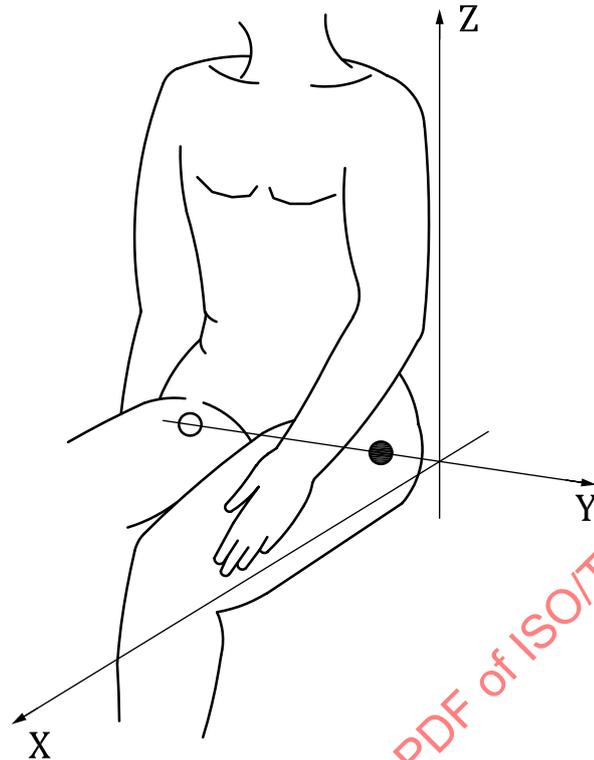

NOTE The Y-axis is parallel to the line that connects the greater trochanters (circles).

Figure 4 — Cartesian coordinate system for a seated person

7 Characterization of postures

7.1 General


When reporting quantities determined, it is important to report clearly the conventions used.

In order to characterize a posture, the quantities in this clause can be determined. For postural information, e.g. angles of body segments, see 7.2; for other information which can be collected in order to describe the ergonomic environment, e.g. whether arm- or backrests are present or not, see 7.3.

7.2 Postural information

There are four types of degrees of freedom describing the posture (see Figure 5):

- Inclination, flexion, rotation and torsion.
- The inclination [see Figure 5 b)] is the change of an angle from the reference posture angle (zero-neutral-posture 0°), [see Figure 5 a)].
- The flexion [see Figure 5 c)] is the difference of two inclinations (upper inclination minus lower inclination).
- The torsion [see Figure 5 d)] is the difference of two rotations with respect to one axis (upper rotation minus lower rotation).

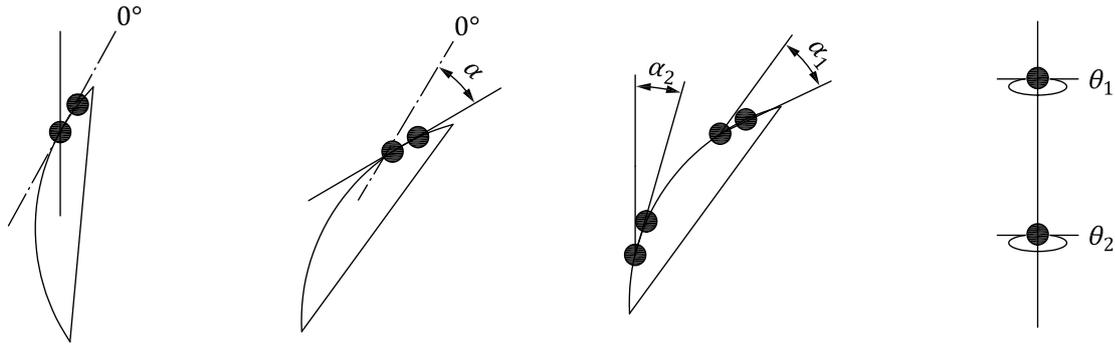

a) Neutral 0 posture b) Inclination α c) Flexion $\beta (\alpha_1 - \alpha_2)$ d) Torsion $\gamma (\theta_1 - \theta_2)$

Figure 5 — Degrees of freedom describing posture

7.2.1 Angles of body segments

This subclause describes angles of body segments (see Table 2) with respect to the coordinate system defined in Clause 6. The sign of inclination/flexion angles is positive when the inclination/flexion resembles a clockwise movement.

Each body segment is represented by a line between two points on the body of the person as in ISO 11226[4]. These points are palpable landmarks on the skin or the surface of the clothing in accordance with ISO 8727[3]. Transducers or markers can be fixed at these points or alternative techniques can be applied such as goniometry, video or visual analysis to provide equivalent data.

These body segment angles might continuously or periodically change during a measurement. The nature of movement can be described.

Figure 1 presents a sketch of the human body together with a possible set of points for the description of the movement of the respective body segments. The latter are summarized in Table 2.

Table 2 — Body segments and their movements as described by the position of attributed points of the body according to Figure 1

Body segment	Movement/angle	Necessary points
Head/cervical spine	Sagittal inclination of the head	1 to 3
	Lateral inclination of the head	2 to 3
	Sagittal flexion, extension of the neck	1 to 7
	Lateral flexion of the neck	2 to 7
	Neck torsion	2 to 5
Thoracic spine	Sagittal inclination of thoracic spine	6, 7
	Lateral inclination of thoracic spine	6, 7
	Position of the backrest	6, 7
	Back torsion	4 to 10

Table 2 (continued)

Body segment	Movement/angle	Necessary points
Lumbar spine	Sagittal inclination of the lumbar spine	9 to 10
	Lateral inclination of the lumbar spine	9 to 10
	Sagittal flexion of the back	6 to 10
	Lateral flexion of the back	6 to 10
	Back torsion	4 to 12
	Position of the backrest	8, 10
	Sagittal inclination of the back	4 to 10
	Curvature (kyphosis, lordosis)	8 to 10
Pelvis	Lateral tilt	11, 12
	Axial rotation	11, 12

Body angles that are listed in Table 2 are described in 7.2.2 to 7.2.16. In the case of simultaneous movements, the descriptions have to be adapted accordingly.

7.2.2 Sagittal inclination of the head

For a person in an upright standing posture, the line between the lateral canthus and the tragus (points 1 and 3 in Figures 1 and 6) is used for describing the head inclination. Looking straight ahead is represented for the reference position 0° . The inclination of the head in the sagittal plane is defined by the deviation of this line from the reference position (see Figure 6). Looking downward results in positive angles and vice versa.

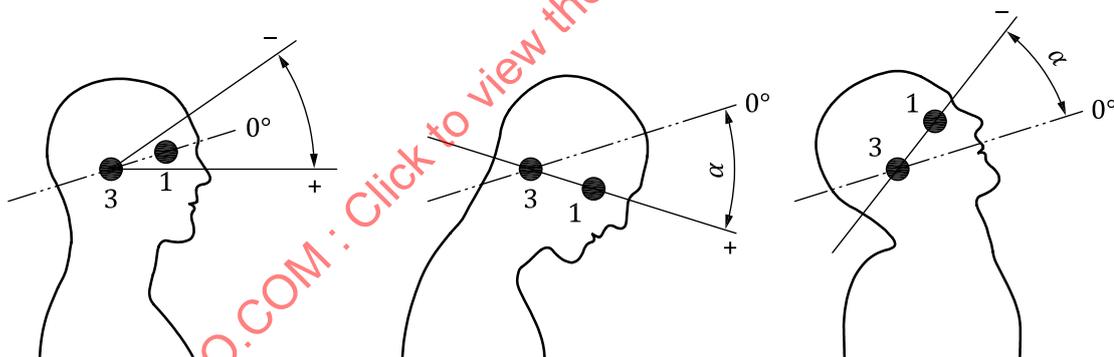


Figure 6 — Sagittal inclination of the head

7.2.3 Lateral inclination of the head

The line that is orthogonal to the line between the left and right tragus (points 2 and 3 in Figures 1 and 2) is used to describe lateral inclination of the head. For a person in an upright standing posture this line is declared for 0° . Lateral inclination of the head is the deviation of this line from the reference position in the lateral plane (see Figure 7). Angles to the right hand side of the person are positive and vice versa.

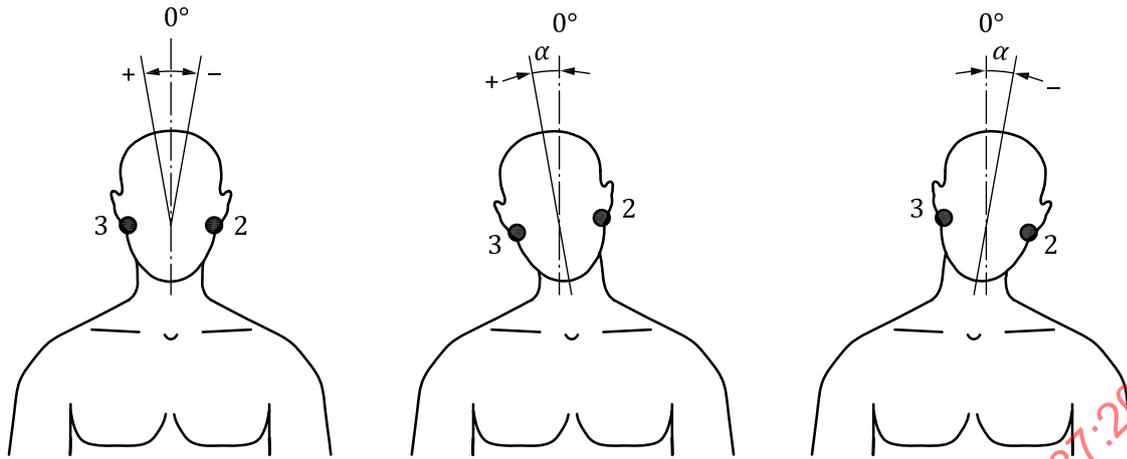


Figure 7 — Lateral inclination of the head

7.2.4 Sagittal inclination of the thoracic spine

The line between the third thoracic vertebrae (T_3) and the seventh cervical vertebrae (C_7) (points 7 and 6 in Figures 1 and 8) is used for describing the reference position 0° in an upright standing posture. Sagittal inclination of the thoracic spine is a deviation of this line from the reference position in the sagittal plane. Forward angles are positive and vice versa.

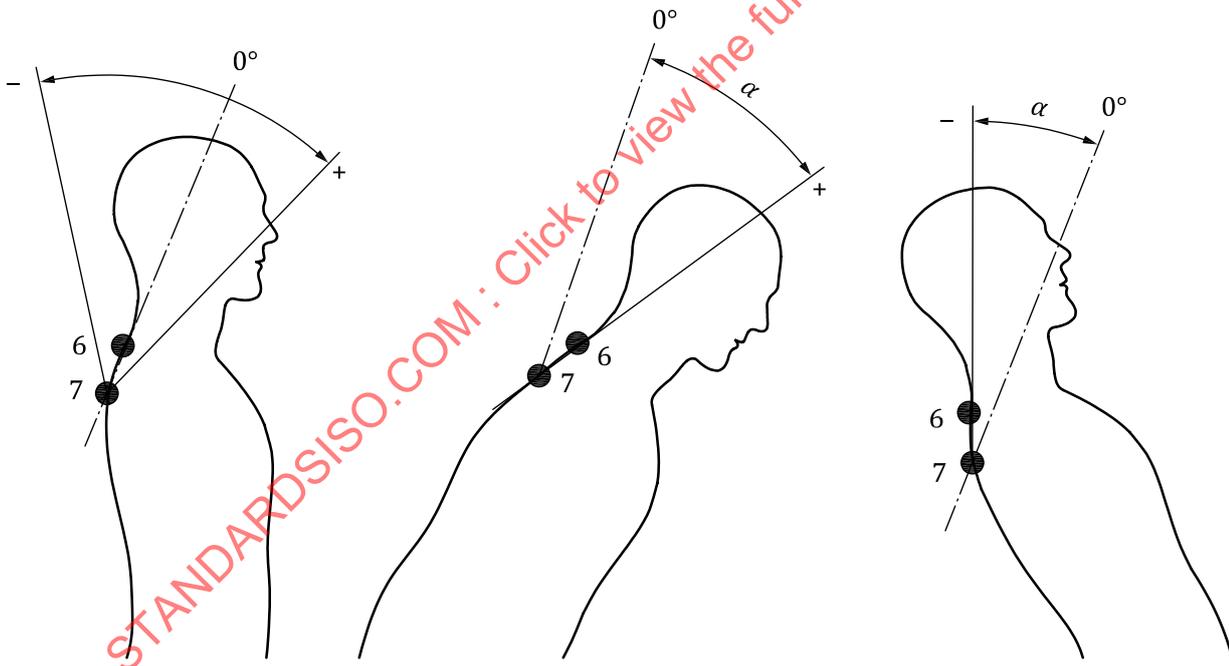


Figure 8 — Sagittal inclination of the thoracic spine

7.2.5 Lateral inclination of the thoracic spine

The line between the seventh vertebrae of the cervical spine (C_7) and the third thoracic vertebrae (T_3) (points 6 and 7 in Figures 1 and 9) is used for describing the reference position 0° in an upright standing posture. Lateral inclination of the thoracic spine is a deviation of this line from the reference position in the lateral plane. Angles to the right-hand side of the person are positive and vice versa.

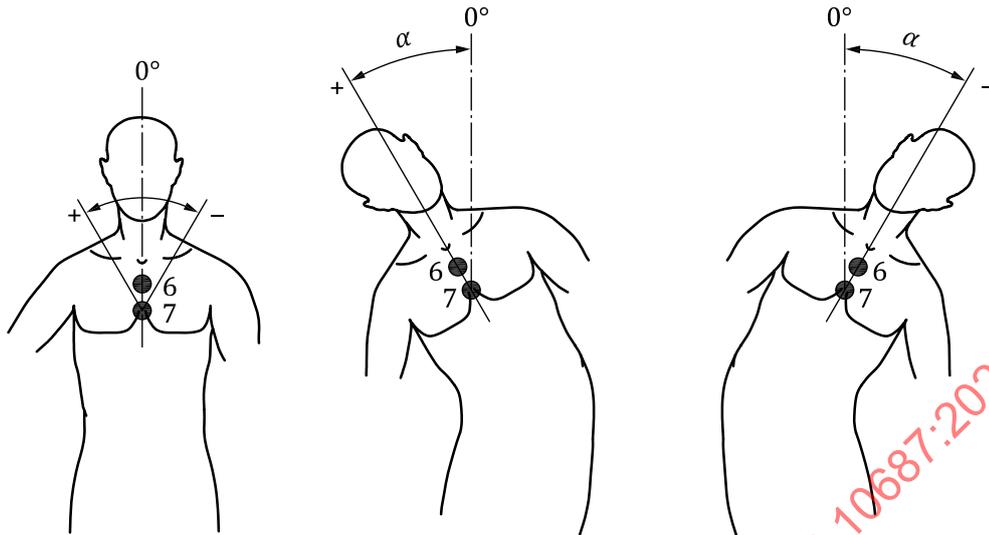


Figure 9 — Lateral inclination of the thoracic spine

7.2.6 Sagittal inclination of the lumbar spine

The line between the third lumbar spinous process (L_3) and the fifth lumbar spinous process (L_5) (points 9 and 10 in [Figures 1](#) and [10](#)) is used for describing the reference position 0° in an upright standing posture. Sagittal inclination of the lumbar spine is a deviation of this line from the reference position in the sagittal plane. Forward angles are positive and vice versa.

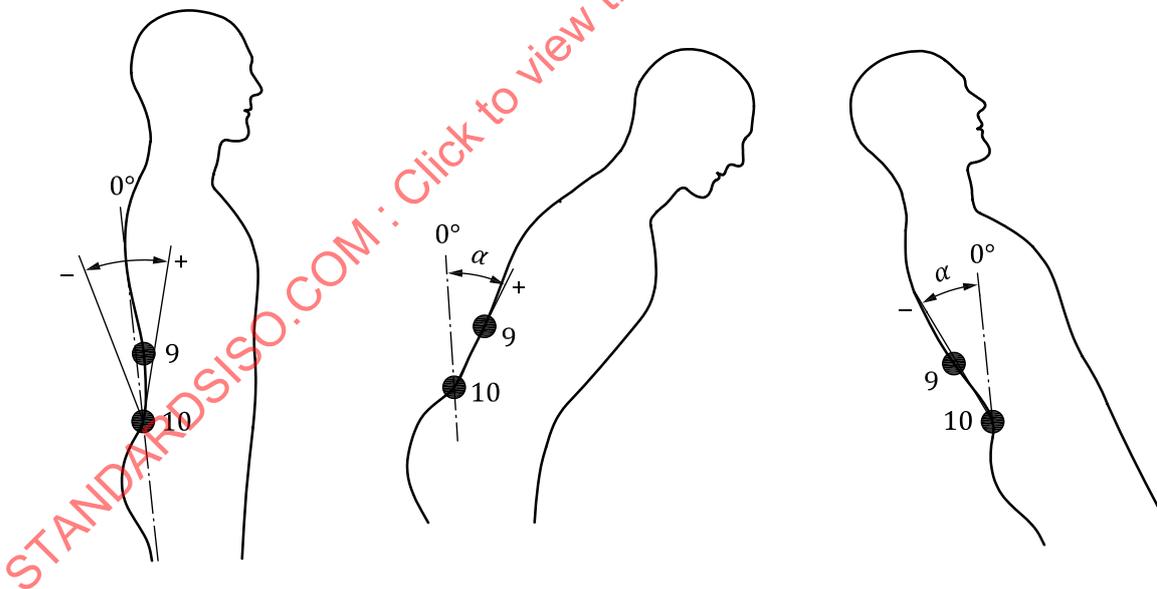


Figure 10 — Sagittal inclination of the lumbar spine

7.2.7 Lateral inclination of the lumbar spine

The line between the third lumbar spinous process (L_3) and the fifth lumbar spinous process (L_5) (points 9 and 10 in [Figures 1](#) and [11](#)) is used for describing the reference position 0° in an upright standing posture. The lateral inclination of the lumbar spine is a deviation of this line from the reference position in the lateral plane. Angles to the right-hand side of the person are positive and vice versa.

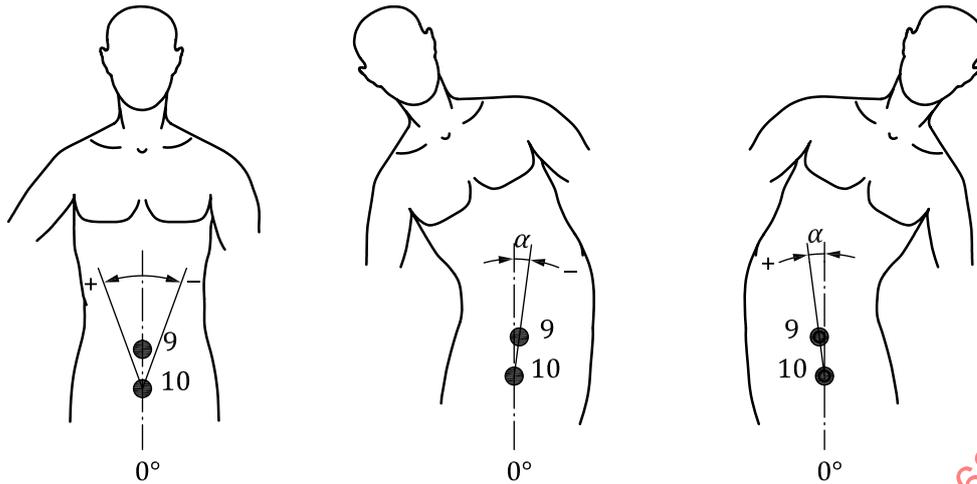


Figure 11 — Lateral inclination of the lumbar spine

7.2.8 Sagittal flexion of the neck

This angle is described as the difference between head and thoracic inclination in the sagittal plane ($\alpha_1 - \alpha_2$) as shown in Figure 12.

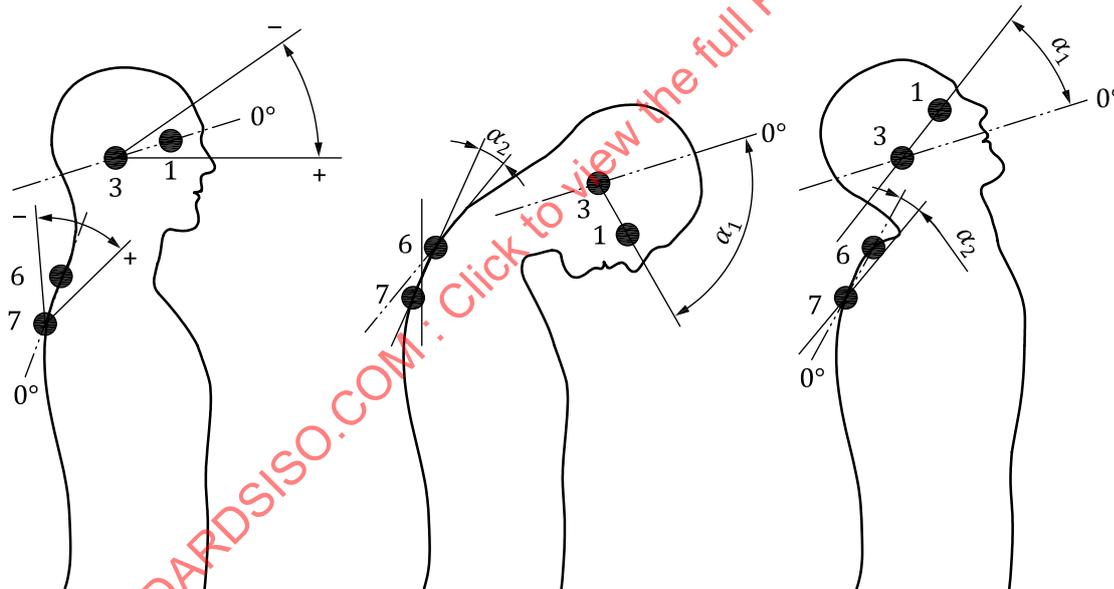


Figure 12 — Sagittal flexion of the neck

7.2.9 Lateral flexion of the neck

This angle is described as the difference between head and thoracic inclination in the lateral plane ($\alpha_1 - \alpha_2$) as shown in Figure 13.

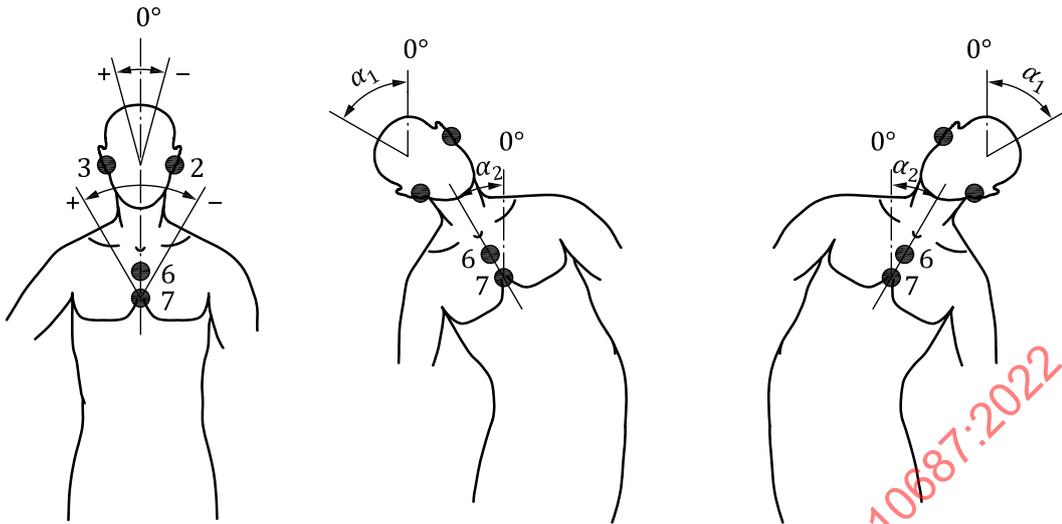


Figure 13 — Lateral flexion of the neck

7.2.10 Neck torsion

For a person in an upright standing posture, the line between the left and right tragus (points 2 and 3 in Figures 1 and 14) is defined as the reference position for rotational movement of the head. Also, the line between the left and right acromion (points 4 and 5 in Figures 1 and 14) is defined as the reference position for the axial rotation of the thoracic spine. The neck torsion is given by the angle difference between the axial rotation of the head and the axial rotation of the thoracic spine ($\alpha_1 - \alpha_2$). This leads to a torsion within the cervical spine. Axial rotation to the right hand side is positive and vice versa.

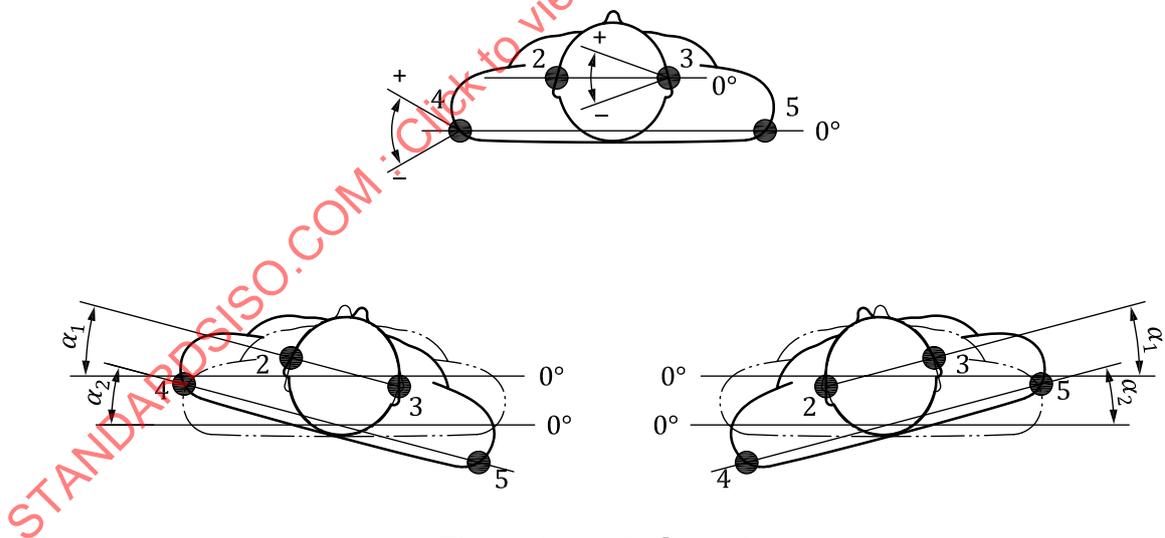


Figure 14 — Neck torsion

7.2.11 Sagittal flexion of the back

This angle is described as the difference between the inclination of thoracic spine and the inclination of lumbar spine in the sagittal plane ($\alpha_1 - \alpha_2$) as shown in Figure 15.

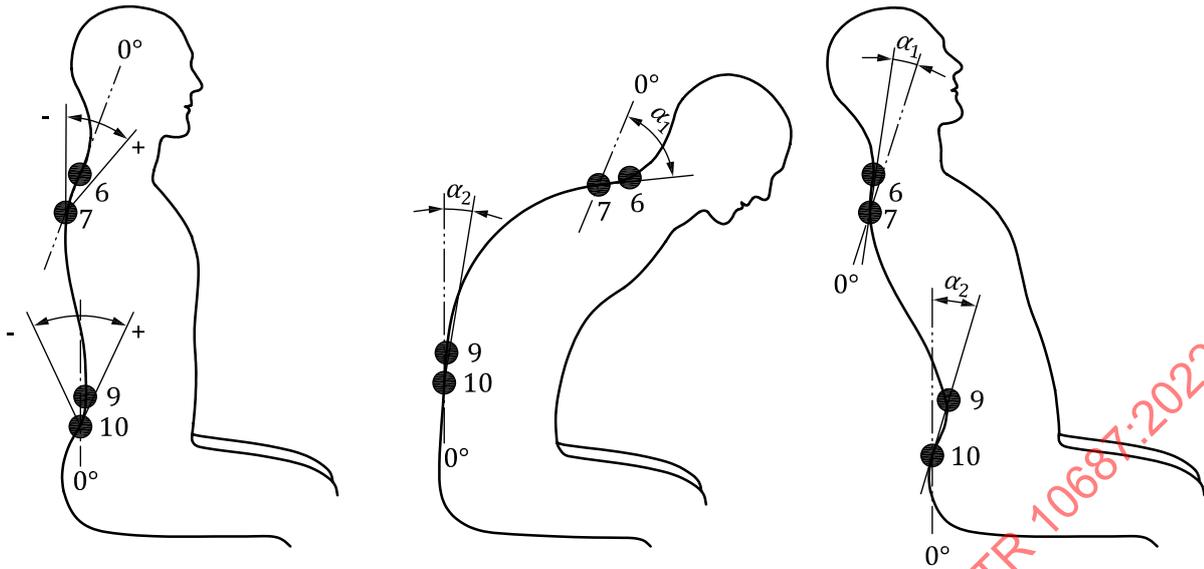


Figure 15 — Sagittal flexion of the back

7.2.12 Lateral flexion of the back

This angle is described as the difference between the inclination of thoracic spine and lumbar spine in the lateral plane ($\alpha_1 - \alpha_2$) as shown in Figure 16.

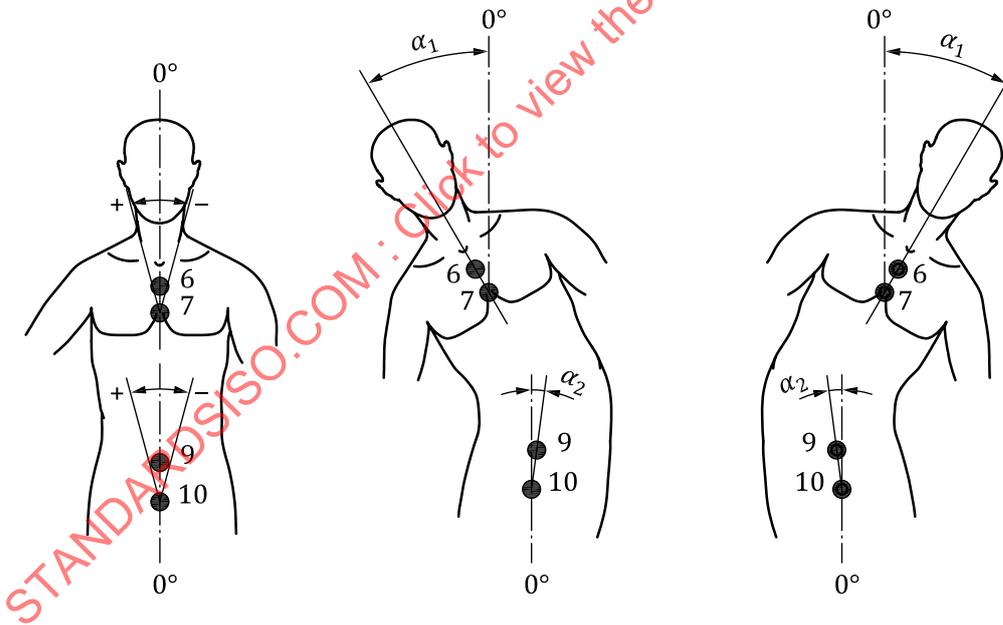


Figure 16 — Lateral flexion of the back

7.2.13 Back torsion

For a person in an upright standing posture, the line between the left and right acromion (points 4 and 5 in Figures 1 and 17) is defined as the reference position for the axial rotation of the thoracic spine. Also the line between the left and right greater trochanter (points 11 and 12 in Figures 1 and 17) is defined as the reference position for the axial rotation of the lumbar spine. The back torsion is given by the angle difference between the axial rotation of the thoracic spine and the axial rotation of the lumbar spine ($\alpha_1 - \alpha_2$). This leads to a torsion within the thoracic spine. Axial rotation to the right hand side is positive and vice versa.

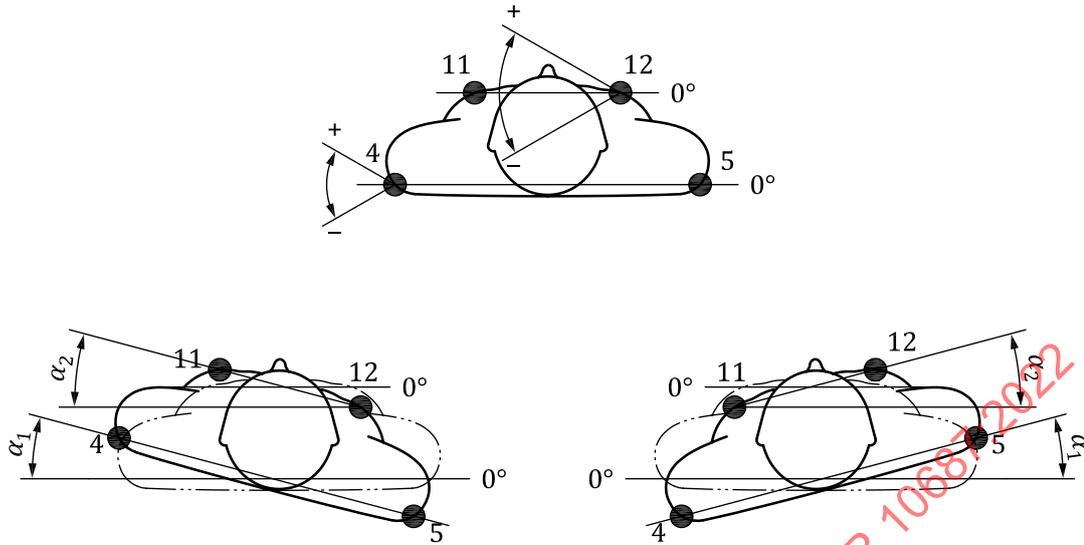


Figure 17 — Back torsion

7.2.14 Curvature of the lumbar spine (kyphosis, lordosis)

The curvature of the lumbar spine is given by the angle between the first, third and fifth lumbar spinous processes (L_1 , L_3 and L_5). The curvature is kyphosis, if the angle opens toward the front of the person (see [Figure 18](#)), and lordosis if the angle opens toward the back of the person.

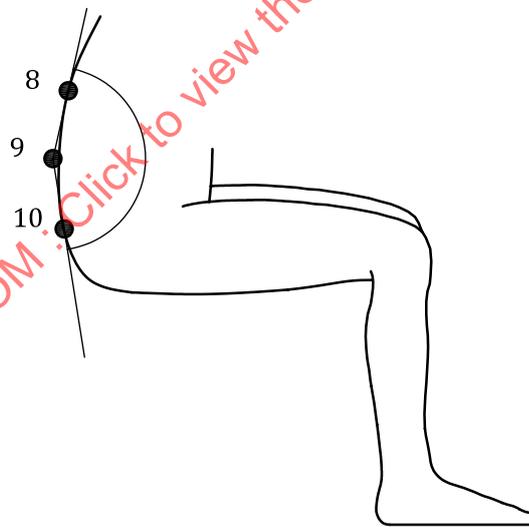


Figure 18 — Curvature of the lumbar spine (kyphosis)

7.2.15 Lateral tilt of the pelvis

Because, in most cases, the location of the pelvis is in the seat, when the driver is, for example, leaning out of the window, the pelvis is tilted. The tilt angle is given by the line between the greater trochanters and the horizontal axis (see [Figure 19](#)). Leaning to the left results in negative tilt angles.

In this case, the coordinate system (see [Clause 6](#) [Coordinate system]) changes.

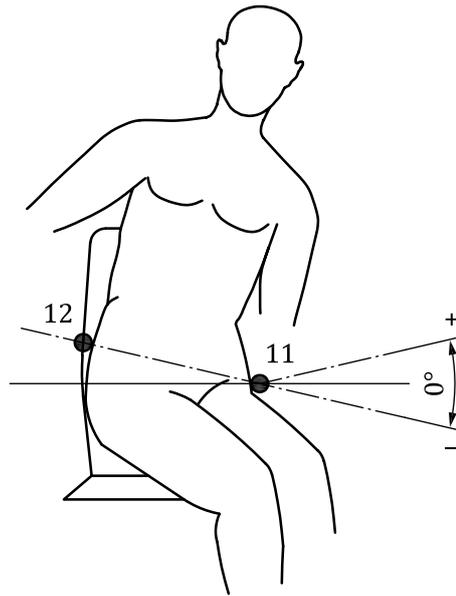


Figure 19 — Lateral tilt of the pelvis

7.2.16 Axial rotation of the pelvis

If the pelvis is rotated on the seat surface, the coordinate system (see [Clause 6](#) [Coordinate system]) changes. The axial rotation angle is given by the line between the greater trochanters and the horizontal axis (see [Figure 20](#)). Axial rotation to the left hand side leads to negative axial rotation angles.

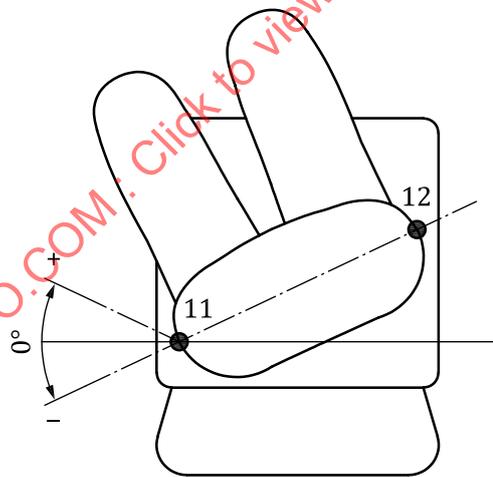


Figure 20 — Axial rotation of the pelvis

7.3 Other information

7.3.1 General

Other information provide sufficient data to understand internal and external loading on the body. This can be split into body support, controls and external loading. For example, the angle of the legs can affect the pelvis and trunk posture. The consequences of this information on the posture of the upper and lower limbs can be described (see 3.3).

7.3.2 Body support

Each contact point supporting the body can be described.

- Feet: flat on floor/on heels/free hanging/on pedals.
- Seat pan: angle, length of contact and seat pan shape
- Seat back: angle, height of contact and seat back shape
- Headrest: contact/no contact.
- Armrest: no/yes (dimensions).
- Grip: grab rail/steering wheel/joystick/other.
- Other.

7.3.3 Controls

Primary controls can be described. Primary controls can change during different phases of a work cycle. Foot controls are controlled by the feet; hand controls are controlled by motion of the arm or wrist; finger controls are controlled by motion of the fingers.

- Foot controls: control type, continuous/intermittent operation, (legs stretched? no/yes).
- Hand controls: control type, continuous/intermittent operation, (arms stretched? no/yes).
- Finger controls: control type, continuous/intermittent operation, (arms stretched? no/yes).
- Other.

A record of the position of the controls with respect to the seat can be valuable.

7.3.4 External loading

External loading can come from items mounted on the body. Some of these items are designed to restrict body movement (e.g. harnesses, some protective equipment). Where appropriate, the masses of these items can be reported.

- Harness: seatbelt/harness type.
- Protective equipment: helmet/body armour/buoyancy aid/other.
- Equipment: pack/weapon/tools/other.
- Other.

8 Methods for determination of posture quantities

8.1 General

The posture of persons can be determined in a variety of ways. Some of the most common methods are described here but this list is not comprehensive and does not impede innovation. Several methods described here require specialized measurement equipment.

8.2 Optical methods

Optical methods have been applied to assess posture simultaneously with whole-body vibration in the laboratory and in the field as shown e.g. in References [7] and [8]. Generally, they measure the position of markers on the surface of the skin or clothing of the test person. Dedicated cameras and software can

be used to track these markers and determine the relevant angles. One problem with optical markers is that complex software is needed to evaluate results from multi-camera measurements. Some optical systems cannot be used outdoors during the day.

8.3 Ultrasonic sensors

Ultrasonic sensors determine the propagation of ultrasound via the skin and deduce information on posture by comparing the actual signal to a set of reference positions (leaning in the backrest, forward inclination, etc.; for an example see Reference [9]). The choice of these reference positions determines the number of quantities that are accessible and the connection to the definitions of this Technical Report is more difficult.

8.4 Electro-goniometers

Electro-goniometers measure segment angles directly using devices which are mounted across a joint. They can be obscured from view and do not require cameras. Some problems with electro-goniometers include the bulk and routing of cables for multiple measurement sites and potentially erroneous measurements if the device is unable to bend freely.

8.5 Other transducer-based methods

Other transducer-based methods include: gyrometers, magnetometers and accelerometers which can be fixed on the surface of the skin or clothing. For examples see References [10], [11] and [12]. Usually, the exact position in space is not accessible, but a relative one, e.g. the angle of a transducer with respect to gravity, which gives access to the relevant angles. A combination of transducers can provide a full measurement of posture.

8.6 Visual methods

Visual methods determine the posture by predefined categories, e.g. as described in References [13], [14] and [15]. They can be used for postures which do not require continual monitoring (e.g. a driver who alternates between several postural positions such as driving, loading, reversing) by using goniometers to measure segment angles for example postures. Video recording can then be used to measure the time in each posture and to synchronize these with vibration events.

9 Measurement errors

Measurement errors can be considered for any selected measurement system. Systems are calibrated and validated for systematic and random errors as well as calibration drift for measurements in the environment of interest. Marker-based systems might have a high accuracy under laboratory conditions which cannot be replicated under field conditions. In many cases, a precision of $\pm 10^\circ$ might be sufficient in order to understand the movements of the person.

Even under the most ideal conditions, the description of the complex movement of the human spine by the measurement of a limited number of external landmarks has the following restrictions.

- The resolution of a single vertebra is not possible.
- The effect of muscles and connective tissues is not described. Therefore, the actual load on the spine can be different for the same measured posture.
- The ball and stick model of the spine on the basis of the considerations in 5.2 cannot represent all degrees of freedom (e.g. curvature of the cervical spine).
- Consequently, some of the assumptions made in Clause 7 might not be valid (e.g. the coplanarity of the shoulders, C₇ and T₃).

In particular for measurements of body angles, the external transducers are

- fixed at palpable landmarks (ISO 8727^[3]);
- closely related to the body segment in focus (ISO 11226^[4]);
- not too close together to avoid measurement errors (ISO 11226^[4]).

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 10687:2022

Annex A (informative)


Examples for the application to different body segments

A.1 General

This annex shows the application of the descriptive posture quantities to different body segments. In [Table A.1](#), the movements monitored for each body segment are summarized, together with the definitions of their respective angles.

All quantities are defined by the angles of a vector within an appropriate coordinate system (see [Clause 6](#) [Coordinate system]). In the examples, the seven vectors defined are needed for a minimal description of the quantities in [Table A.1](#).

[Figure A.1](#) provides a sketch of these vectors and the 12 points from [Figure 1](#) that are used in their definition.

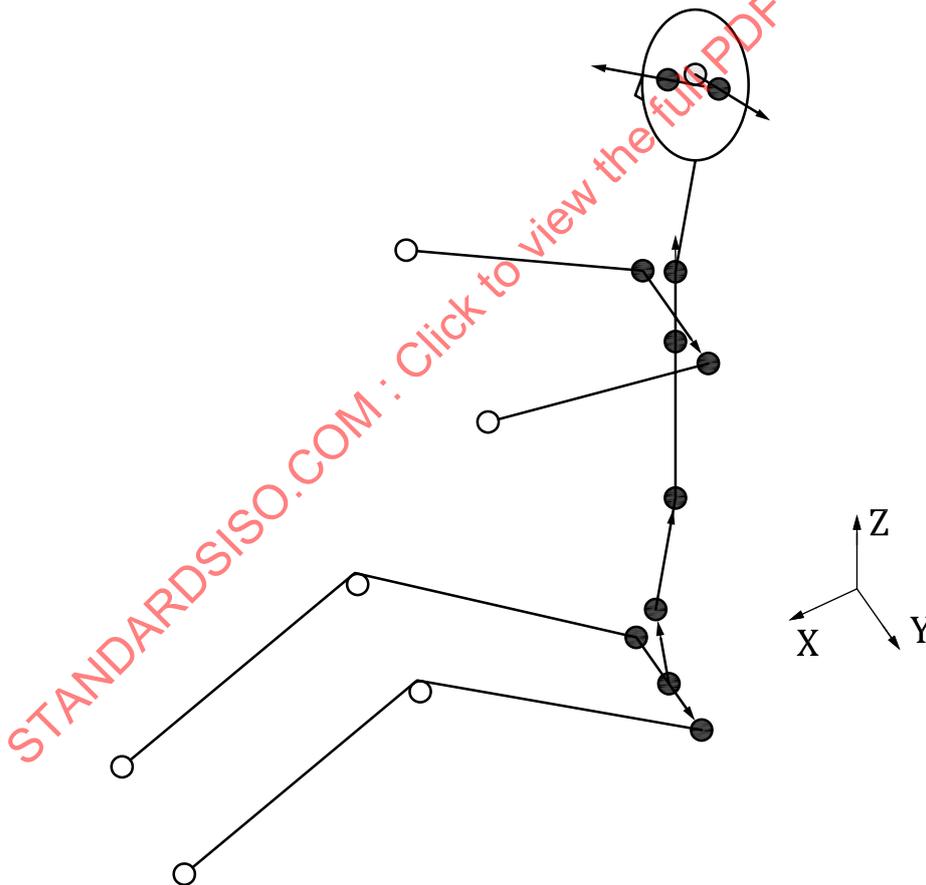

NOTE Correlated vectors are represented by arrows. Details are given in [A.2](#) to [A.5](#).

Figure A.1 — Overview of measured points on the body from [Figure 1](#) which are represented by filled circles

Table A.1 — Quantities of parts of the body that are described in 5.2

Body part	Quantity		
	Designation	Definition	Prerequisites
Lumbar spine	Sagittal inclination	$\theta_{ls}^{xz} = \arctan \frac{v_{ls}^x}{v_{ls}^z}$	$v_{ls} = \frac{1}{N} \overline{L_5 L_1}$ (Extension $v_{ls}^x < 0$) [Formulae (1), (A.2)]
Lumbar spine	Lateral inclination	$\theta_{ls}^{yz} = \arctan \frac{-v_{ls}^y}{v_{ls}^z}$	$v_{ls} = \frac{1}{N} \overline{L_5 L_1}$ [Formulae (2), (A.2)]
Lumbar spine	Support by backrest	$\theta_{ls,backrest}^{xz} = \arctan \frac{v_{ls,backrest}^x}{v_{ls}^z}$	$v_{ls} = \frac{1}{N} \overline{L_5 L_1}$ [Formulae (A.2), (A.3)]
Lumbar spine	Lordosis	$\chi_{ls,curv} = \arccos(v_{ls,1} \cdot v_{ls,2})$ lordosis: $v_{ls,1}^x > 0$ kyphosis: $v_{ls,1}^x < 0$	$v_{ls,1} = \frac{1}{N} \overline{L_5 L_3}$, $v_{ls,2} = \frac{1}{N} \overline{L_3 L_1}$ or projections on to sagittal plane [Formulae (A.1), (A.4)]
Pelvis	Lateral tilt	$\frac{\pi}{2} - \theta_{pelvis}$	$v_{pelvis} = \frac{1}{N} \overline{tr tl} = (1, \theta_{pelvis}, \phi_{pelvis})$ [Formula (A.5)]
Pelvis	Axial rotation	$\frac{\pi}{2} - \phi_{pelvis}$	$v_{pelvis} = (1, \theta_{pelvis}, \phi_{pelvis})$ [Formula (A.5)]
Thoracic spine	Sagittal inclination	$\theta_{th}^{xz} = \arctan \frac{v_{th}^x}{v_{th}^z}$	$v_{th} = \frac{1}{N} \overline{T_3 C_7}$ (Extension $v_{th}^x < 0$) [Formulae (1), (A.6)]
Thoracic spine	Lateral inclination	$\theta_{th}^{yz} = \arctan \frac{-v_{th}^y}{v_{th}^z}$	$v_{th} = \frac{1}{N} \overline{T_3 C_7}$ [Formulae (2), (A.6)]
Thoracic spine	Support by backrest	$\theta_{th,backrest}^{xz} = \arctan \frac{v_{th,min}^x}{v_{th}^z}$	$v_{th} = \frac{1}{N} \overline{T_3 C_7}$ [Formulae (A.3), (A.6)]
Thoracic spine	Axial rotation	$\chi_{th} = \arccos(v'_{sh} \cdot y)$	$v_{th} = (1, \theta_{th}, \phi_{th})$; $v_{sh} = \frac{1}{N} \overline{srs l}$ $D(\theta_{th}, \phi_{th}) v_{sh} = v'_{sh}$ [Formulae (A.6) to (A.9)]
Head	Sagittal inclination	$\theta_{head}^{xz} = \arctan \frac{v_{head}^x}{v_{head}^z} - \theta_{head}^{xz}(0)$	$v_{jj} = \frac{1}{N} \overline{jr jl}$; $v_{base} = \frac{1}{N} \overline{jl eye}$ $v_{head} = v_{base} \otimes v_{jj}$ $\theta_{head}^{xz}(0) = \theta_{head}^{xz}$ for the upright standing person looking straight ahead [Formulae (1), (A.10), (A.11), (A.12)]
Head	Lateral inclination	$\theta_{head}^{yz} = \arctan \frac{-v_{head}^y}{v_{head}^z}$	$v_{head} = v_{base} \otimes v_{jj}$ [Formulae (2), (A.10), (A.11)]
Head	Axial rotation	$\chi_{head} = \arccos(v'_{jj} \cdot v'_{sh})$	$D(\theta_{th}, \phi_{th}) v_{sh} = v'_{sh}$ $v_{head} = (1, \theta_{head}, \phi_{head})$ $v_{jj} = \frac{1}{N} \overline{jr jl}$ $D(\theta_{head}, \phi_{head}) v_{jj} = v'_{jj}$ [Formulae (A.6) to (A.8), (A.10) to (A.14)]


A.2 Lumbar spine

For the lumbar spine, the positions of L_1 , L_3 and L_5 are monitored which gives rise to the following vectors (Figure A.2):

$$v_{ls,1} = \frac{1}{N} \overline{L_5 L_3}, \quad v_{ls,2} = \frac{1}{N} \overline{L_3 L_1} \tag{A.1}$$

$$v_{ls} = \frac{1}{N} (v_{ls,1} + v_{ls,2}) = \frac{1}{N} \overline{L_5 L_1} \tag{A.2}$$

where N is the relevant normalization constant, the vector length.

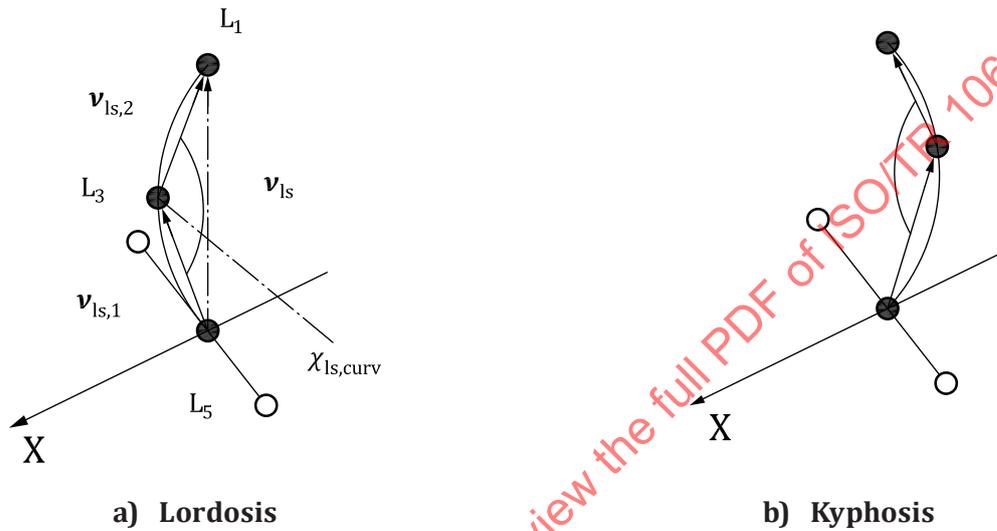

NOTE Measured vertebrae (L_1 , L_3 and L_5) are represented as filled circles that define two vectors (black arrows for $v_{ls,1}$ and $v_{ls,2}$). Their sum v_{ls} is a derived quantity and therefore printed as a dashed arrow. The sufficient criterion for a lordosis $v_{ls,1}^x > 0$ [see a)] and kyphosis $v_{ls,1}^x < 0$ [see b)] is illustrated (origin of coordinate system shifted to L_5).

Figure A.2 — Representation of the lumbar spine (black circles) resting on the pelvis (empty circles)

The sagittal inclination and lateral inclination of the lumbar spine are defined with the help of v_{ls} and Formulae (1) and (2), see Figure 3 a) and Table A.1. The angle of the maximal sagittal extension, $\theta_{ls,backrest}^{xz}$, is given by $v_{ls,backrest}^x$ when the lumbar spine is supported by the backrest:

$$\theta_{ls,backrest}^{xz} = \arctan \frac{v_{ls,backrest}^x}{v_{ls}^z} \tag{A.3}$$

where $v_{ls,backrest}^x < 0$ (see Table A.1).

In order to describe the lordosis, however, the following angle is determined by:

$$\chi_{ls,curv} = \arccos(v_{ls,1} \cdot v_{ls,2}) \tag{A.4}$$

between $v_{ls,1}$ and $v_{ls,2}$ as well as the sign of $v_{ls,1}^x$ (see Figure A.2). A finite value of $\chi_{ls,curv}$ is a lordosis for $v_{ls,1}^x > 0$ and a kyphosis for $v_{ls,1}^x < 0$. This definition assumes that $v_{ls,1}$ and $v_{ls,2}$ lie in the sagittal plane. Otherwise, the projections on to the sagittal plane can be used.

A.3 Pelvis

The Y-axis of the pelvis determines the Y-axis of the coordinate system (see [Clause 6](#) [Coordinate system]) and is the reference for the axial rotation angle of the thoracic spine ([5.2](#) and [A.4](#)). Therefore, one determines the Y-axis of the pelvis in all cases when it is not parallel with the side-to-side direction of the vehicle, e.g. when the driver is leaning out of the window.

The normalized vector of the pelvis line in y -direction, between the left and right greater trochanters, tl , tr , is

$$\mathbf{v}_{\text{pelvis}} = \frac{1}{N} \overline{\text{tr tl}} = (1, \theta_{\text{pelvis}}, \phi_{\text{pelvis}}) \quad (\text{A.5})$$

The lateral-tilt θ_{pelvis} and axial rotation angle ϕ_{pelvis} of the pelvis are derived from the polar angles of the pelvis line, when \mathbf{z} defines the polar axis. When these two angles deviate from $\pi/2$, then the pelvis is tilted to the side or rotated and the coordinate system is transformed ([Table A.1](#) [Clause 6](#) [Coordinate system]).

Since the lower part of the lumbar spine is closely connected to the pelvis ([Clause 5](#) [Biomechanical background]), the forward and lateral tilt of the pelvis can be monitored also by the sagittal and lateral inclinations of $\mathbf{v}_{\text{ls},1}$ in [Formula \(A.1\)](#).

A.4 Thoracic spine

The sagittal and lateral movements as well as the position of the backrest for the thoracic spine are determined by means of [Formulae \(1\)](#), [\(2\)](#), and [\(A.3\)](#) in the same way as for the lumbar spine ([Table A.1](#)). The reference vector is now defined by the upper part of the thoracic spine, [Figure A.3 a\)](#):

$$\mathbf{v}_{\text{th}} = \frac{1}{N} \overline{\text{T}_3 \text{C}_7} \quad (\text{A.6})$$

In addition, the axial rotation of the thoracic spine is determined by the rotation angle χ_{th} of the plane pl_{th} defined by the shoulders and T_3 around \mathbf{v}_{th} . It is assumed, that all four points (shoulders, T_3 , C_7) lie within this plane. The shoulder line is defined by the normalized vector between the right shoulder, sr , and the left shoulder, sl :

$$\mathbf{v}_{\text{sh}} = \frac{1}{N} \overline{\text{sr sl}} \quad (\text{A.7})$$

One way to determine χ_{th} is to turn all vectors in pl_{th} by means of the rotary matrix $\mathbf{D}(\theta_{\text{th}}, \phi_{\text{th}})$. The angles θ_{th} and ϕ_{th} are the polar angles of \mathbf{v}_{th} and illustrated in [Figure A.3 b\)](#) with \mathbf{z} being the polar axis.


Applying $\mathbf{D}(\theta_{\text{th}}, \phi_{\text{th}})$ to \mathbf{v}_{th} leads to a transformed vector that lies parallel to \mathbf{z} as described in [4.3](#):

$$\begin{aligned} \mathbf{D}(\theta_{\text{th}}, \phi_{\text{th}}) \mathbf{v}_{\text{sh}} &= \mathbf{v}'_{\text{sh}} \\ \mathbf{D}(\theta_{\text{th}}, \phi_{\text{th}}) \mathbf{v}_{\text{th}} \cdot \mathbf{z} &= 1 \end{aligned} \quad (\text{A.8})$$

The same transformation leads to a transformed vector of the shoulder line that is parallel to the xy -plane and

$$\chi_{\text{th}} = \arccos(\mathbf{v}'_{\text{sh}} \cdot \mathbf{y}) \quad (\text{A.9})$$

is the rotation angle of the thoracic spine [see [Figure 3 b\)](#), [Figure A.3 a\)](#), and [Table A.1](#)].

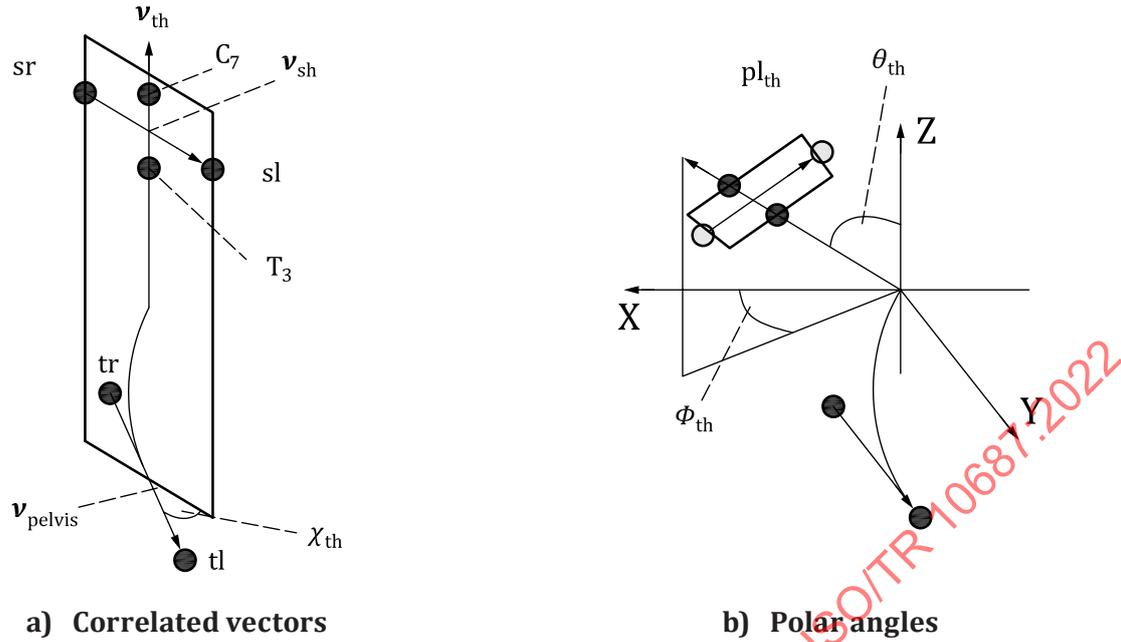

NOTE The filled circles in a) are the measured vertebrae, C₇, T₃, the left and right shoulder, sl, sr, and the left and right greater trochanters, tl, tr. Black arrows indicate the correlated vectors v_{th} , v_{sh} , and v_{pelvis} . The plane pl_{th} is defined by (sl, sr, T₃); b) highlights the polar angles ϕ_{th} , θ_{th} of a given v_{th} (Z-axis is the polar axis).

Figure A.3 — Representation of the thoracic spine and of the pelvis

A.5 Cervical spine

The load and posture of the cervical spine is mainly determined by the position of the head which is described by a plane of the base of the skull pl_{head} or any other parallel plane. This work refers to the left and right tragus, jl, jr, and to the corner of the left eye (eye) to define

$$v_{jj} = \frac{1}{N} \overline{jr \ jl}, \quad v_{base} = \frac{1}{N} \overline{jl \ eye} \tag{A.10}$$

which in turn give rise to

$$v_{head} = v_{base} \otimes v_{jj} = (1, \theta_{head}, \phi_{head}) \tag{A.11}$$

where θ_{head} and ϕ_{head} are the polar angles of v_{head} when z is the polar axis, [Figure A.4 a\)](#).

The vector v_{head} is the reference vector for the head and defines the lateral flexions by means of [Formula \(2\)](#), see [Table A.1](#) for the definition of the sign. For the sagittal flexion (positive sign) and extension (negative sign), the reference angle $\theta_{head}^{xz}(0)$ [i.e. the value of [Formula \(2\)](#) for an upright standing person looking straight ahead] is subtracted from [Formula \(1\)](#):

$$\theta_{head}^{xz} = \arctan \frac{v_{head}^x}{v_{head}^z} - \theta_{head}^{xz}(0) \tag{A.12}$$

The axial rotation of the head is determined in a similar way to the axial rotation of the thoracic spine. Here, the angle between v_{jj} and the shoulder line v_{sh} is calculated. In order to eliminate the effects of flexion and extension, v_{jj} and v_{sh} are transformed into v'_{jj} and v'_{sh} which are orthogonal to z . For v_{sh} ,

this is defined in [Formula \(A.8\)](#). For \mathbf{v}_{jj} , the same rotary matrix $\mathbf{D}(\theta_{\text{head}}, \phi_{\text{head}})$ is used that transforms \mathbf{v}_{head} to lie parallel to \mathbf{z} :


$$\mathbf{D}(\theta_{\text{head}}, \phi_{\text{head}}) \mathbf{v}_{jj} = \mathbf{v}'_{jj} \tag{A.13}$$

$$\mathbf{D}(\theta_{\text{head}}, \phi_{\text{head}}) \mathbf{v}_{\text{head}} \cdot \mathbf{z} = 1$$

The vector \mathbf{v}'_{jj} is parallel to the xy -plane and the rotation angle of the head is

$$\chi_{\text{head}} = \arccos(\mathbf{v}'_{jj} \cdot \mathbf{v}'_{\text{sh}}) \tag{A.14}$$

i.e. the angle of the head with the transformed shoulder line, [Figure A.4 b\)](#).

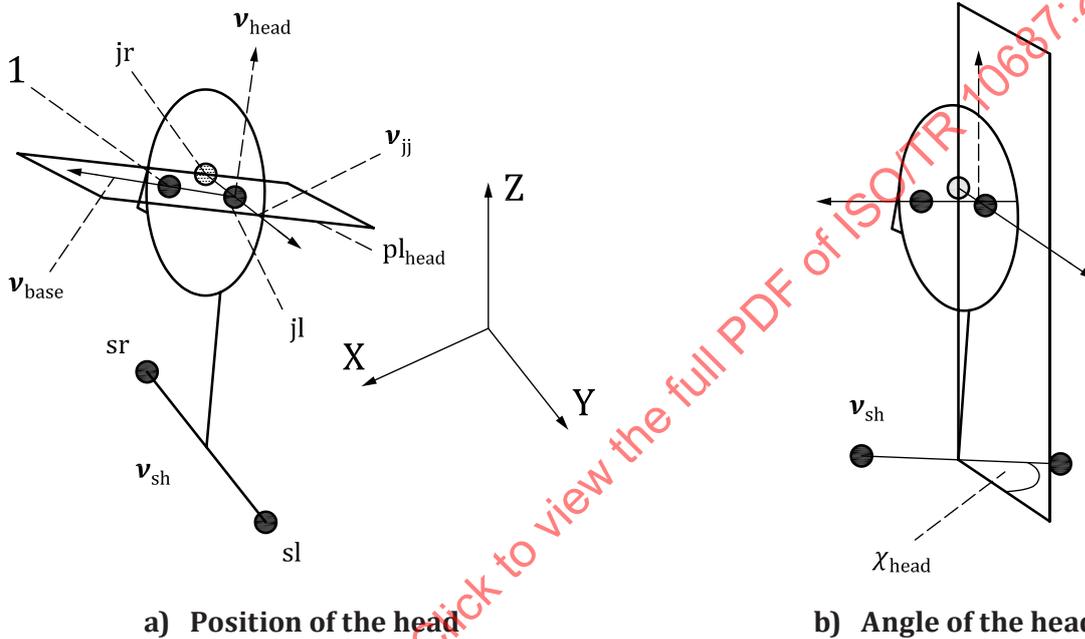

NOTE The filled circles in a) are the corner of the left eye, eye, the left and right tragus, jl, jr, and the left and right shoulder, sl, sr. Black arrows indicate the correlated vectors \mathbf{v}_{jj} , \mathbf{v}_{base} from which \mathbf{v}_{head} is derived (dashed arrow). The plane pl_{head} is defined by (jl, jr, eye); b) shows \mathbf{v}_{head} parallel to the Z-axis and the rotation angle χ_{head} . The vector triple in the middle between a) and b) depicts the external coordinate system for both figures.

Figure A.4 — Representation of the head and the shoulder line

Annex B (informative)

Assessment of health effects

B.1 General

This annex proposes a possibility to assess musculoskeletal health effects such as low back problems as an outcome of a combined exposure of posture and whole-body vibration^[16]. The proposed method rests on the concepts outlined in ISO 11226^[4] and EN 1005-4^[5], where acceptance criteria are defined for static postures. Since the upright standing or sitting posture is the reference in References ^[4] and ^[5], one adopts the angle definitions to be suitable for the seated posture.

The main criterion in the underlying standards^{[4][5]} to assess posture is the avoidance of extreme angles of the body segments. Therefore, they define ranges of angle values, which are “acceptable”. These ranges of angle values are called “neutral” (green) or “awkward” (red) in this annex. In some cases, the standards define additional criteria, whether certain angle values are acceptable or not (e.g., holding times, support of body segments). These ranges are called “moderate” in this annex, but the additional criteria have not been used.

In addition to the avoidance of awkward body angles, the underlying standards point out that constrained postures without variation and movements with high frequencies can increase the exposure due to posture. These effects have not been considered here, although for instance dynamic effects are also discussed in the assessment of comfort^[17]. The inclusion of dynamic effects is therefore a possibility to improve this quasi-static assessment in the future. The measurement of dynamic posture, angular deviations in various environments were reported by Amari et al^[18].

B.2 Angle definitions

B.2.1 Head and neck postures

There are small differences between ISO 11226^[4] and this Technical Report in the definition of the plane which describes the posture of the head. Since these differences are small, it is proposed to use the same categories proposed in References ^[4] and ^[5] to assess the posture of the head which are given in [Table B.1](#).

The evaluation of the holding time for postures where the sagittal head inclination lies between 25° and 85° is neglected here. Instead, this angle range is defined as “moderate”. While ISO 11226^[4] only recommends a symmetrical head posture with respect to the lateral head inclination and neck torsion, one can find values for these angles in EN 1005-4^[5] which define the awkward region.