

---

---

**Road vehicles — Determination of head  
contact and duration in impact tests**

*Véhicules routiers — Détermination du moment et de la durée du contact  
tête dans les essais de choc*

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 12351:1999



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 12351:1999

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 734 10 79  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Contents

	Page
1	Scope ..... 1
2	Reference..... 1
3	Terms and definitions ..... 1
4	Calculation method ..... 2
4.1	Principle, device..... 2
4.2	Data acquisition and processing system..... 3
4.3	Procedure for determining head contact duration ( $t_e$ , $t_d$ ) ..... 3
4.4	Other information..... 4
5	Visual method by film analysis ..... 5
5.1	Principle..... 5
5.2	Implementation ..... 5
5.3	Limits of the method ..... 5
6	Electrical method ..... 5
6.1	Principle..... 5
6.2	Particular definitions ..... 6
6.3	Data acquisition system..... 6
6.4	Procedure for the determination of the impact duration..... 6

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 12351:1999

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In exceptional circumstances, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example), it may decide by a simple majority vote of its participating members to publish a Technical Report. A Technical Report is entirely informative in nature and does not have to be reviewed until the data it provides are considered to be no longer valid or useful.

Attention is drawn to the possibility that some of the elements of this Technical Report may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TR 12351 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 12, *Restraint systems*.

## Introduction

This Technical Report gives several methods of determination presented in:

- clause 4, calculation method. This method is based on SAE J2052, *Test device head contact duration analysis*;
- clause 5, visual method;
- clause 6, electrical contact method.

The calculation method is recommended subject to the availability of the appropriate transducer, as it is the most reliable of the three methods described. When the transducer cannot be used, the other two methods can be applied with their limitations.

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 12351:1999



# Road vehicles — Determination of head contact and duration in impact tests

## 1 Scope

This Technical Report gives methods to determine the instant of head contact and the duration of this contact during impact tests.

The determination of head engagement and disengagement times are used in the calculation of the contact head injury criteria (HIC).

## 2 Reference

ISO 6487:—<sup>1)</sup>, *Road vehicles — Measurement techniques in impact tests — Instrumentation*.

## 3 Terms and definitions

For the purposes of this Technical Report, the following term and definition apply.

### 3.1

#### HIC

#### Head Injury Criterion

maximum value calculable from the head centre-of-gravity resultant acceleration-time profile, in accordance with the following equation:

$$\text{HIC} = \sup \left\{ \left[ \frac{1}{(t_2 - t_1)} \int_{t_1}^{t_2} a \, dt \right]^{2.5} (t_2 - t_1) \right\}$$

where

$a$  is the resultant acceleration expressed as multiples of  $g$  (the standard acceleration of gravity);

$t_1$  and  $t_2$  are any two points in time during the crash.

NOTE Other measures of head injury may be calculated from a similar formula, where  $t_1$  and  $t_2$  are separately-defined instants during the period when the head is in contact.

1) To be published. (Revision of ISO 6487:1987)

## 4 Calculation method

### 4.1 Principle, device

#### 4.1.1 Principle

This clause gives a method to determine head engagement and disengagement times for use in the calculation of the HIC without reliance on contact switches or photography.

This method can be used for all calculations of HIC, with all test devices having an upper neck load cell with a minimum of three force channels ( $F_x$ ,  $F_y$ ,  $F_z$ ) mounted rigidly to the head and head triaxial accelerometers.

#### 4.1.2 Head contact

Head contact is defined as the application of a force over 500 N to the head other than a force through the neck as defined in 4.3.

#### 4.1.3 Contact HIC

HIC values are calculated only during the periods of each head contact.

#### 4.1.4 Head engagement ( $t_e$ ) and disengagement ( $t_d$ ) times

The head engagement and disengagement times, are determined by the method given in 4.3. These are the starting and ending times, i.e. the windows for the iterative HIC calculations for each head contact.

NOTE The maximum contact HIC for each  $t_e$ ,  $t_d$  interval will have associated with it times  $t_1$ ,  $t_2$  which may be equal to, or less than the  $t_e$ ,  $t_d$  interval.

#### 4.1.5 Accelerometers ( $a_x$ , $a_y$ , $a_z$ )

The triaxial accelerometer(s) in the head of the test device will be referred to as an accelerometer:  $+a_x$  is forward,  $+a_y$  is to the right, and  $+a_z$  is downward. These orientations are shown in Figure 1.

#### 4.1.6 Test device

Any full, partial or simulated anthropomorphic dummy equipped with head accelerometers and load cell per 4.1.5 and 4.1.7 is defined as the test device.

#### 4.1.7 Load cell


The load cell (attached rigidly to the base of the skull portion of the test device to which the neck is attached) will be referred to as a load cell, omitting the triaxial and upper neck classification. Load cells with additional outputs can also be used.

#### 4.1.8 Head mass ( $M$ )

The mass of the head including the masses of the head accelerometers and mounting brackets and the mass of the load cell which is rigidly attached to the head.

#### 4.1.9 Inertial head forces ( $Ma_x$ , $Ma_y$ , $Ma_z$ )

The inertial head forces are calculated from the triaxial accelerometers which are inside the head of the test device. The accelerations are multiplied by the head mass of the test device to determine the inertial head forces. The directions of these inertial forces are the same as the directions of their corresponding acceleration vectors.

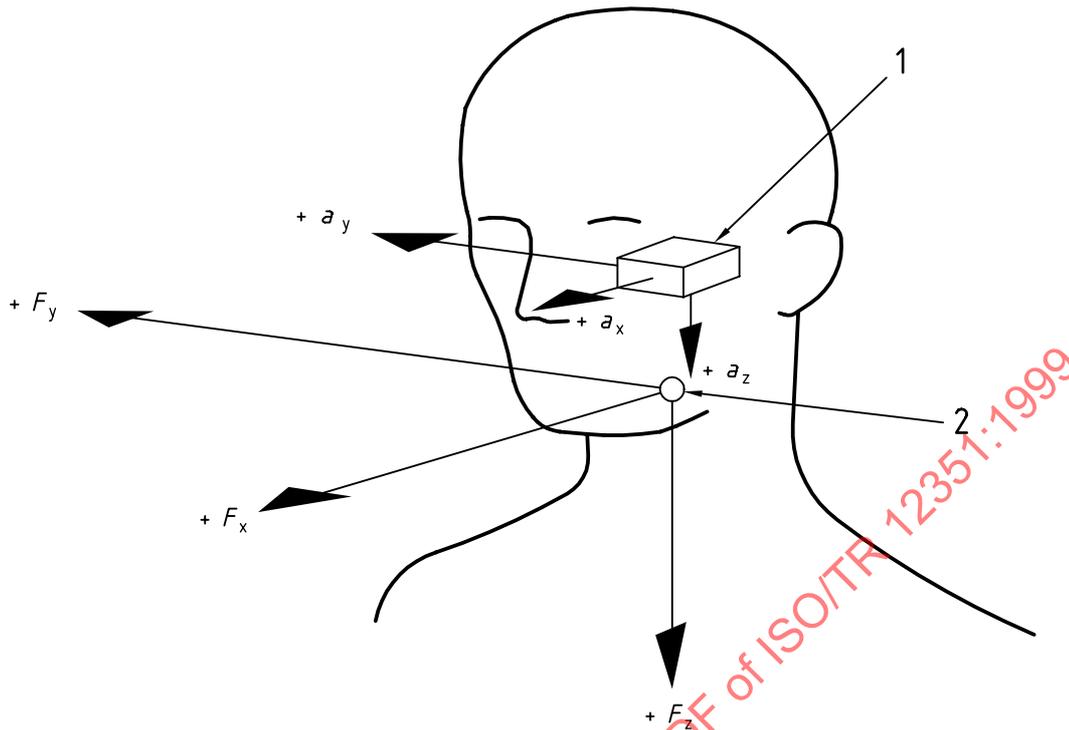

#### Key

- 1 Triaxial accelerometer at centre of gravity of head
- 2 Upper neck transducer at base of skull

**Figure 1 — Head contact duration analysis — Acceleration and force**

#### 4.1.10 Neck forces ( $F_x$ , $F_y$ , $F_z$ )

The neck forces are determined directly from the load cell, per 4.1.7, which reads the forces acting on the neck at the location of the load cell (the base of the skull).  $F_x$  is longitudinal shear,  $F_y$  is lateral shear, and  $F_z$  is axial force. Forces ( $F_x$ ,  $F_y$ ,  $F_z$ ) are applied to the neck according to Figure 1. A positive  $F_x$  output from the load cell means head rearward motion relative to neck; positive  $F_y$  output is head left motion relative to neck; and positive  $F_z$  output is tensile force or head upward motion relative to the neck. Any other sign convention may be used subject to modification in the formulae in 4.3 and 4.4.2.

#### 4.2 Data acquisition and processing system

The data acquisition and processing system shall be capable of supplying transducer data per ISO 6487.

#### 4.3 Procedure for determining head contact duration ( $t_e$ , $t_d$ )

Acceleration and forces are filtered using a CFC 1000. According to ISO 6487, filtering shall be carried out before calculating the resultant.

The subject method uses the following equation:

$$F = \sqrt{(Ma_x - F_x)^2 + (Ma_y - F_y)^2 + (Ma_z - F_z)^2}$$

The acceleration components ( $a_x$ ,  $a_y$ ,  $a_z$ ) of the head are multiplied by the head mass ( $M$ ) to produce the components of inertial head force. Each neck force component ( $F_x$ ,  $F_y$ ,  $F_z$ ) is subtracted from the corresponding calculated inertial head force component. The aforementioned subtractions produce three force-differences. The

external resultant head force ( $F$ ) is calculated by taking the root sum square of the force-differences and is plotted as a function of time. This plot represents the resultant contact force acting on the head.

"Head contact" is determined as having been made when the contact force exceeds 500 N.

However, engagement time  $t_e$  will commence when the force exceeds the last 200 N before the 500 N level is reached and disengagement  $t_d$  at the first 200 N level after.


A subsequent contact is assumed to have occurred when the force level again has reached 500 N after  $t_2$  for the first head contact. The  $t_e$  and  $t_d$  for this second contact are determined in the same manner used for determining  $t_e$  and  $t_d$  in the previous contact.

This process is repeated for each subsequent contact, and is illustrated in Figure 2.

#### 4.4 Other information

##### 4.4.1 Maximum contact HIC

The HIC is calculated for each contact interval determined in 4.3. The HIC  $t_1$  and  $t_2$  values for each contact interval may be equal to, or within the corresponding  $t_e$ ,  $t_d$  interval. The maximum contact HIC is the largest HIC value from all the contacts.

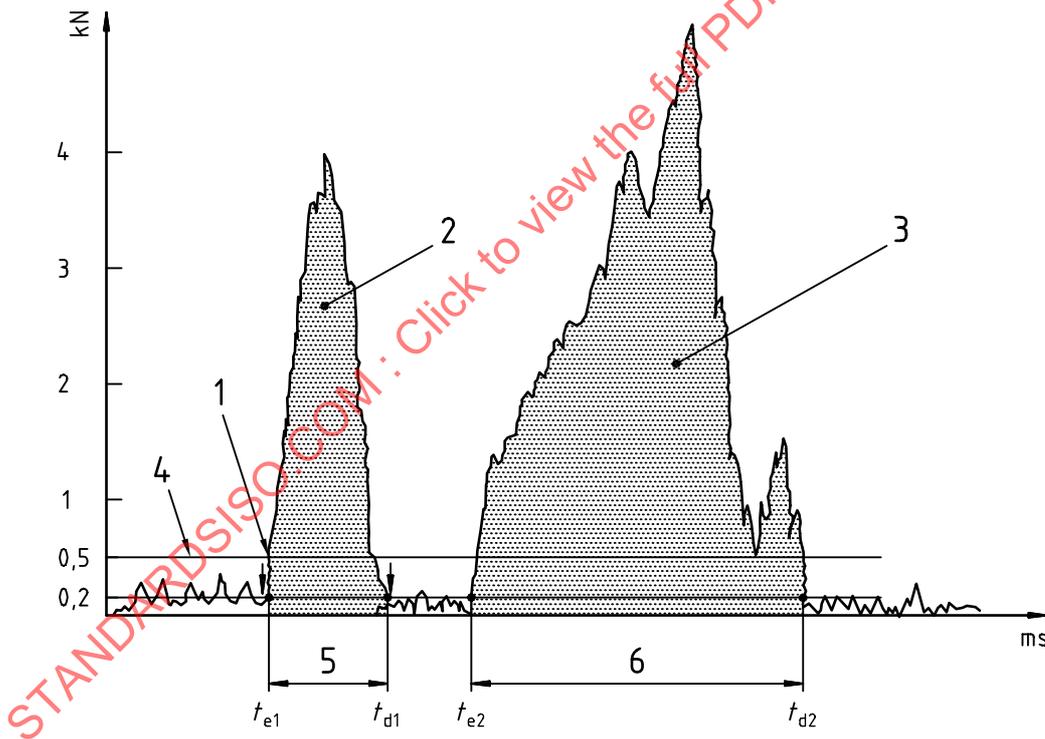

- Key**
- 1 First evidence of significant contact at 500 N level. Those points determine  $t_e$  and  $t_d$  for each contact. Repeat as required.
  - 2 Contact 1
  - 3 Contact 2
  - 4 Search level
  - 5 Duration 1
  - 6 Duration 2

Figure 2 — Determination of contact durations from contact force-time curve

#### 4.4.2 Resultant external contact force, $F$ , and its direction ( $\theta_x$ , $\theta_y$ , $\theta_z$ )

The procedure in subclause 4.3 allows the calculation of the actual contact force (which is the force shown in Figure 2). The direction of the contact force can be obtained by the following equations:

$$\theta_x = \cos^{-1} \left[ \frac{Ma_x - F_x}{F} \right]$$

$$\theta_y = \cos^{-1} \left[ \frac{Ma_y - F_y}{F} \right]$$

$$\theta_z = \cos^{-1} \left[ \frac{Ma_z - F_z}{F} \right]$$

where  $\theta_x$ ,  $\theta_y$  and  $\theta_z$  are the direction cosine angles of the resultant external contact force,  $F$ .

## 5 Visual method by film analysis

### 5.1 Principle

This visual procedure consists of observing the frames provided by the test films with the view to plot the instant of contact between the dummy head and any other element.

### 5.2 Implementation

A film camera or a high-speed video camera is focused on the area where there is an impact risk. The lighting is appropriately set.

The speed of the camera is at least 1 000 frames/s. A time base is required. This time base shall give at least 1/100 s resolution with an error of less than 1/10 000 s.

Where different camera views are used to record head engagement and disengagement, their respective time bases shall be synchronised by a unique, instantaneous event, such as a flash, visible in each film.

### 5.3 Limits of the method

The accuracy of the contact duration determination is function of the quality of the frame and of the camera speed. For 1 000 frames/s the maximum accuracy is  $\pm 1$  ms.

In practice, the instant of first contact can normally be determined by this method. However, the end of contact is much more difficult to determine, even using several camera views.

## 6 Electrical method

### 6.1 Principle

This clause gives an electrical method to determine head engagement and disengagement times for use in the calculation of the HIC.

This method is a general one, based on the closing duration measure of an electrical contact composed of a wire netting on the head and any other part of the passenger cell which could be contacted by the dummy's head.