
**Machine tool spindles — Evaluation
of machine tool spindle vibrations by
measurements on spindle housing —**

Part 1:

**Spindles with rolling element bearings
and integral drives operating at speeds
between 600 min⁻¹ and 30 000 min⁻¹**

*Broches pour machines-outils — Évaluation des vibrations d'une broche
pour machine-outil par mesurages sur le logement de la broche —*

*Partie 1: Broches à roulements à billes et moteurs intégrés opérant à
des vitesses comprises entre 600 min⁻¹ et 30 000 min⁻¹*



STANDARDSISO.COM : Click to view the full PDF of ISO/TR 17243-1:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Preliminary operations	3
4.1 General.....	3
4.2 Process load.....	3
4.3 Spindle speed.....	3
4.4 Thermal conditions.....	4
4.5 Spindle position and orientation.....	4
4.6 Tool or workpiece balancing.....	4
4.7 Spindle chuck.....	4
4.8 Spindle cooling.....	5
4.9 Drawbar.....	5
4.10 Background vibration.....	5
4.11 Idle operation.....	5
5 Measurement and operational procedures	5
5.1 Measuring instruments.....	5
5.2 Measurement locations/directions.....	6
5.3 Sensor mounting procedures.....	7
6 Evaluation parameters	8
6.1 Vibration velocity parameter.....	8
6.2 Vibration acceleration parameter.....	9
6.3 Demodulated vibration spectra bearing analysis methods.....	10
7 Spindle classification	10
7.1 General.....	10
7.2 Classification according to rated power.....	10
7.3 Classification according to maximum spindle speed.....	10
7.4 Classification according to bearing type.....	10
8 Evaluation	11
8.1 General.....	11
8.2 Criterion I: vibration magnitude.....	11
8.3 Criterion II: change in vibration magnitude.....	12
8.4 General zone boundaries.....	12
8.5 Examples of evaluation zone boundary values.....	13
8.6 Operational limits.....	14
Annex A (informative) Introduction to alternative bearing condition assessment techniques	16
Bibliography	18

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

ISO/TR 17243 consists of the following parts, under the general title *Machine tool spindles — Evaluation of machine tool spindle vibrations by measurements on spindle housing*:

- *Part 1: Spindles with rolling element bearings and integral drives operating at speeds between 600 min⁻¹ and 30 000 min⁻¹*
- *Part 2: Direct driven spindles and belt driven spindles with rolling element bearings operating at speeds between 600 min⁻¹ and 30 000 min⁻¹*

Introduction

This part of ISO/TR 17243 provides specific guidance for assessing the severity of vibration measured on the spindle housing at customer site or at the machine tool manufacturer test facilities.

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 17243-1:2014

STANDARDSISO.COM : Click to view the full PDF of ISO/TR 17243-1:2014

Machine tool spindles — Evaluation of machine tool spindle vibrations by measurements on spindle housing —

Part 1:

Spindles with rolling element bearings and integral drives operating at speeds between 600 min⁻¹ and 30 000 min⁻¹

1 Scope

This part of ISO/TR 17243 provides information on how to assess the severity of machine tool spindle vibrations measured on the spindle housing. The vibration criteria provided in this part of ISO/TR 17243 apply to spindles with integral drive intended for stationary machine tools with nominal operating speeds between 600 min⁻¹ and 30 000 min⁻¹. This part of ISO/TR 17243 only applies to spindles with rolling element bearing types.

This part of ISO/TR 17243 applies to spindles assembled on metal cutting machine tools.

This part of ISO/TR 17243 is applicable for testing, periodic verification, and continuous monitoring.

Spindles with bearing types other than rolling element bearings are excluded from this part of ISO/TR 17243.

This part of ISO/TR 17243 does not address geometrical accuracy of axes of rotation (see ISO 230-7).

This part of ISO/TR 17243 does not address unacceptable cutting performance with regards to surface finish and accuracy.

This part of ISO/TR 17243 does not address vibration severity issues of machine tool spindles operating at speeds below 600 min⁻¹ or exceeding 30 000 min⁻¹ due to lack of supporting vibration data and limitations in many vibration measurement instruments. Also, due to lack of data, machine tool spindles with bearing types other than rolling element bearings are excluded from this part of ISO/TR 17243.

This part of ISO/TR 17243 does not address frequency domain analyses such as fast fourier transform (FFT) analyses, envelope analyses, or other similar techniques.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1925, *Mechanical vibration — Balancing — Vocabulary*

ISO 1940-1, *Mechanical vibration — Balance quality requirements for rotors in a constant (rigid) state — Part 1: Specification and verification of balance tolerances*

ISO 2041, *Mechanical vibration, shock and condition monitoring — Vocabulary*

ISO 2954:2012, *Mechanical vibration of rotating and reciprocating machinery — Requirements for instruments for measuring vibration severity*

ISO 13372, *Condition monitoring and diagnostics of machines — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1925, ISO 2041, ISO 13372, ISO 2954, and the following apply.

NOTE A concept limited to a special meaning in a particular context is indicated by designating the subject field in angle brackets (<, >) before the definition. For example, in the context of spindle condition monitoring for the term entry for alert, see [3.11](#).

3.1

belt driven spindle

spindle where the power transmission is achieved by a belt between the drive motor and the spindle

3.2

direct driven spindle

machine tool spindle in a motor-coupling-spindle configuration with no belts, gears, or other power transmitting elements in the power train

3.3

gear driven spindle

machine tool spindle with one or more power transmitting gear units in the power train

Note 1 to entry: Gear driven spindles may also incorporate coupling and/or belts in the power train.

3.4

spindle with integral drive

spindle unit where the rotor of the drive motor is the rotor of the spindle

3.5

short term

<spindle condition monitoring> time period of six months or shorter

Note 1 to entry: Time periods may differ for specific spindle types and/or operational conditions.

3.6

long term

<spindle condition monitoring> time period of longer than six months

Note 1 to entry: Time period may differ for specific spindle types and/or operational conditions.

3.7

machine condition monitoring

detection, collection, and interpretation of information and data that indicate the spindle condition of a machine tool spindle

3.8

spindle condition

root-mean-square (RMS) values for vibration velocity and acceleration of machine tool spindles as defined by specifications

3.9

short term spindle condition

STSC

parameter indicating the short term spindle condition of a machine tool spindle

3.10

long term spindle condition

LTSC

parameter indicating the long term spindle condition of a machine tool spindle

3.11**alert**

<spindle condition monitoring> condition where a significant change in spindle vibration magnitude with respect to normal values has been detected

3.12**alarm**

<spindle condition monitoring> condition where the vibration magnitude induces increased dynamic load on spindle bearings, reducing bearing lifetime

3.13**threshold for shutdown**

<spindle condition monitoring> condition where the vibration magnitude induces high dynamic load on the spindle bearings potentially with substantial loss of bearing lifetime

3.14**steady-state operating temperature**

<spindle condition monitoring> condition where machine tool spindle has been running for a sufficient time to reach a stable operating temperature

4 Preliminary operations**4.1 General**

When measuring vibration, the operational condition of the machine tool is of great importance. This part of ISO/TR 17243 is applicable to all normal operational conditions that the machine tool could be in when machining.

For any spindle vibration measurement intended to characterize the spindle condition according to this part of ISO/TR 17243, important operational conditions should be recorded; such operational conditions include, but are not limited to, characteristics listed in [4.2](#) to [4.11](#).

When using vibration measurement results for evaluation of spindle condition, other factors contributing to or interfering with the measured signals should be taken into consideration. Such factors include spindle motor current control signals with their associated frequencies, influences of machine foundation and the position of the other moving components affecting the dynamic response of the overall system, and possible high level of scatter due to low energy content in the frequency range of interest. If such interfering signals or conditions are suspected, frequency analysis techniques can be used to differentiate bearing signals from other contributing factors.

4.2 Process load

All vibration measurements should be made under no-load conditions (no cutting, milling, or grinding).

4.3 Spindle speed

This part of ISO/TR 17243 is applicable for every speed within the nominal speed range of the machine tool/spindle. Manufacturer may specify non-continuous speed ranges like 600 min⁻¹ to 17 000 min⁻¹ and 19 000 min⁻¹ to 24 000 min⁻¹ in order to avoid unreasonable limits at resonance speeds. Two such resonance speed intervals are allowed together, occupying a maximum of 10 % of the nominal operating speed range of the spindle. The possibility to exclude certain speed ranges only applies to the vibration velocity parameter as defined in [6.1](#), i.e. indicators for long term spindle condition (LTSC). The vibration acceleration parameter as defined in [6.2](#), i.e. indicators for short term spindle condition (STSC), applies to any speed within the nominal speed range of the spindle.

When measuring vibration magnitude as a function of spindle speed, it is important to execute the spindle speed changes in such a way that a steady-state vibration of the spindle is reached before recording the measurements. The following are typical methods.

- Step: Increasing or decreasing the spindle speed in steps not greater than 3 % of spindle maximum speed with 10 s of constant speed at each such selected speed.
- Acceleration: Increasing or decreasing the spindle speed with a rate of not more than 20 % of maximum spindle speed per minute.

Both the above methods will result in approximately 5 min measurement time.

4.4 Thermal conditions

Thermal conditions have to be agreed upon between manufacturer/supplier and user. If no conditions are specified, the tests should be made under conditions as near as possible to those of normal operation with regards to lubrication and warm-up. Therefore, the machine should have an idle running performance in accordance with the conditions of use and the instructions of the manufacturer until the machine/spindle has reached steady-state operating temperature. Refer to ISO 230-1 for the installation of the machine before testing and warming up of the spindle and other moving components.

4.5 Spindle position and orientation

Spindle position: ISO/TR 17243-1 is applicable for all possible linear axis positions.

Spindle orientation: ISO/TR 17243-1 is applicable for all possible spindle orientations.

Spindle direction of rotation: For spindles that can be operated in either direction, ISO/TR 17243-1 applies to both clockwise and counter clockwise spindle rotation.

Spindle position, orientation, and direction of rotation for vibration measurements have to be agreed upon between manufacturer/supplier and user.

4.6 Tool or workpiece balancing

A tool or workpiece mounted in the spindle might influence the vibration measurements due to the unbalance of the tool or workpiece itself. It should be recorded whether a tool/workpiece is used during the measurements or not. If used, the mass and balancing grade according to ISO 1940-1 of tool/workpiece used during vibration measurements should be recorded.

4.6.1 Spindle vibration measurements with a tool/workpiece mounted in the spindle

Care should be taken to avoid errors introduced by the unbalance of the tool/workpiece. For most machine tools/spindles, this implies that a balance quality grade of G2.5 or better, according to ISO 1940-1, is required. If available, refer to spindle manufacturer recommendations.

4.6.2 Spindle vibration measurements without tool/workpiece

Spindles that can be operated throughout their entire operating speed range without any tool/workpiece mounted and do not require tool/workpiece for balance can be measured without a tool/workpiece mounted in the spindle.

4.7 Spindle chuck

Spindle chuck mechanical settings such as chuck front end position with respect to spindle gauge line for clamped and unclamped positions, as well as jaw positions, should be recorded.

4.8 Spindle cooling

The spindle cooling system settings should be set appropriately and the performance confirmed. All settings should be recorded.

4.9 Drawbar

The drawbar status should be recorded as tool clamped, tool unclamped, or tool improperly clamped. It is recommended that all spindle vibration measurements be performed with tool clamped or no tool. Refer to [4.6](#).

4.10 Background vibration

If the measured vibration magnitude is greater than an acceptance criterion established by mutual agreement between manufacturer/supplier and user and background vibration is suspected, measurements should be made with the machine shut down to determine the degree of external influence. If the vibration magnitude with the machine shut down exceeds 10 % of the value measured when the machine is running, corrective action might be necessary to reduce the effect of background vibration.

NOTE In some cases, the effect of background vibration can be nullified by spectrum analysis or by eliminating the offending external source.

4.11 Idle operation

It can be beneficial to conduct vibration measurements with the spindle idle but other machine tool systems, such as pumps, fans, and hydraulic systems, active. Vibration data acquired this way can be useful when comparing spindle vibration changes over time.

Idle spindle vibration measurements should be taken at the same measurement locations/directions as running spindle vibration measurements. Refer to [5.2](#).

5 Measurement and operational procedures

5.1 Measuring instruments

The measuring instrument should comply with requirements of ISO 2954 for a specified frequency range of 10 Hz to 10 kHz.

Various methods exist to compute the rms value of a specified frequency band. Refer to ISO 2954, Annex A for further information on how to test the rms indicator of any measuring instrument.

Care should be taken to ensure that the measurements are not influenced by environmental factors or other external factors including, but not limited to, the following:


- temperature variations;
- magnetic fields;
- sound pressure fields;
- sensor cable length;
- power supply noise.

Refer to [5.3](#) for further information on sensor mounting procedures.

5.2 Measurement locations/directions

5.2.1 General

For vibration criteria presented in this part of ISO/TR 17243, measurements should be taken on the spindle housing at the front end of the spindle, as well as at the back end. Preferably, sensor longitudinal locations should coincide with spindle bearing longitudinal locations as close as possible. Measurements should be taken in a minimum of two radial directions at both ends of the spindle and in axial direction in at least one end of the spindle (see [Figure 1](#)). It is recognized that the back end of the spindle, in many cases, can be hard to access, requiring dismantling of covers, etc.

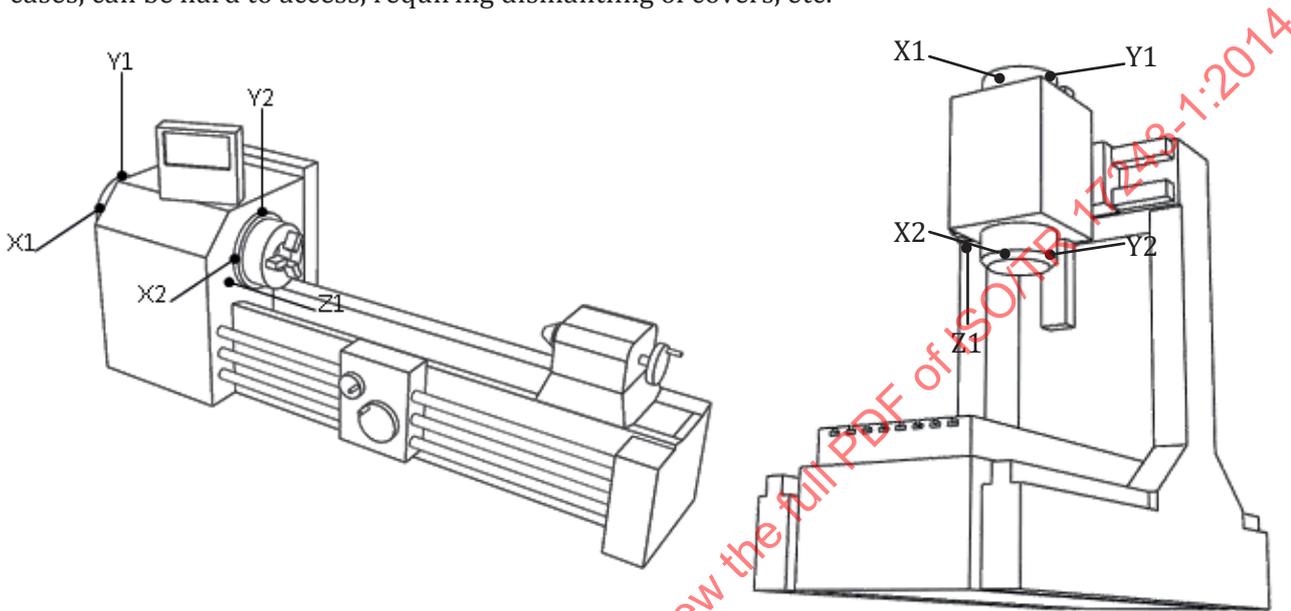

Key

- X1, X2 preferred radial measurement locations in x-axis direction of machine
- Y1, Y2 preferred radial measurement locations in y-axis direction of machine
- Z1 preferred axial measurement locations in Z-axis direction of machine

Figure 1 — Examples of preferred measurement locations and possible naming conventions of common machine/spindle configurations

The preferred sensor locations/directions ensure a good mechanical coupling with the mechanical interface (the bearings) of rotating and non-rotating parts of the machine and hence, ensure low damping of the vibration signals with good signal quality.

If, for practical reasons, some of the preferred sensor locations are not deemed possible to access, these sensor locations may be omitted or alternative sensor positions be established by mutual agreement between manufacturer/supplier and user. If alternative sensor locations are selected, the measurement results might be affected.

The two radial measurement directions should be perpendicular to each other and coincide with the movement axes of the machine tool, such as X and Y or any other axes defined by ISO 841. Refer to [Figure 1](#) for examples on common machine types.

For some machine tool designs, other measurement directions might be preferred.

It is recommended that the vibration sensor be placed at the preferred measurement locations of [Figure 1](#). For periodic measurements where the main interest is in observing changes in the vibration related parameters over time, a single tri-axial sensor is a valid solution. In this last case, a fixed threaded installation of the vibration sensor (see [5.3](#)) is suggested to ensure measurement repeatability.

All sensor locations/directions used for vibration measurements should be recorded.

5.2.2 Naming convention for measurement locations

Spindles with integral drive covered by this part of ISO/TR 17243 are used in many different machine tool types and applications. Therefore, no obvious naming convention exists for assigning names to the measurement locations/directions.

The nomenclature is according to ISO 841 when referring to directions coinciding with movement axes of machine types covered by that International Standard. Possible measurement location names include the following:

- “Spindle front end X”;
- “Spindle back end Y”

In any case where measurement location/direction names could be misinterpreted, additional data should be supplied (i.e. a simple drawing).

5.3 Sensor mounting procedures

The sensor mounting should be as rigid as possible, ensuring that mounting procedure does not influence the measured value in any significant way. Proper care should be taken to minimize any sensor mounting resonances and signal saturation.

For acceptance testing of new or overhauled machine tools or spindles, chemical bonding or threaded sensor mounting is recommended since these mounting procedures will ensure best possible measurement results for all parameters defined in this part of ISO/TR 17243.

For periodic measurements, sensors mounted on wax or a magnetic base may be considered as a practical alternative procedure.

[Table 1](#) provides an overview of sensor mounting procedures and precautions.

Table 1 — Sensor mounting procedures

Type of mounting	Suitability	Precautions
Threaded	Preferred	Ensure clean, flat mounting surface
Chemical bonding	Preferred	Ensure clean, flat mounting surface
Wax	Possible	Be careful not to use wax on hot surfaces since this will significantly reduce the upper frequency limit of the mounting. Wax mounting might influence the upper frequency limit of the measurements even when used on normal temperature surfaces.
Magnetic base	Possible	Always be careful when assessing parameters involving high frequency data when measured with magnetic base mounting. Be careful to use suitable magnetic base type depending on mounting surface type. For curved surfaces, use magnetic base if surface is single-curved and never use magnetic base for double-curved surfaces. Make sure mounting surface is clean. Also, note that magnetic base performance can vary with vibration magnitude.
Hand-held sensor	Not applicable	

Refer to ISO 5348 for further information regarding the mounting of accelerometers.

6 Evaluation parameters

6.1 Vibration velocity parameter

The vibration velocity parameter is measured as the broadband vibration magnitude in mm/s rms, typically within the frequency range of 10 Hz to 5 kHz.

The vibration velocity parameter can be used as an indication of long term spindle condition (LTSC).

The vibration velocity is selected because it has been found to reflect long term machine condition in a very consistent manner. It is also the preferred parameter in other machine condition related International Standards such as ISO 10816-3. See ISO 10816-3 and References [17], [18], and [19].

Even if the LTSC parameter is very low, spindle lifetime can be shortened dramatically by inappropriate working conditions.

The typical frequency range of 10 Hz to 5 kHz ensures that low frequency vibrations from building movements, etc. are removed from the signal but still any unbalance vibration (1× running speed) from a 600 min⁻¹ spindle would be within the selected frequency band. On the high end, the 5 kHz upper frequency limit allows for multiple speed harmonics (as would be produced by, for example, a loosely mounted spindle) on a 30 000 min⁻¹ spindle to be reflected in the evaluation parameter. Other frequency ranges can be used and the used frequency range should be recorded.

6.1.1 Spindles with maximum speed between 6 000 min⁻¹ and 30 000 min⁻¹


For spindles operating at speeds between 6 000 min⁻¹ and 30 000 min⁻¹, typically, one or two speed ranges may be excluded with respect to the LTSC parameter. This is due to the fact that most such spindle designs exhibit at least one resonance speed within the nominal operating speed range of the spindle (see Figure 2). Applying the LTSC parameter at the resonance speeds of a spindle might be considered an unrealistic demand leading to costly design changes for new machine tools.

Together, the excluded speed ranges can occupy a maximum of 10 % of the nominal speed range of the spindle. For a spindle with a maximum speed range of 20 000 min⁻¹, the total excluded speed range is therefore, 2 000 min⁻¹ distributed on the excluded ranges.

It should be noted that any speed ranges that the machine tool manufacturer would like to exclude from this evaluation parameter should be stated beforehand. The user needs this information to evaluate any machine tool involving such a spindle.

If such excluded speed ranges are not specified by the machine tool manufacturer, the spindle should be tested with the assumption that the LTSC parameter applies without exclusions of certain speed ranges.

NOTE The resonance speeds of the spindle correspond closely to the spindle speeds exhibiting minimum dynamic stiffness.

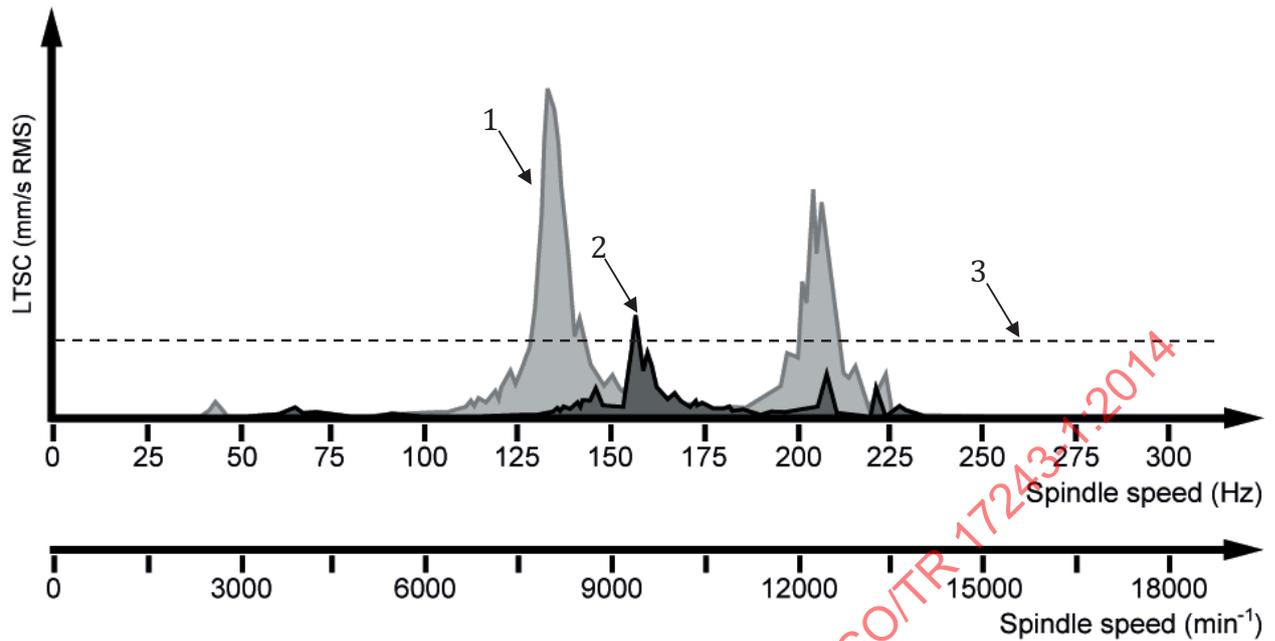

Key

- 1 vibration signal (LYSC) which does not comply with the typical $2\times$ resonance speed range exclusion criteria because the total width of the speed ranges where the vibration magnitude exceeds the evaluation zone limit (above line 3) occupies more than 10% of the nominal speed range of the spindle
- 2 vibration signal (LTSC) which does not comply with $2\times$ resonance speed range exclusion criteria
- 3 evaluation zone limit

Figure 2 — Example of low frequency broadband vibration velocity (LTSC) of 18 000 min⁻¹ (300 Hz) spindle

6.1.2 Spindles with maximum operating speed below 6 000 min⁻¹

For spindles with a maximum speed below 6 000 min⁻¹, the LTSC parameter criteria applies without any exclusion of speed ranges.

6.2 Vibration acceleration parameter

The short term vibration acceleration parameter is intended to reflect problems that might lead to a catastrophic failure of the spindle within a reasonable short time period, in most cases, ranging from days to six months. For spindles with integral drive covered by ISO/TR 17243-1, the major concern is the spindle bearings. Since rather severe bearing problems are not safely detected by low frequency broadband vibration measurements, the vibration acceleration parameter is measured as broadband vibration magnitude in m/s² rms typically within the frequency range of 2 kHz to 10 kHz.

The vibration acceleration quantity is selected because of its sensitivity to very short vibration impulses resulting from damaged rolling element bearings. The stipulated frequency range will suppress low frequency speed harmonics below 2 kHz and is easily measured with most modern instrumentation since the upper frequency limit is 10 kHz. Other frequency ranges may be used and should be recorded.

The vibration acceleration parameter can be used as an indication of short term spindle condition (STSC).

The vibration acceleration evaluation parameter (for STSC) does not offer the possibility of excluding certain speed ranges as the vibration velocity evaluation parameter (for LTSC) does.

6.3 Demodulated vibration spectra bearing analysis methods

Demodulated vibration spectra refer to specific bearing analysis methods developed to emphasize on the detection of transient vibration signals emitted by damaged bearings.

However, these methods are currently individual to each instrument manufacturer producing different numerical values for the same vibration signal and even using different measurement units. For this reason, it is difficult to introduce the amplitude demodulation technique in ISO/TR 17243. In [Annex A](#), some further discussions are found regarding these matters.

7 Spindle classification

7.1 General

Spindles covered by this part of ISO/TR 17243 are divided with respect to the following:

- rated power;
- maximum speed of spindle;
- bearing type.

7.2 Classification according to rated power

This part of ISO/TR 17243 divides motor spindles into the following:

- spindles with rated power ≤ 5 kW;
- spindles with rated power > 5 kW.

7.3 Classification according to maximum spindle speed

This part of ISO/TR 17243 divides spindles with integral drives into four speed ranges with respect to spindle maximum speed.

The following are the speed ranges, expressed in min^{-1} :

- 600 < speed range 1 $\leq 6\ 000$
- 6 000 < speed range 2 $\leq 12\ 000$
- 12 000 < speed range 3 $\leq 18\ 000$
- 18 000 < speed range 4 $\leq 30\ 000$

Spindle speed only affects the vibration evaluation zone boundaries for STSC (short term spindle condition, vibration acceleration) and it does not affect the zone boundaries for the LTSC (long term spindle condition, vibration velocity) parameter.

Classification according to spindle maximum speed is reflected by four speed range classes in the general vibration evaluation zone boundaries, as defined in [Table 2](#).

7.4 Classification according to bearing type

This part of ISO/TR 17243 divides motor spindles according to the following bearing types:

- ball bearings (point contact);
- roller bearings (line contact).

Refer to ISO 5593 for further information on different bearing types.

8 Evaluation

8.1 General

This part of ISO/TR 17243 refers to both the LTSC (long term spindle condition, vibration velocity) parameter, as well as the STSC (short term spindle condition, vibration acceleration) parameter.

The criteria of this part of ISO/TR 17243 apply to measurements at the customer's, as well as tests at the manufacturer's testing facility with the spindle mounted in the machine tool. Criteria apply to broadband measurements taken on the spindle housing during steady-state operating conditions with no load (no cutting) and within the nominal speed range. This part of ISO/TR 17243 applies to testing, periodic measurements, as well as continuous monitoring when measurements are taken without load.

If measurement results are suspected to be influenced by signals not coming from the spindle itself, an analysis in the frequency domain (e.g. fast fourier transform (FFT) analysis, envelope analysis, or other similar techniques) is useful. These analyses in frequency domain are out of the scope of this part of ISO/TR 17243.

The evaluation zones have been established by extensive experience from several large multinational companies over a period of more than 15 years, covering a significant number of machines.

Numerical values assigned to the zone boundaries defined in [Table 2](#) are not intended to serve as acceptance specifications which should be subject to agreement between the machine/spindle manufacturer/supplier and user. However, these values provide guidelines for ensuring that gross deficiencies or unrealistic requirements are avoided. In certain cases, there might be specific features associated with a particular machine/spindle design which would require different zone boundaries. Normally, it is necessary for the machine/spindle manufacturer to explain the reasons for different zone boundaries, especially if the zone boundaries are to be set at greater values than recommended by this part of ISO/TR 17243.

8.1.1 Measurement uncertainty

Measurement uncertainty is a combination of uncertainty of measuring instruments, sensor mounting procedure, and electrical and environmental influences. Refer to [5.1](#) for recommendations regarding measuring instruments, refer to [5.3](#) for sensor mounting procedure, and refer to [Clause 4](#) for preliminary operations. If such recommendations are considered according to ISO 2954, 5.6, acceptable measurement uncertainty should be obtained with typical uncertainties for the LTSC and STSC not exceeding $\pm 10\%$ of the indicated value.

The stated typical measurement uncertainty is obtainable under the assumption that electrical and environmental factors do not influence the measurements significantly. Refer to [4.1](#) for information on the influencing factors.

For further information, refer to ISO/IEC Guide 98-3:2008.

8.2 Criterion I: vibration magnitude

This criterion defines limits for acceptable vibration magnitudes measured on the spindle bearings. The maximum vibration magnitude observed at each measuring location/direction is assessed against the evaluation zone boundaries for the relevant machine class. When determining vibration magnitudes, extraneous factors influencing the measurements mentioned in [4.1](#) should be taken into consideration.

8.2.1 Evaluation zones

The evaluation zones are defined to permit a qualitative assessment of the vibration of a given spindle and provide guidelines on possible actions.

Zone A: Newly commissioned machine tools/spindles.

- Zone B: Normal operating conditions, unrestricted long term operation.
- Zone C: Increased vibration magnitudes, not suitable for long term operation.
- Zone D: Unacceptable vibration magnitudes, critical condition.

8.2.2 Exemplary evaluation zone boundaries

The values for the zone boundaries which are given in 8.5 are based on the maximum broadband vibration values of velocity and acceleration, respectively, when measured in directions as specified in 5.2. Therefore, the higher of each of the values measured in each measurement plane should be used when using these tables.

8.3 Criterion II: change in vibration magnitude

This criterion provides an assessment of a change in vibration magnitude from a previously established reference value. A significant change in broadband vibration magnitude might occur which requires some actions even though zone C of criterion I has not been reached. Such changes can be instantaneous or progressive with time and can indicate incipient damage or some other irregularity. Criterion II is specified on the basis of the change in the broadband vibration magnitude occurring under steady-state operating conditions.

When criterion II is applied, the vibration measurements being compared should be taken at the same sensor location and orientation and under approximately the same machine/spindle operating conditions. Obvious changes in the normal vibration magnitudes, regardless of their total amount, should be investigated so that a dangerous situation can be avoided. When an increase or decrease in vibration magnitude exceeds 25 % of the upper value of zone B as defined in 8.5, such changes should be considered significant particularly if they are sudden. Diagnostic investigations should then be initiated to ascertain the reason for the change and to determine what further actions are appropriate. Such diagnostic investigation can include vibration signal spectrum analysis (fast fourier transform, FFT), specific bearing condition analysis methods (Hilbert transformation of vibration signal), or geometric tests according to ISO 230-7.

8.4 General zone boundaries

Zone boundaries are subject to agreement between the machine manufacturer/supplier and user. The numerical values assigned to the zone boundaries (defined in Table 2) in 8.5 are examples only and may serve as guidelines for ensuring that gross deficiencies or unrealistic requirements are avoided.

Normally, the upper value assigned to zone A would be a reasonable acceptance value for a new or overhauled machine/spindle.

Table 2 — General zone boundaries

		$600 < \text{min}^{-1} \leq 6\,000$	$6\,000 < \text{min}^{-1} \leq 12\,000$	$12\,000 < \text{min}^{-1} \leq 18\,000$	$18\,000 < \text{min}^{-1} \leq 30\,000$
LTSC (mm/s rms)	a	A			
	b	B			
	c	C			
		D			
STSC (m/s ² rms)	i	A	A	A	A
	ii	B	B	B	A
	iii	C	B	B	A
	iv	C	C	B	B
	v	C	C	C	B
	vi	C	C	C	C
	vii	D	D	D	C
	viii	D	D	D	D

8.5 Examples of evaluation zone boundary values

[Table 3](#) shows examples of zone boundary values for typical spindle classes.

Numerical values assigned to the zone boundaries defined in [Table 2](#) are not intended to serve as acceptance specifications, which should be subject to agreement between the machine/spindle manufacturer/supplier and user (customer). However, these values provide guidelines for ensuring that gross deficiencies or unrealistic requirements are avoided. In certain cases, there can be specific features associated with a particular machine/spindle design which would require different zone boundaries. Normally, it is necessary for the machine/spindle manufacturer to explain the reasons for different zone boundaries, especially if the zone boundaries are to be set at greater values than recommended by this part of ISO/TR 17243.

Table 3 — Examples of evaluation zone boundary values

Zone boundary	Unit	Spindle classification			
		Rated power ≤5kW ball bearing (point contact)	Rated power >5kW ball bearing (point contact)	Rated power ≤5kW roller bearing (line contact)	Rated power >5kW roller bearing (line contact)
a	mm/s rms	0,7	0,7	0,7	0,7
b	mm/s rms	1,1	1,4	1,1	1,4
c	mm/s rms	1,8	2,8	1,8	2,8
i	m/s ² rms	6	6	8	8
ii	m/s ² rms	10	10	13	13
iii	m/s ² rms	15	15	20	20
iv	m/s ² rms	20	20	26	26
v	m/s ² rms	25	25	32	32
vi	m/s ² rms	30	30	39	39
vii	m/s ² rms	40	40	52	52
viii	m/s ² rms	50	50	65	65

8.6 Operational limits

8.6.1 General

Operational limits for vibration magnitudes in this clause refer solely to the condition of the machine tool spindle. Refer to ISO 230-7 for information on vibration issues related to work piece quality and spindle error motion.

8.6.2 Setting of alerts

The ALERT values aim to indicate a change of broadband vibration magnitude irrespective of spindle classification. For specific spindles, it is true that they might exhibit extremely low broadband vibration magnitudes. In these cases, the general recommendation for setting the ALARM values could generate values exceeding three times the spindle baseline values. In such cases, the broadband vibration magnitudes could change very significantly without violating the ALARM values.

For reasons discussed above, the ALERT value is introduced. Typically, the ALERT value can be set to 1,4 to 2,0 times established baseline value depending on baseline fluctuation over time.

Although not covered in this part of ISO/TR 17243, it should be noted that for certain machine/spindle types spindle vibration, magnitudes exceeding the ALERT value might induce detrimental effects on work piece quality. This is especially true for grinding machines.

8.6.3 Setting of alarms

The ALARM values may vary considerably, up or down, for specific spindles. The values will normally be set relative to a baseline value determined from experience for the measurement position and direction for that particular machine type.

It is recommended that the ALARM value should be set higher than the baseline by an amount equal to 25 % of the upper limit for zone B. If the baseline is low, the ALARM value may be below zone C. See ISO 10816-1 and ISO 10816-3.